

**FCC PART 15 SUBPART C TEST REPORT**

**for**

**2.4 GHz Wireless Keyboard**

**Model No.: SRKB04EN**

**FCC ID: FDISRKB04EN-0**

of

Applicant: Buffalo Inc.

Address: AKAMONDORI Bldg, 30-20, Ohsu 3-chome, Naka-ku,  
Nagoya, 460-8315 Japan

Tested and Prepared

by

**Worldwide Testing Services (Taiwan) Co., Ltd.**


**FCC Registration No.: 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679A-1**

**A2LA Accredited No.: 2732.01**




**Report No.: W6M21205-12475-C-1**



Registration number: W6M21205-12475-C-1  
FCC ID: FDISRKB04EN-0

## **TABLE OF CONTENTS**

<b>1</b>	<b>GENERAL INFORMATION .....</b>	<b>2</b>
1.1	NOTES.....	2
1.2	TESTING LABORATORY .....	3
1.2.1	<i>Location</i> .....	3
1.2.2	<i>Details of accreditation status</i> .....	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS .....	4
1.5	GENERAL INFORMATION OF TEST ITEM .....	4
1.6	TEST STANDARDS.....	4
<b>2</b>	<b>TECHNICAL TEST .....</b>	<b>5</b>
2.1	SUMMARY OF TEST RESULTS .....	5
2.2	TEST ENVIRONMENT .....	5
2.3	TEST EQUIPMENT LIST .....	6
2.4	GENERAL TEST PROCEDURE .....	10
<b>3</b>	<b>TEST RESULTS (ENCLOSURE) .....</b>	<b>11</b>
3.1	PEAK OUTPUT POWER (TRANSMITTER) .....	12
3.2	EQUIVALENT ISOTROPIC RADIATED POWER.....	13
3.3	RF EXPOSURE COMPLIANCE REQUIREMENTS .....	13
3.4	OUT OF BAND RADIATED EMISSIONS.....	13
3.5	SPURIOUS EMISSION (TX) .....	14
3.6	RADIATED EMISSIONS FROM DIGITAL PART .....	17
3.7	RADIATED EMISSION ON THE BAND EDGE .....	18
3.8	POWER LINE CONDUCTED EMISSION .....	20
	<b>APPENDIX.....</b>	<b>22</b>



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1  
FCC ID: FDISRKB04EN-0

## 1 General Information

### **1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.


Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.


The test report may only be reproduced or published in full.


Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

### **Tester:**

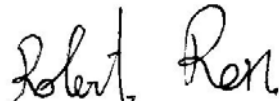July 18, 2012		Robert Ren	
Date	WTS-Lab.	Name	Signature

### **Technical responsibility for area of testing:**

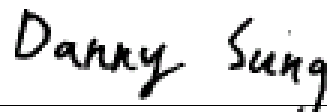July 18, 2012		Danny Sung	
Date	WTS	Name	Signature



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

## **1.2 Testing laboratory**

### **1.2.1 Location**

OATS

No.5-1, Lishui, Shuang Sing Village,  
Wanli Dist., New Taipei City 207,  
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

### **1.2.2 Details of accreditation status**

#### **Accredited testing laboratory**

**A2LA accredited number: 2730.01**

**FCC filed test laboratory Reg. No. 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679A-1**



#### **Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.

Accredited number: ./.


Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.



Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

### **1.3 Details of approval holder**

Name: Buffalo Inc.  
Street: AKAMONDORI Bldg, 30-20, Ohsu 3-chome, Naka-ku,  
City: Nagoya, 460-8315  
Country: Japan  
Telephone: 052-249-6608  
Fax: 050-5830-8808  
Teletex: ./.

### **1.4 Application details**

Date of receipt of test item: June 13, 2012  
Date of test: From June 14, 2012 to July 18, 2012

### **1.5 General information of Test item**

Type of test item: 2.4 GHz Wireless Keyboard  
Model Number: SRKB04EN  
Multi-listing model number: ./.  
Brand Name: iBUFFALO  
Photos: see Annex

### **Technical data**

Frequency band: 2.400-2.4835GHz  
Operation Frequency: 2.406-2.478 GHz  
Frequency 1: 2.406 GHz  
Frequency 2: 2.440 GHz  
Frequency 3: 2.478 GHz  
  
Operation modes: duplex  
Modulation Type: GFSK  
Antenna type / gain: Copper trace antenna / -4.43 dBi  
Power supply: Battery: 3V (1.5V\*2)

### **Manufacturer: (if different from applicant)**

Name: JING MOLD ELECTRONICS TECHNOLOGY (SHEN ZHEN) CO., LTD.  
Street: Xinqiao, 3rd Industrial Estate, Shajing Baoan,  
Town: Shen Zhen,  
Country: China  
Additional information: ./.

### **1.6 Test standards**

Technical standard : FCC RULES PART 15 SUBPART C § 15.249 (2011-10)



Registration number: W6M21205-12475-C-1  
FCC ID: FDISRKB04EN-0

## **2 Technical test**

### **2.1 Summary of test results**


No deviations from the technical specification(s) were ascertained in the course of the tests performed.

**or**

The deviations as specified in 2.5 were ascertained in the course of the tests performed.

### **2.2 Test environment**

Temperature:	23 °C
Relative humidity content:	20 ... 75 %
Air pressure:	86 ... 103 kPa
Details Power supply:	Battery: 3V (1.5V*2)
Extreme conditions parameters:	Not required




Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

## 2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2011/9/2	2012/9/1
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2011/12/28	2012/12/27
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2011/9/5	2012/9/4
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2012/3/5	2013/3/4
ETSTW-CE 007	SPECTRUM ANALYZER 5GHz	FSB	849670/001	R&S	Pre-test Use	
ETSTW-CE 008	HF-EICHELITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2012/7/3	2013/7/2
ETSTW-CE 013	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T4-02	20242	FCC	2011/9/6	2012/9/5
ETSTW-CE 024	IMPEDANCE STABILIZATION NETWORK	ISN T800	29454	TESEQ	2012/1/4	2013/1/3
ETSTW-CS 004	COUPLING AND DECOUPLING NETWORK	CDN M016	20053	SCHAFFNER	2011/8/12	2012/8/11
ETSTW-CS 005	RF Power Amplifier	100A250A	306547	AR	Function Test	
ETSTW-CS 010	6 dB Attenuator	SA3N1007-06	None	AISI	Function test	
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2011/8/16	2012/8/15
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2011/9/5	2012/9/4
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2011/9/2	2012/9/1
ETSTW-RE 010	ABSORBING CLAMP	MDS 21	3469	Schwarzbeck	2011/9/7	2012/9/6
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2010/10/4	2012/10/3
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2012/4/03	2013/4/02
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	Function Test	
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2012/7/18	2013/7/17
ETSTW-RE 028	Log-Periodic Dipole Array Antenna	3148	34429	EMCO	Function Test	
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	Function Test	
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2012/2/21	2013/2/20
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2011/10/4	2012/10/3
ETSTW-RE 033	WaveRunner 6000A Serie Oscilloscope	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	Function Test	
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2011/10/4	2012/10/3
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2012/1/10	2013/1/9
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2012/4/13	2013/4/12
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2012/4/06	2013/4/05




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2011/8/29	2012/8/28
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2012/3/23	2013/3/22
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2012/3/3	2013/3/2
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2012/3/3	2013/3/2
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2012/3/3	2013/3/2
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2012/5/29	2013/5/28
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2012/3/3	2013/3/2
ETSTW-RE 061	Amplifier Module	CHC 1	None	ETS	2012/5/17	2013/5/16
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2011/11/29	2012/11/28
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 065	Amplifier	AMF-6F-18002650- 25-10P	941608	MITEQ	2012/4/6	2013/4/5
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	EMCO	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2011/10/5	2012/10/4
ETSTW-RE 073	Power Meter	N1911A	MY45100769	Agilent	2012/1/4	2013/1/3
ETSTW-RE 074	Power Sensor	N1921A	MY45241198	Agilent	2012/1/4	2013/1/3
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2011/10/13	2012/10/12
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2012/3/5	2013/3/4
ETSTW-RE 105	2.4GHz Notch Filter	NO124411	39555	MICROWAVE CIRCUITS, INC.	2012/3/5	2013/3/4
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2011/12/1	2012/11/30
ETSTW-RE 111	TRILOG Super Broadband test Antenna	VULB 9160	9160-3309	Schwarz beck	2011/12/27	2012/12/26
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	None	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2012/1/12	2013/1/11
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2012/7/3	2013/7/2
ETSTW-RE 125	5GHz Notch filter	5NSL11- 5200/E221.3-O/O	1	K&L Microwave	2011/8/19	2012/8/18
ETSTW-RE 126	5GHz Notch filter	5NSL11- 5800/E221.3-O/O	1	K&L Microwave	2011/8/19	2012/8/18
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2012/3/3	2013/3/2
ETSTW-EMI 001	HARMONICS 1000	HAR1000-1P	093	EMC-PARTNER	2011/9/1	2012/8/31
ETSTW-EMS 001	BASELSTRASSE 160 CH- 4242 LAUFEN	CN-EFT1000	354	EMC-PARTNER	Function Test	
ETSTW-EMS 002	Frequency Converter	YF-6020	0308014	None	Function Test	
ETSTW-EMS 003	EMC Immunity Test System	TRA2000IN6	579	EMC-PARTNER	2011/11/2	2012/11/1
ETSTW-EMS 009	Magnetic Field Antenna	MF1000-1	104	EMC-PARTNER	Function Test	
ETSTW-EMS 010	Coupling De-coupling Network	CDN-UTP8	014	EMC-PARTNER	Function Test	
ETSTW-EMS 012	EM Injection Clamp	F-203I-23MM	476	FCC	2012/5/29	2013/5/28
ETSTW-EMS 016	EMF Tester	1390	071208732	TES	2011/10/6	2012/10/5
ETSTW-EMS 017	Multimeter	DM-1220	518614	HOLA	2011/8/11	2012/8/10






# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

ETSTW-EMS 019	Electrostatic Discharge Simulator	ESS-2002	ESS06Y6300	NoiseKen	2011/10/31	2012/10/30
ETSTW-EMS 020	Humidity Temperature Meter	TES-1366	091011116	TES	2011/12/20	2012/12/19
ETSTW-RS 003	RF Power Amplifier	30S1G3	306933	AR	Function Test	
ETSTW-RS 004	RF Power Amplifier	150W1000	307009	AR	Function Test	
ETSTW-RS 006	SIGNAL GENERATOR	SML03	101551	R&S	2012/2/29	2013/2/28
ETSTW-RS 007	14" COLOR VIDEO MONITOR	HS-CM145A	0512011548	None	Function Test	
ETSTW-RS 009	SIGNAL GENERATOR	8648C	3642U01656	HP	2012/2/20	2013/2/19
ETSTW-RS 010	Broadband Field Meter	NBM-520	C-0195	Narda	2011/9/8	2012/9/7
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2011/10/4	2012/10/3
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2012/1/13	2013/1/12
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2012/1/13	2013/1/12
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2012/1/13	2013/1/12
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2012/1/13	2013/1/12
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2011/9/19	2012/9/18
ETSTW-Cable 002	Microwave Cable	SUCOFLEX 104 (S_Cable 7)	238093	HUBER+SUHNER	2012/5/17	2013/5/16
ETSTW-Cable 003	Microwave Cable	SUCOFLEX 104 (S_Cable 11)	209953	HUBER+SUHNER	2012/5/17	2013/5/16
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2012/3/5	2013/3/4
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test Use NCR	
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2012/3/5	2013/3/4
ETSTW-Cable 013	Microwave Cable	SUCOFLEX 104 (S_Cable 5)	232345	HUBER+SUHNER	Function Test	
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2012/3/3	2013/3/2
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2012/3/3	2013/3/2
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2012/3/3	2013/3/2
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2012/3/3	2013/3/2
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2012/4/6	2013/4/5
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2012/3/5	2013/3/4
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2012/3/5	2013/3/4
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2011/10/13	2012/10/12
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2011/10/13	2012/10/12
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2012/3/5	2013/3/4
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S_Cable 10)	238092	HUBER+SUHNER	2011/11/29	2012/11/28
ETSTW-Cable 032	Microwave Cable	SUCOFLEX 104 (S_Cable 12)	237301	HUBER+SUHNER	Function Test	
ETSTW-Cable 039	Microwave Cable	SUCOFLEX 104 (S_Cable 19)	316739	HUBER+SUHNER	2012/5/17	2013/5/16
ETSTW-Cable 040	Microwave Cable	SUCOFLEX 104 (S_Cable 20)	316738	HUBER+SUHNER	Function Test	
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2011/11/29	2012/11/28
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2011/11/29	2012/11/28




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

ETSTW-Cable 051	BNC Cable	BNC Cable 6	None	JYE BAO CO.,LTD.	2012/3/30	2013/3/29
ETSTW-Cable 052	BNC Cable	Clamp Cable	None	Schwarz beck	2012/3/30	2013/3/29
ETSTW-Cable 053	N TYPE To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2012/4/6	2013/4/5
ETSTW-Cable 054	BNC To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2012/4/6	2013/4/5
ETSTW-Cable 055	N TYPE Cable	N30N30-JBY240-80CM	20110621-1.1	JYE BAO CO.,LTD.	Function Test	
ETSTW-Cable 056	N TYPE Cable	N30N30-JBY240-80CM	20110621-1.0	JYE BAO CO.,LTD.	Function Test	
ETSTW-Cable 057	N TYPE Cable	N30N30-JBY240-80CM	20110621-1.1	JYE BAO CO.,LTD.	Function Test	
WTSTW-SW 001	EMI TEST SOFTWARE	Harmonics-1000	None	EMC PARTNER	HARCS Version 4.16 Firmware Version 2.18	
WTSTW-SW 002	EMI TEST SOFTWARE	EZ_EMG	None	Farad	Version ETS-03A1	
WTSTW-SW 003	EMS TEST SOFTWARE	i2	None	AUDIX	Version 3.2007-8-17b	



Registration number: W6M21205-12475-C-1  
FCC ID: FDISRKB04EN-0

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)      METER READING + ACF + CABLE LOSS (to the receiver) = FS  
33                      20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m


**ANSI STANDARD C63.4-2009 6.3.1 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm height and with dimensions of 1m by 1.5m (non metallic table). The EUT was placed in the centre of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10<sup>th</sup> harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: 930600.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

**ANSI STANDARD C63.4-2009 10.2.7:** Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.




Registration number: W6M21205-12475-C-1  
FCC ID: FDISRKB04EN-0

**3 Test results (enclosure)**

Test case	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.249 (a)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.249 (e)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions conducted – Transmitter operating	15.249 (e)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Digital Part	15.109	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Out of Band Spurious Emission, Band edge-Transmitter operating	15.249 (e)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

The follows is intended to leave blank.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

## 3.1 Peak Output Power (transmitter)

FCC Rule: 15.249 (b)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

Model: SRKB04EN Date: 2012/6/24  
 Mode: TX 2406 MHz Temperature: 24 °C Engineer: Vic  
 Polarization: Horizontal Humidity: 60 %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit Peak	(dBuV/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.					
2406.0860	56.44	21.83	37.09	93.53	58.92	114.00	94.00	-35.08	160	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit Peak	(dBuV/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.					
2406.0820	52.63	21.85	37.09	89.72	58.94	114.00	94.00	-35.06	247	100

Mode: TX 2440 MHz  
 Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit Peak	(dBuV/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.					
2440.1200	58.01	21.54	37.17	95.18	58.71	114.00	94.00	-35.29	162	100

Polarization: Vertical


Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit Peak	(dBuV/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.					
2440.0840	53.92	20.63	37.17	91.09	57.80	114.00	94.00	-36.20	127	100

Mode: TX 2478MHz  
 Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit Peak	(dBuV/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.					
2478.1340	58.39	21.94	37.27	95.66	59.21	114.00	94.00	-34.79	186	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit Peak	(dBuV/m) Ave.	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.					
2478.1460	54.14	21.21	37.27	91.41	58.48	114.00	94.00	-35.52	135	100



Registration number: W6M21205-12475-C-1  
FCC ID: FDISRKB04EN-0

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 044

Explanation: The diagrams for the field strength measurements are included in appendix.

**3.2 Equivalent isotropic radiated power**

Because using an permanent antenna there are no deviations from the radiated test results according 3.1.

**3.3 RF Exposure Compliance Requirements**

Not applicable for this EUT for the low power level.

**3.4 Out of Band Radiated Emissions**

FCC Rule: 15.249 (d)(e), 15.35(b)

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

For frequency above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Limits:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.5
Above 960	500	54.0

For frequencies above 1 GHz (Peak measurements).


Limit + 20 dB    54.0 dBμV/m + 20 dB= 74dBμV/m

Or

Must be attenuated at least 50dB below the level of fundament

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 111, ETSTW-RE 030, ETSTW-RE 044

Explanation: Please see attached diagram as appendix.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

## 3.5 Spurious emission (tx)

Spurious emission was measured with modulation (declared by manufacturer).

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

For frequencies above 1000 MHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

SAMPLE CALCULATION OF LIMIT. ALL results will be updated by an automatic measuring system in accordance with point 2.3.

The peak and average spurious emission plots was measured with the average limits.

The critical peak value listed in the table agree with the above calculated limits.

### Summary table with radiated data of the test plots


Model: SRKB04EN Date: 2012/6/24  
 Mode: TX 2406 MHz Temperature: 24 °C Engineer: Vic  
 Polarization: Horizontal Humidity: 60 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
146.6332	3.33	peak	14.99	18.32	43.50	-25.18	245	100
249.6593	7.36	peak	13.99	21.35	46.00	-24.65	130	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
4811.9900	63.90	42.49	-1.35	62.55	41.14	74.00	54.00	-12.86	120	100
7222.4450	44.43	---	4.18	48.61	---	74.00	54.00	-25.39	215	100
9624.0000	34.66	---	6.49	41.15	---	74.00	54.00	-32.85	275	100
12030.0000	33.72	---	11.36	45.08	---	74.00	54.00	-28.92	330	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
134.9700	3.00	peak	14.29	17.29	43.50	-26.21	330	100
276.8737	2.56	peak	15.10	17.66	46.00	-28.34	295	100



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1  
 FCC ID: FDISRKB04EN-0

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
4812.0580	65.66	43.68	-1.35	64.31	42.33	74.00	54.00	-11.67	54	100
7218.0740	50.59	39.29	4.18	54.77	43.47	74.00	54.00	-10.53	60	100
9624.0000	35.15	---	6.49	41.64	---	74.00	54.00	-32.36	175	100
12030.0000	34.00	---	11.36	45.36	---	74.00	54.00	-28.64	330	100

Mode: TX 2440 MHz

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
129.1382	5.41	peak	13.72	19.13	43.50	-24.37	195	100
241.8838	7.10	peak	13.75	20.85	46.00	-25.15	315	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
4880.1590	55.42	42.29	-1.13	54.29	41.16	74.00	54.00	-12.84	55	100
7320.0860	51.31	40.10	4.37	55.68	44.47	74.00	54.00	-9.53	55	100
9760.0000	35.29	---	6.83	42.12	---	74.00	54.00	-31.88	210	100
12200.0000	32.80	---	12.45	45.25	---	74.00	54.00	-28.75	175	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
162.1844	3.75	peak	14.95	18.70	43.50	-24.80	295	100
311.8637	3.19	peak	15.87	19.06	46.00	-26.94	135	100


Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
4880.1590	64.47	42.15	-1.13	63.34	41.02	74.00	54.00	-12.98	315	100
7320.2060	57.30	40.10	4.37	61.67	44.47	74.00	54.00	-9.53	75	100
9760.0000	35.65	---	6.83	42.48	---	74.00	54.00	-31.52	220	100
12200.0000	33.02	---	12.45	45.47	---	74.00	54.00	-28.53	325	100

Mode: TX 2478 MHz

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
162.1844	3.57	peak	14.95	18.52	43.50	-24.98	55	100
243.8276	8.26	peak	13.81	22.07	46.00	-23.93	170	100





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
4956.0420	59.34	41.04	-0.85	58.49	40.19	74.00	54.00	-13.81	110	100
7433.8900	48.28	38.41	4.58	52.86	42.99	74.00	54.00	-11.01	360	100
9912.0000	35.51	---	7.25	42.76	---	74.00	54.00	-31.24	285	100
12390.0000	32.59	---	12.83	45.42	---	74.00	54.00	-28.58	210	100

Polarization: Vertical


Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
45.5511	3.79	peak	14.02	17.81	40.00	-22.19	220	100
162.1844	4.00	peak	14.95	18.95	43.50	-24.55	175	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
4956.0900	65.14	41.66	-0.85	64.29	40.81	74.00	54.00	-13.19	35	100
7434.1470	52.73	39.47	4.58	57.31	44.05	74.00	54.00	-9.95	70	100
9912.0000	34.81	---	7.25	42.06	---	74.00	54.00	-31.94	125	100
12390.0000	32.41	---	12.83	45.24	---	74.00	54.00	-28.76	340	100

- Note**
- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
  - 2. The formula of measured value as: Test Result = Reading + Correction Factor**
  - 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
  - 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
  - 5. Measurement uncertainty for 3m measurement: 30-1000 MHz = ± 3.72 dB, 1-18 GHz = ± 5.56 dB, 18-40 GHz = ± 3.46 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**
  - 6. Up Line: PK Limit Line, Down Line: Ave Limit Line.**
  - 7. See attached diagrams in appendix.**

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 111, ETSTW-RE 030,  
ETSTW-RE 044, ETSTW-RE 088, ETSTW-RE 018



Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

## **3.6 Radiated Emissions from Digital Part**

### **Summary table with radiated data of the test plots**

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

#### **Note**

- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
- 2. The formula of measured value as: Test Result = Reading + Correction Factor**
- 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
- 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
- 5. Measurement uncertainty for 3m measurement : 30-1000 MHz = ± 3.72 dB, 1-18 GHz = ± 5.56 dB, 18-40 GHz = ± 3.46 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 111, ETSTW-RE 030,  
ETSTW-RE 044


Explanation: The test results are listed in the separated test report no.: W6M21205-12475-P-15B.



Registration number: W6M21205-12475-C-1  
 FCC ID: FDISRKB04EN-0


**3.7 Radiated Emission on the band edge**

From the following plots, they show that the fundamental emissions are confined in the specified band and they are at least 50 dB below the carrier level at band edge (2400 and 2483.5 MHz). It meets the requirement of section 15.249(d).

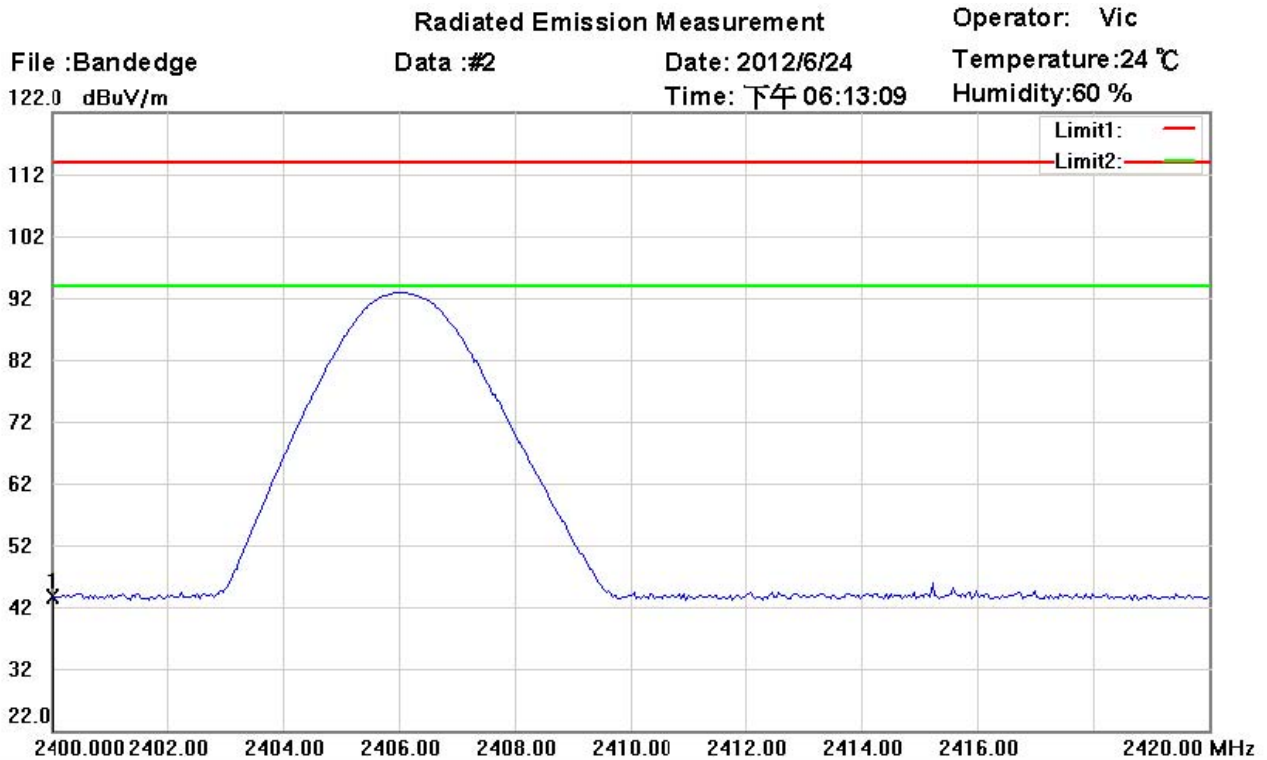


Site : Chamber  
 Condition : FCC 15.249 power\_PK      Polarization:  
 EUT : W6M21205-12475      Power : 3VDC  
 M/N: SRKB04EN      Distance: 3m  
 Test Mode : 2406MHz  
 Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2400.000	6.64	peak	37.07	43.71	74.00	100	165	-30.29	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1  
 FCC ID: FDISRKB04EN-0

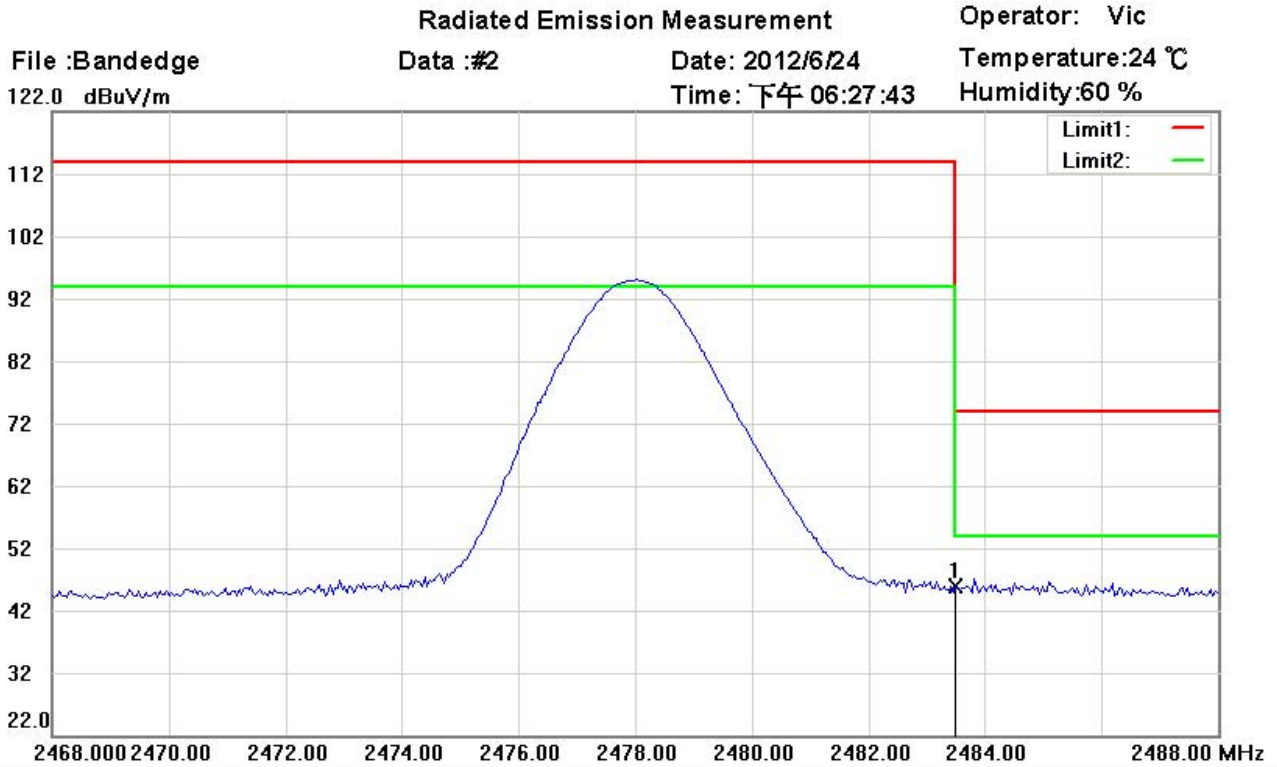

Site : Chamber  
 Condition : FCC 15.249 power\_PK  
 EUT : W6M21205-12475  
 M/N: SRKB04EN  
 Test Mode : 2478MHz  
 Note :


Polarization:  
 Power : 3VDC  
 Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	2483.500	8.53	peak	37.28	45.81	74.00	100	155	-28.19	

Limit:

Frequency Range (MHz)	Limit (dB $\mu$ V/m)	
	Peak	Average
902 – 928	74	54
2400 – 2483.5		
5725 – 5875		
24000 - 24250		

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 044




Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

### 3.8 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

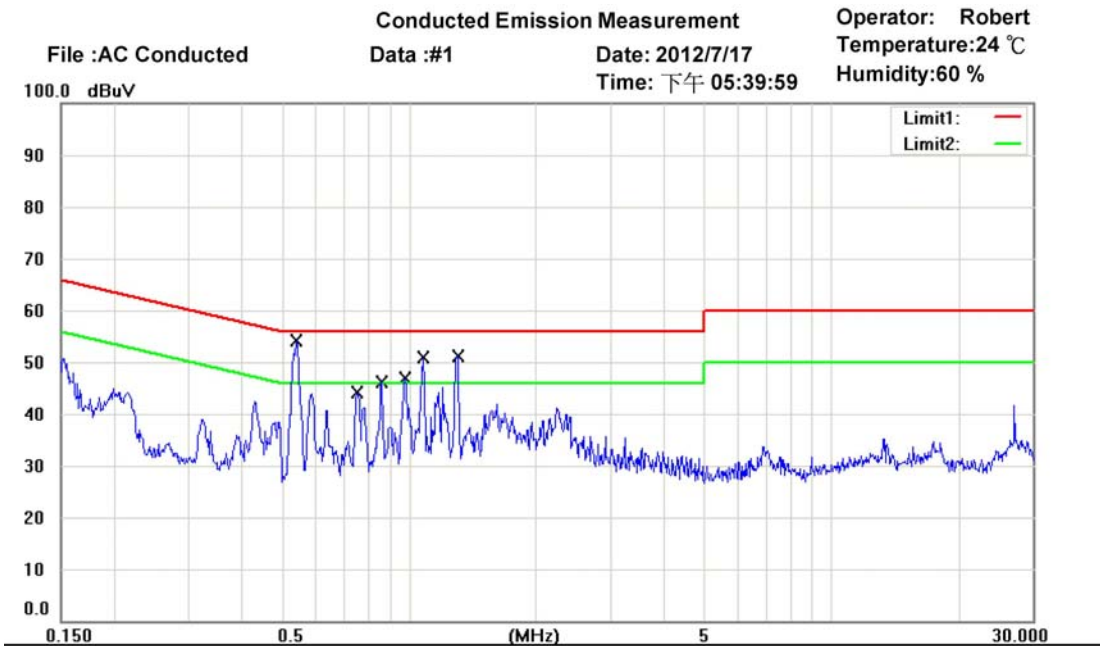

Site : Chamber\_03

Condition : FCC Part 15 Class B Conduction (QP)

Phase: N

EUT : W6M21205-12475


Power : 110VAC

M/N: SRKB04EN

Test Mode :


Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
*	0.5404	40.90	QP	10.00	50.90	56.00	-5.10	
	0.5404	23.67	AVG	10.00	33.67	46.00	-12.33	
	0.7498	30.34	QP	9.98	40.32	56.00	-15.68	
	0.7498	17.16	AVG	9.98	27.14	46.00	-18.86	
	0.8578	30.68	QP	9.97	40.65	56.00	-15.35	
	0.8578	19.51	AVG	9.97	29.48	46.00	-16.52	
	0.9770	29.22	QP	9.96	39.18	56.00	-16.82	
	0.9770	27.05	AVG	9.96	37.01	46.00	-8.99	
	1.0760	38.57	QP	9.96	48.53	56.00	-7.47	
	1.0760	19.56	AVG	9.96	29.52	46.00	-16.48	
	1.2965	33.99	QP	9.97	43.96	56.00	-12.04	
	1.2965	18.21	AVG	9.97	28.18	46.00	-17.82	



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1  
 FCC ID: FDISRKB04EN-0

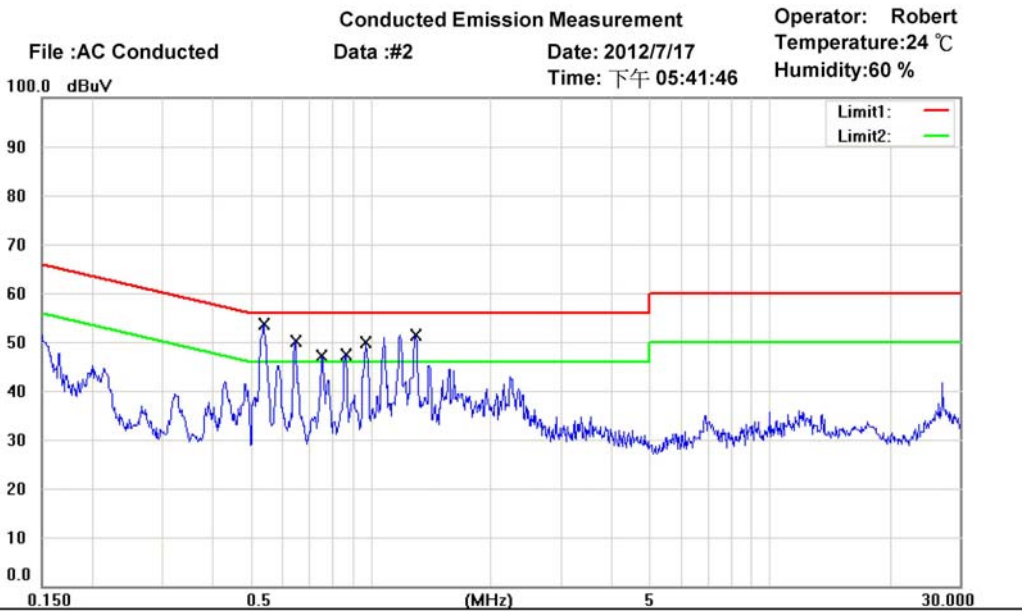

Site : Chamber\_03  
 Condition : FCC Part 15 Class B Conduction (QP) Phase: L1  
 EUT : W6M21205-12475 Power : 110VAC  
 M/N: SRKB04EN  
 Test Mode :  
 Note :


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
*	0.5383	41.81	QP	10.13	51.94	56.00	-4.06	
	0.5383	25.51	AVG	10.13	35.64	46.00	-10.36	
	0.6462	36.65	QP	10.13	46.78	56.00	-9.22	
	0.6462	19.81	AVG	10.13	29.94	46.00	-16.06	
	0.7542	34.30	QP	10.13	44.43	56.00	-11.57	
	0.7542	20.09	AVG	10.13	30.22	46.00	-15.78	
	0.8622	34.17	QP	10.13	44.30	56.00	-11.70	
	0.8622	23.62	AVG	10.13	33.75	46.00	-12.25	
	0.9702	37.27	QP	10.13	47.40	56.00	-8.60	
	0.9702	25.53	AVG	10.13	35.66	46.00	-10.34	
	1.2942	37.15	QP	10.15	47.30	56.00	-8.70	
	1.2942	21.58	AVG	10.15	31.73	46.00	-14.27	

- Note: 1. The formula of measured value as: Test Result = Reading + Correction Factor  
 2. The Correction Factor = Cable Loss + LISN Insertion Loss  
 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average  
 4. All not in the table noted test results are more than 20 dB below the relevant limits.  
 5. Measurement uncertainty = ±1.10 dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.  
 6. Up Line: QP Limit Line, Down Line: Ave Limit Line.

## Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 004, ETSTW-CE 006, ETSTW-RE 045




Registration number: W6M21205-12475-C-1  
FCC ID: FDISRKB04EN-0

## **Appendix**

### **Measurement diagrams**

1. Fundamental Field Strength
2. Spurious Emissions radiated




Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


## Fundamental Field Strength

2406 MHz

Antenna Polarization H

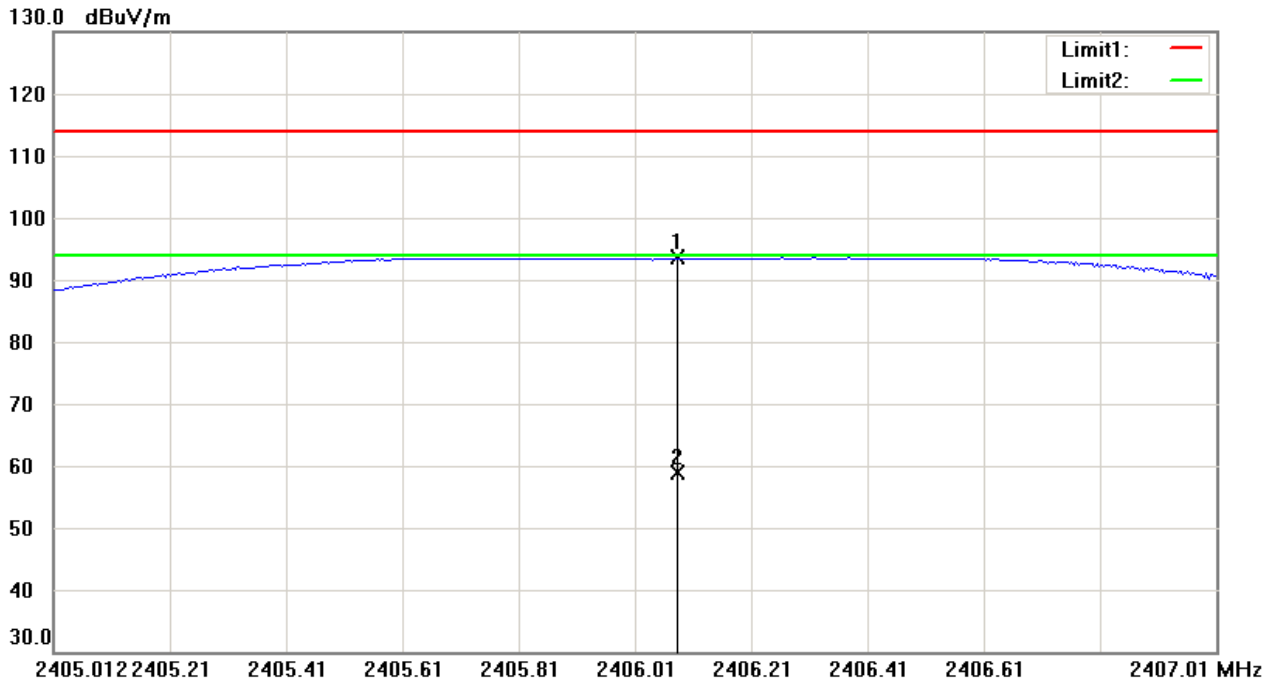

Antenna Polarization V

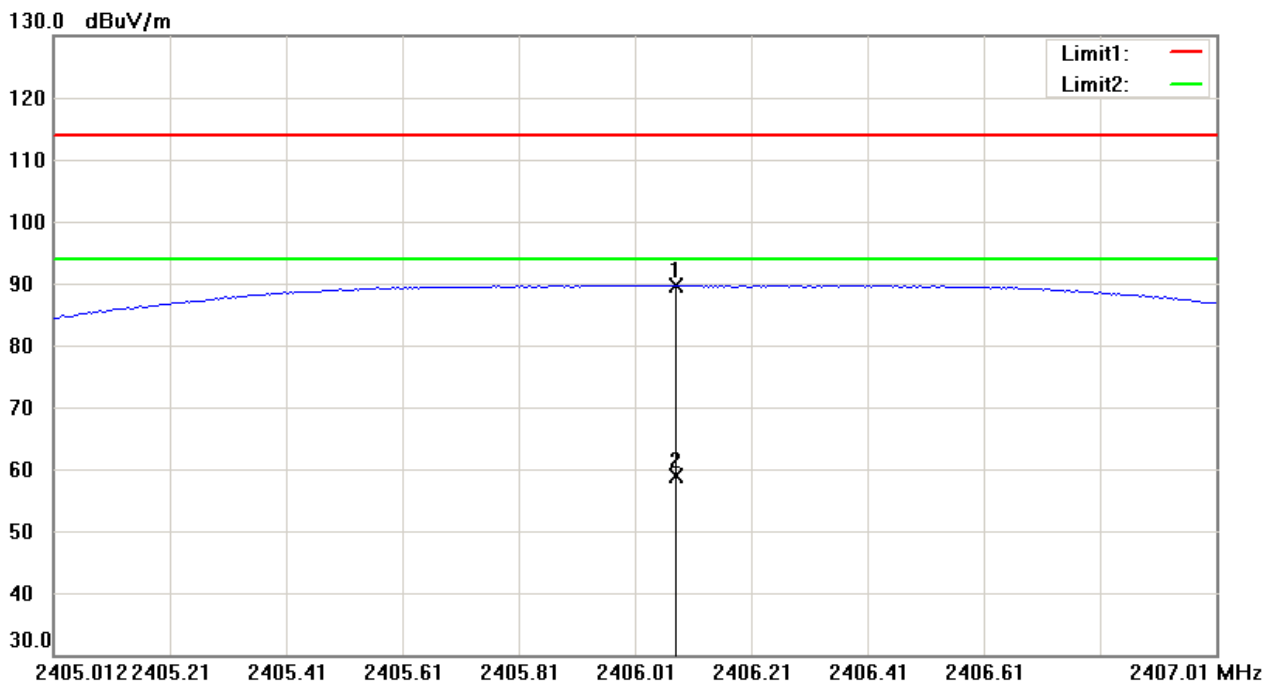


Up Line: Peak Limit Line    Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of fundamental field strength test data of this test report.






Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

2440 MHz


Antenna Polarization H

130.0 dBuV/m

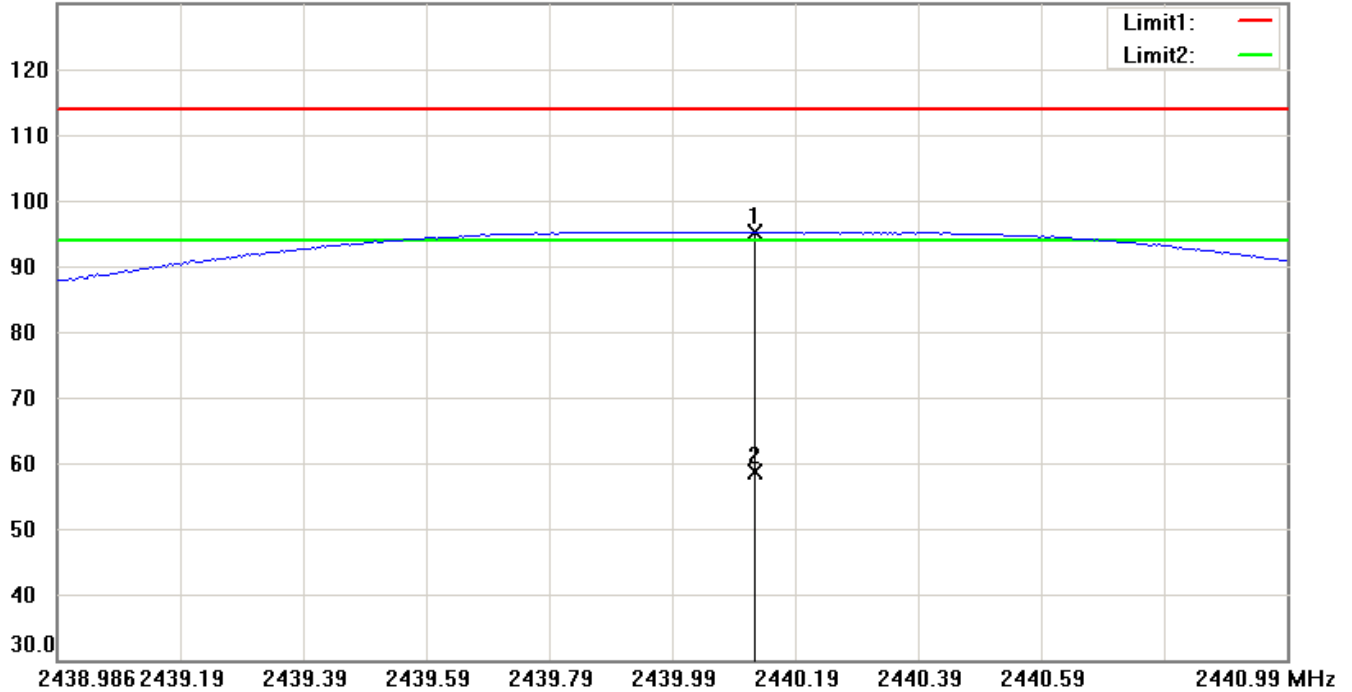

Antenna Polarization V


130.0 dBuV/m

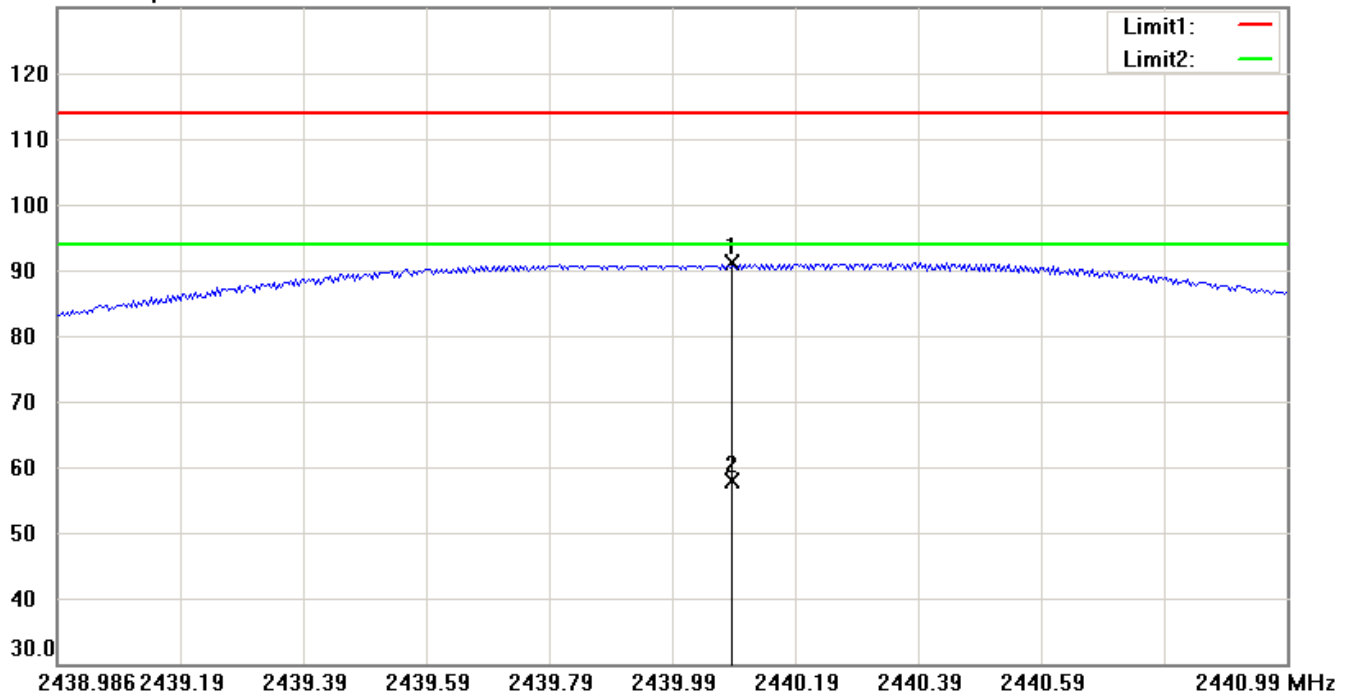

Up Line: Peak Limit Line    Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of fundamental field strength test data of this test report.




Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

2478 MHz


Antenna Polarization H

130.0 dBuV/m

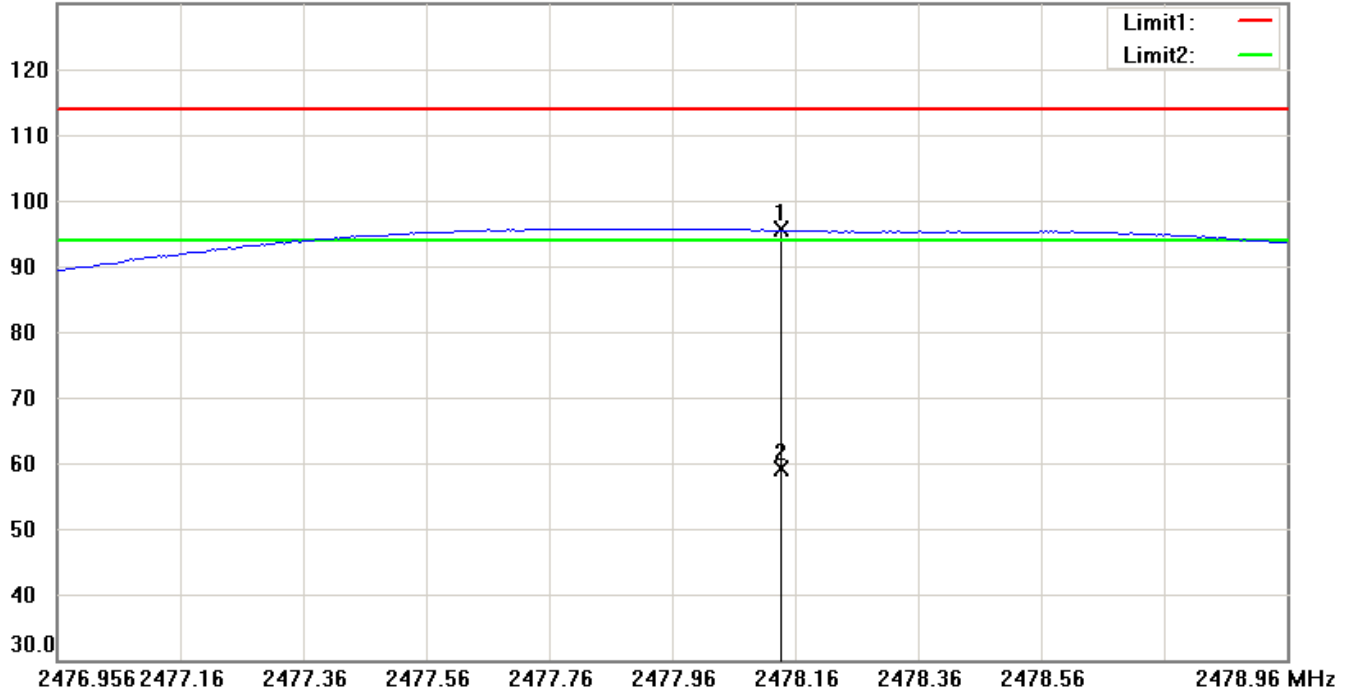

Antenna Polarization V


130.0 dBuV/m

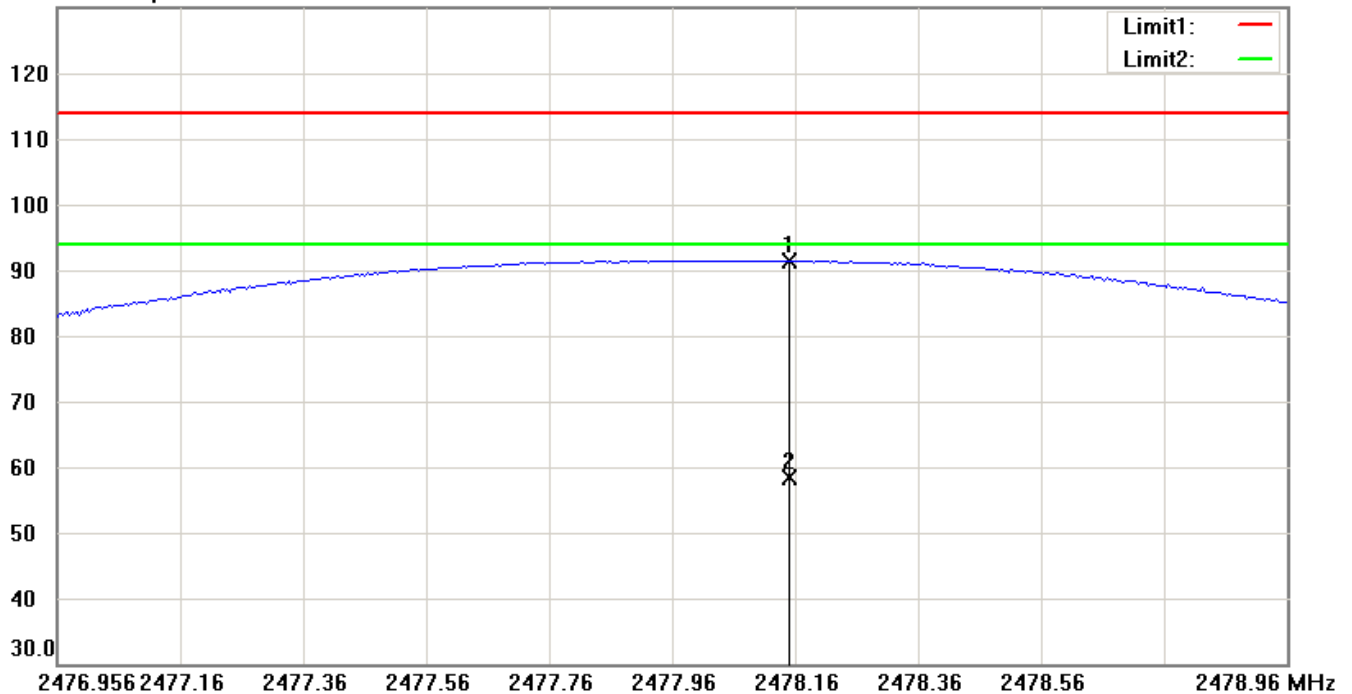

Up Line: Peak Limit Line    Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of fundamental field strength test data of this test report.



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

Spurious Emissions radiated\_Transmitter

2406 MHz


Antenna Polarization H

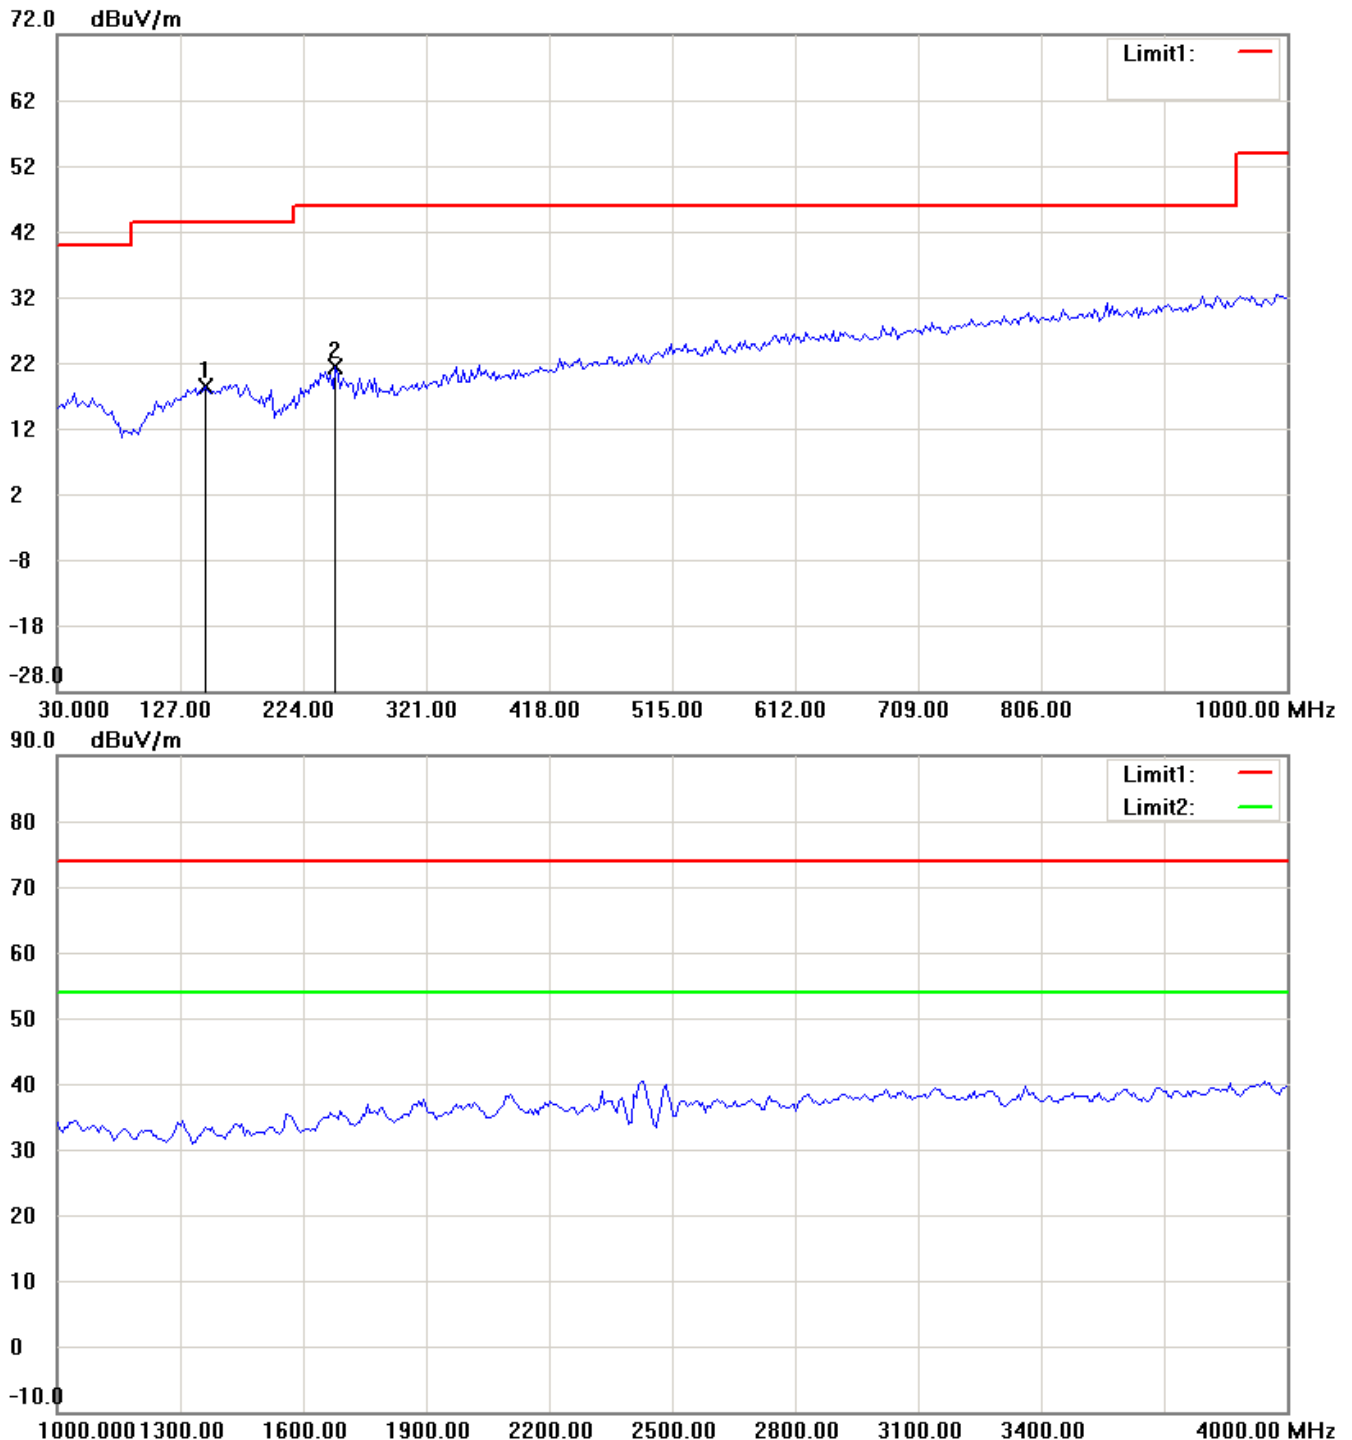

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


90.0 dBuV/m

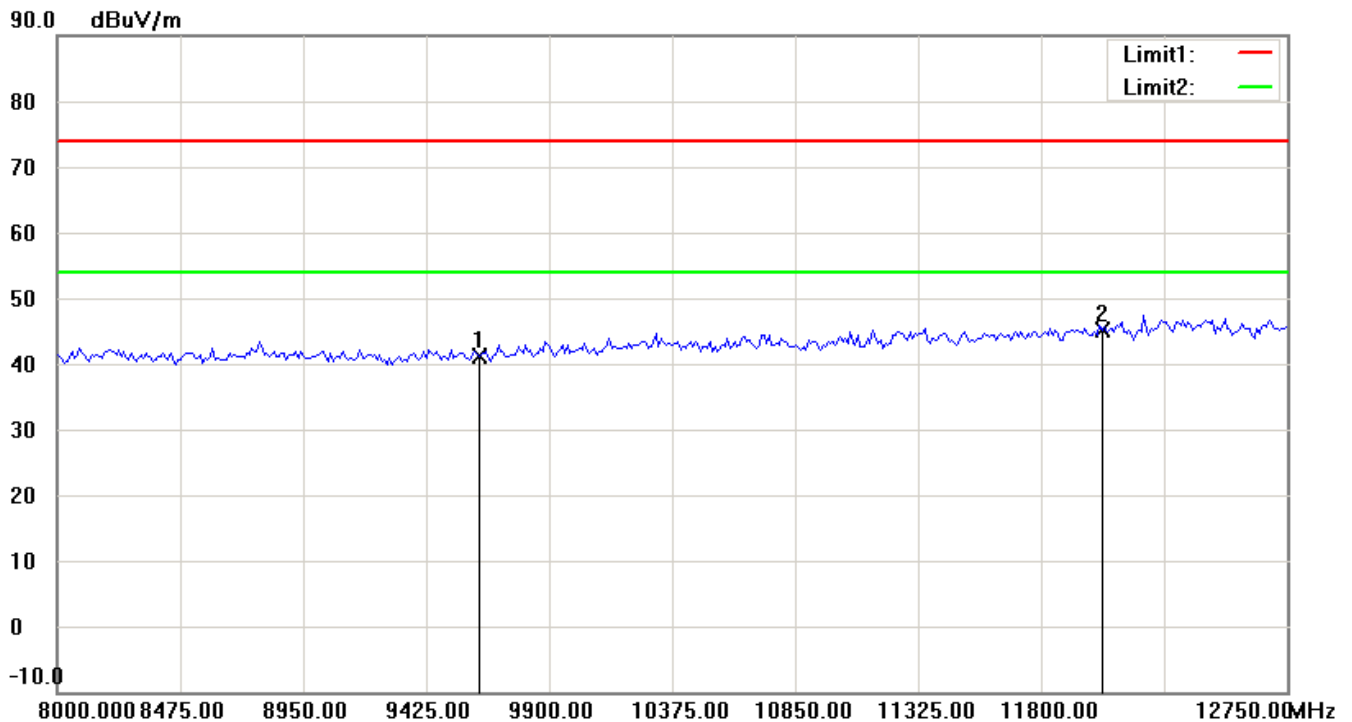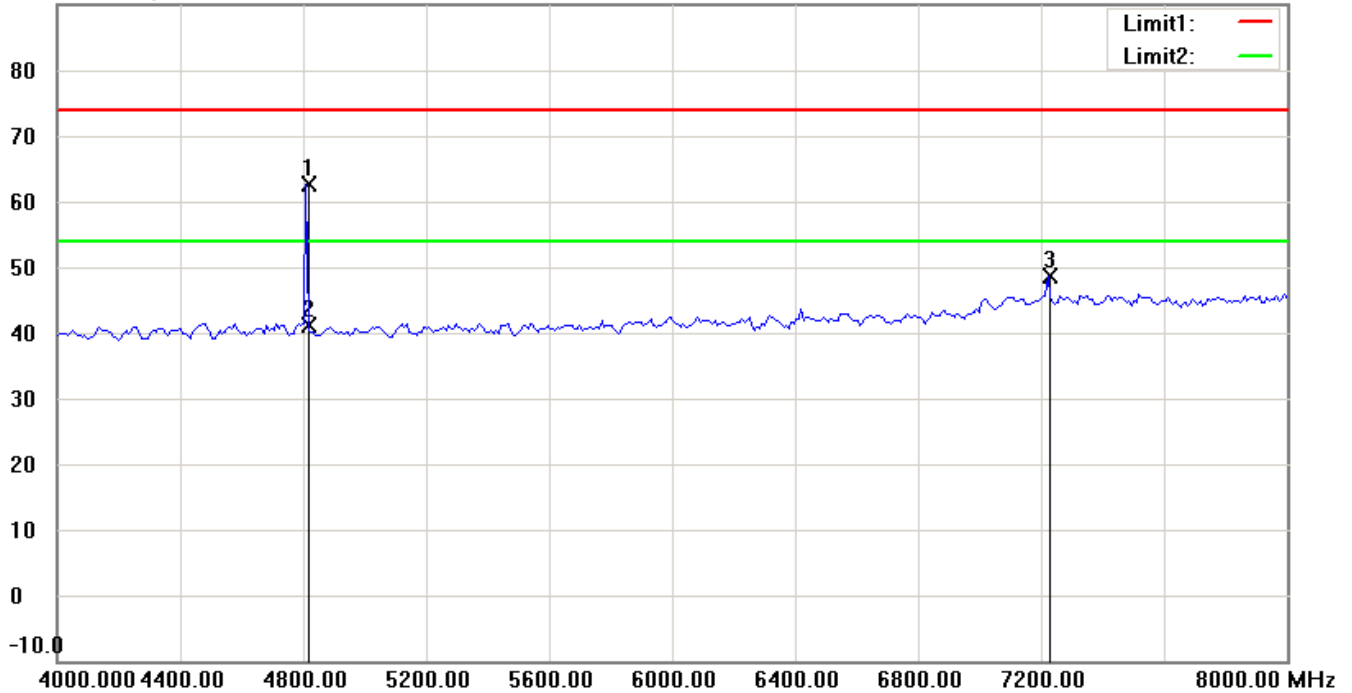

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


90.0 dBuV/m

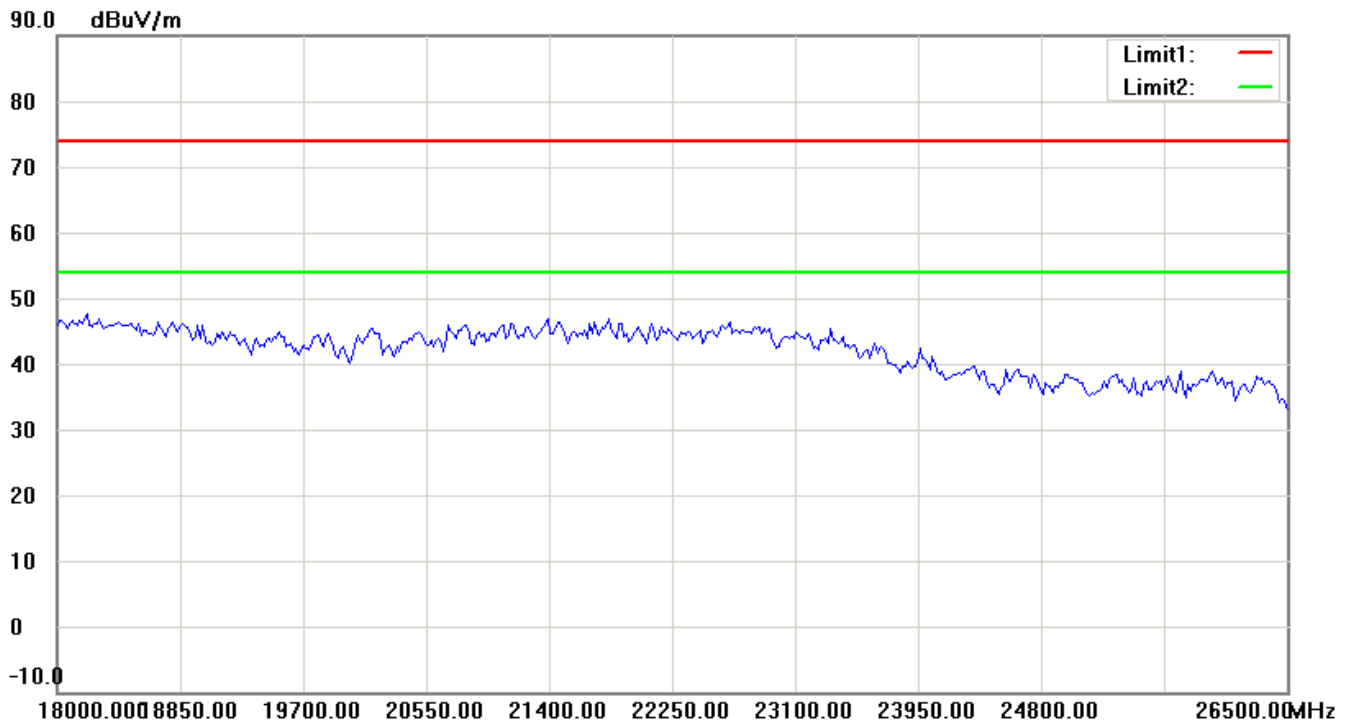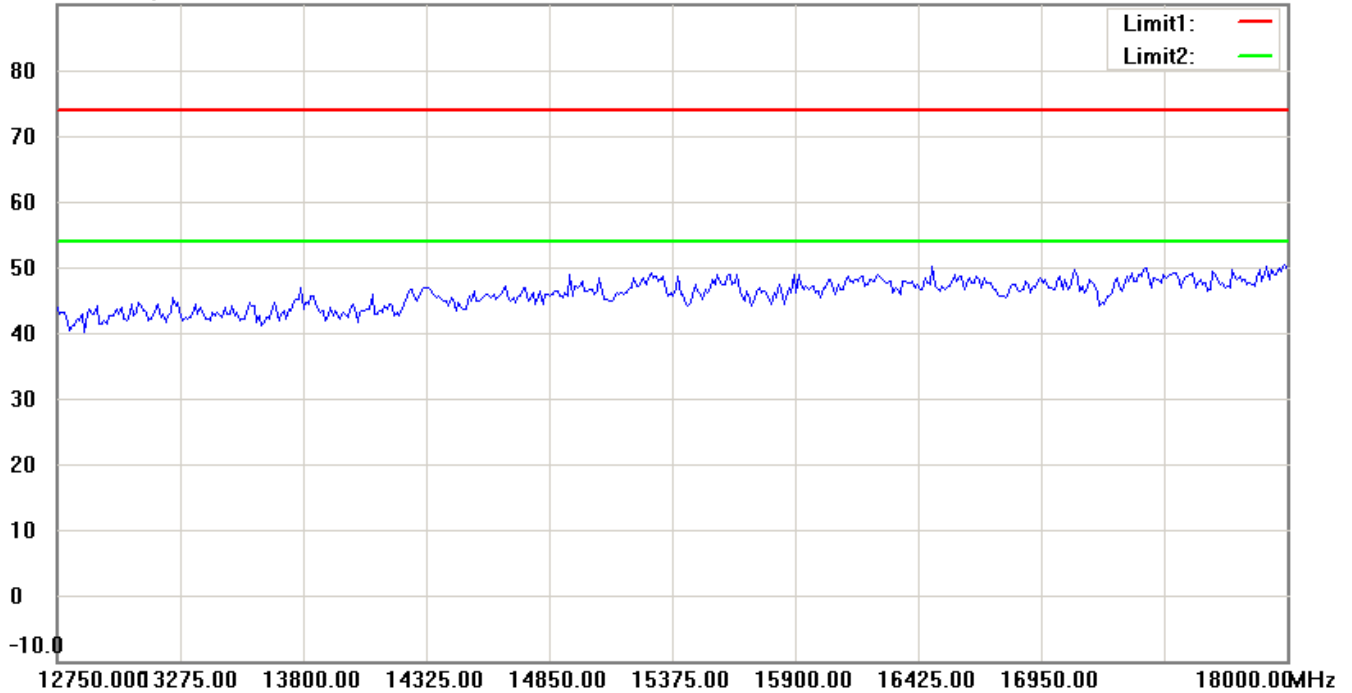

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:



1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


## Antenna Polarization V

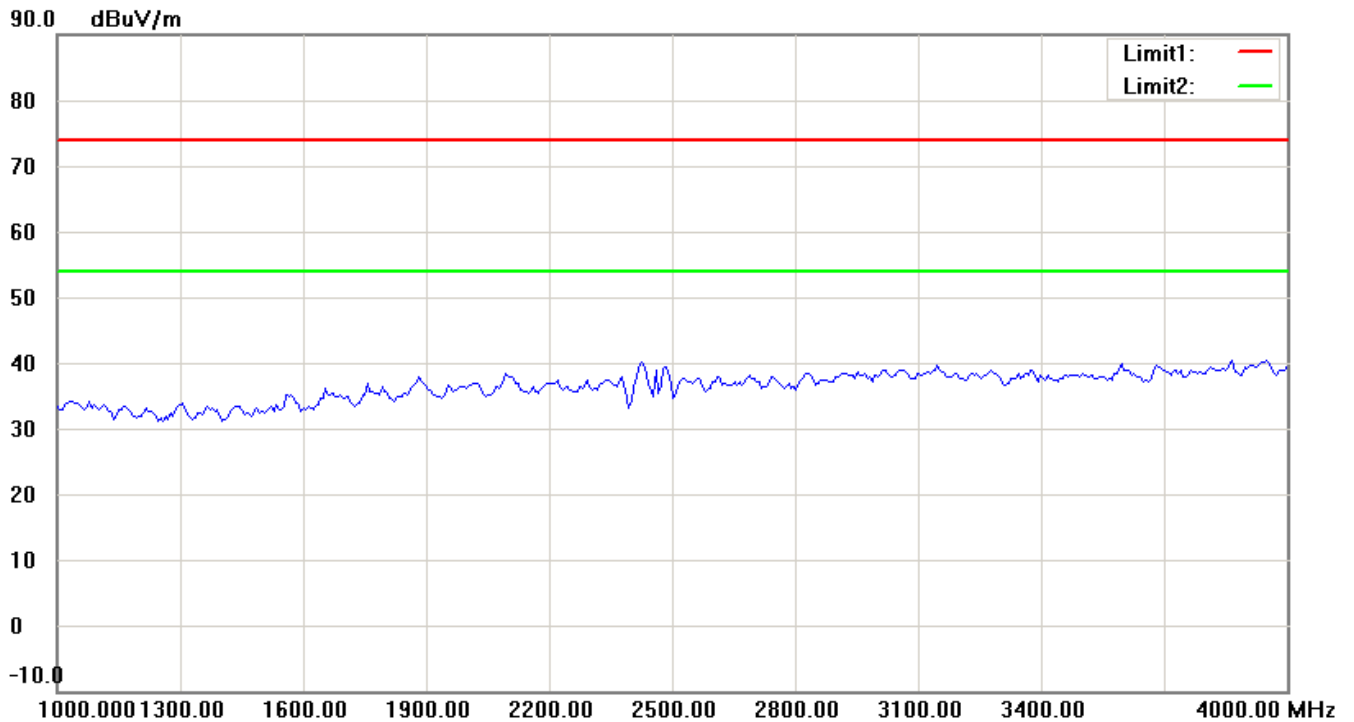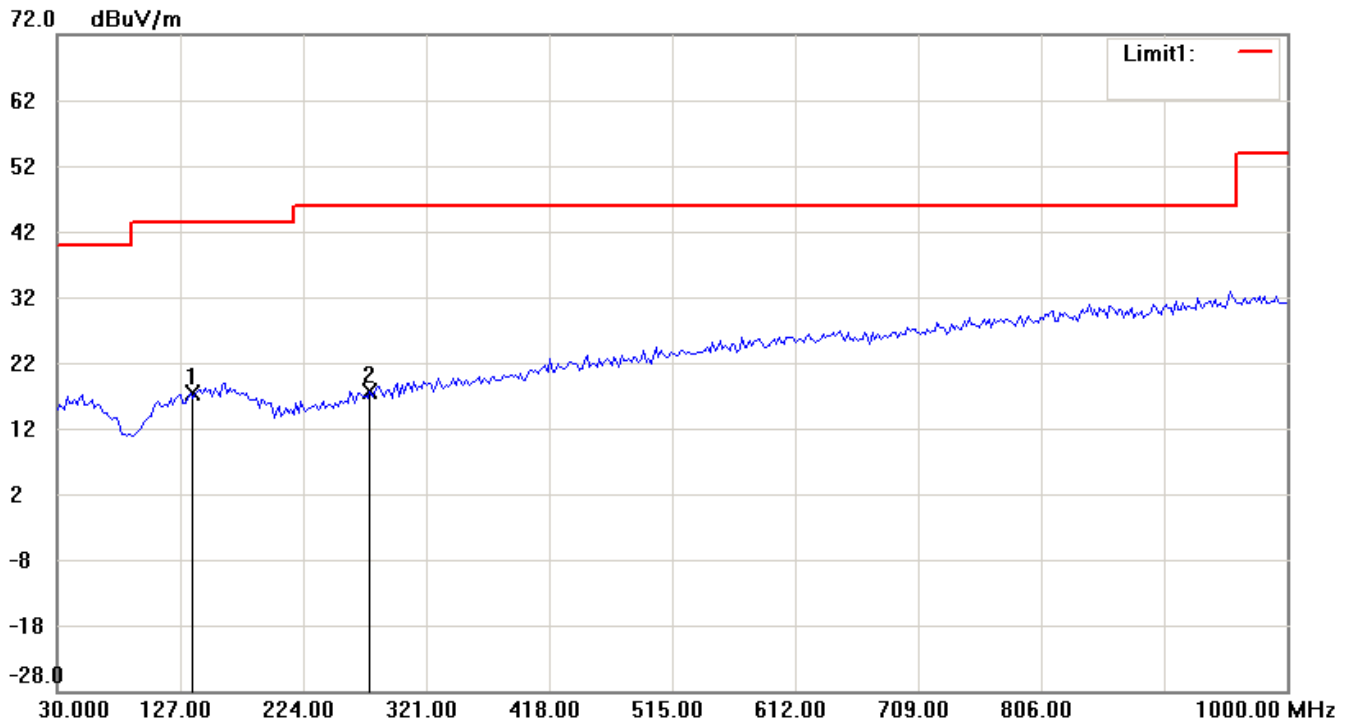

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


90.0 dBuV/m

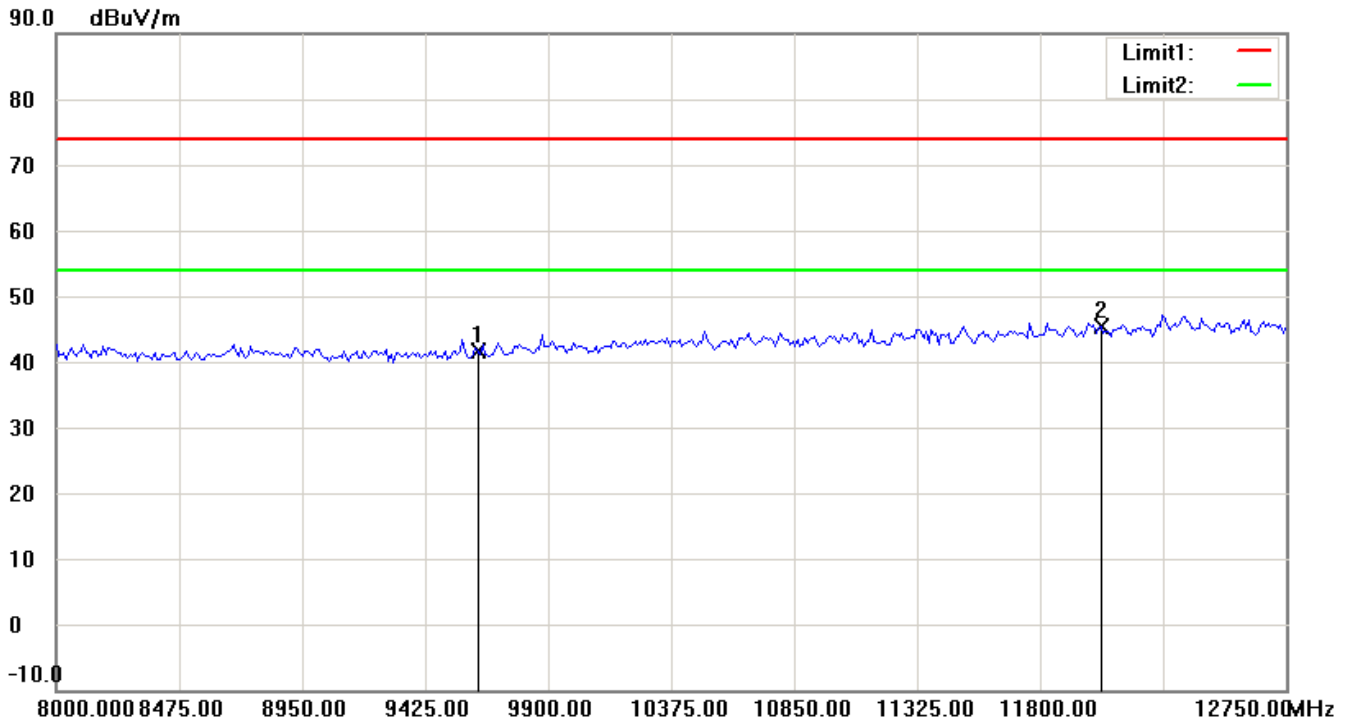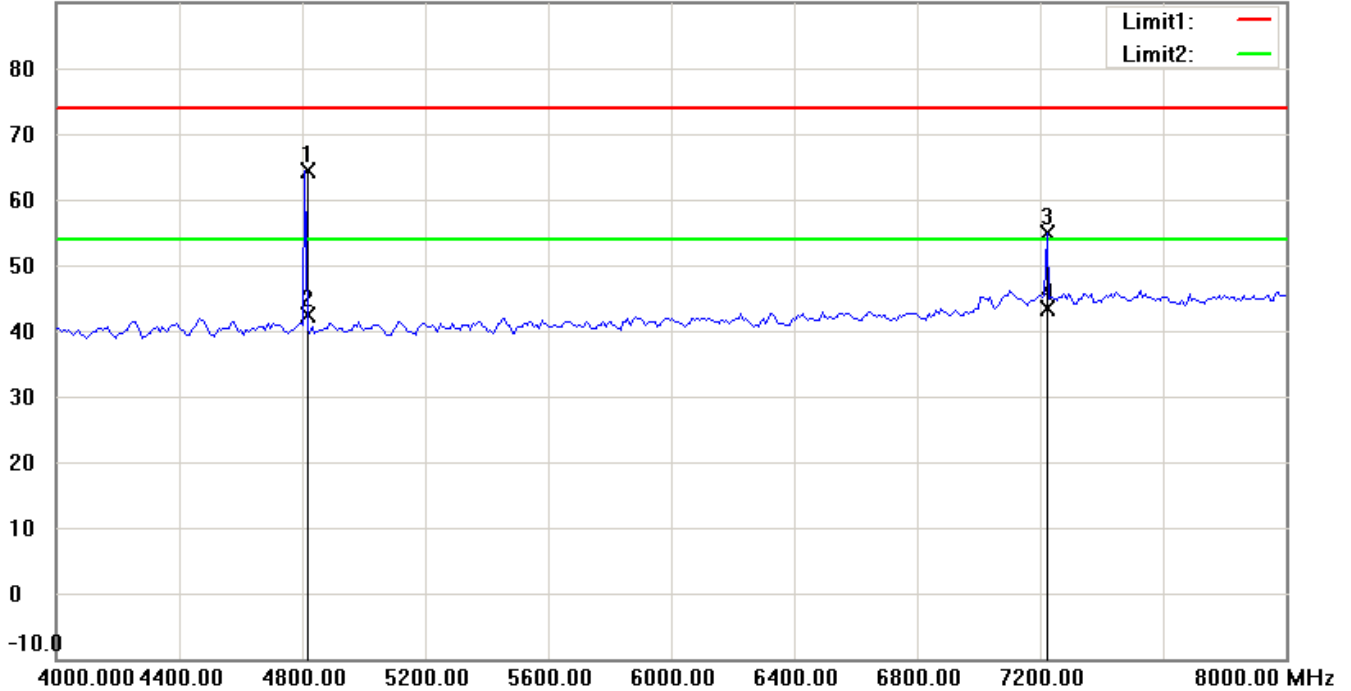

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

90.0 dBuV/m

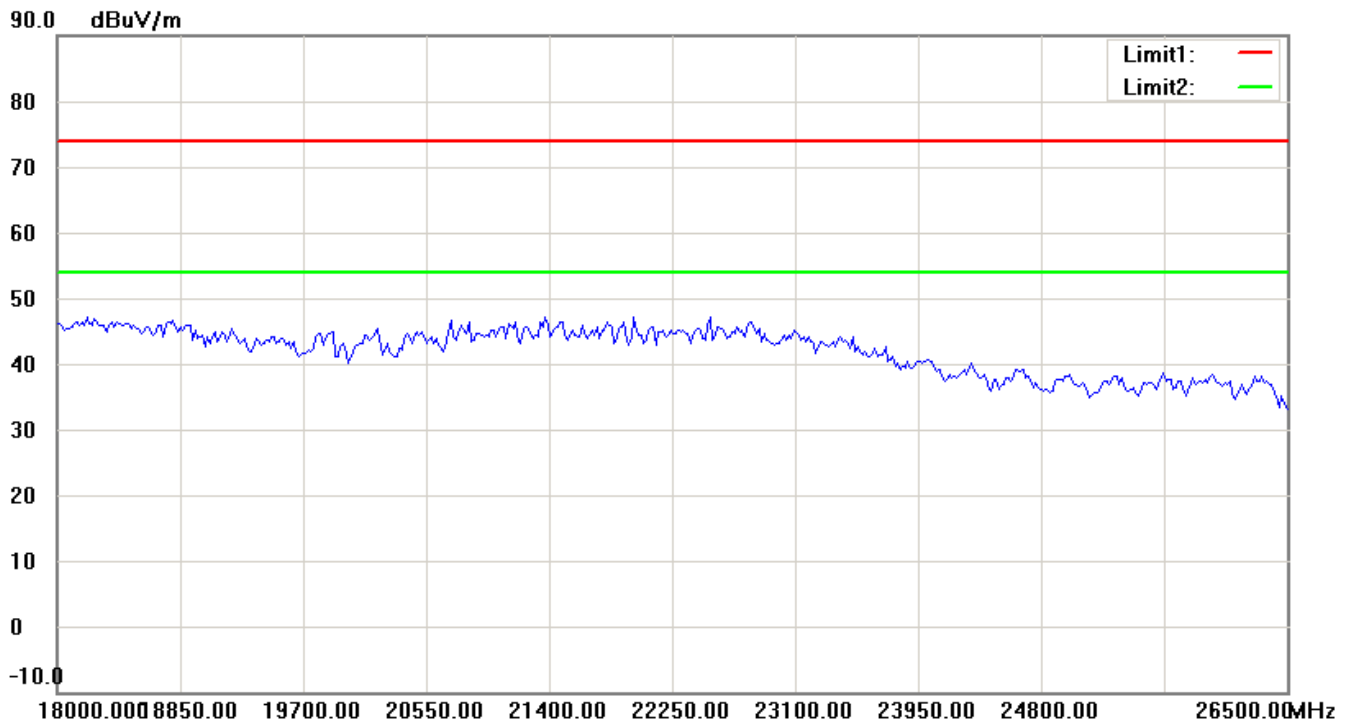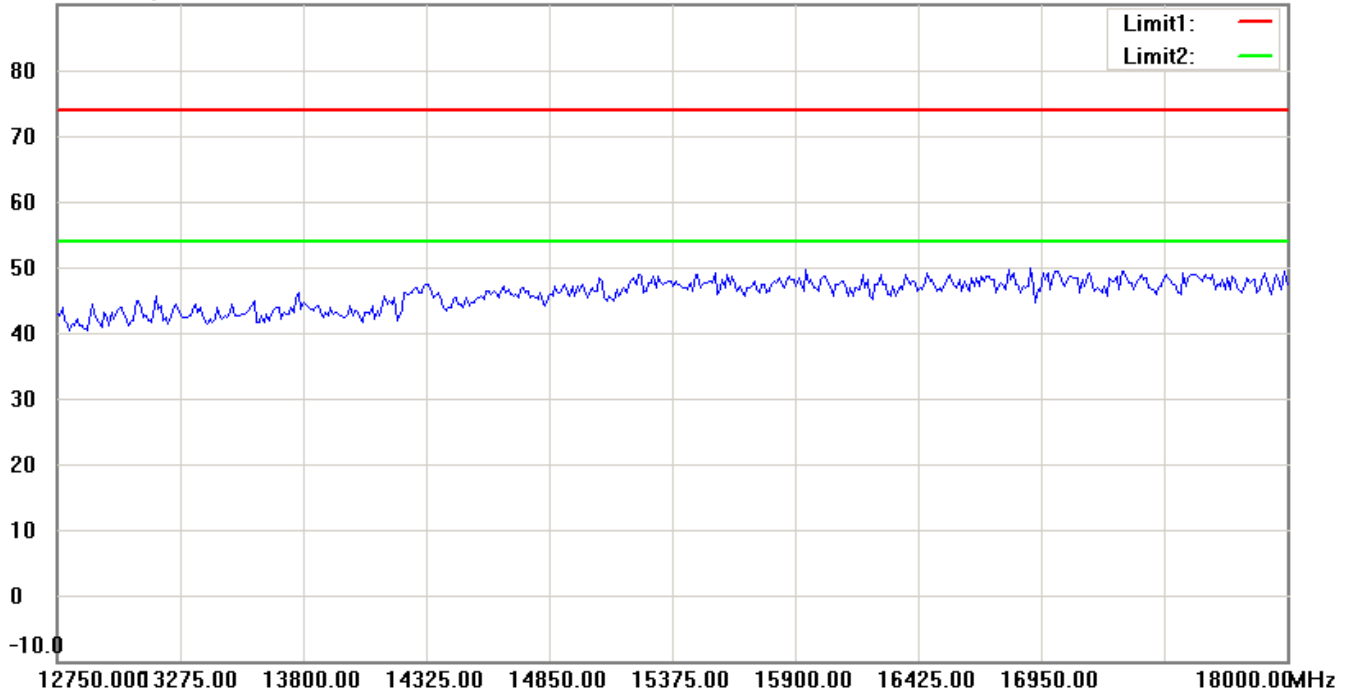


Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.







# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

2440 MHz


Antenna Polarization H

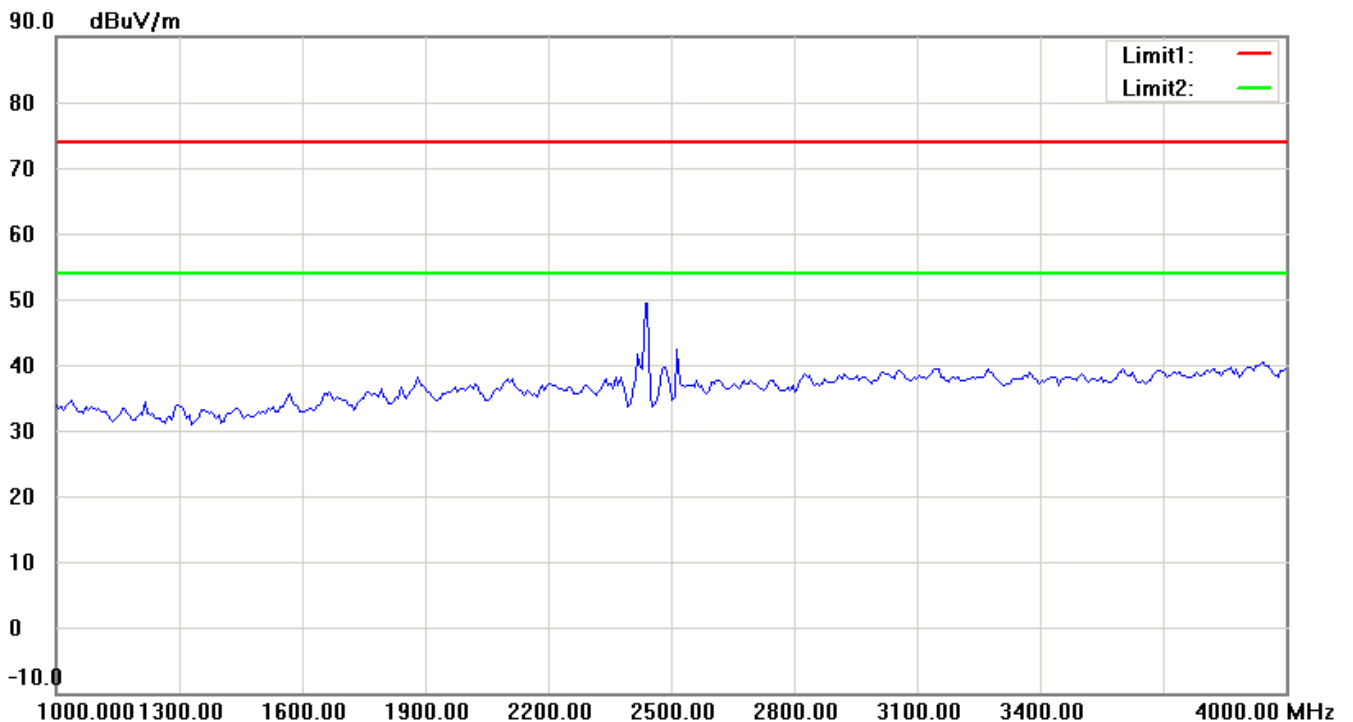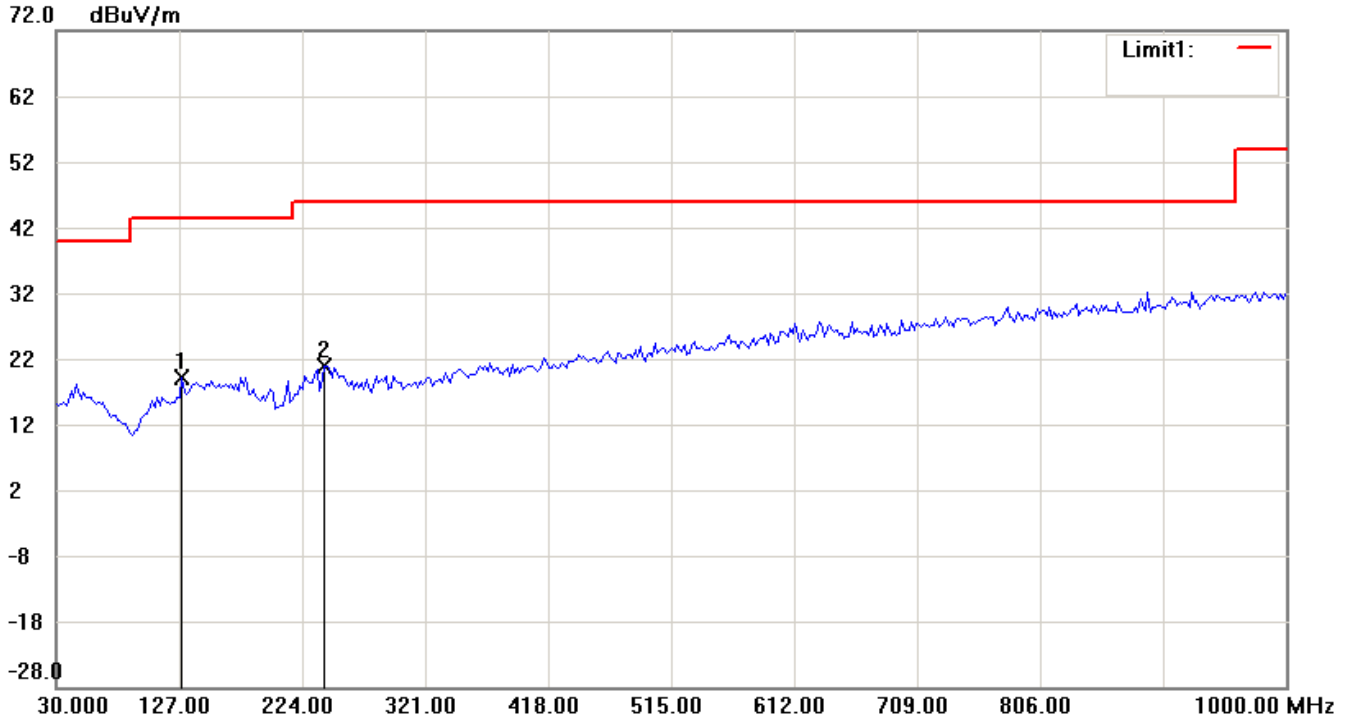

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:



1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


90.0 dBuV/m

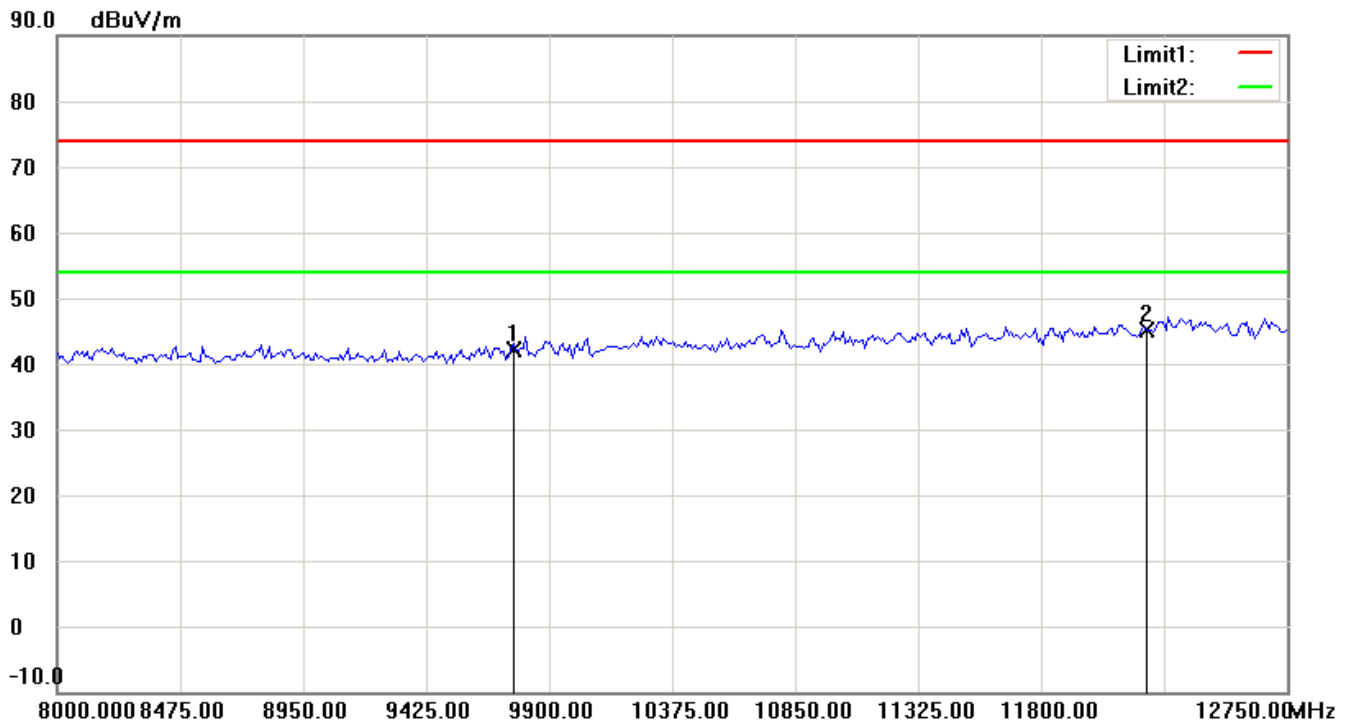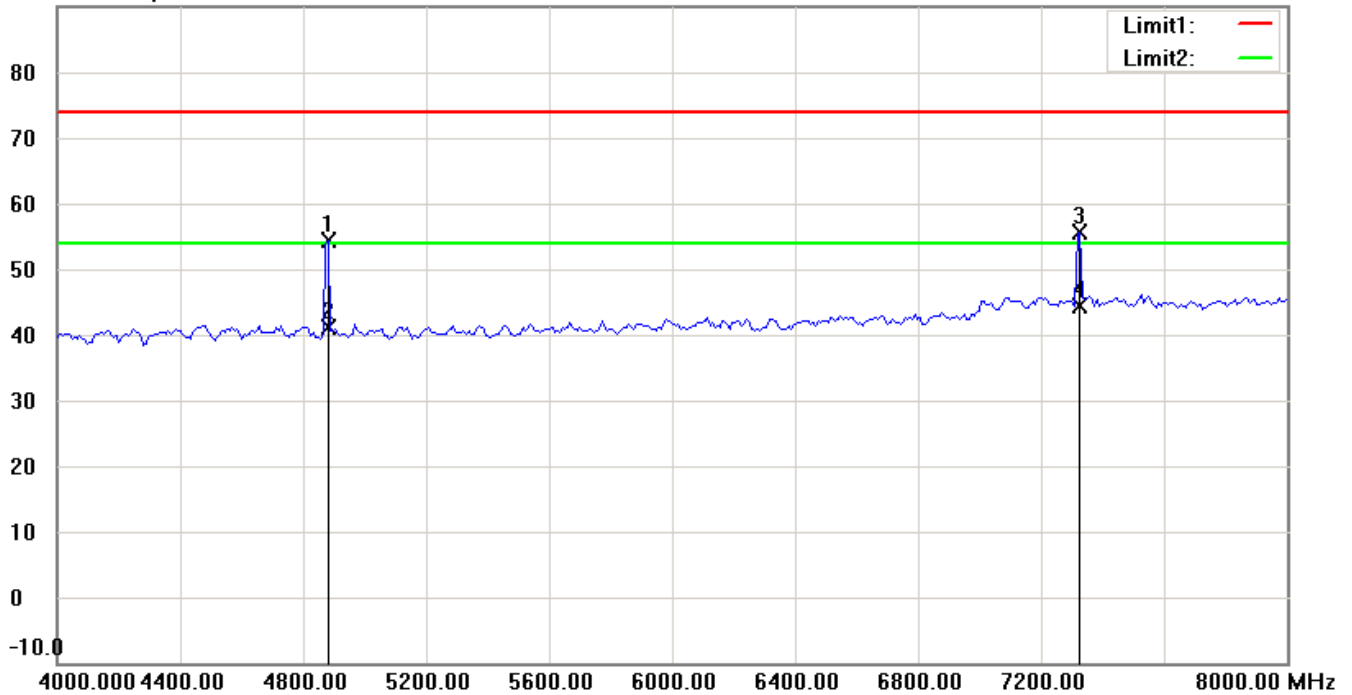

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


90.0 dBuV/m

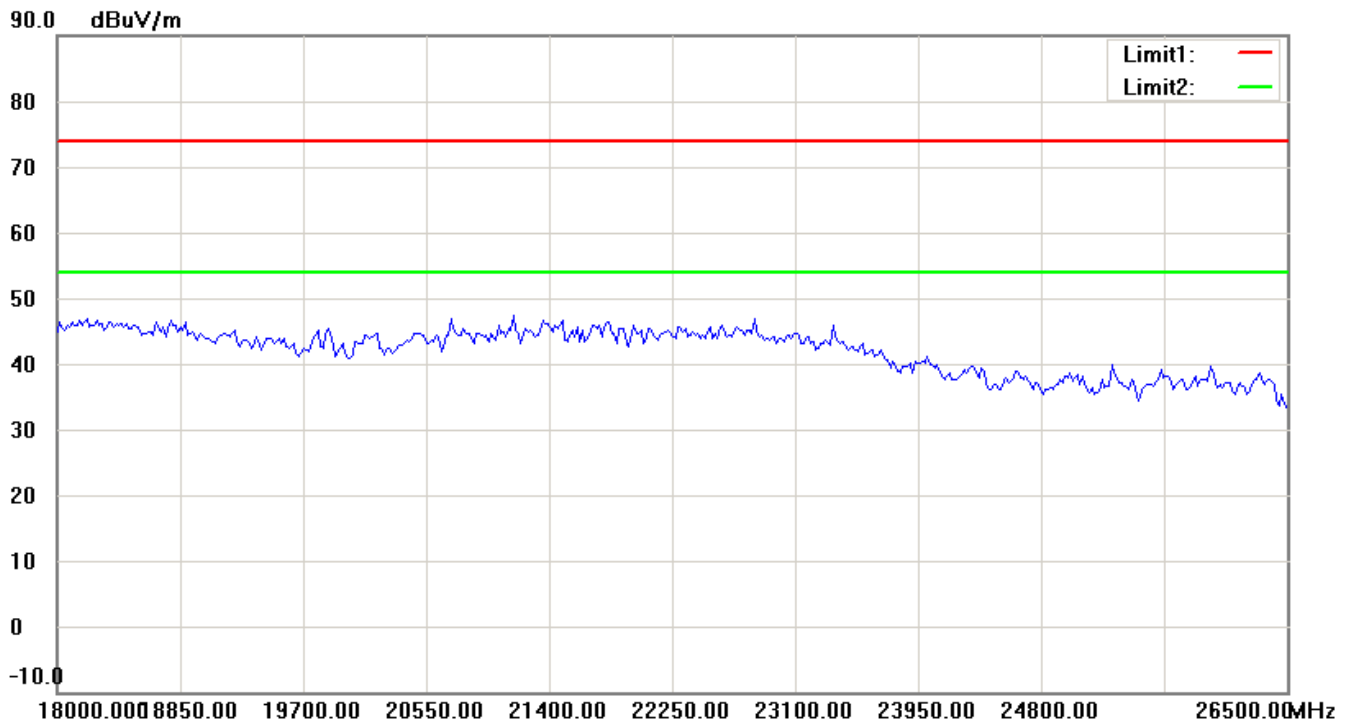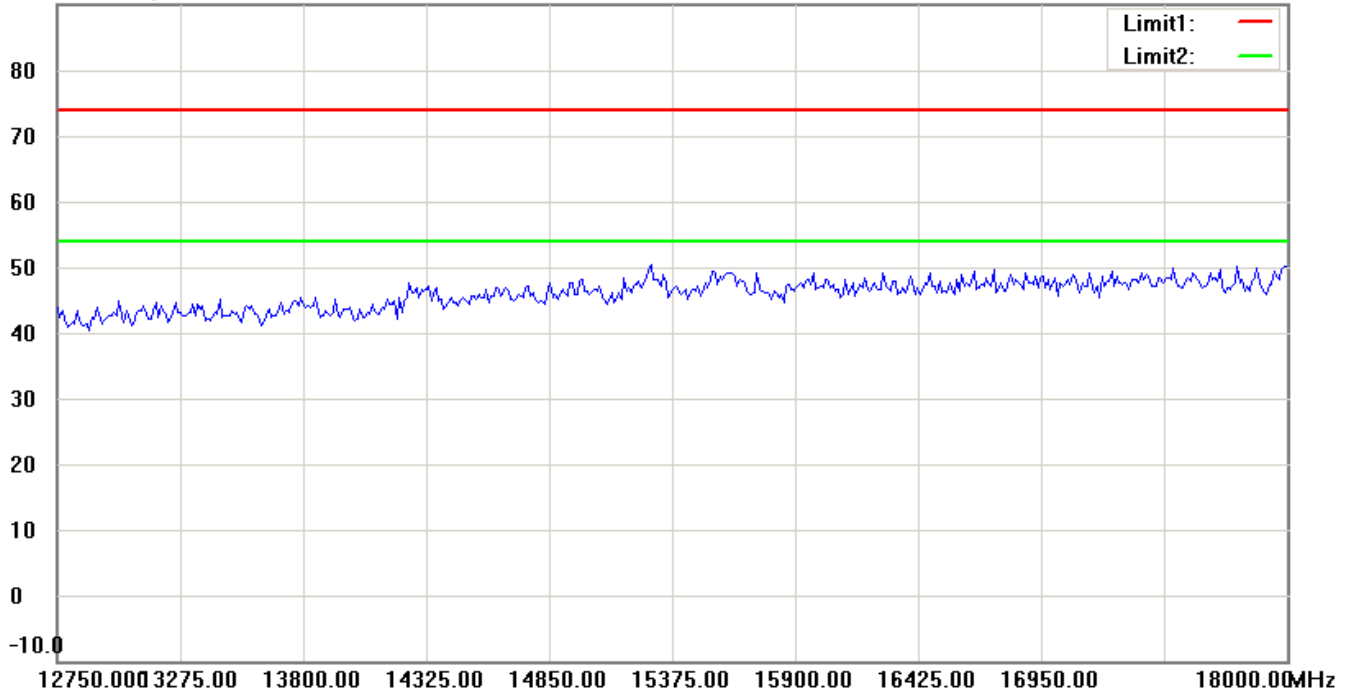

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:



1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


## Antenna Polarization V

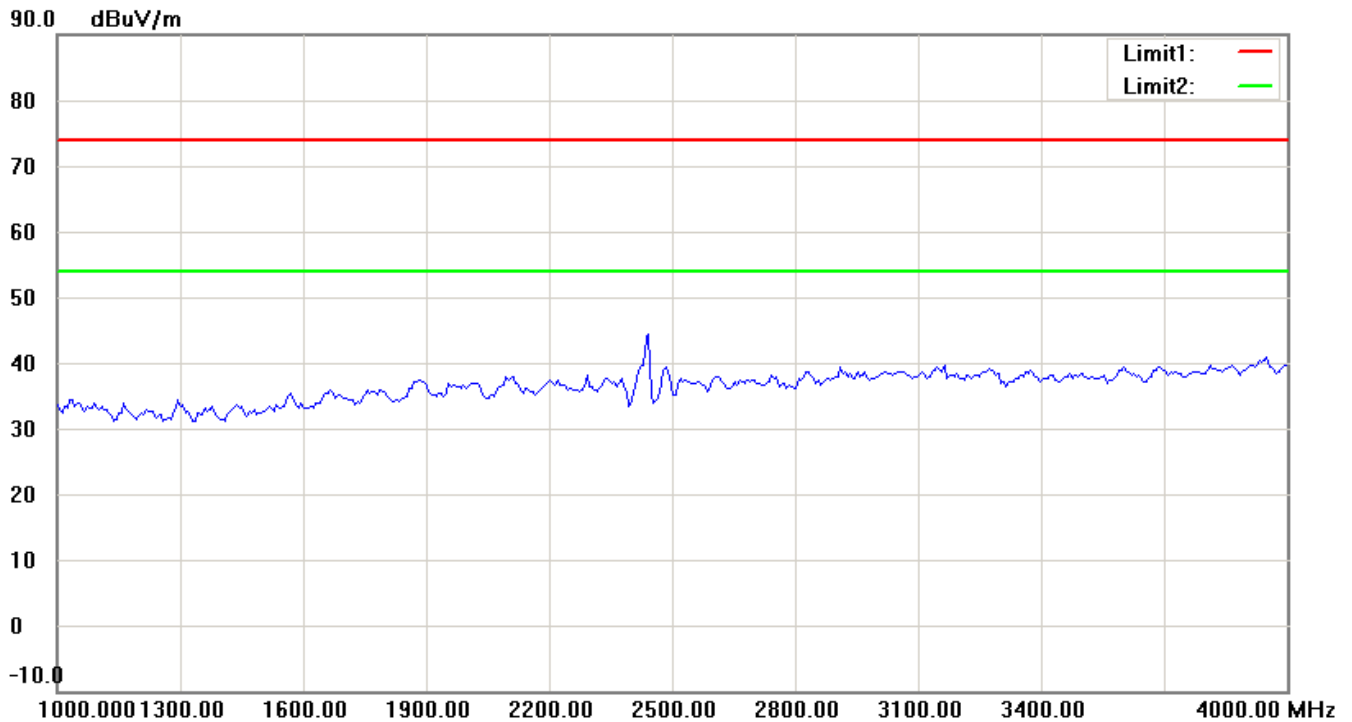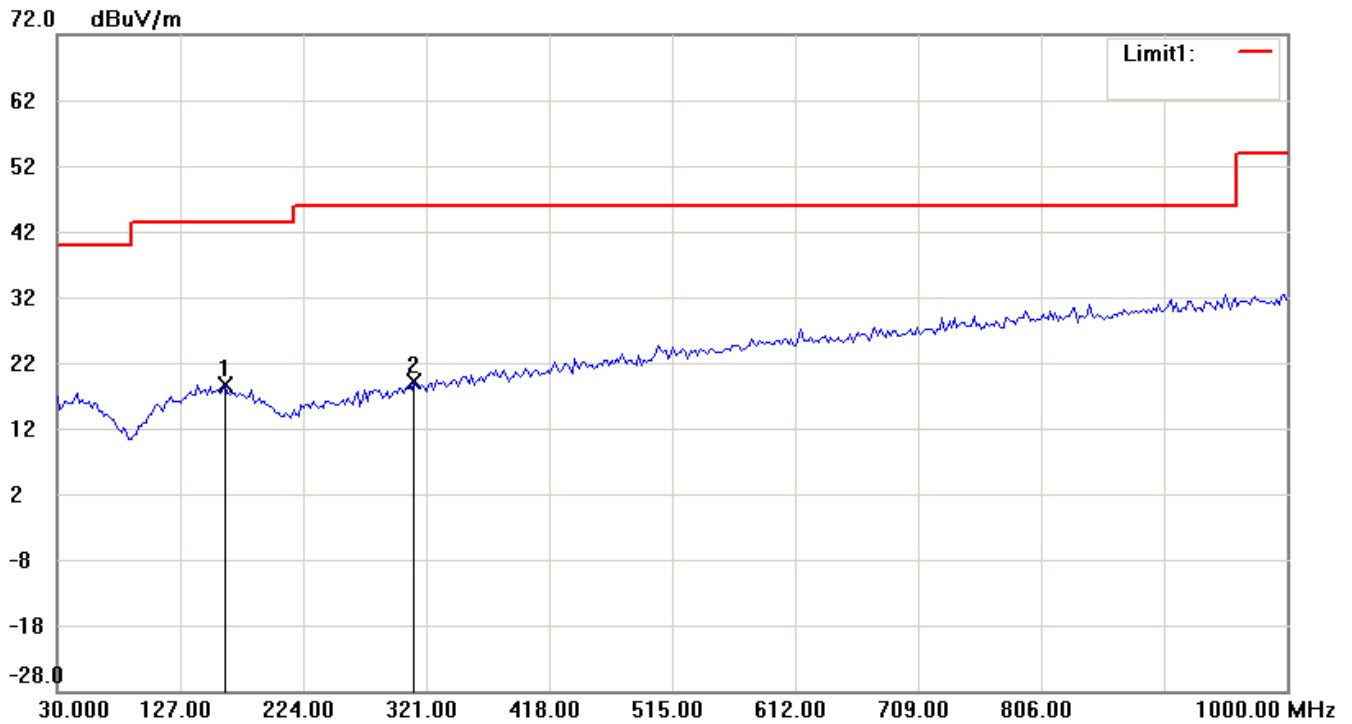

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


90.0 dBuV/m

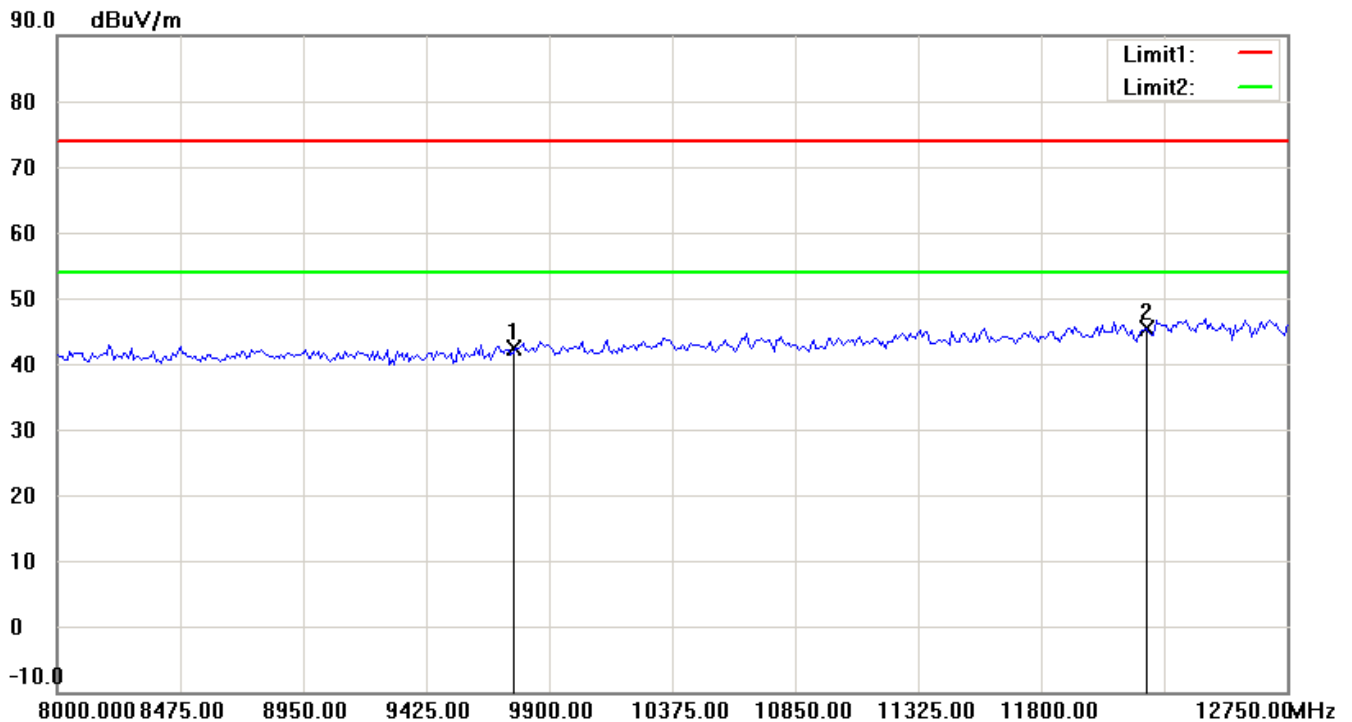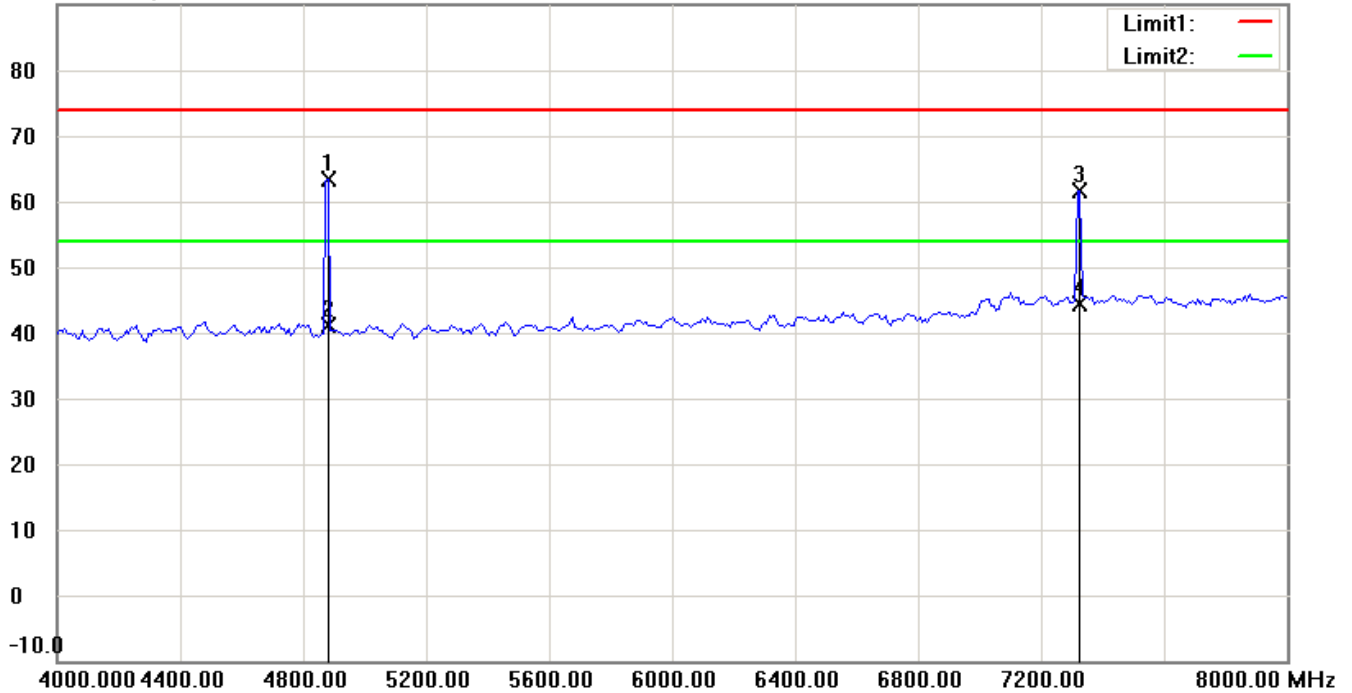

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


90.0 dBuV/m

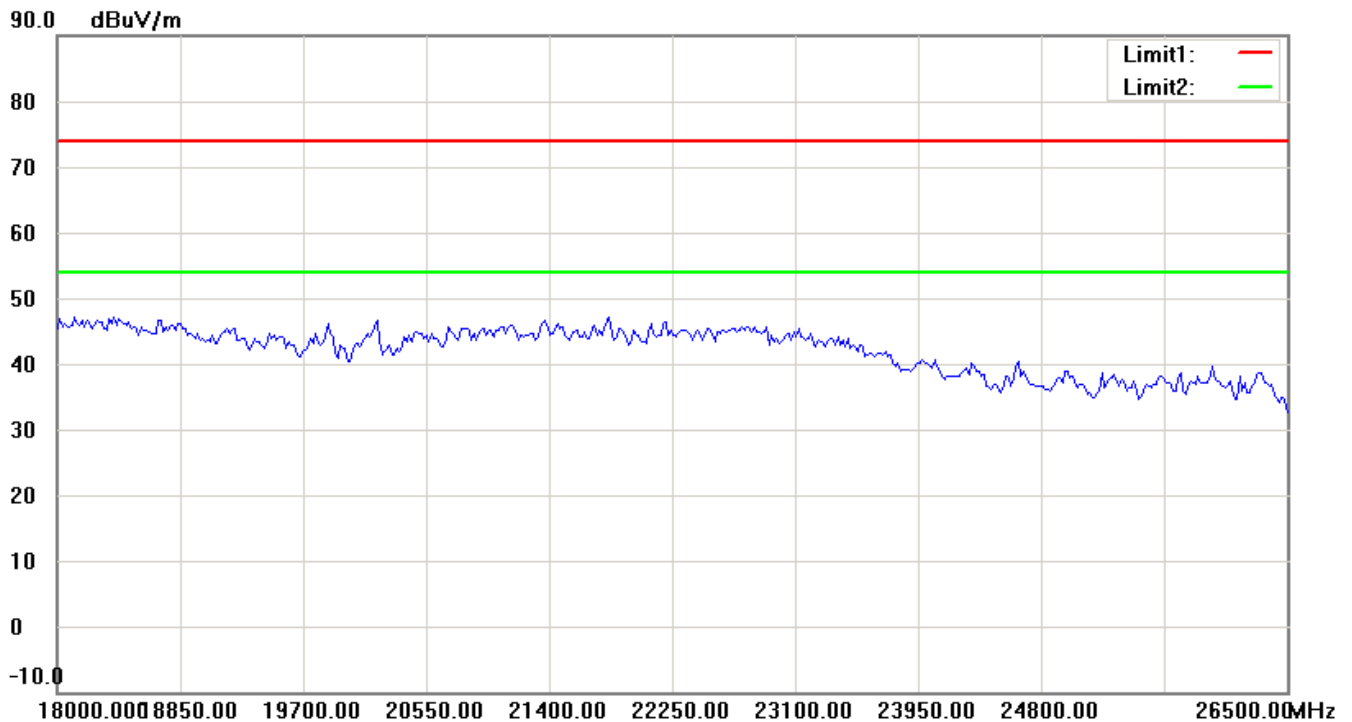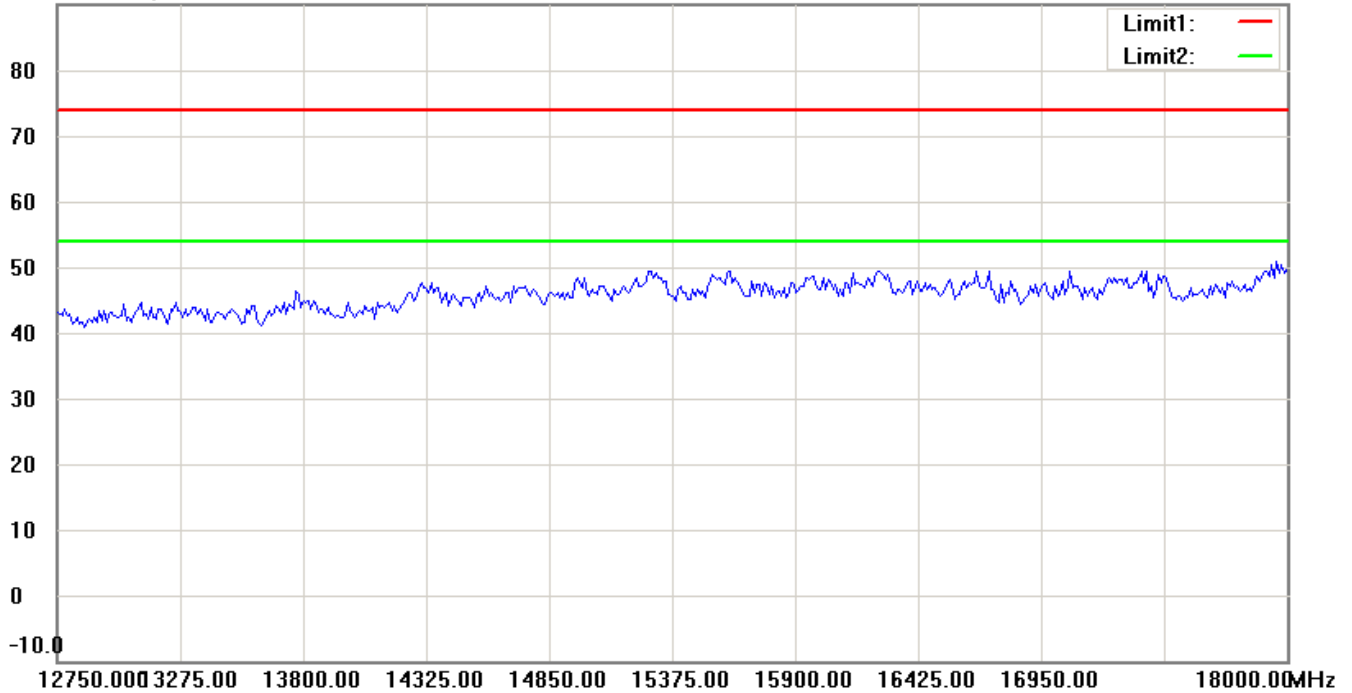

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

2478 MHz


Antenna Polarization H

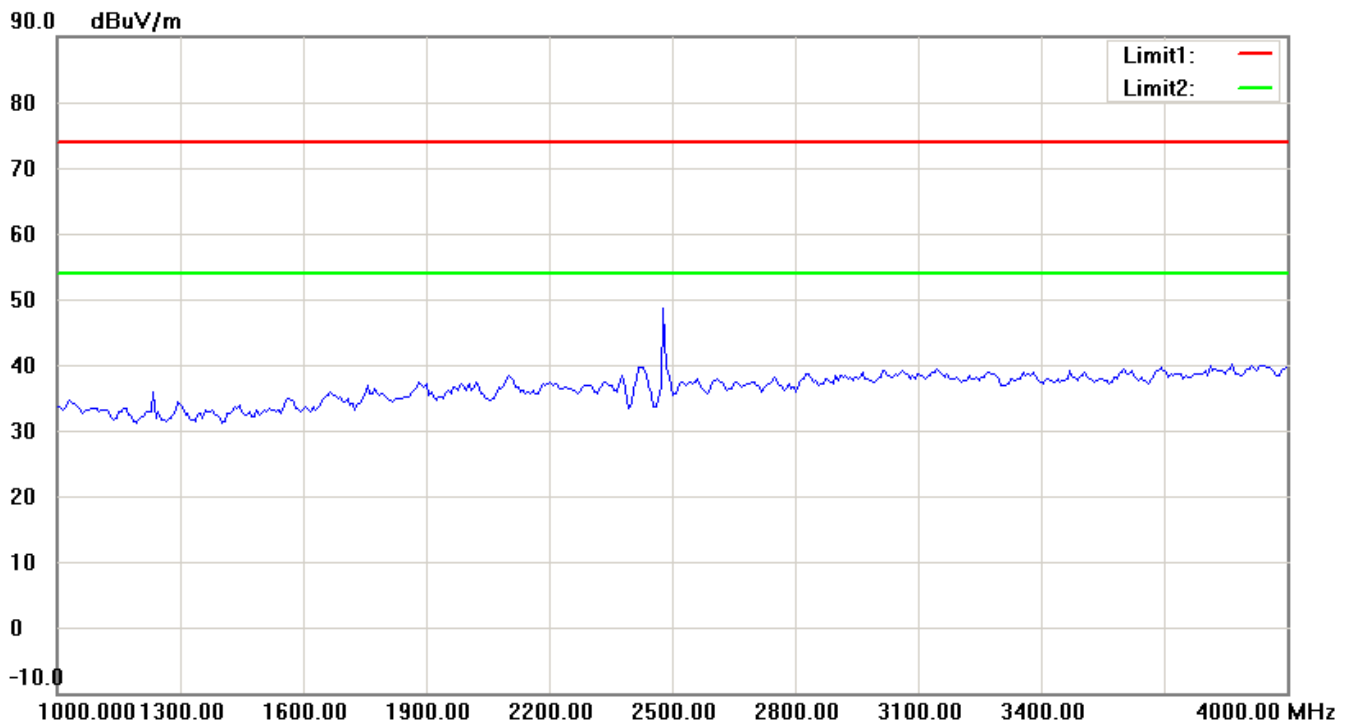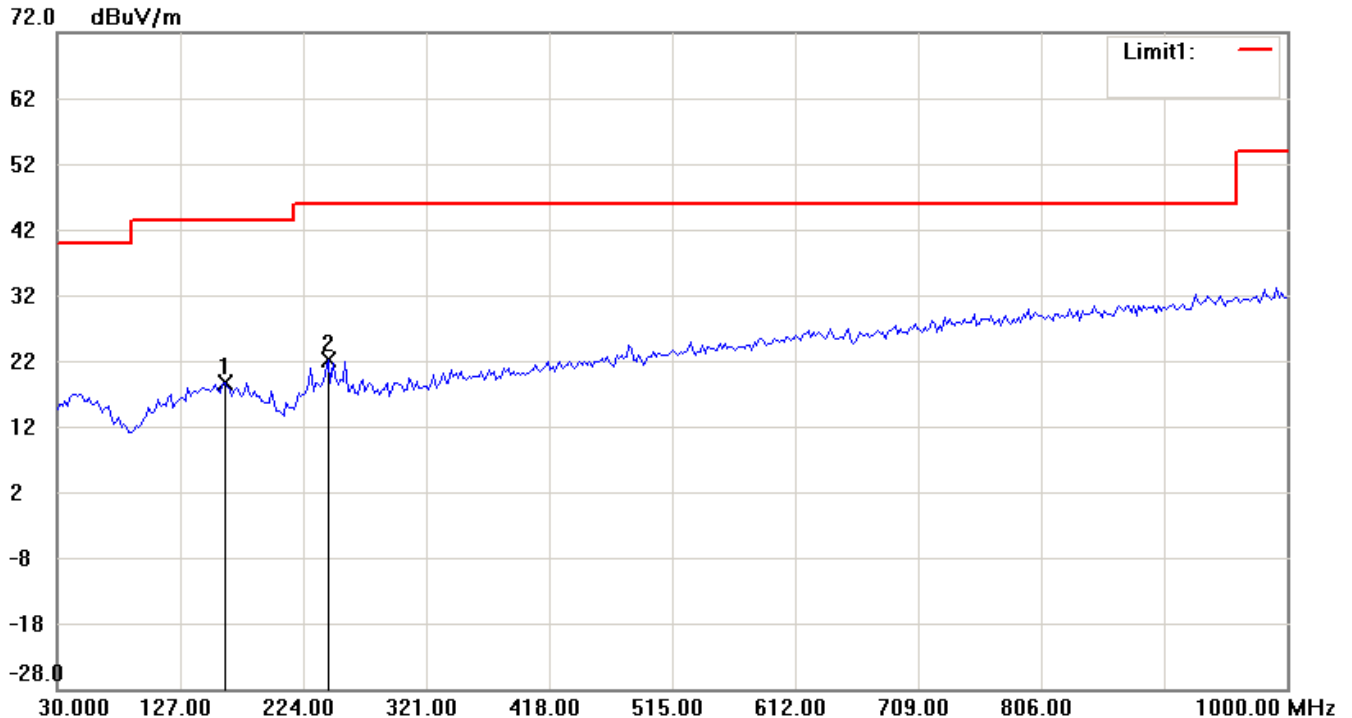

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

90.0 dBuV/m

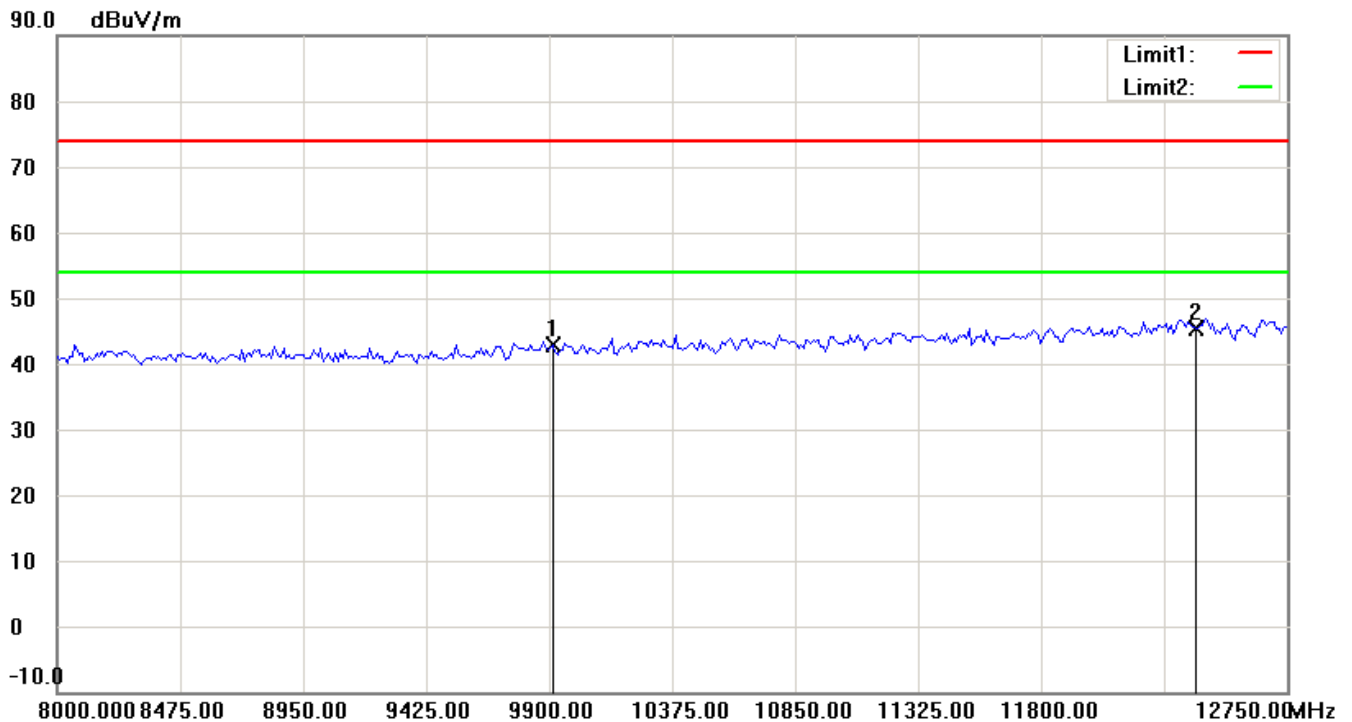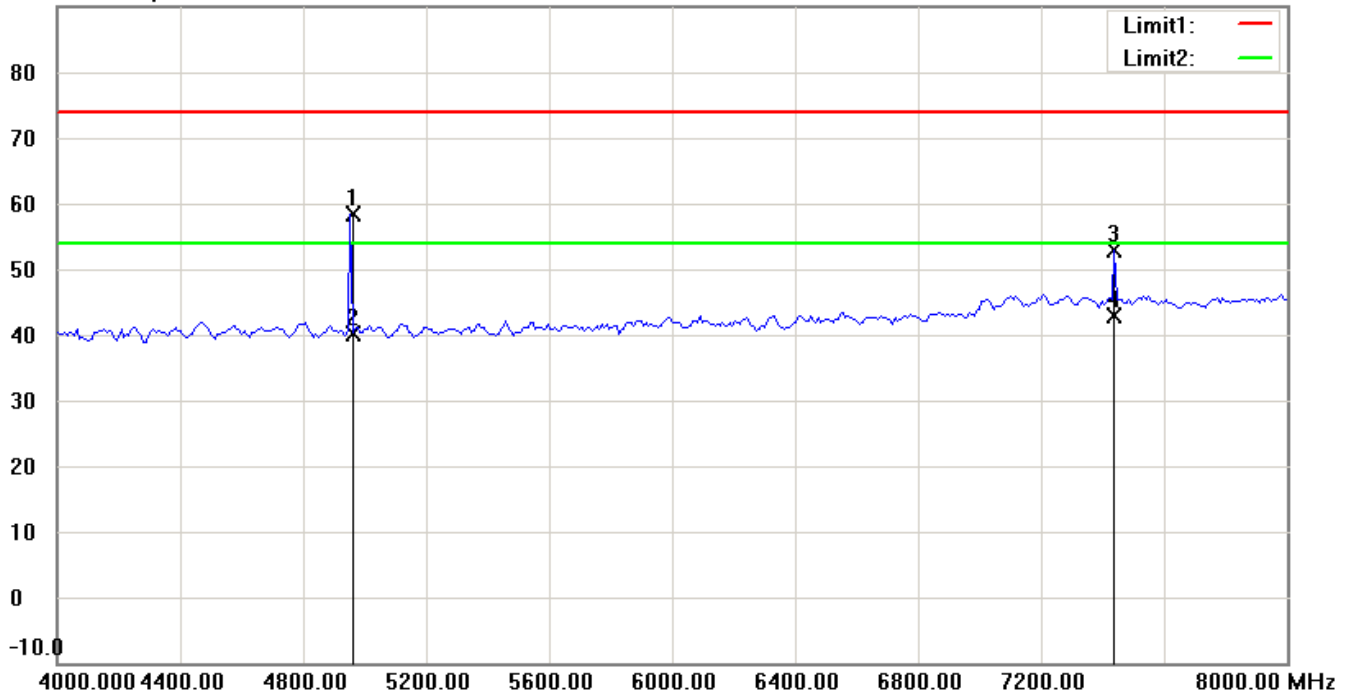


Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.






# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

90.0 dBuV/m

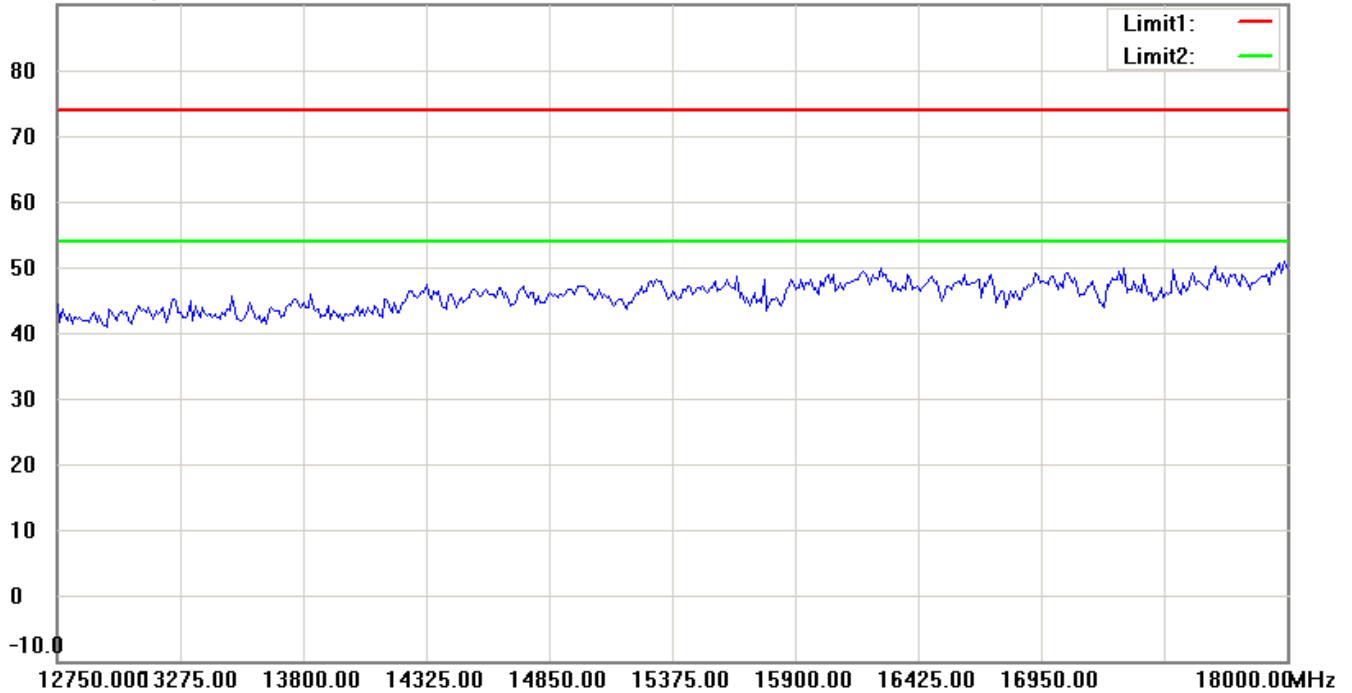


90.0 dBuV/m

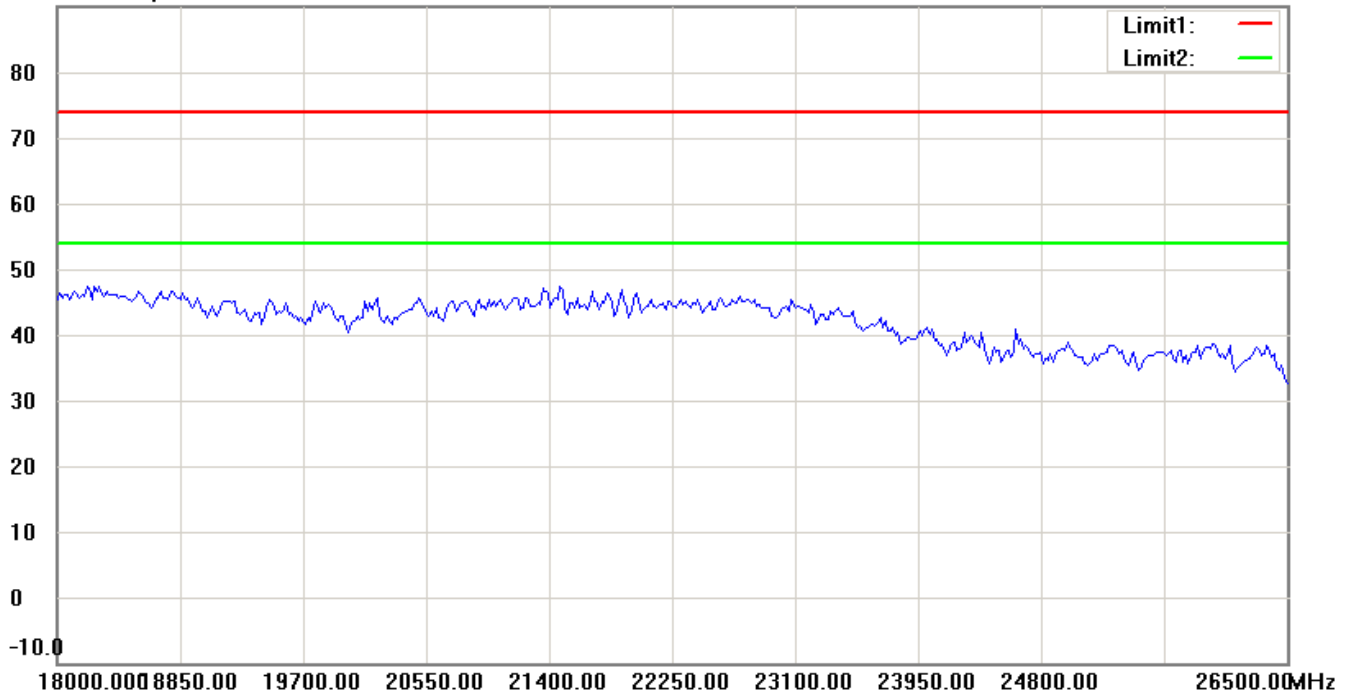

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:



1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


## Antenna Polarization V

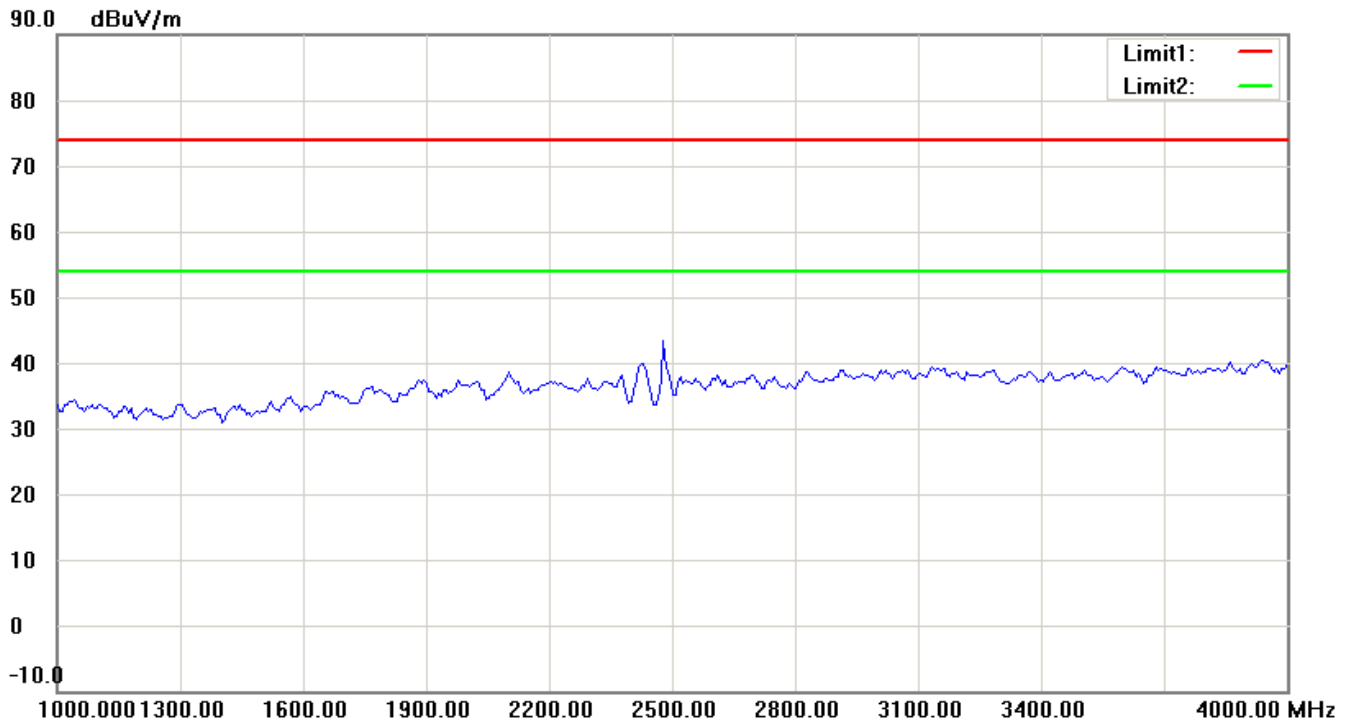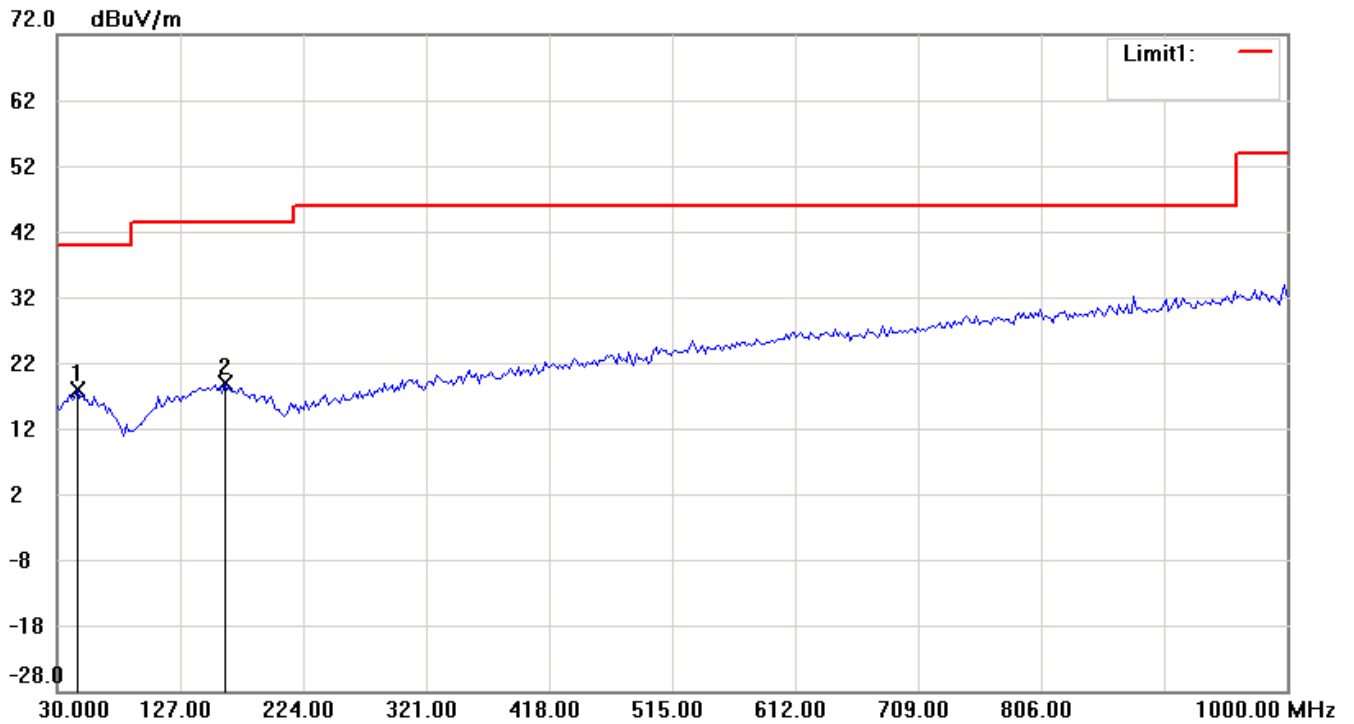

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0


90.0 dBuV/m

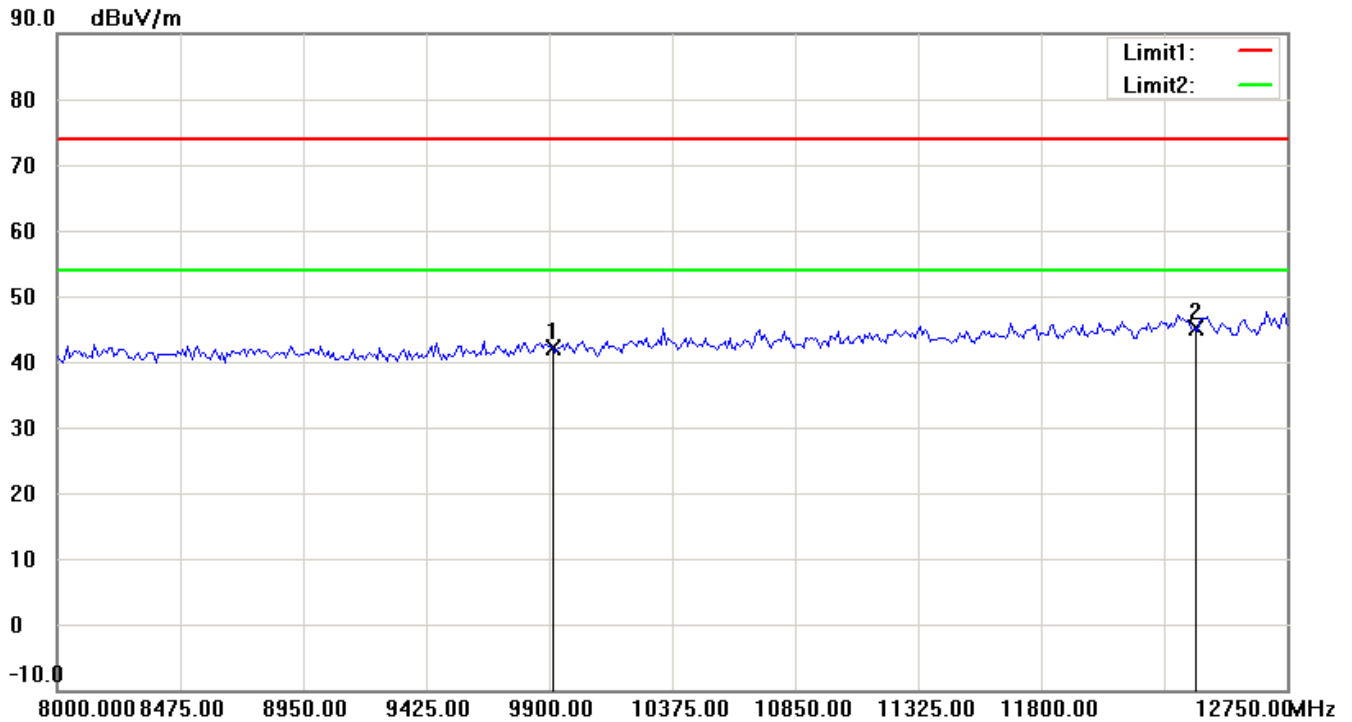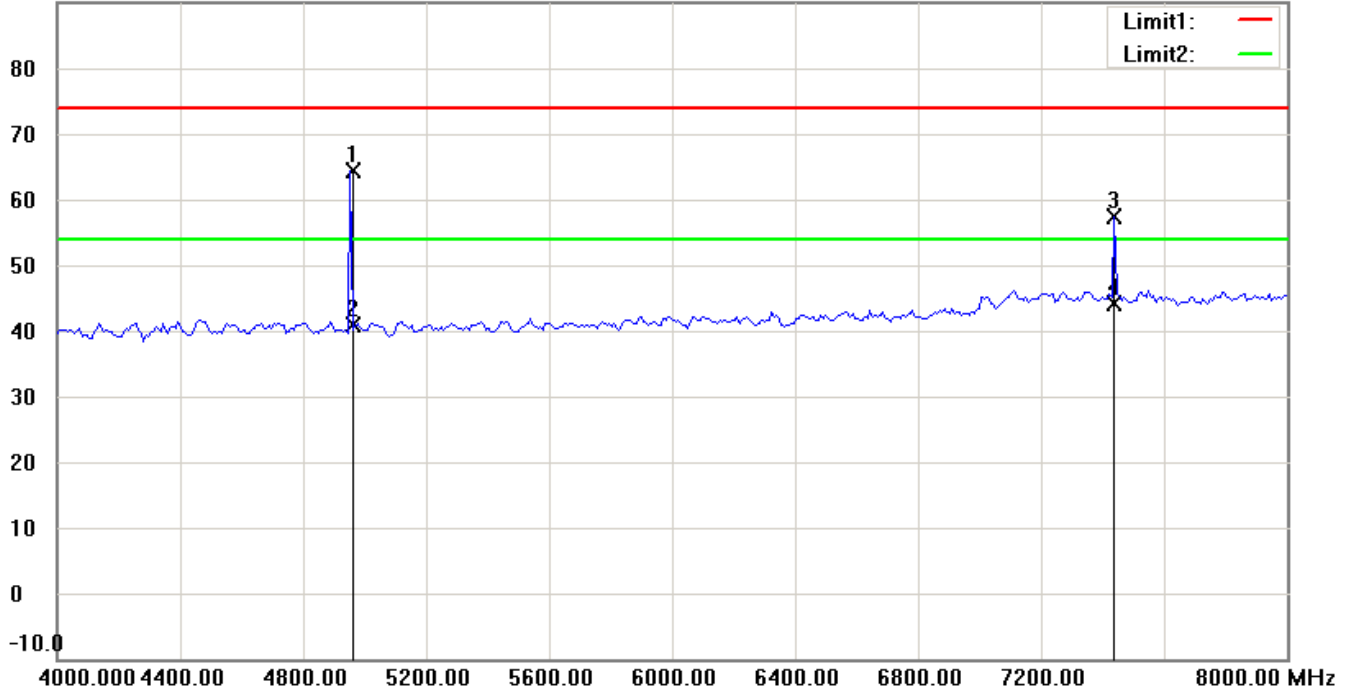

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M21205-12475-C-1

FCC ID: FDISRKB04EN-0

90.0 dBuV/m

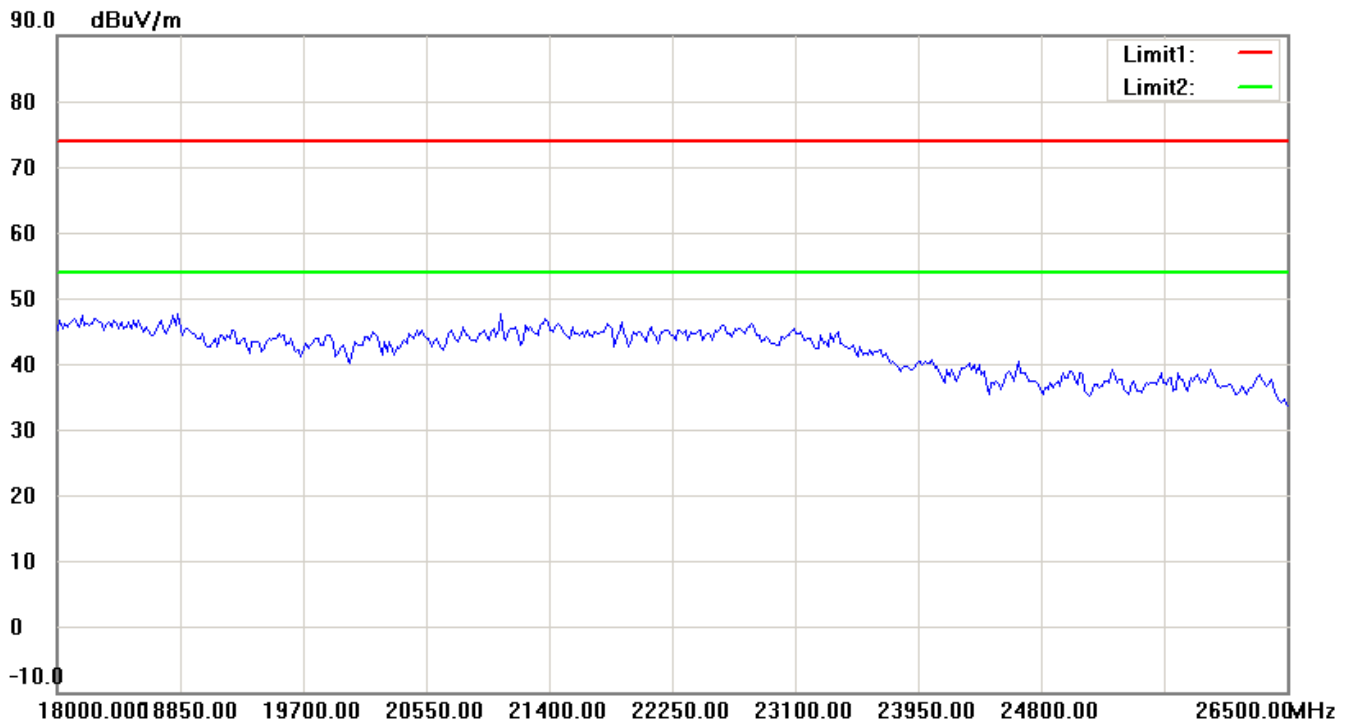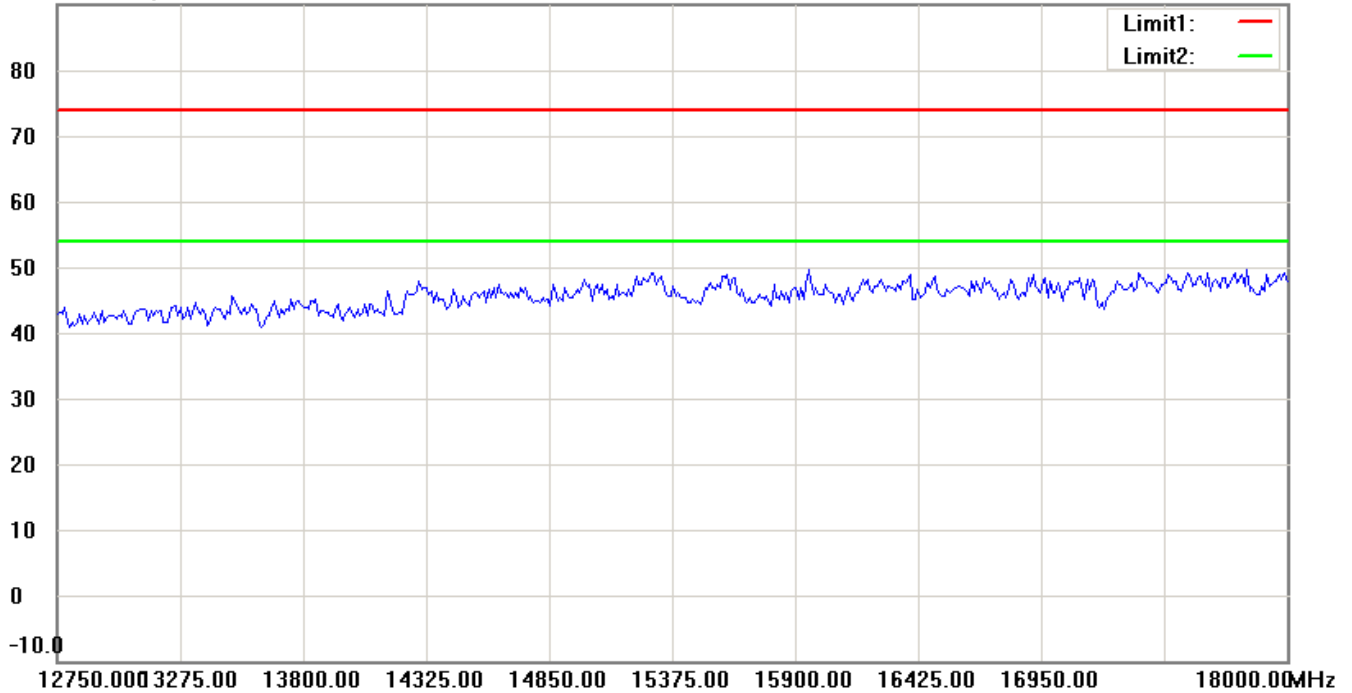

Up Line: Peak Limit Line, Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.