

FCC Part 15C

Measurement and Test Report

For

JETION INTERNATIONAL LIMITED
Room 501, No.894, North TianHe Road, GuangZhou, China

FCC ID: FGODKB283

Report Concerns: Original Report	Equipment Type: Bluetooth Keyboard
Item No.: PJT-DKB283	
Report No.: CTR120315018F(A1)	
Test / Witness Engineer: David Lee	
Test Date: February 29, 2012 to March 10, 2012	
Issued Date: March 28, 2012	
Prepared By:	
<u>CTC Compliance Service Co., Ltd.</u> 7F, Xingzhong Building, Xingzhong Road, Shiqi District, Zhongshan, Guangdong, P.R.C. (528400)	
Approved & Authorized By: 	
Richard Chow / Assistant Manager	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by CTC Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS	3
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	3
1.4 TEST METHODOLOGY	4
1.5 EUT EXERCISE SOFTWARE	4
1.6 TEST FACILITY.....	4
2. SUMMARY OF TEST RESULTS	5
3. §15.203 ANTENNA REQUIREMENT	6
3.1 STANDARD APPLICABLE.....	6
3.2 TEST RESULT.....	6
4. NUMBER OF HOPPING CHANNELS AND CHANNEL SPACING.....	7
4.1 STANDARD APPLICABLE.....	7
4.2 TEST EQUIPMENT LIST AND DETAILS.....	7
4.3 TEST PROCEDURE.....	7
4.4 ENVIRONMENTAL CONDITIONS.....	7
4.5 SUMMARY OF TEST RESULTS/PLOTS	7
5. DWELL TIME OF A HOPPING CHANNEL.....	9
5.1 STANDARD APPLICABLE.....	9
5.2 TEST EQUIPMENT LIST AND DETAILS.....	9
5.3 TEST PROCEDURE.....	9
5.4 ENVIRONMENTAL CONDITIONS.....	9
5.5 SUMMARY OF TEST RESULTS/PLOTS	9
6. FREQUENCY SEPARATION.....	12
6.1 STANDARD APPLICABLE.....	12
6.2 TEST EQUIPMENT LIST AND DETAILS.....	12
6.3 TEST PROCEDURE.....	12
6.4 ENVIRONMENTAL CONDITIONS.....	12
6.5 SUMMARY OF TEST RESULTS/PLOTS	12
7. 20-DB BANDWIDTH.....	15
7.1 STANDARD APPLICABLE.....	15
7.2 TEST EQUIPMENT LIST AND DETAILS.....	15
7.3 TEST PROCEDURE.....	15
7.4 ENVIRONMENTAL CONDITIONS.....	15
7.5 SUMMARY OF TEST RESULTS/PLOTS	15
8. POWER OUTPUT.....	18
8.1 STANDARD APPLICABLE.....	18
8.2 TEST EQUIPMENT LIST AND DETAILS.....	18
8.3 TEST PROCEDURE.....	18
8.4 ENVIRONMENTAL CONDITIONS.....	18
8.5 SUMMARY OF TEST RESULTS/PLOTS	18
9. RADIATED EMISSION.....	19
9.1 MEASUREMENT UNCERTAINTY.....	19
9.2 STANDARD APPLICABLE.....	19
9.3 TEST EQUIPMENT LIST AND DETAILS.....	19
9.4 TEST PROCEDURE.....	20
9.5 ENVIRONMENTAL CONDITIONS.....	20
9.6 SUMMARY OF TEST RESULTS/PLOTS	21
10. BAND EDGE EMISSIONS.....	25
10.1 STANDARD APPLICABLE.....	25
10.2 TEST EQUIPMENT LIST AND DETAILS.....	25
10.3 TEST PROCEDURE.....	25
10.4 ENVIRONMENTAL CONDITIONS.....	25
10.5 SUMMARY OF TEST RESULTS/PLOTS	25
EXHIBIT 1 – PRODUCT LABELING.....	30
PROPOSED CE LABEL FORMAT	30
PROPOSED LABEL LOCATION ON EUT.....	30
EXHIBIT 2 – EUT PHOTOGRAPHS.....	31
EXHIBIT 3 – TEST SETUP PHOTOGRAPHS.....	35
EXHIBIT 4 – SCHEMATICS.....	36
EXHIBIT 5 – USERS MANUAL.....	36

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: JETION INTERNATIONAL LIMITED
Address of applicant: Room 501, No.894, North TianHe Road, GuangZhou, China

Manufacturer: JETION INTERNATIONAL LIMITED
Address of manufacturer: Room 501, No.894, North TianHe Road, GuangZhou, China

General Description of E.U.T

Items	Description
EUT Description	Bluetooth Keyboard
Trade Names	N/A
Model No.	PJT-DKB283
Operating Voltage	DC3-5V
Bluetooth specification	V3.0 Class 2
Working Current	<5.0mA
Standby Current	1.2mA
Frequency Range	2402MHz-2480MHz
Dimension	284.34x119.80x5.80mm

1.2 Test Standards

The following report is prepared on behalf of the **JETION INTERNATIONAL LIMITED** in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted with Low Channel, Middle Channel and High Channel, accordingly in reference to the Operating Instructions.

Test is carried out under the requirements of IEC/ISO 17025.

1.5 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software, provided by the customer, is started while the whole system is running.

1.6 Test Facility

All measurement facilities used to collect the measurement data are located at:

NTEK Testing Technology Co., Ltd

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC FRN Registration Number:238937; IC Registration Number:9270A-1

CNAS Registration Number:L5516.

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203; §15.247(b)(4)(i)	Antenna Requirement	PASS
§15.247(a)(1)(iii)	Quantity of Hopping Channel	PASS
§15.247(a)(1)	Frequency Separation	PASS
§15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	PASS
§15.247(a)	20dB Bandwidth	PASS
§15.247(b)(1)	Power Output	PASS
§15.209(a)(f)	Radiated Emission	PASS
§15.247(c)	Band Edge Emission	PASS

3. §15.203 ANTENNA REQUIREMENT

3.1 Standard Applicable

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a permanent antenna, fulfill the requirement of this section.

4. NUMBER OF HOPPING CHANNEL

4.1 Standard Applicable

FCC Part15 (15.247), Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	2400-2483.5	Pass

4.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	R&S	ESCI	100687	2012-1-26	2013-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2012-1-26	2013-1-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

4.3 Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

4.4 Environmental Conditions


Temperature	26°C
Relative Humidity	55%
ATM Pressure	1011 mbar

4.5 Summary of Test Results/Plots

Test Result: PASS

Detailed information, Please refer to the test charts.

No. of Channel=79

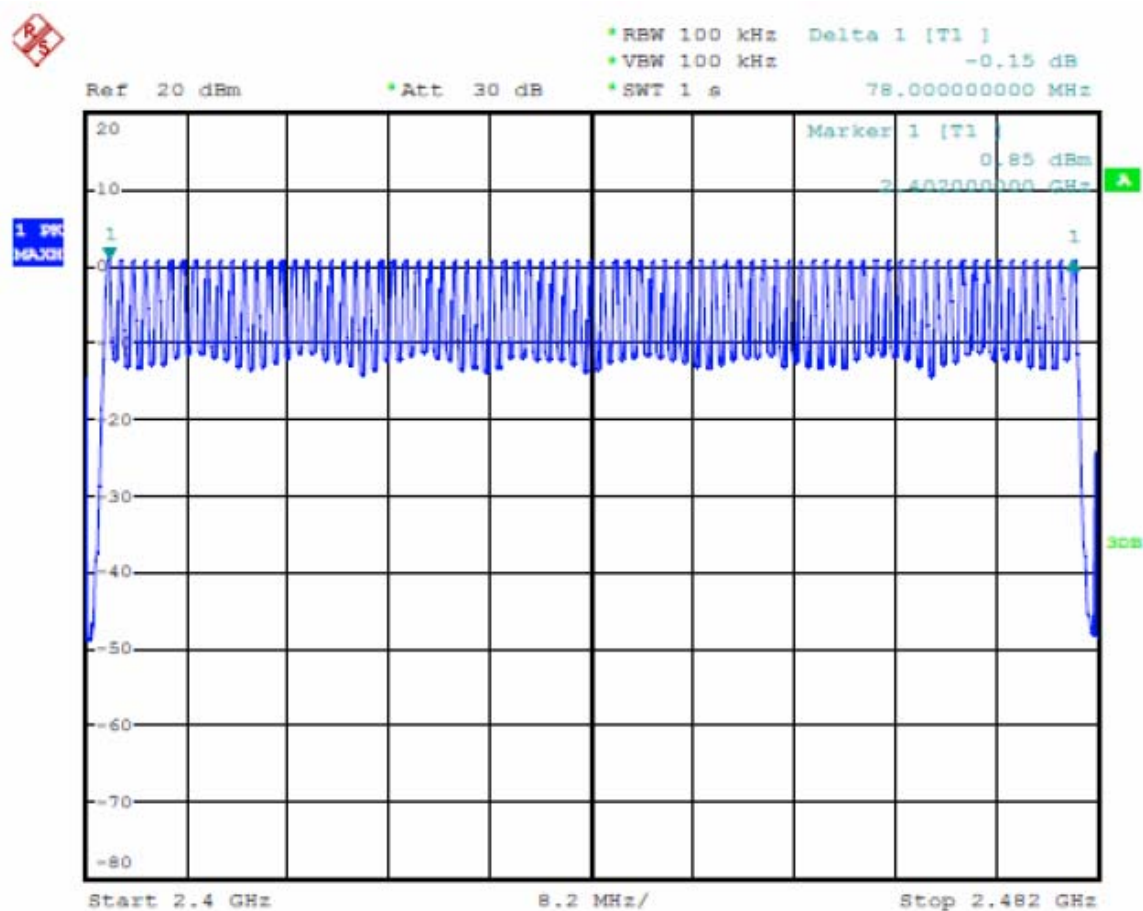

5. DWELL TIME OF A HOPPING CHANNEL

5.1 Standard Applicable

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	R&S	ESCI	100687	2012-1-26	2013-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2012-1-26	2013-1-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz.
4. Repeat above procedures until all frequency measured was complete.

5.4 Environmental Conditions


Temperature	26°C
Relative Humidity	55%
ATM Pressure	1011 mbar

5.5 Summary of Test Results/Plots


Test Result: PASS

Detailed information, Please refer to the test charts.


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2402 MHz	3.1150	0.3323	0.4000
DH3	2402 MHz	1.8950	0.3032	0.4000
DH1	2402 MHz	0.5350	0.1712	0.4000

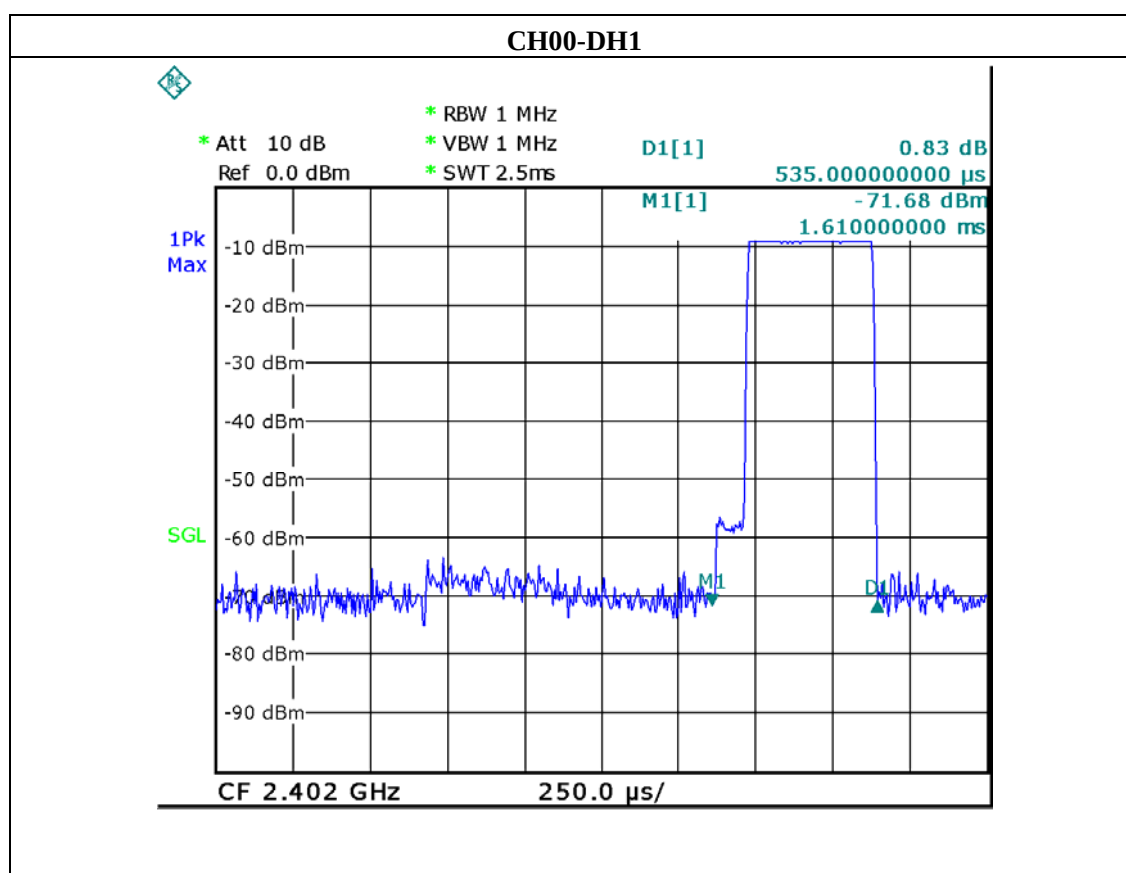


CH00-DH3


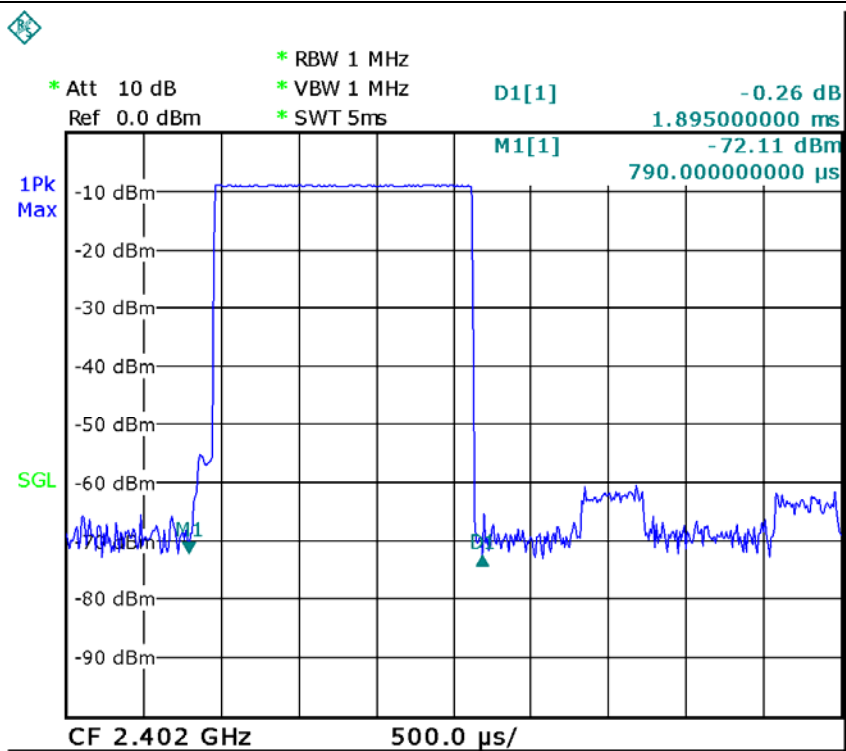


CH00-DH5

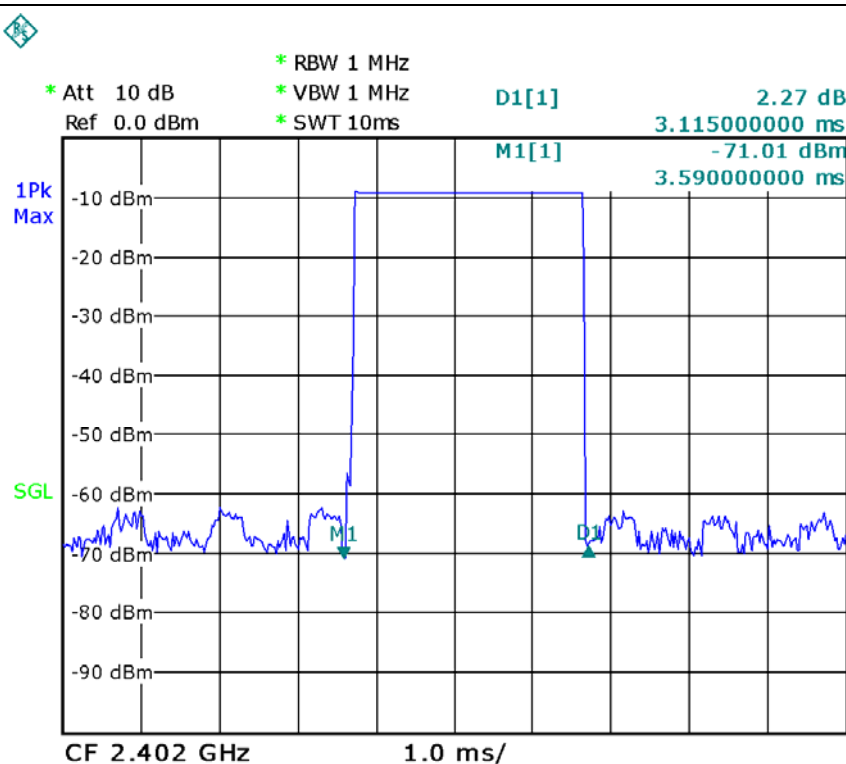


Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2441 MHz	3.1750	0.3387	0.4000
DH3	2441 MHz	1.8050	0.2888	0.4000
DH1	2441 MHz	0.5450	0.1744	0.4000

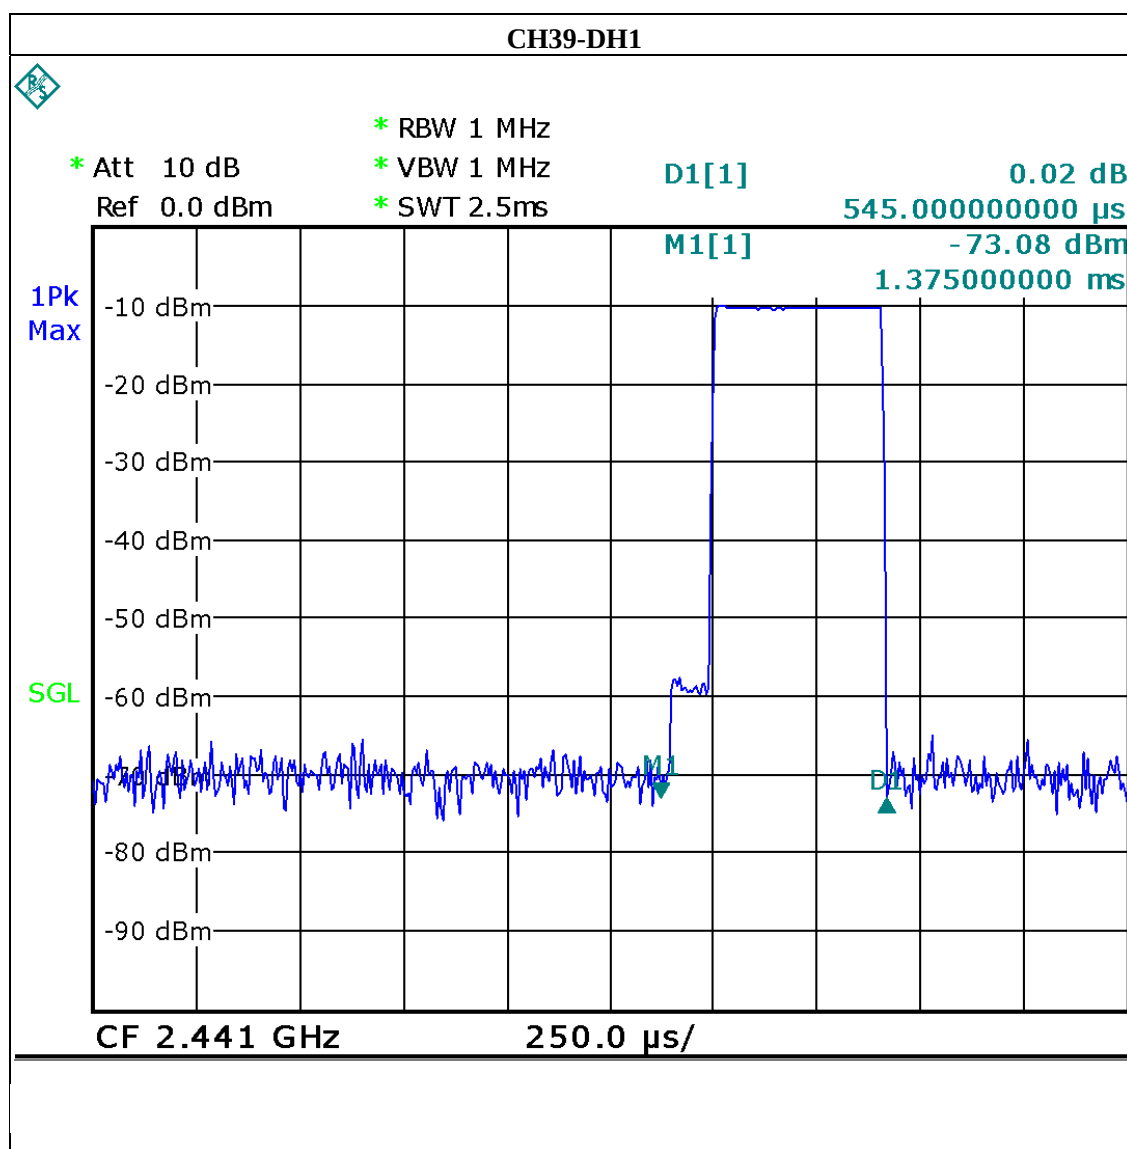

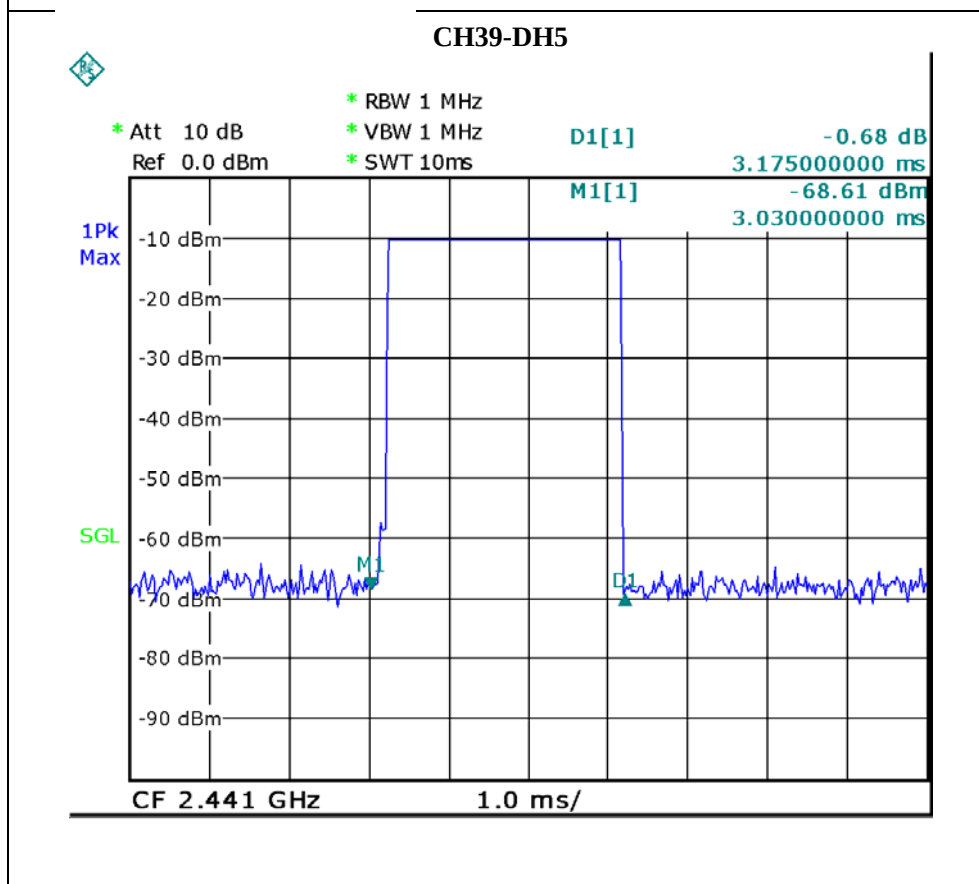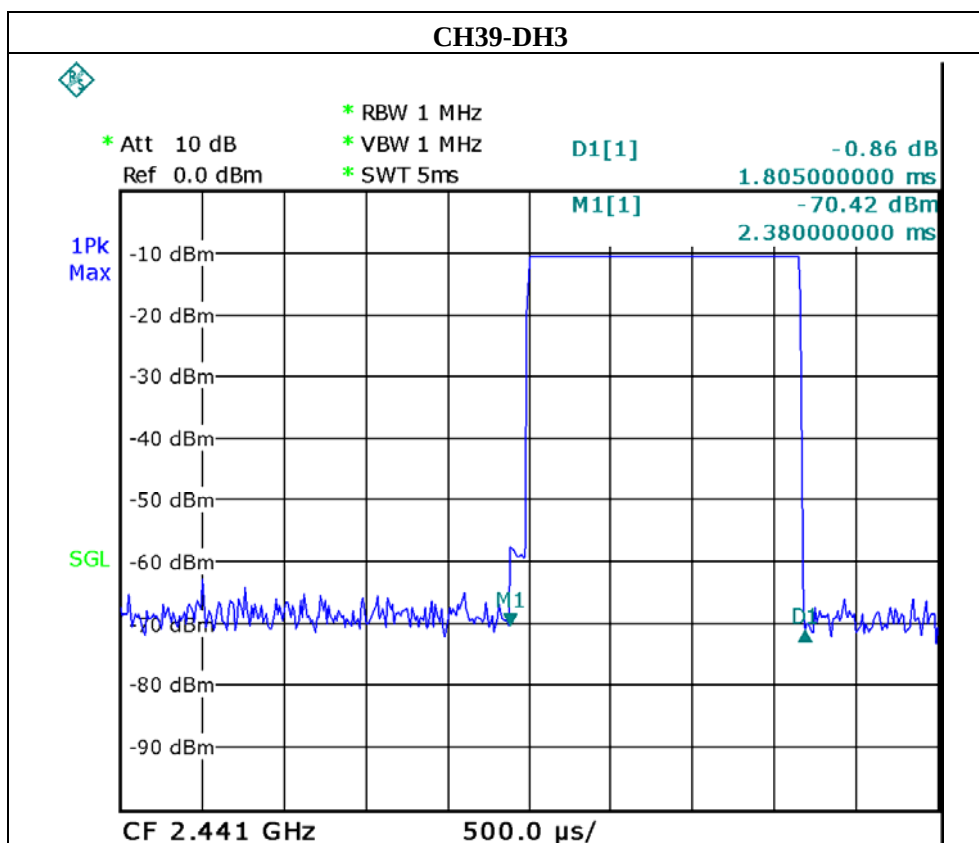

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limits (s)
DH5	2480 MHz	3.2150	0.3429	0.4000
DH3	2480 MHz	1.8350	0.2936	0.4000
DH1	2480 MHz	0.5450	0.1744	0.4000

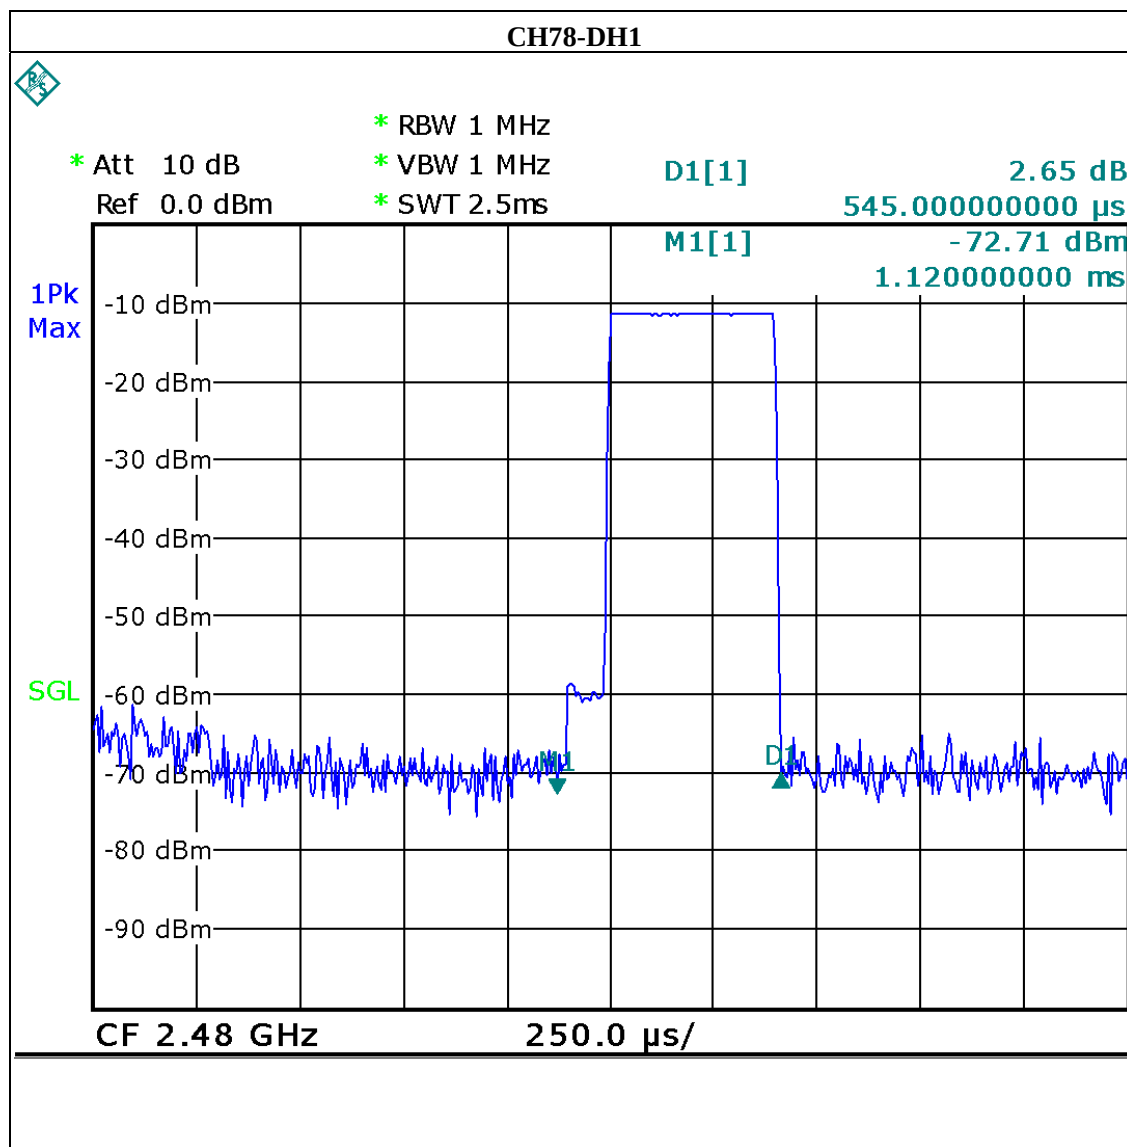

6.FREQUENCY SEPARATION

6.1 Standard Applicable

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	R&S	ESCI	100687	2012-1-26	2013-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2012-1-26	2013-1-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

6.3 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span Video (or Average) Bandwidth (VBW) $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.

6.4 Environmental Conditions

Temperature	26°C
Relative Humidity	55%
ATM Pressure	1011 mbar


6.5 Summary of Test Results/Plots

Channel	Frequency (MHz)	Channel Separation (MHz)	Limit	Result
Low	2402	1.00	$\geq 25\text{KHz}$ or $2/3$ 20dB BW	Pass
Middle	2441	1.00		Pass
High	2480	1.00		Pass


Test Result: PASS

Detailed information, Please refer to the test charts.


Low channel: 2402MHz

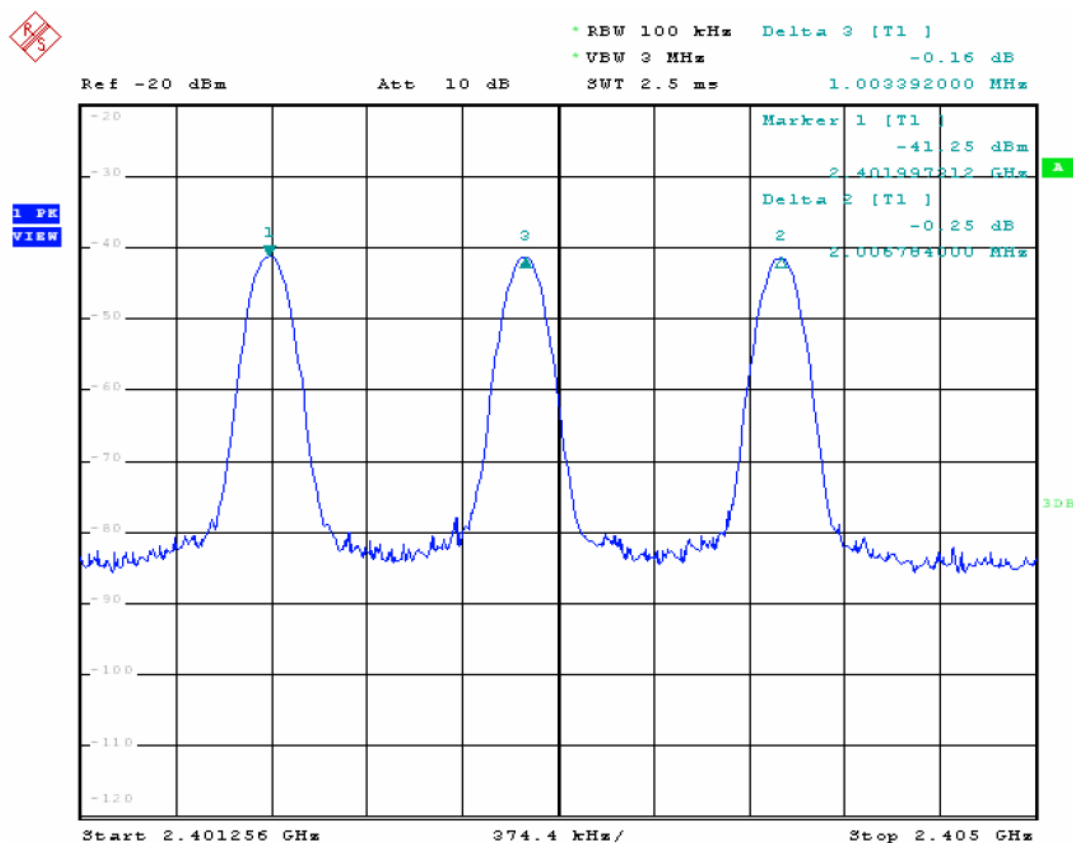

Middle channel: 2441MHz

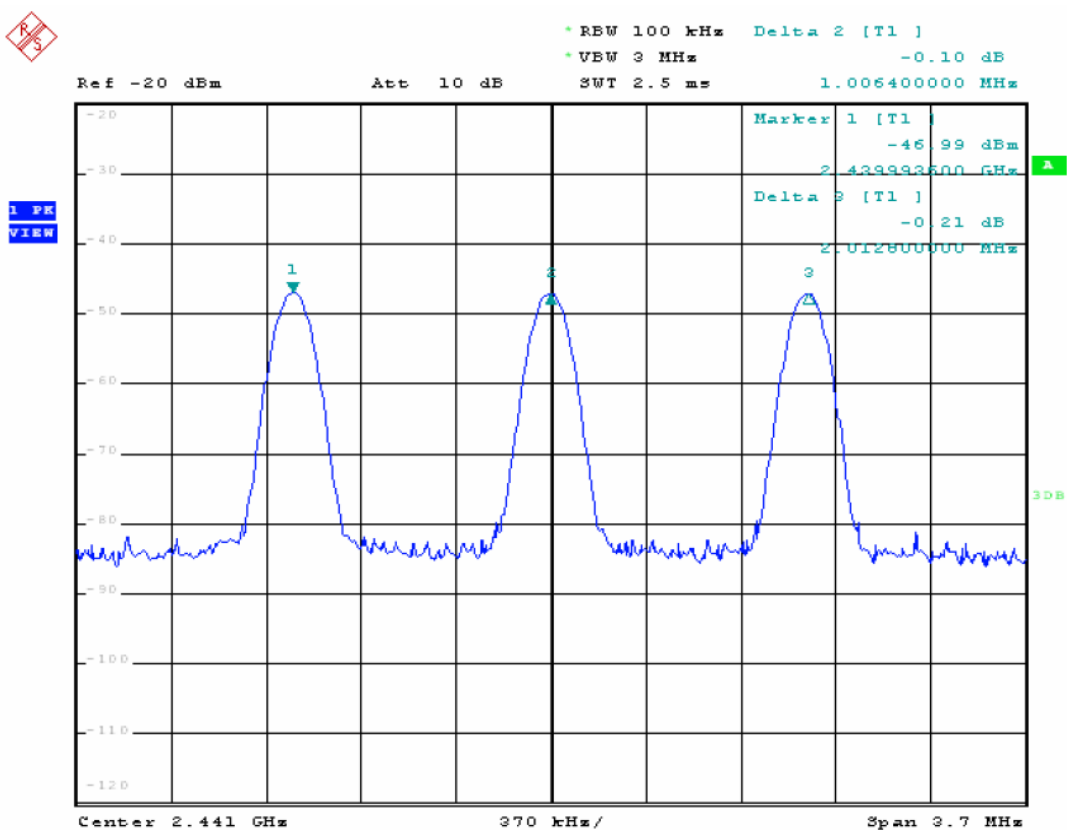

High channel: 2480MHz

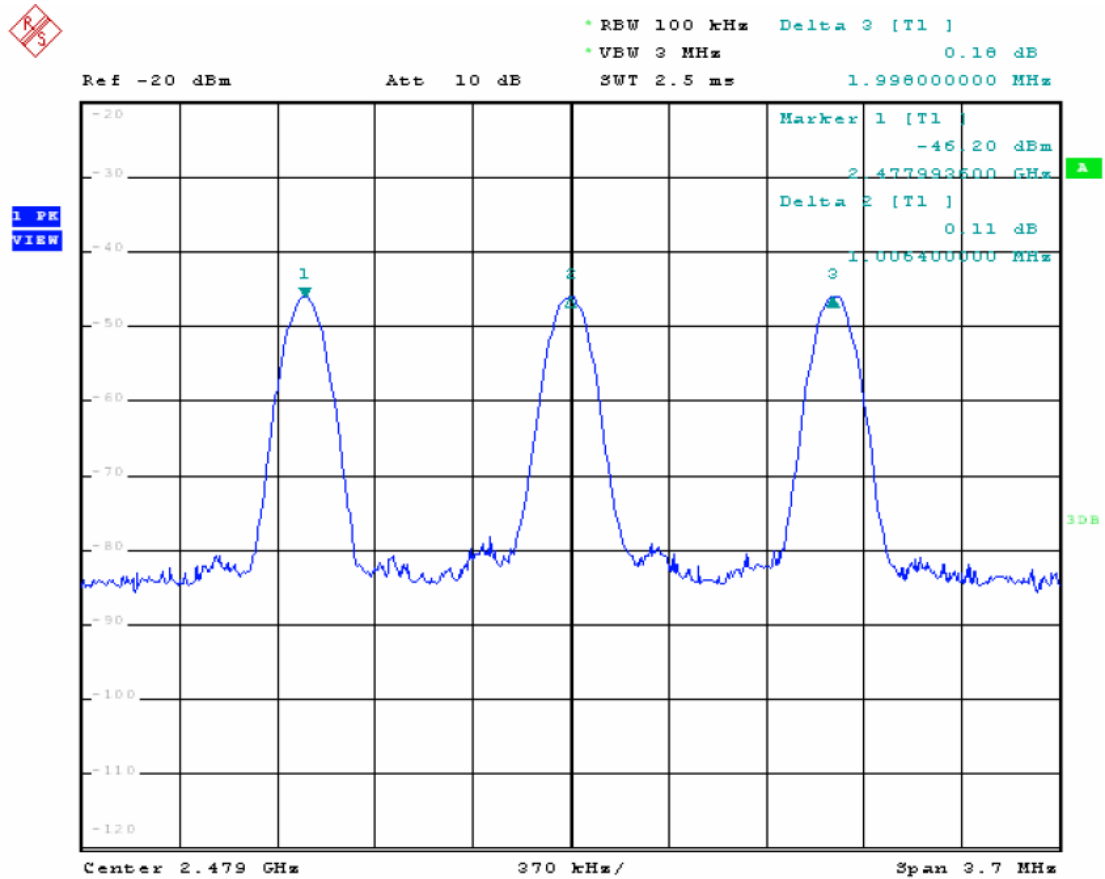

7. 20-dB BANDWIDTH

7.1 Standard Applicable

According to 15.247(a)(1)(iii). For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	R&S	ESCI	100687	2012-1-26	2013-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2012-1-26	2013-1-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

7.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=30KHz,VBW=100kHz , Sweep=auto
4. Mark the peak frequency and –20dB (upper and lower) frequency.

7.4 Environmental Conditions


Temperature	26°C
Relative Humidity	55%
ATM Pressure	1011 mbar


7.5 Summary of Test Results/Plots

Test Result: PASS

Detailed information, Please refer to the test charts.

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	846.30	PASS
2441 MHz	838.30	PASS
2480 MHz	846.30	PASS

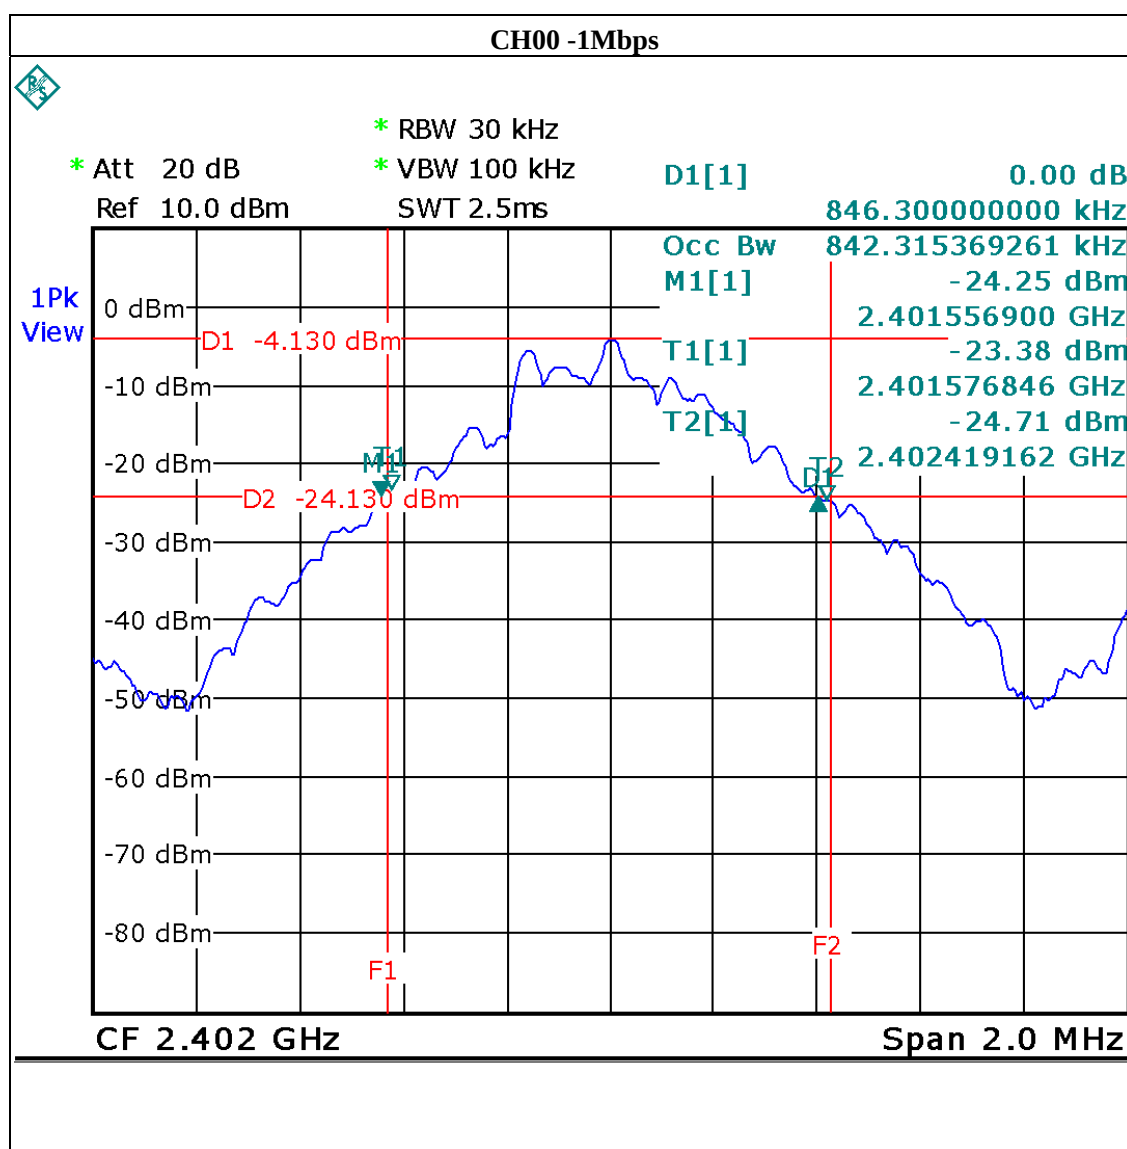

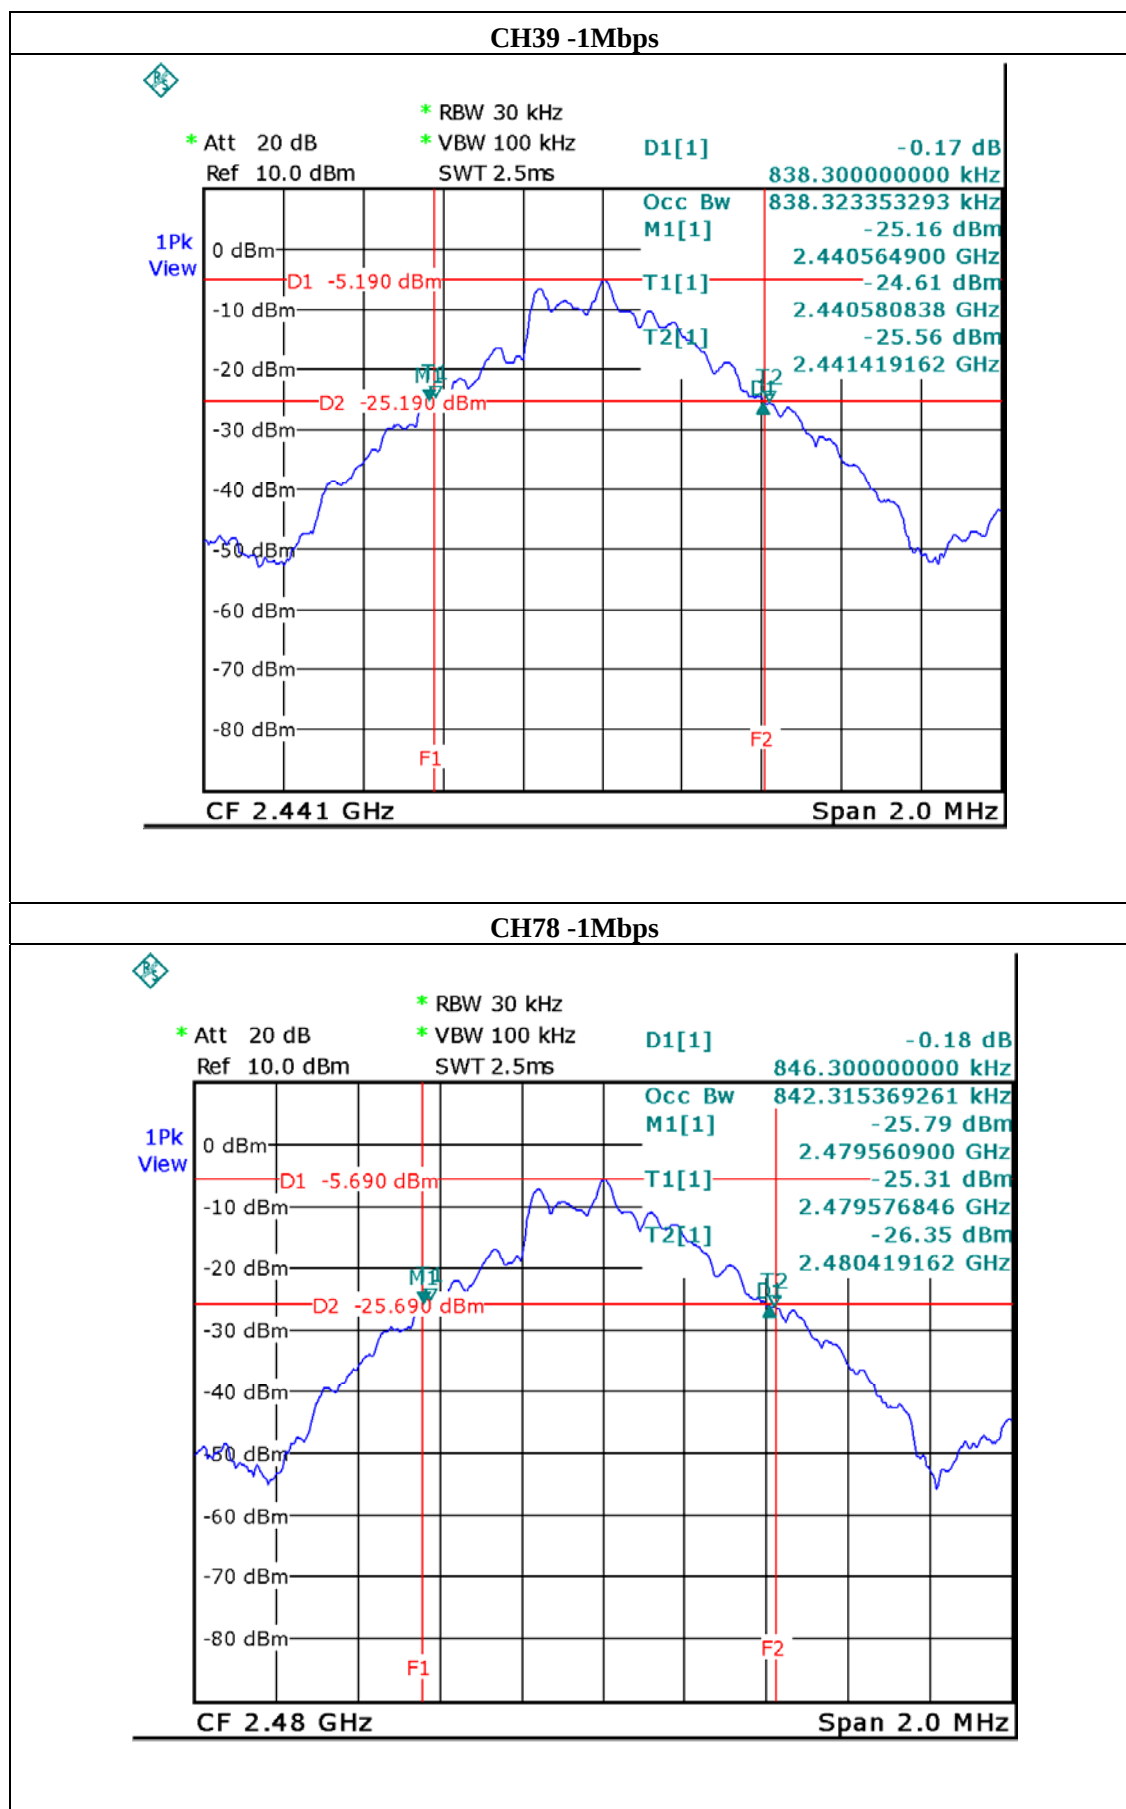

8. POWER OUTPUT

8.1 Standard Applicable

According to 15.247(b)(1). For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

8.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	R&S	ESCI	100687	2012-1-26	2013-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2012-1-26	2013-1-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

8.3 Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 1MHz, VBW= 3MHz, Sweep time = Auto.

8.4 Environmental Conditions

Temperature	26°C
Relative Humidity	55%
ATM Pressure	1011 mbar

8.5 Summary of Test Results/Plots

LIMITS AND MEASUREMENT RESULT			
Frequency (GHz)	Result (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	5.35	30	Pass
2.441	5.43	30	Pass
2.480	5.41	30	Pass

Test Result: PASS

9. RADIATED EMISSION

9.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is +3.0 dB.

9.2 Standard Applicable

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBuV/m) (at 3M)		Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80	60	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Emissions that fall in the restricted bands (15.205) must be less than 54dBuV/m otherwise the spurious and harmonics must be attenuated by at least 20dB.

9.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	R&S	ESI26	830245/009	2012-1-26	2013-1-25
Multi_Device Controller	ETS	2090	57230	2012-1-26	2013-1-25
Horn Antenna	EM	EM-AH-10180	2011071402	2011-6-5	2012-6-6
Receiver Antenna	ETS	2175	57337	2012-1-26	2013-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2012-1-26	2013-1-25
Horn Antenna	R&S	HF906	100014	2012-1-26	2013-1-25
Loop Antenna	ARA	PLA-1030/B	1029	2011-6-5	2012-6-6


Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

9.4 Test Procedure


The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

RADIATED MISSION TEST SETUP BELOW 1000MHz

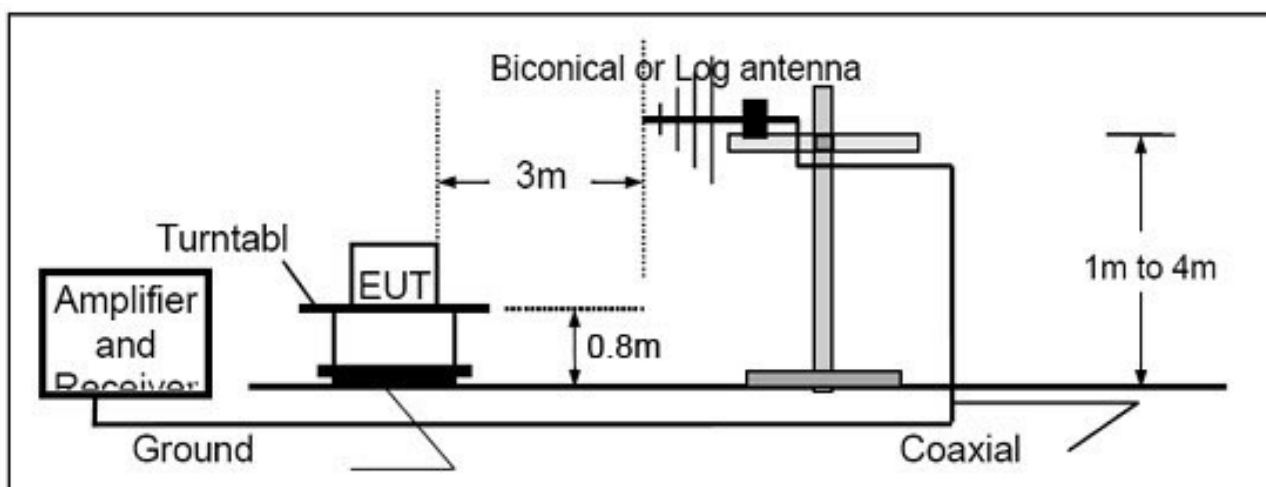

RADIATED EMISSION TEST SETUP UP ABOVE 1000MHz

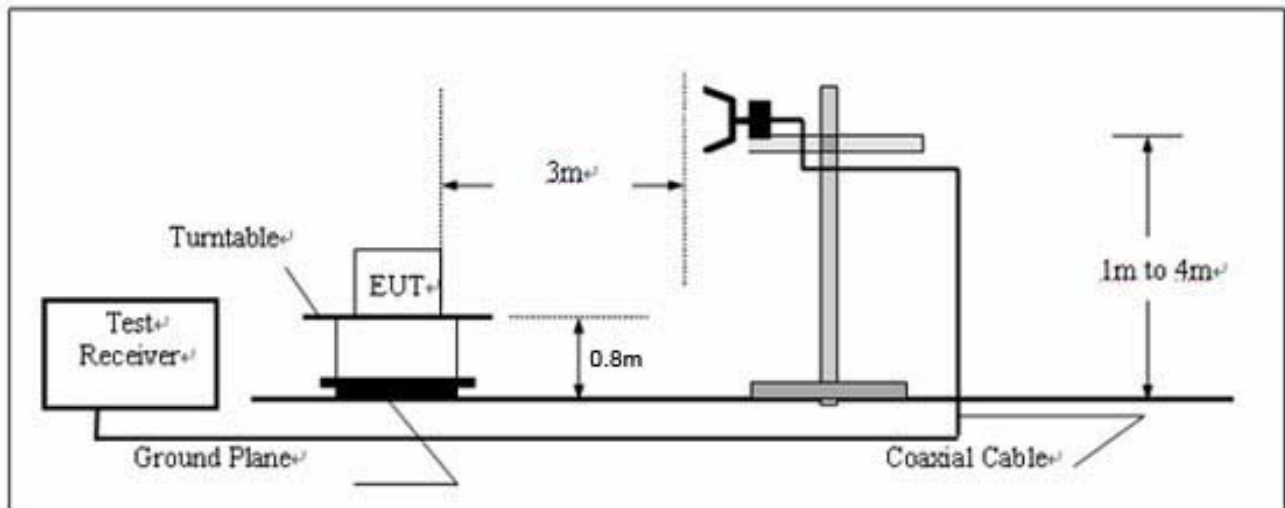

9.5 Environmental Conditions

Temperature	26°C
Relative Humidity	55%
ATM Pressure	1011 mbar

9.6 Summary of Test Results/Plots

TEST RESULTS (BELOW 30 MHZ)

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $20 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapo

RADIATED EMISSION BELOW 1GHZ (POLARIZATION: HORIZONTAL)

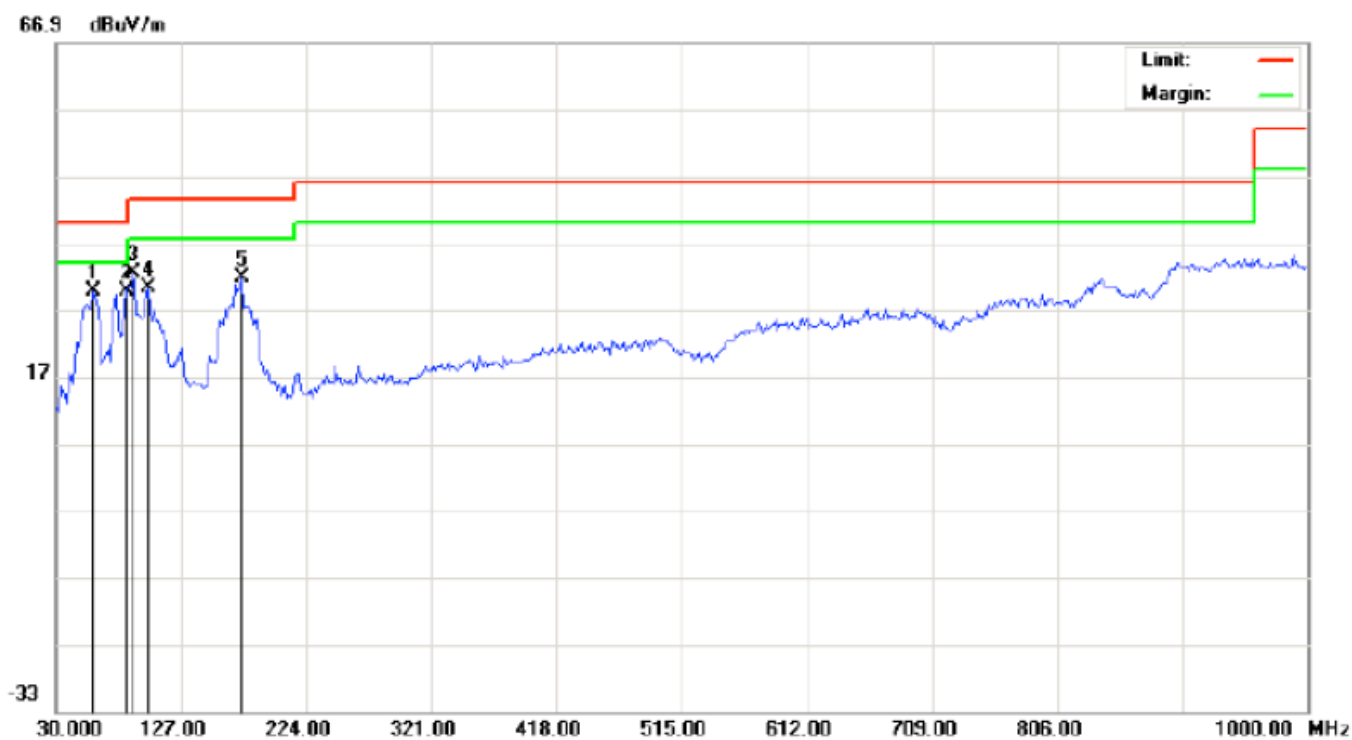


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		59.1000	19.09	10.64	29.73	40.00	-10.27	peak			
2	*	84.9666	18.55	11.25	29.80	40.00	-10.20	peak			
3		89.8167	20.14	12.28	32.42	43.50	-11.08	peak			
4		101.1333	14.45	15.77	30.22	43.50	-13.28	peak			
5		173.8833	14.95	16.78	31.73	43.50	-11.77	peak			

RADIATED EMISSION BELOW 1GHZ (POLARIZATION: VERTICAL)




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		65.5667	27.88	3.26	31.14	40.00	-8.86	peak			
2	*	80.1167	27.53	5.27	32.80	40.00	-7.20	peak			
3		101.1333	19.26	10.71	29.97	43.50	-13.53	peak			
4		156.1000	10.16	13.49	23.65	43.50	-19.85	peak			
5		181.9667	12.87	18.36	31.23	43.50	-12.27	peak			
6		238.5500	2.89	16.98	19.87	46.00	-26.13	peak			

RADIATED EMISSION ABOVE 1GHZ (POLARIZATION: HORIZONTAL)

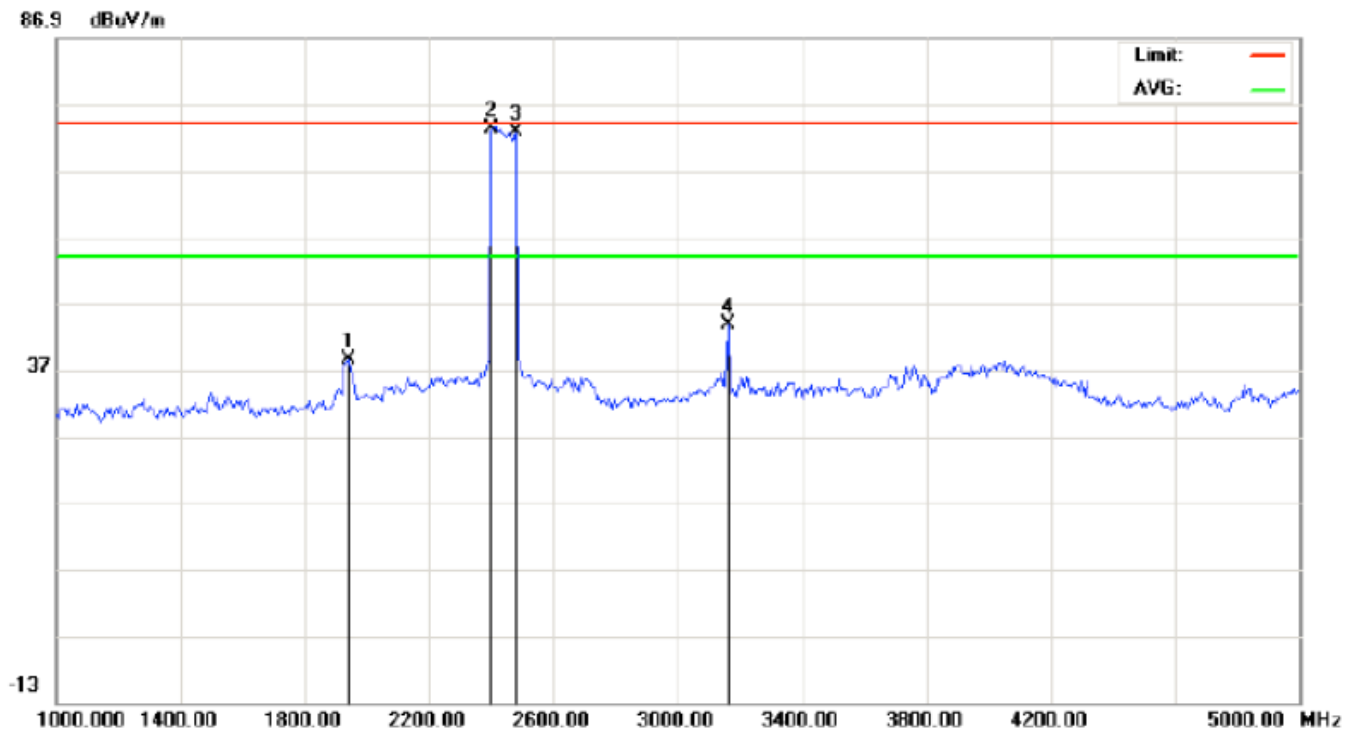

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1940.000	39.22	-0.75	38.47	74.00	-35.53	peak			
2	*	2402.000	72.85	0.32	73.17	74.00	-0.83	peak			
3		2480.000	72.32	0.41	72.73	74.00	-1.27	peak			
4		3160.000	42.08	1.79	43.87	74.00	-30.13	peak			

RADIATED EMISSION ABOVE 1GHZ (POLARIZATION: VERTICAL)

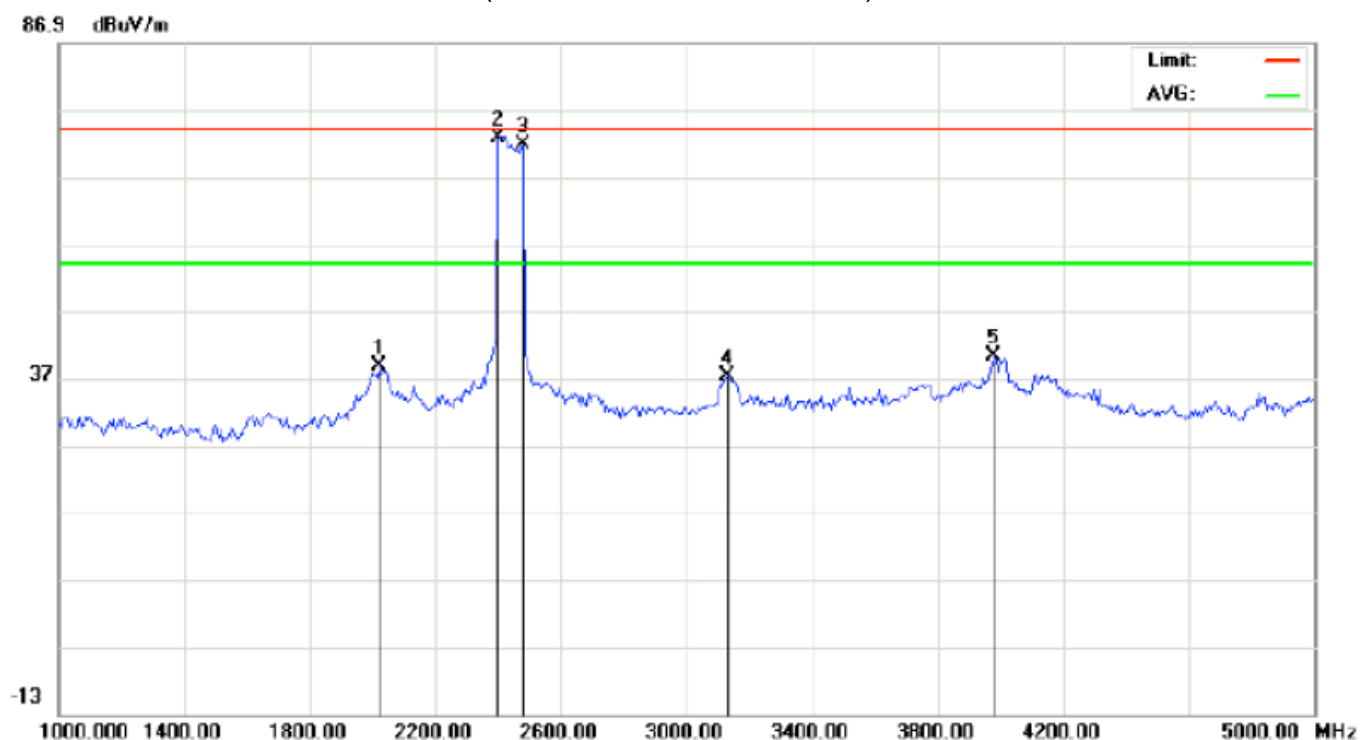

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2020.000	38.88	-0.10	38.78	74.00	-35.22	peak			
2	*	2402.000	72.35	0.32	72.67	74.00	-1.33	peak			
3		2480.000	71.32	0.41	71.73	74.00	-2.27	peak			
4		3133.333	35.53	1.76	37.29	74.00	-36.71	peak			
5		3980.000	35.20	5.07	40.27	74.00	-33.73	peak			

Note: No emission found between lowest internal used/generated frequency to 30MHz.

5~25GHz at least have 20dB margin. No recording in the test report.

Factor = Antenna Factor + Cable Loss - Amplifier Gain, Margin = Measurement - Limit

10. BAND EDGE EMISSIONS

10.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

10.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	R&S	FSU	BCT-019	2012-1-26	2013-1-25
Receiver Antenna	ETS	2175	57337	2012-1-26	2013-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2012-1-26	2013-1-25
Horn Antenna	R&S	HF906	100014	2012-1-26	2013-1-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

10.3 Test Procedure


1. Test setup is the same as 9.4

10.4 Environmental Conditions

Temperature	26°C
Relative Humidity	55%
ATM Pressure	1011 mbar


10.5 Summary of Test Results/Plots

BAND EDGE EMISSIONS AT MODE: 2402TX (POLARIZATION: HORIZONTAL)

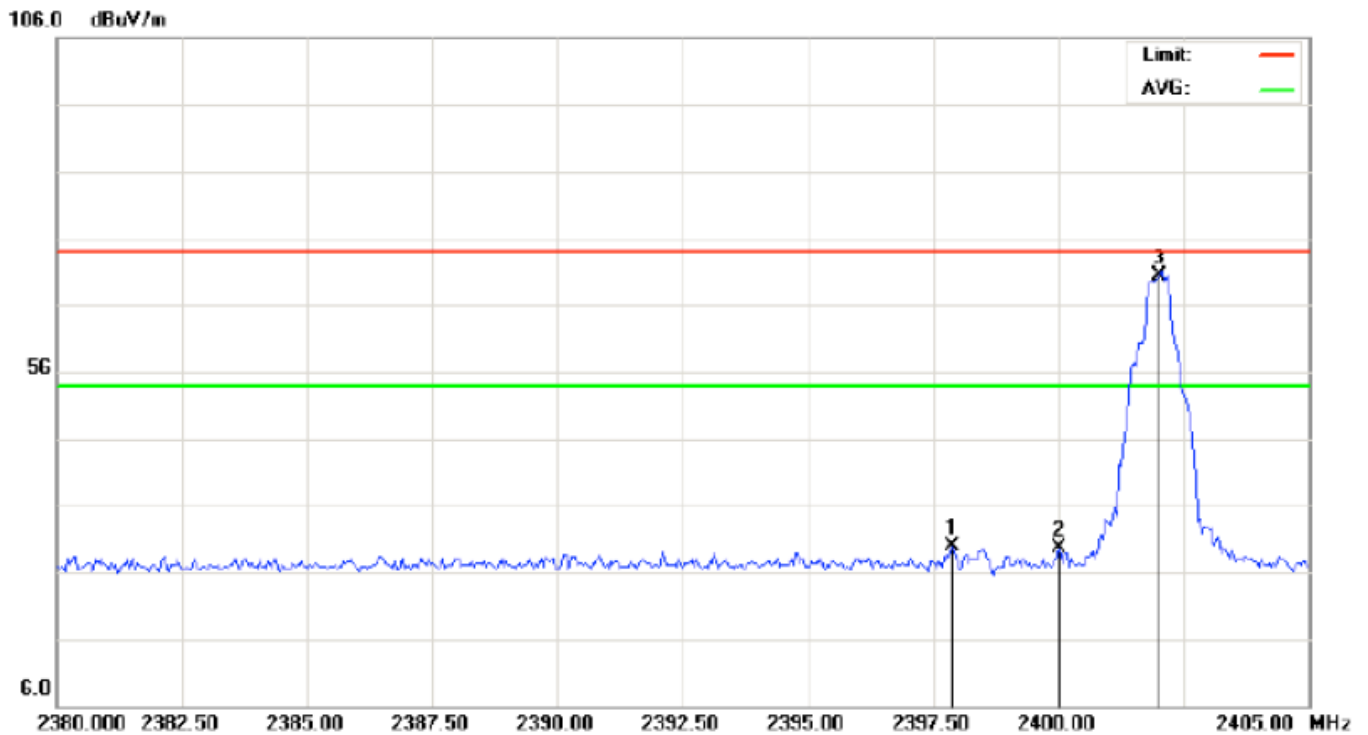


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2397.875	29.52	0.32	29.84	74.00	-44.16	peak			
2		2400.000	29.28	0.32	29.60	74.00	-44.40	peak			
3	*	2402.000	70.09	0.32	70.41	74.00	-3.59	peak			

BAND EDGE EMISSIONS AT MODE: 2402TX
(POLARIZATION: VERTICAL)

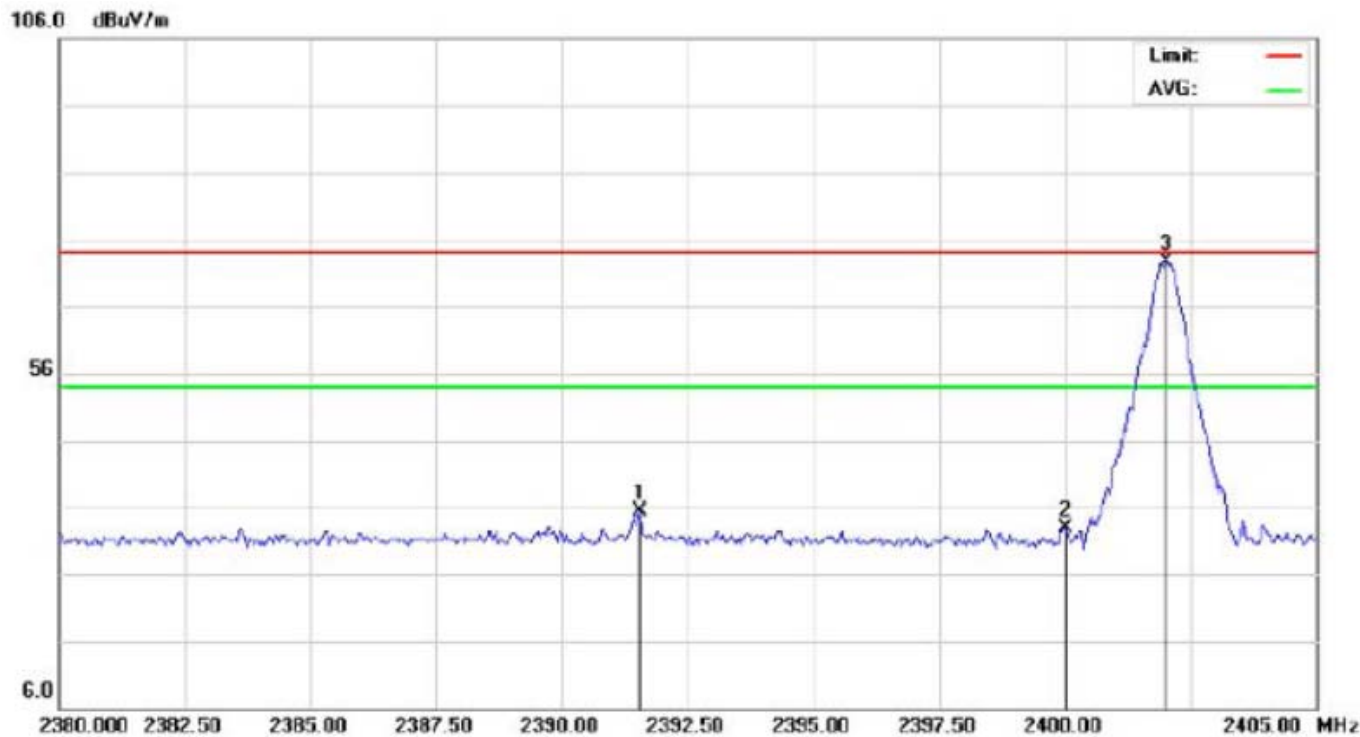


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2391.542	35.19	0.31	35.50	74.00	-38.50	peak			
2		2400.000	32.62	0.32	32.94	74.00	-41.06	peak			
3	*	2402.000	72.42	0.32	72.74	74.00	-1.26	peak			

BAND EDGE EMISSIONS AT MODE: 2480TX (POLARIZATION: HORIZONTAL)

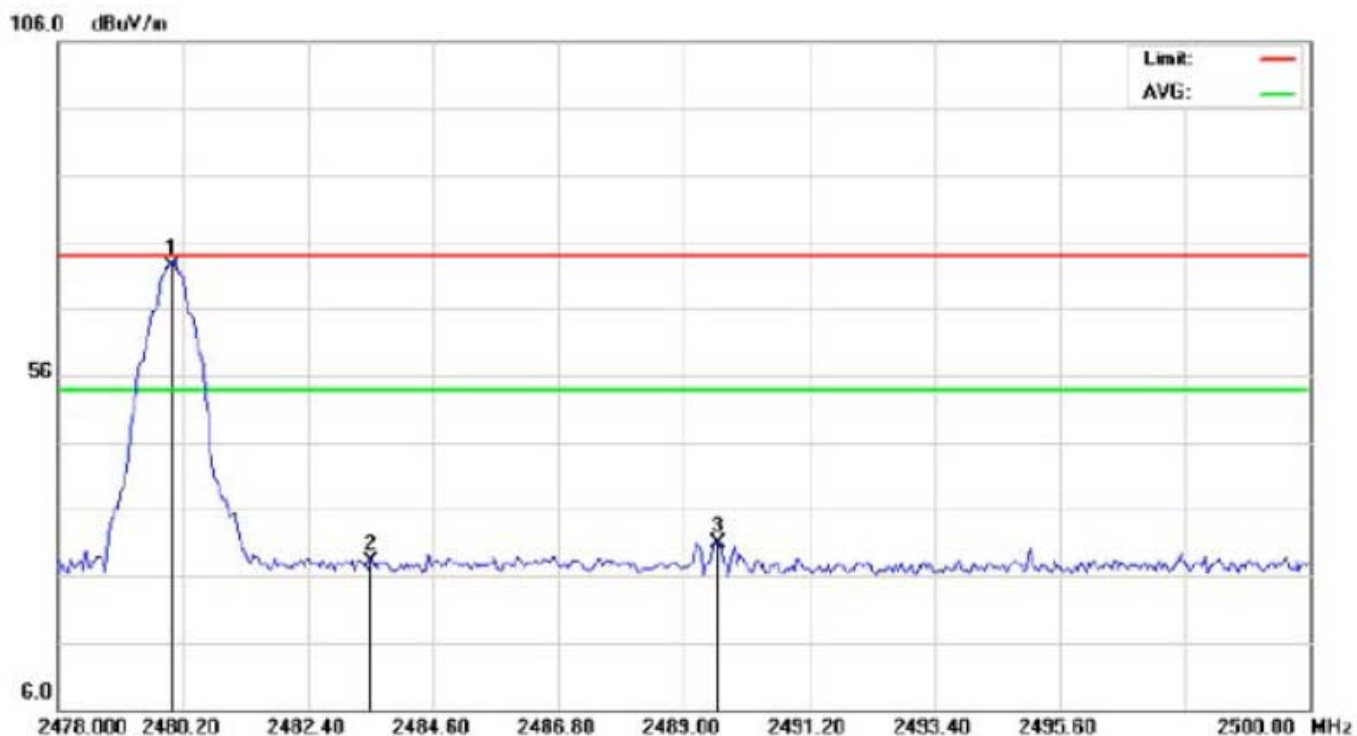

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	72.01	0.41	72.42	74.00	-1.58	peak			
2		2483.500	27.81	0.41	28.22	74.00	-45.78	peak			
3		2489.587	30.47	0.42	30.89	74.00	-43.11	peak			

BAND EDGE EMISSIONS AT MODE: 2480TX (POLARIZATION: VERTICAL)

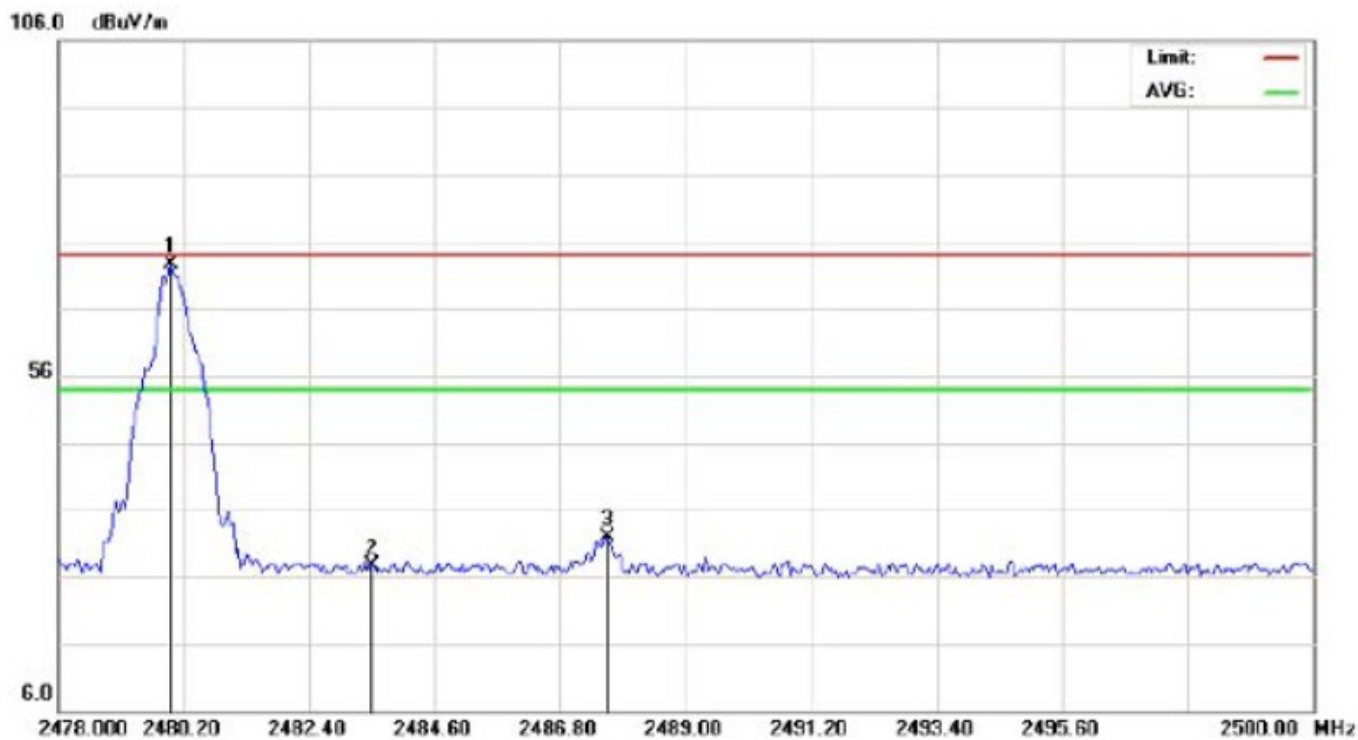

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2479.980	72.20	0.41	72.61	74.00	-1.39	peak			
2		2483.500	27.10	0.41	27.51	74.00	-46.49	peak			
3		2487.643	31.48	0.42	31.90	74.00	-42.10	peak			

EXHIBIT 1 – PRODUCT LABELING

Proposed FCC ID Label Format

Bluetooth Keyboard Model: PJT-DKB283 FCC ID: FGODKB283

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference and, (2) This device must accept any interference that is received, including any interference that may cause undesired operation.

Specification: Text is Black in Color and is left justified. Labels are printed in indelible ink on permanent adhesive backing or silk-screened onto the EUT or shall be affixed at a conspicuous location on the EUT. Also it is needed to mark in the user manual if the EUT is small exactly.

Proposed Label Location on EUT

FCC ID Label Location



EXHIBIT 2 – EUT PHOTOGRAPHS

Model No.:
PJT-DKB283

Photo 1

View:

- ☐ General
☐ Front
☐ Rear
☐ Side
☒ Top
☐ Bottom
☐ Internal
☐ Detail



Model No.:
PJT-DKB283

Photo 2

View:

- ☐ General
☐ Front
☐ Rear
☐ Side
☐ Top
☒ Bottom
☐ Internal
☐ Detail



EXHIBIT 2 – EUT PHOTOGRAPHS

Model No.:
PJT-DKB283

Photo 3

View:

- ☐ General
☐ Front
☐ Rear
☐ Side
☐ Top
☐ Bottom
☐ Internal
☒ Detail



Model No.:
PJT-DKB283

Photo 4

View:

- ☐ General
☐ Front
☐ Rear
☐ Side
☐ Top
☐ Bottom
☐ Internal
☒ Detail



EXHIBIT 2 – EUT PHOTOGRAPHS

Model No.:
PJT-DKB283

Photo 5

View:

- ☐ General
☐ Front
☐ Rear
☐ Side
☐ Top
☐ Bottom
☒ Internal
☐ Detail



Model No.:
PJT-DKB283

Photo 6

View:

- ☐ General
☐ Front
☐ Rear
☐ Side
☐ Top
☐ Bottom
☒ Internal
☐ Detail




EXHIBIT 2 – EUT PHOTOGRAPHS

Model No.:
PJT-DKB283

Photo 7

View:

- ☐ General
☐ Front
☐ Rear
☐ Side
☐ Top
☐ Bottom
☐ Internal
☒ Detail

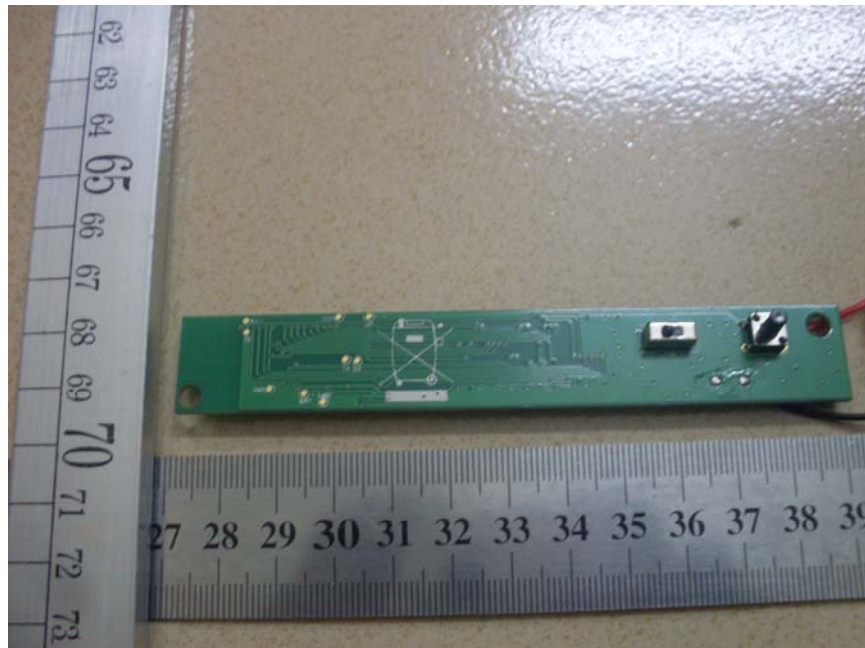

Model No.:
PJT-DKB283

Photo 8

View:

- ☐ General
☐ Front
☐ Rear
☐ Side
☐ Top
☐ Bottom
☐ Internal
☒ Detail

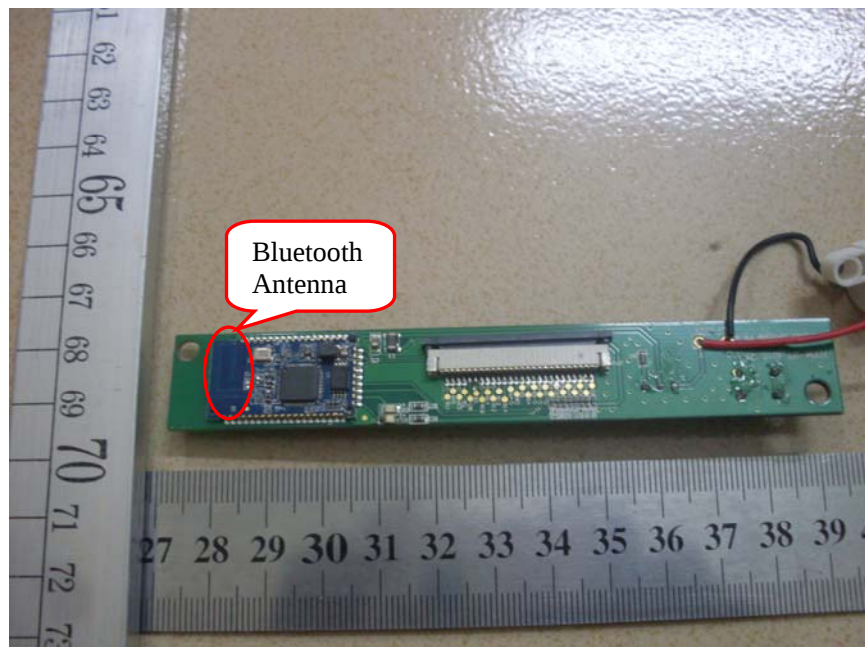
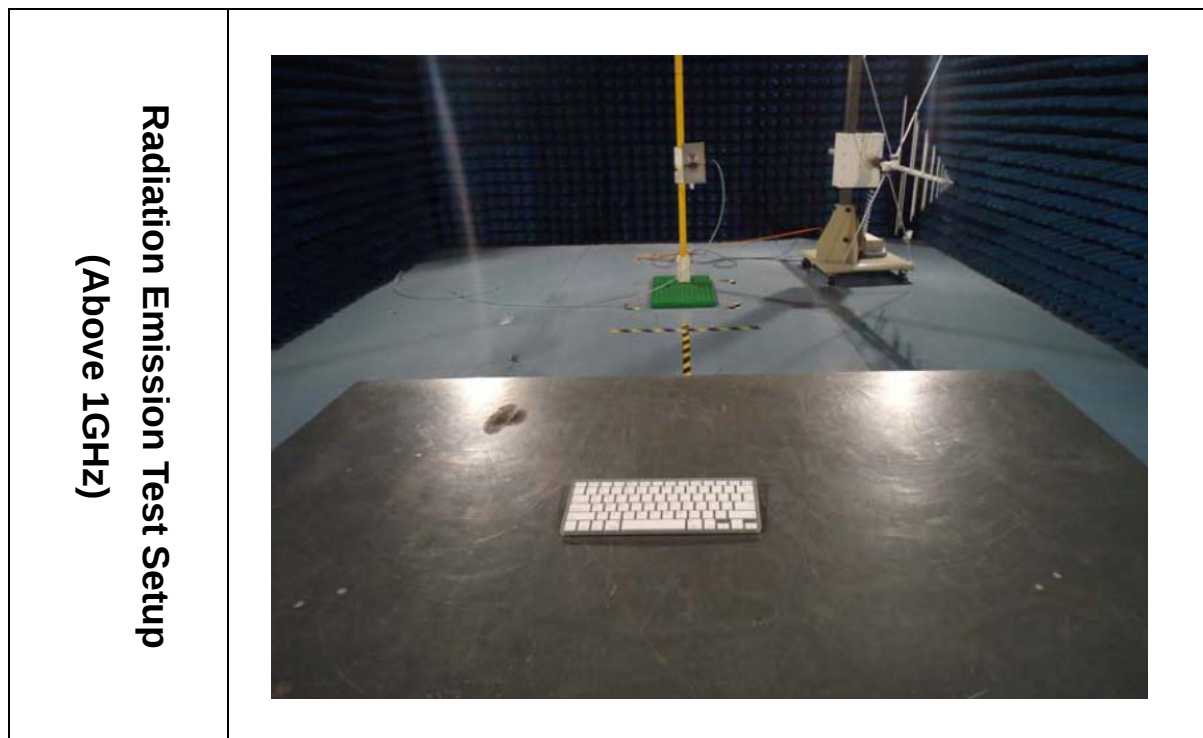
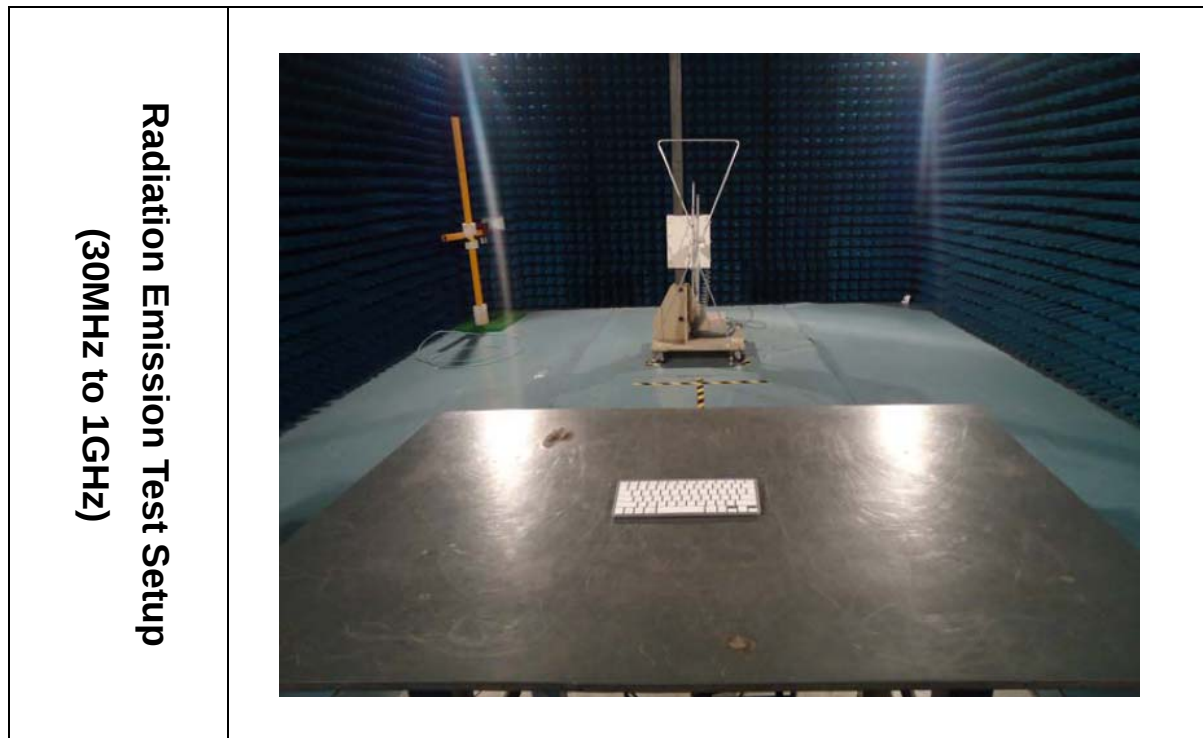


EXHIBIT 3 – TEST SETUP PHOTOGRAPHS

※ End of Report ※