
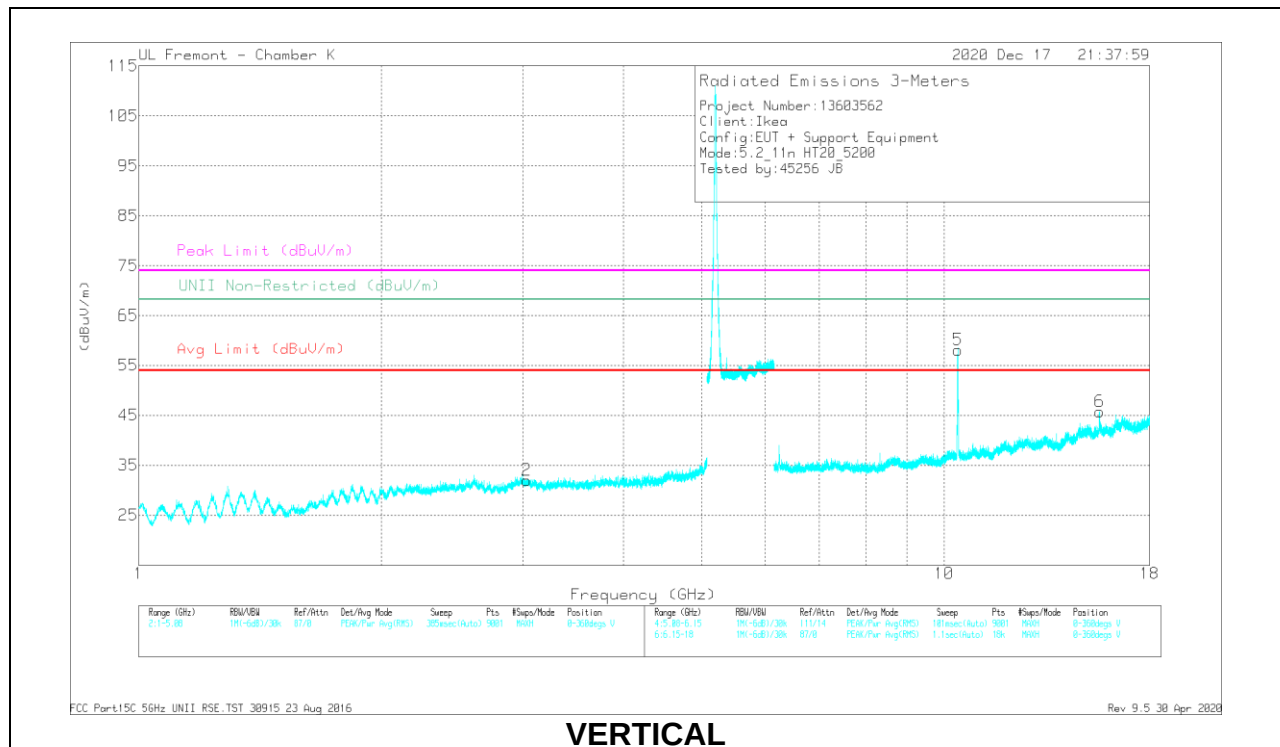


MID CHANNEL RESULTS

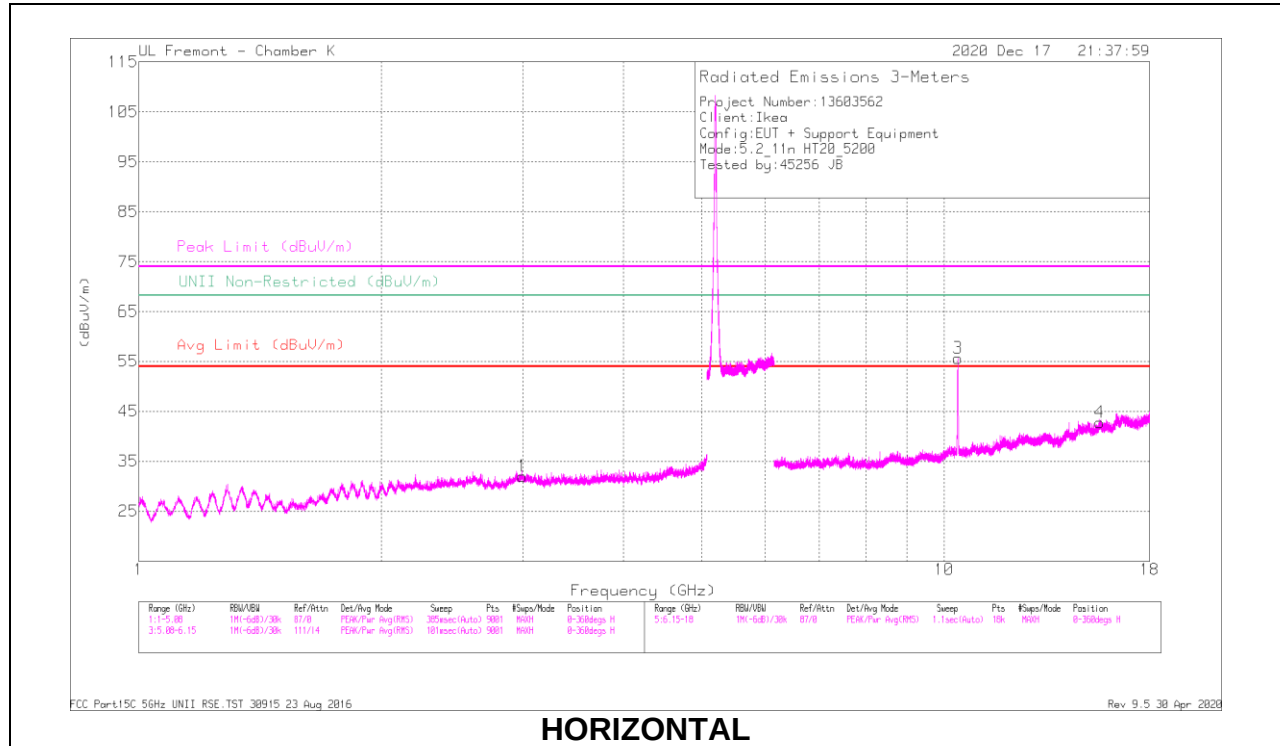

RADIATED EMISSIONS



Frequency (MHz)	Meas Reading (dBm)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Unit Non-Restricted (dBm)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
2.99417	50.24	PK-U	32.8	-42.8	0	40.24	-	-	-	-	68.2	-27.96	330	218	H
3.03041	49.72	PK-U	32.9	-42.5	0	40.12	-	-	-	-	68.2	-28.08	204	215	V
10.40308	45.06	PK-U	37.7	-37.2	0	45.56	-	-	-	-	68.2	-22.64	135	159	H
*15.59386	42.81	PK-U	40.9	-33.5	0	50.21	-	-	74	-23.79	-	-	248	221	H
*15.59377	31.31	ADR	40.9	-33.5	0	38.71	54	-15.29	-	-	-	-	248	221	H
10.98991	45	PK-U	37.7	-37.2	0	45.5	-	-	-	-	68.2	-22.7	95	116	V
*15.59991	42.96	PK-U	40.9	-33.5	0	50.36	-	-	74	-23.64	-	-	177	103	V
*15.60327	31.52	ADR	40.9	-33.6	0	38.82	54	-15.18	-	-	-	-	177	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

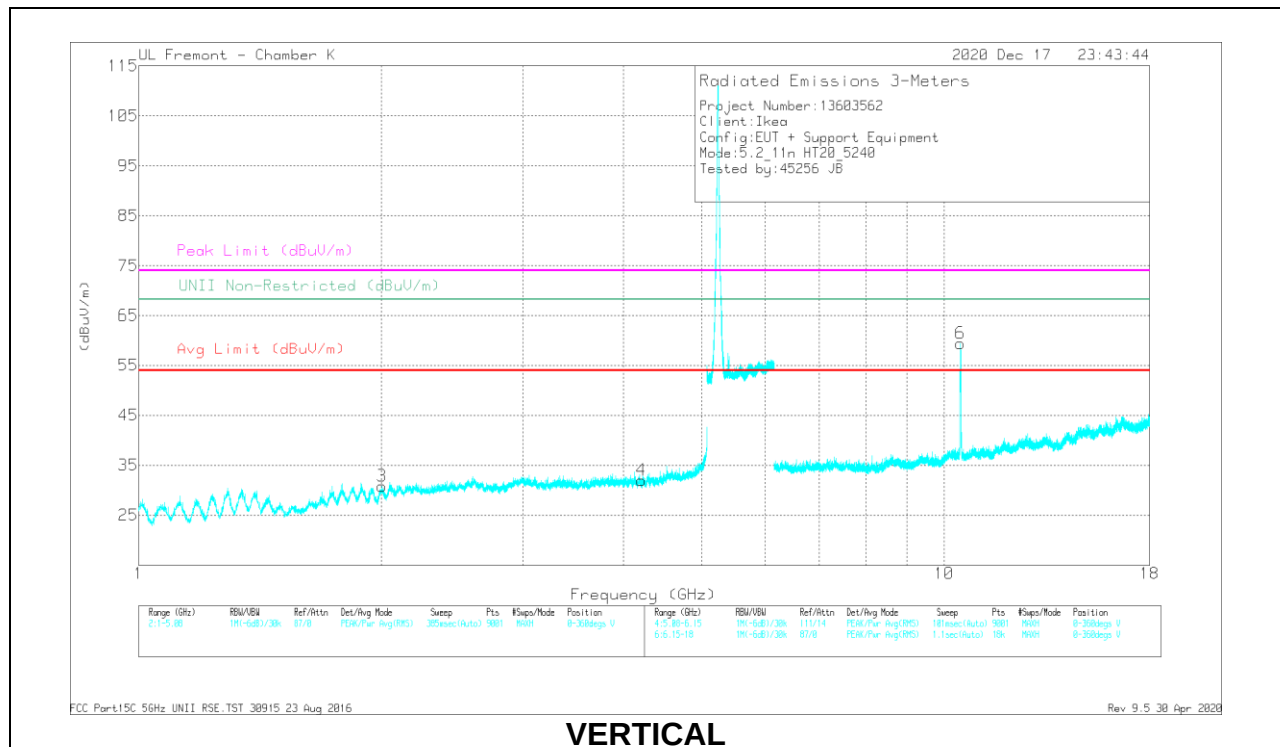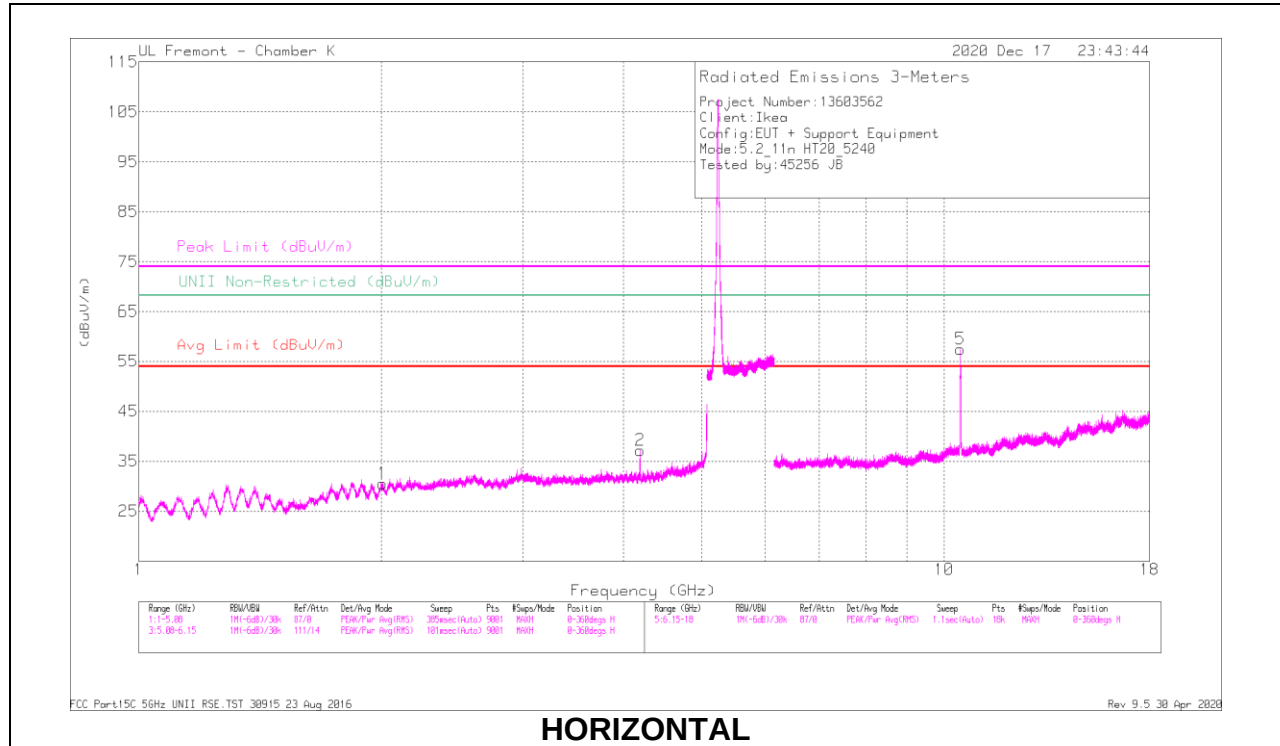

RADIATED EMISSIONS

Frequency (MHz)	Mean Reading (dBuV)	Det	AF 1003 (dBm)	Amp/Cable/Feed (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (ft/m)	Height (m)	Polarity
2.00485	53.11	PK-U	31.3	-45.9	0	38.51	-	-	-	-	68.2	-29.69	273	145	H
* 4.1916	48.36	PK-U	33.6	-41.7	0	40.26	-	-	74	-33.74	-	-	76	102	H
* 4.19193	37.33	ADR	33.6	-41.7	0	29.23	54	-24.77	-	-	-	-	76	102	H
2.00662	53.58	PK-U	31.3	-45.9	0	38.98	-	-	-	-	68.2	-29.22	98	352	V
* 4.2125	48.07	PK-U	33.6	-41.7	0	39.87	-	-	74	-34.13	-	-	148	323	V
* 4.20872	37.09	ADR	33.6	-41.7	0	28.99	54	-25.01	-	-	-	-	148	323	V
10.47583	46.87	PK-U	37.8	-37.1	0	47.57	-	-	-	-	68.2	-20.63	262	385	H
10.48077	44.97	PK-U	37.8	-37.2	0	45.57	-	-	-	-	68.2	-22.63	104	282	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.3. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

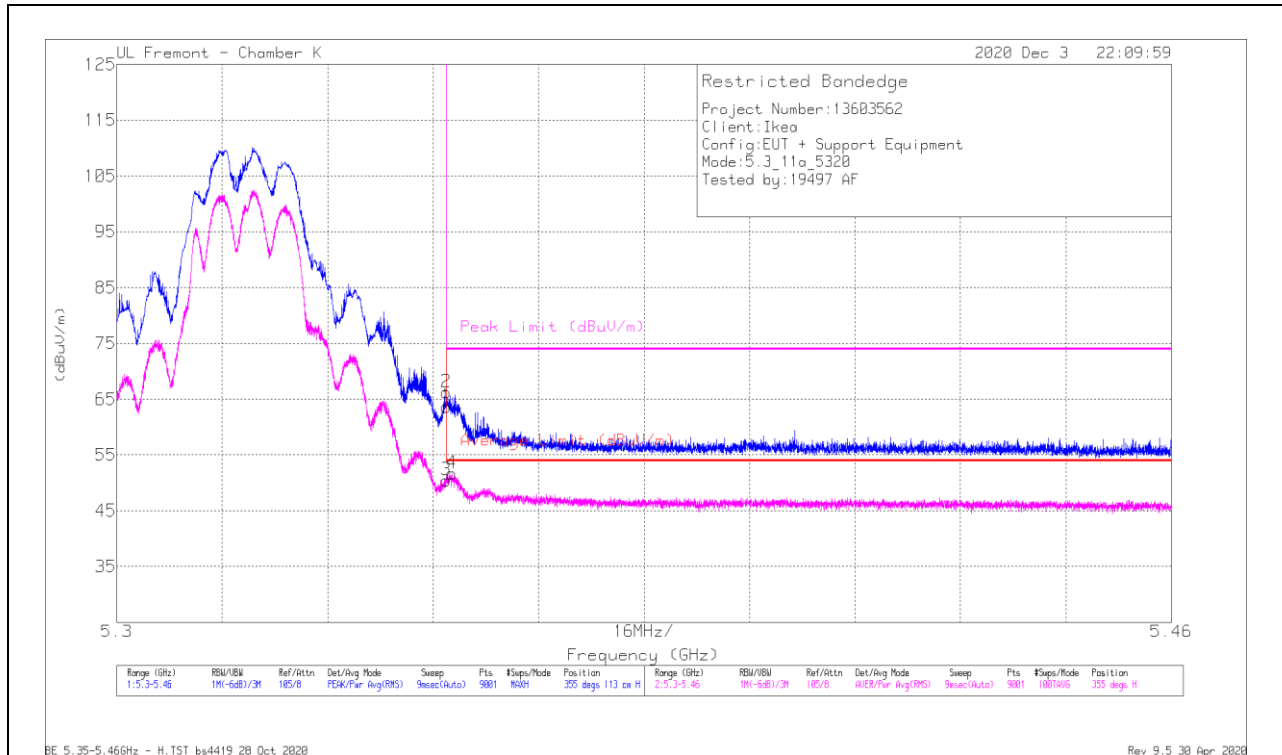

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ch/Filter/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.35001	35.59	Pk	35.2	-7.2	0	63.59	-	-	74	-10.41	355	113	H
2	5.35005	38.26	Pk	35.2	-7.2	0	66.26	-	-	74	-7.74	355	113	H
3	5.35001	21.88	RMS	35.2	-7.2	0.61	50.49	54	-3.51	-	-	355	113	H
4	5.35086	23.09	RMS	35.2	-7.2	0.61	51.7	54	-2.3	-	-	355	113	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT


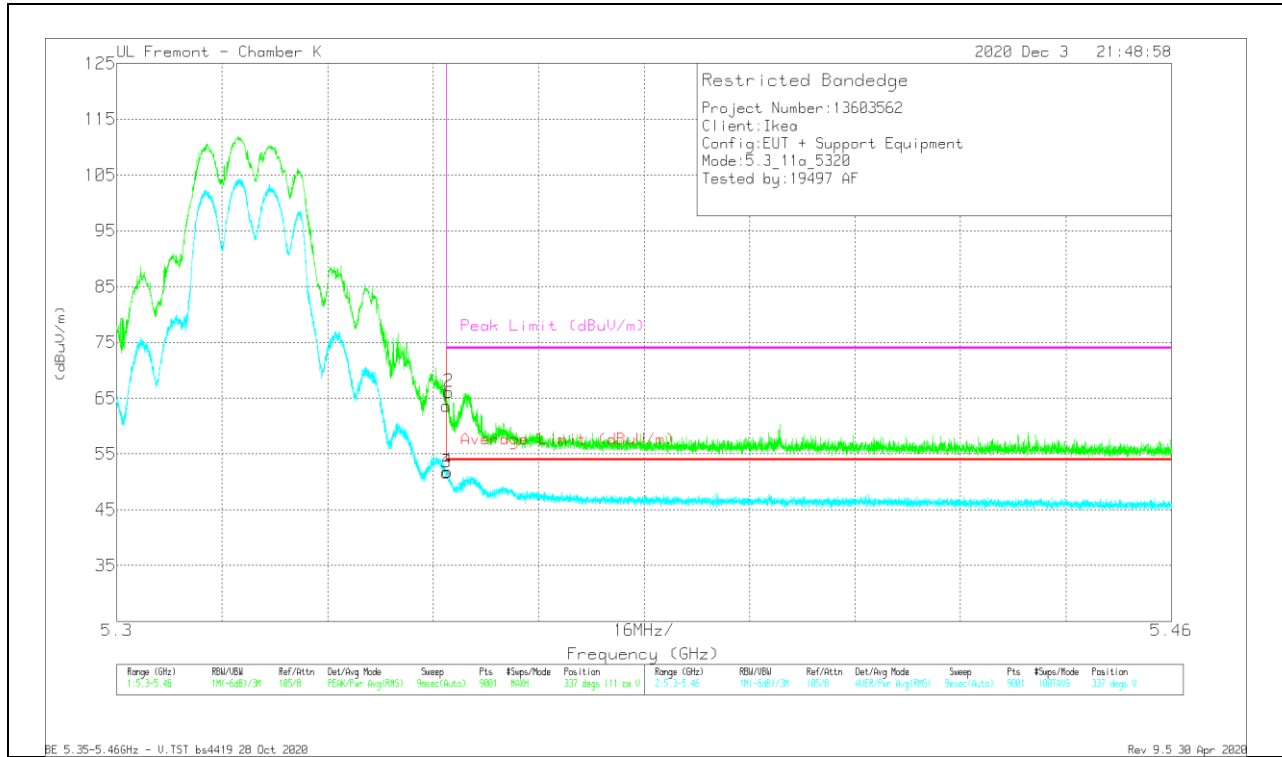


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp(Cal)/Filt(Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.35001	35.63	Pk	35.2	-7.2	0	63.63	-	-	74	-10.37	337	111	V
2	5.35038	38.1	Pk	35.2	-7.2	0	66.1	-	-	74	-7.9	337	111	V
3	5.35001	23.04	RMS	35.2	-7.2	0.61	51.65	54	-2.35	-	-	337	111	V
4	5.35017	23.26	RMS	35.2	-7.2	0.61	51.87	54	-2.13	-	-	337	111	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

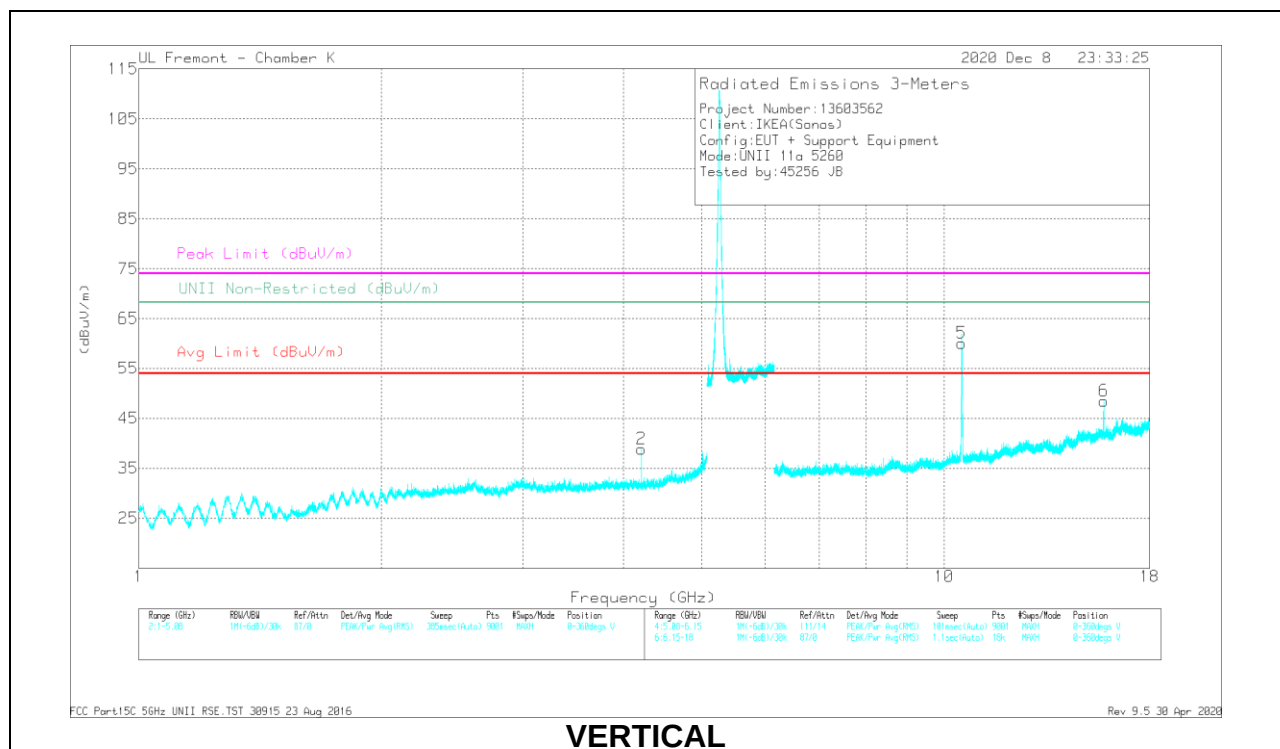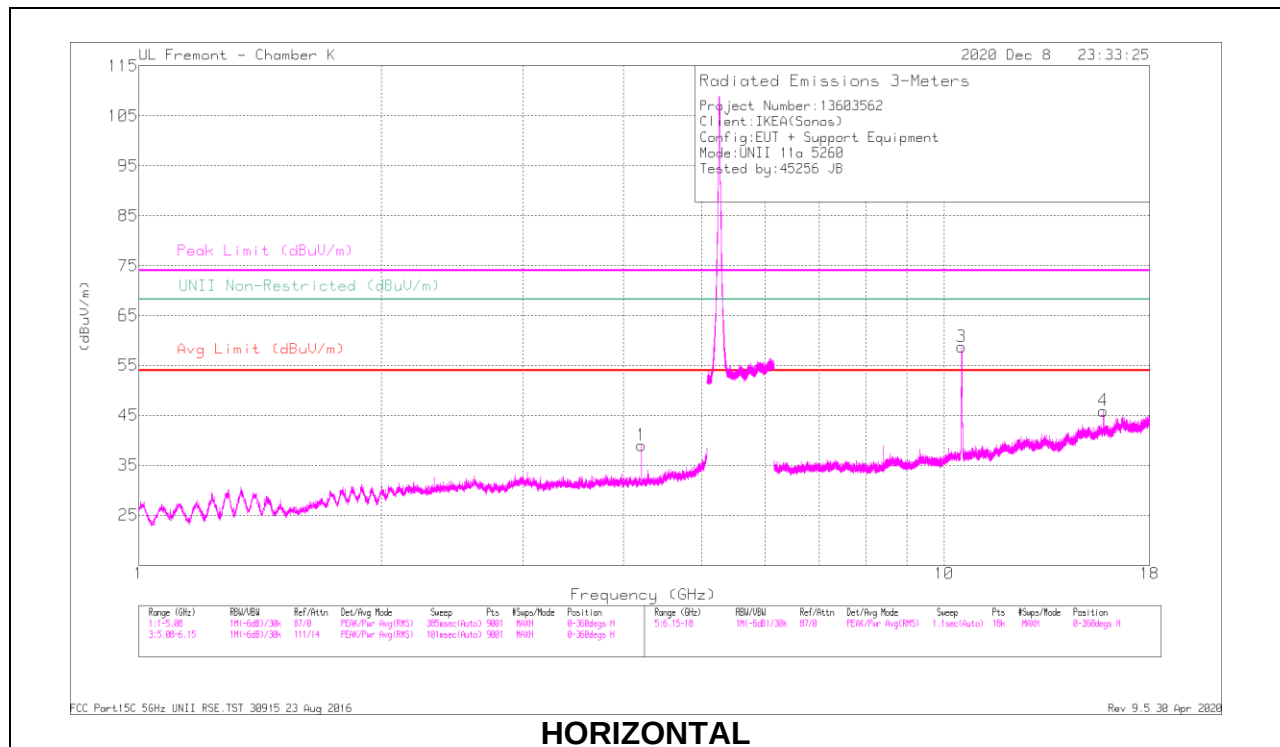

RADIATED EMISSIONS



Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
* 4.20803	52.23	PK-U	33.6	-41.7	0	54.13	-	-	74	-29.87	-	-	344	133	H
* 4.20797	46.21	ADR	33.6	-41.7	0.61	38.72	54	-15.28	-	-	-	-	344	133	H
* 4.20799	51.85	PK-U	33.6	-41.7	0	43.75	-	-	74	-30.25	-	-	161	100	V
* 4.20796	44.85	ADR	33.6	-41.7	0.61	37.87	54	-16.63	-	-	-	-	161	100	V
10.52065	65.26	PK-U	37.8	-37.4	0	65.66	-	-	-	-	68.2	-2.54	172	104	H
* 15.78239	47.96	PK-U	40.8	-34.1	0	54.66	-	-	74	-19.34	-	-	155	97	H
* 15.78212	35.72	ADR	40.8	-34	0.61	43.13	54	-10.87	-	-	-	-	155	97	H
10.52221	65.94	PK-U	37.8	-37.4	0	66.34	-	-	-	-	68.2	-1.86	165	100	V
* 15.78795	49.26	PK-U	40.8	-34.1	0	54.66	-	-	74	-19.04	-	-	151	98	V
* 15.78765	36.19	ADR	40.8	-34.1	0.61	43.5	54	-10.5	-	-	-	-	151	98	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

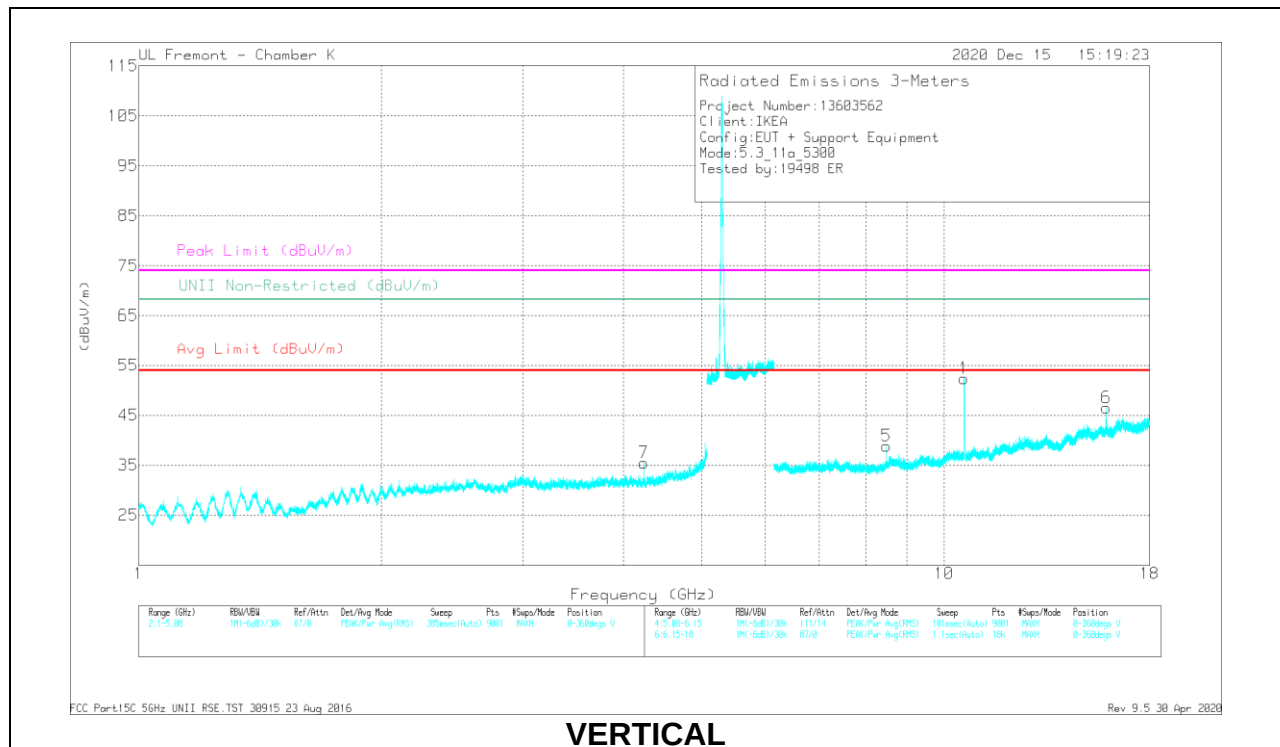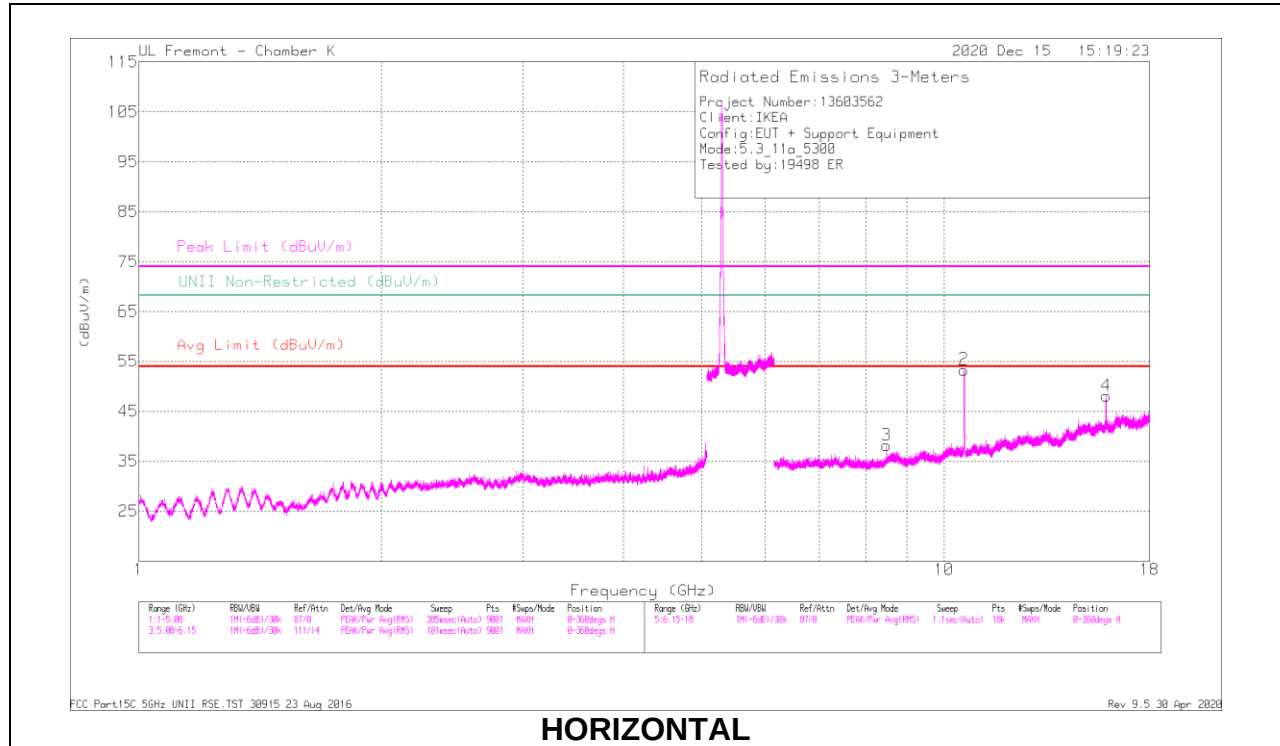

RADIATED EMISSIONS



Frequency (MHz)	Meas Reading (dBm/Hz)	Det	AF TMS2 (dBm)	Amp/Cat/Unfilred (dB)	DC Corr (dB)	Corrected Reading (dBm/Hz)	Avg Limit (dBm/Hz)	Margin (dB)	Peak Limit (dBm/Hz)	PK Margin (dB)	Limit Non-Restricted (dBm/Hz)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
* 4.24007	50.54	PK-U	33.6	-41.7	0	52.44	-	-	74	-31.56	-	-	163	114	V
* 4.23999	42.01	ADR	33.6	-41.7	0.61	34.52	54	-19.48	-	-	-	-	163	114	V
* 10.60377	63.6	PK-U	37.9	-37.4	0	64.1	-	-	74	-9.9	-	-	169	98	H
* 10.60001	51.91	ADR	37.9	-37.4	0.61	53.02	54	-0.98	-	-	-	-	169	98	H
* 8.47995	47.47	PK-U	36.1	-37.2	0	46.27	-	-	74	-27.63	-	-	157	98	H
* 8.47995	39.79	ADR	36.1	-37.2	0.61	39.3	54	-14.7	-	-	-	-	157	98	H
* 15.89702	50.82	PK-U	40.9	-33.5	0	58.22	-	-	74	-15.78	-	-	150	204	H
* 15.9026	39.94	ADR	40.9	-33.5	0.61	47.95	54	-6.05	-	-	-	-	150	204	H
* 10.60385	63.51	PK-U	38	-37.4	0	64.11	-	-	74	-9.89	-	-	169	268	V
* 10.60211	52.41	ADR	37.9	-37.4	0.61	53.52	54	-0.48	-	-	-	-	169	268	V
* 8.47988	46.17	PK-U	36.1	-37.2	0	45.07	-	-	74	-28.93	-	-	162	96	V
* 8.47994	37.13	ADR	36.1	-37.2	0.61	36.64	54	-17.36	-	-	-	-	162	96	V
* 15.89923	48.21	PK-U	40.9	-33.5	0	46.11	-	-	74	-17.89	-	-	149	199	V
* 15.89747	37.3	ADR	40.9	-33.5	0.61	45.31	54	-8.69	-	-	-	-	149	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

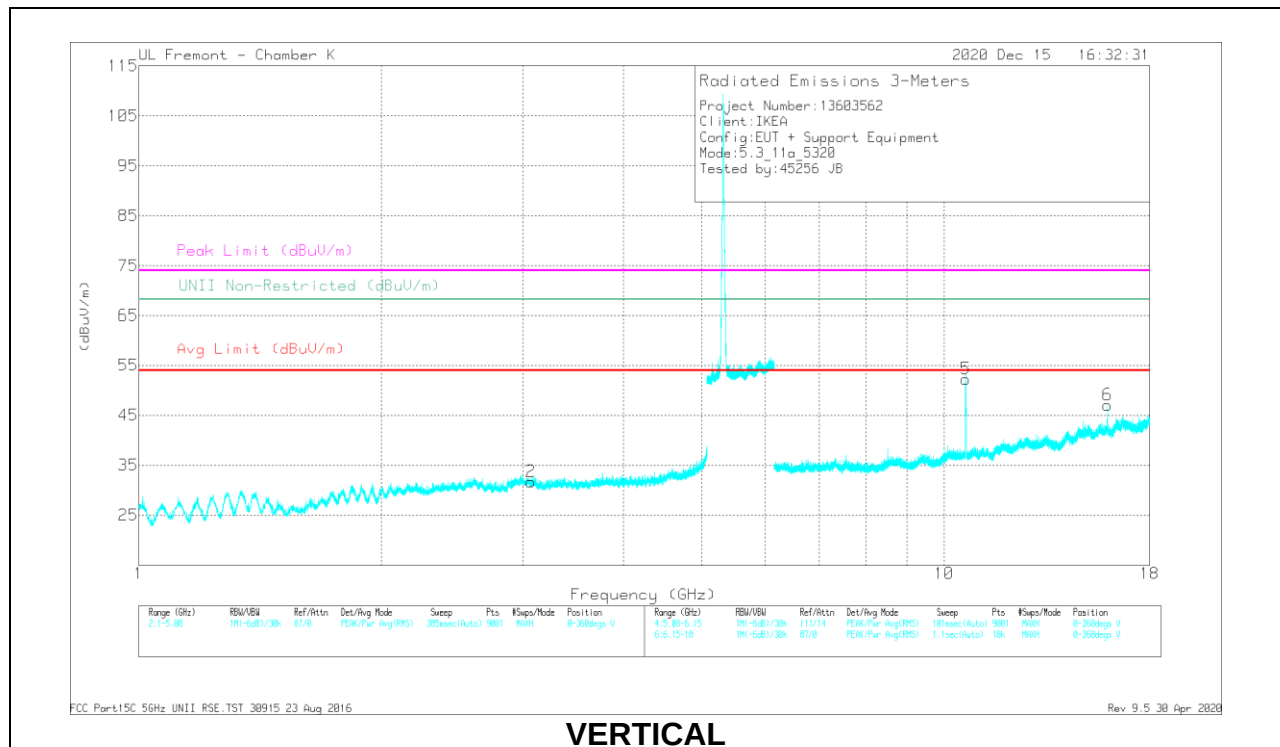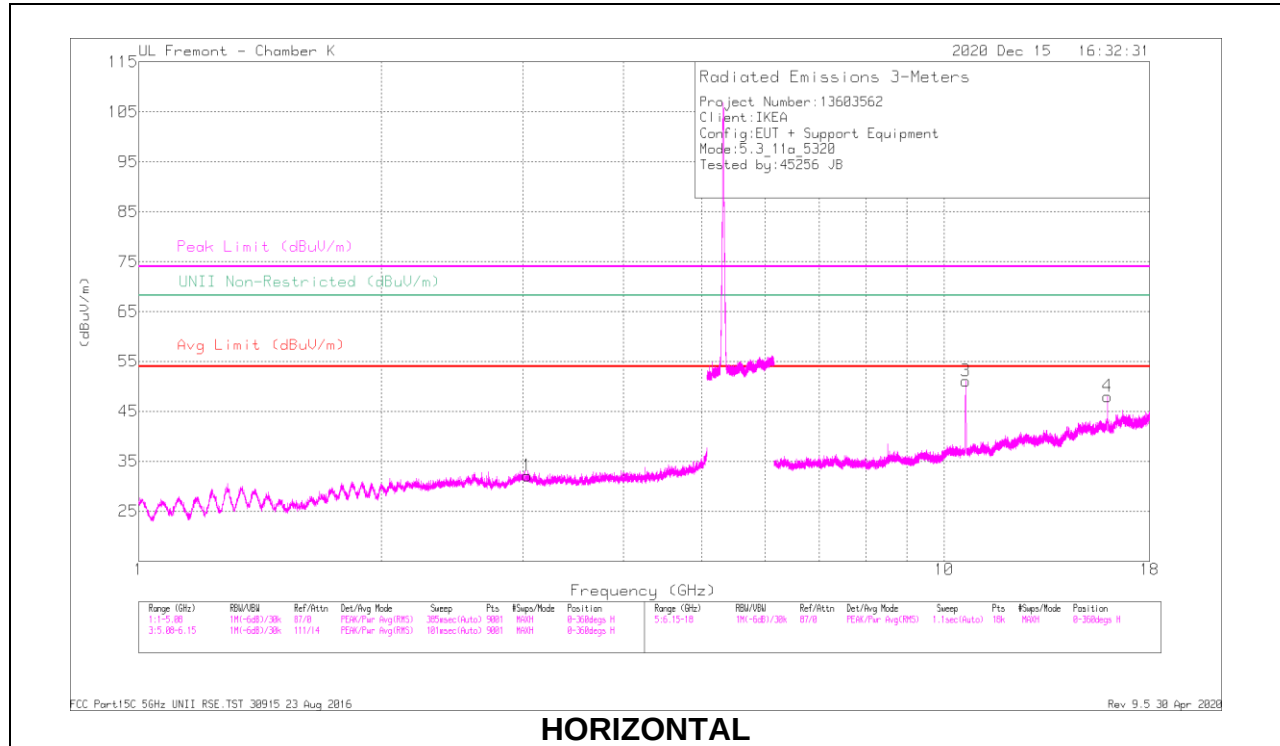

RADIATED EMISSIONS

Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB2 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
3.02832	49.67	PK-U	32.9	-42.4	0	50.17	-	-	-	-	68.2	-28.03	110	133	H
3.0727	49.28	PK-U	33.1	-42.4	0	39.98	-	-	-	-	68.2	-28.22	162	140	V
* 10.63847	58.77	PK-U	38	-37.2	0	59.57	-	-	74	-14.43	-	-	173	106	H
* 10.63885	44.8	ADR	38	-37.2	0.61	46.21	54	-7.79	-	-	-	-	173	106	H
* 15.9535	45.07	PK-U	41	-33.2	0	53.27	-	-	74	-20.23	-	-	151	185	H
* 15.9526	34.15	ADR	41	-33.2	0.61	42.56	54	-11.44	-	-	-	-	151	185	H
* 15.96333	44.98	PK-U	41	-33.4	0	52.58	-	-	74	-21.42	-	-	227	197	V
* 15.96261	33.6	ADR	41	-33.4	0.61	41.61	54	-12.19	-	-	-	-	227	197	V
* 10.63209	65.8	PK-U	37.9	-37.2	0	66.3	-	-	74	-7.5	-	-	186	101	V
* 10.63244	51.75	ADR	37.9	-37.2	0.61	53.06	54	-0.94	-	-	-	-	186	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.4. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

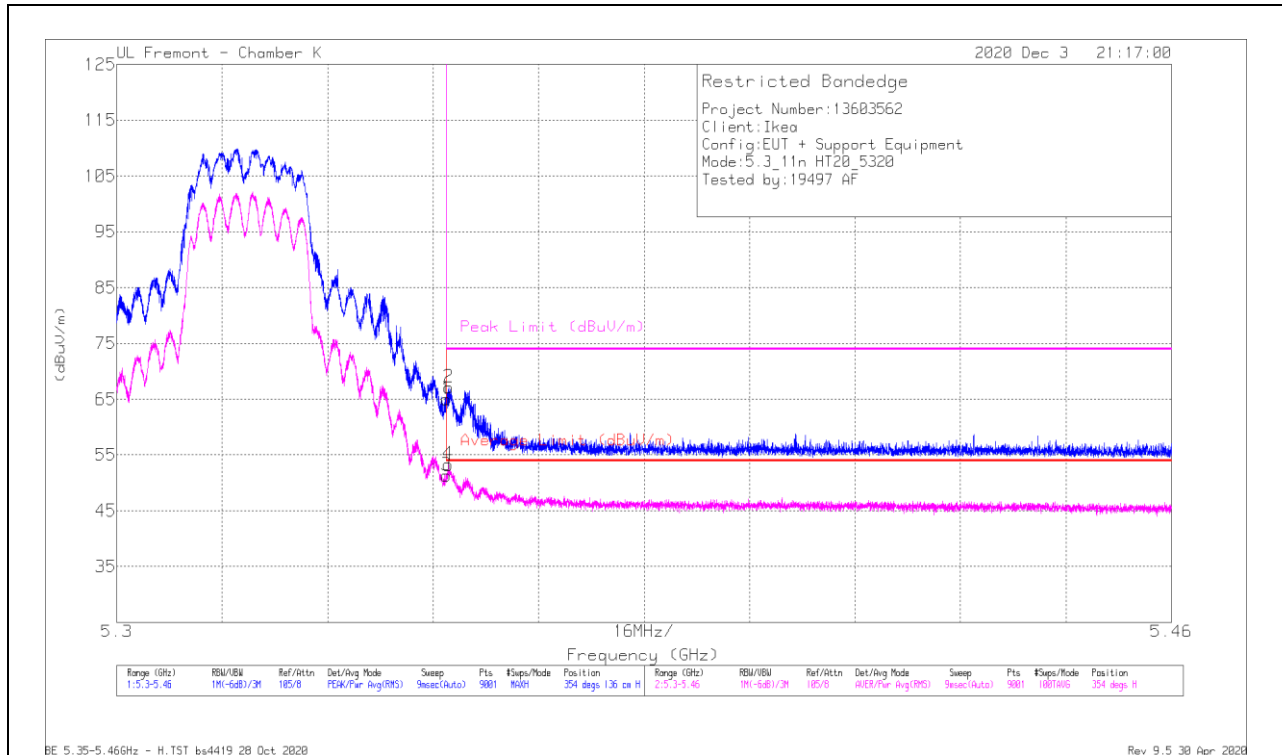

Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T863 (dBm)	Amp/Ch/Filter/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.35001	36.95	Pk	35.2	-7.2	0	64.95	-	-	74	-9.05	354	136	H
2	5.3504	39.13	Pk	35.2	-7.2	0	67.13	-	-	74	-6.87	354	136	H
3	5.35001	23.14	RMS	35.2	-7.2	0	51.14	54	-2.86	-	-	354	136	H
4	5.35033	25.12	RMS	35.2	-7.2	0	53.12	54	-0.88	-	-	354	136	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT


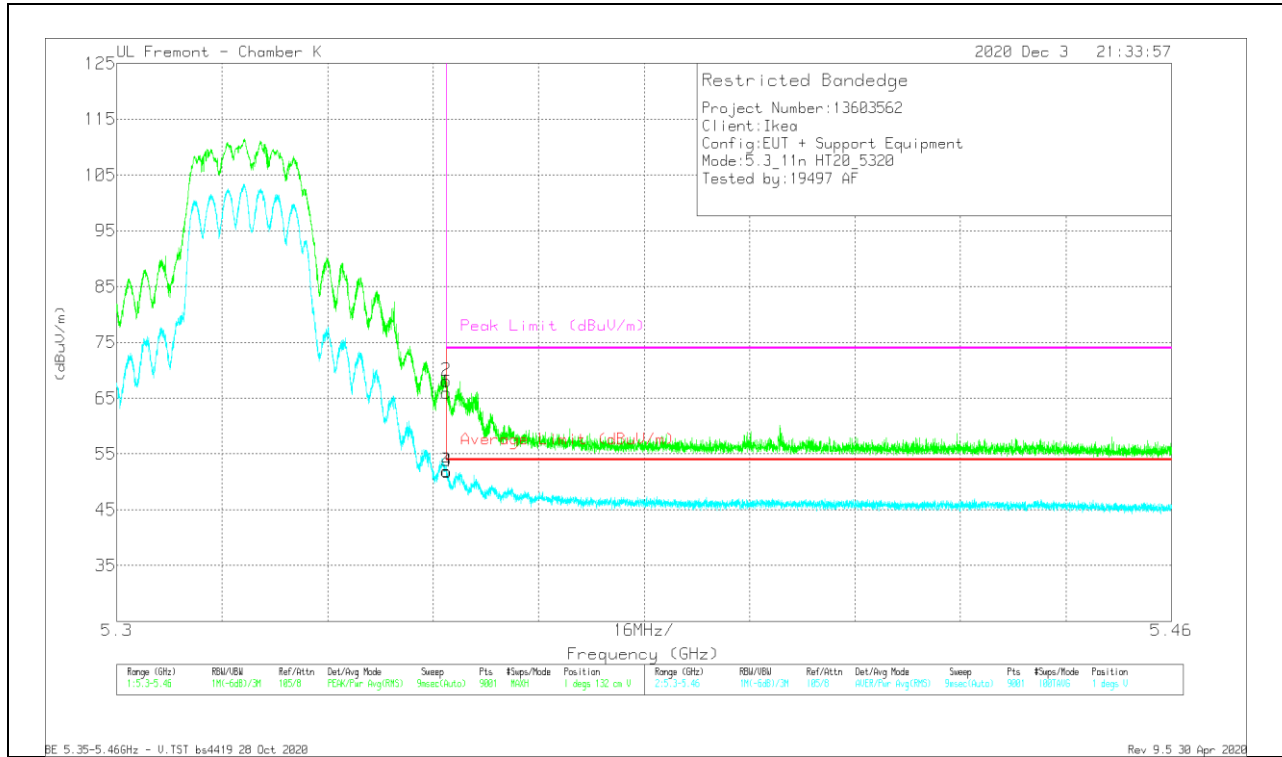


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp(Cal)/FilttrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.35001	37.97	Pk	35.2	-7.2	0	65.97	-	-	74	-8.03	1	132	V
2	5.35003	40.07	Pk	35.2	-7.2	0	68.07	-	-	74	-5.93	1	132	V
3	5.35001	23.8	RMS	35.2	-7.2	0	51.8	54	-2.2	-	-	1	132	V
4	5.35006	23.73	RMS	35.2	-7.2	0	51.73	54	-2.27	-	-	1	132	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

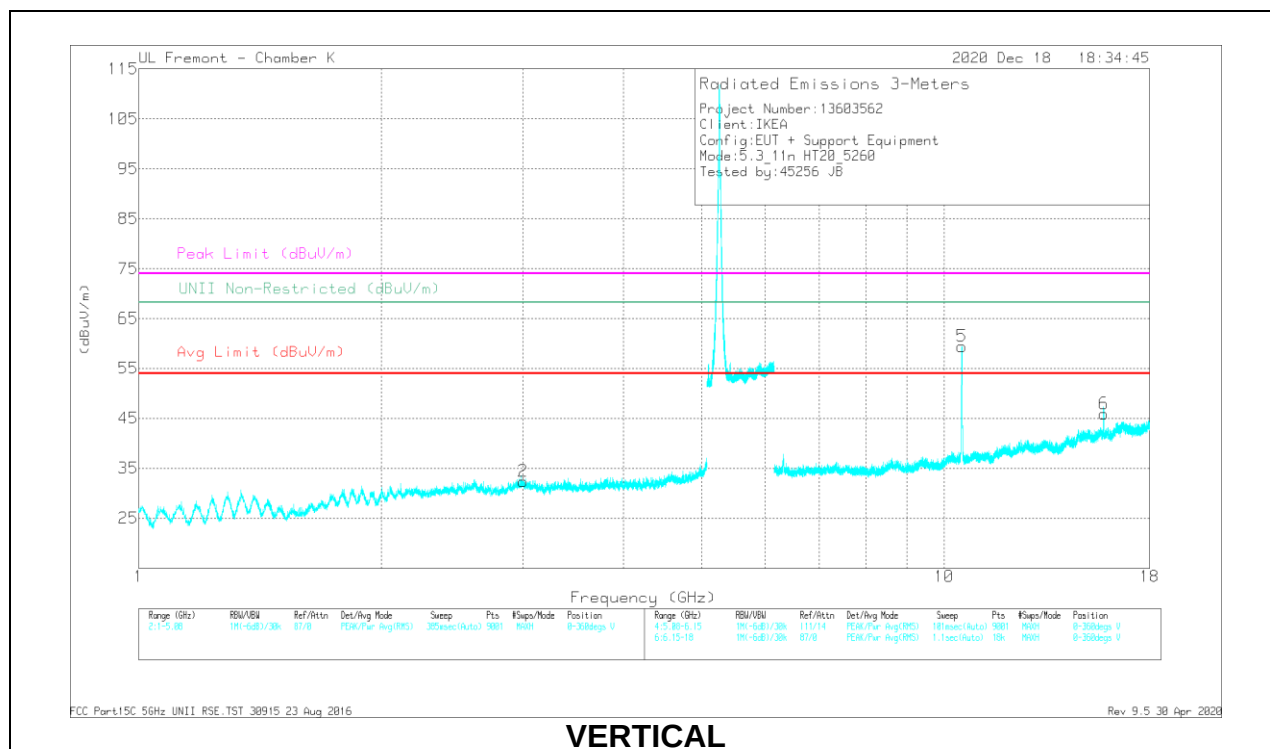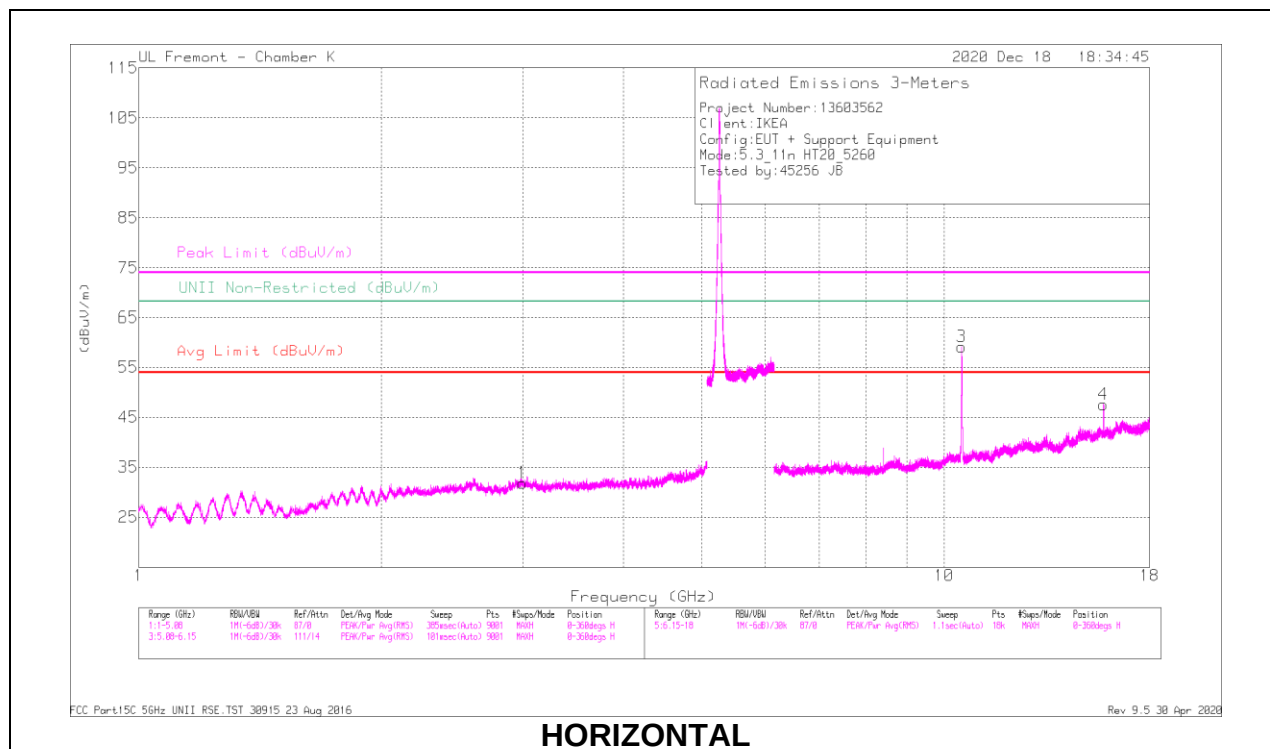

RADIATED EMISSIONS


Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
2.99833	50.04	PK-U	32.8	-42.7	0	40.14	-	-	-	-	68.2	-28.06	13	390	H
3.00215	50.47	PK-U	32.8	-42.7	0	40.57	-	-	-	-	68.2	-27.63	174	116	V
10.51754	44.67	PK-U	37.8	-37.4	0	45.07	-	-	-	-	68.2	-23.13	90	334	H
* 15.77682	44.7	PK-U	40.8	-34	0	51.5	-	-	74	-22.5	-	-	55	333	H
* 15.77497	31.35	ADR	40.8	-33.9	0	38.75	54	-15.25	-	-	-	-	55	333	H
10.52439	44.71	PK-U	37.8	-37.4	0	45.11	-	-	-	-	68.2	-23.09	143	124	V
* 15.78679	42.88	PK-U	40.8	-34.1	0	49.58	-	-	74	-24.42	-	-	168	142	V
* 15.78804	31.71	ADR	40.8	-34.1	0	38.41	54	-15.59	-	-	-	-	168	142	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

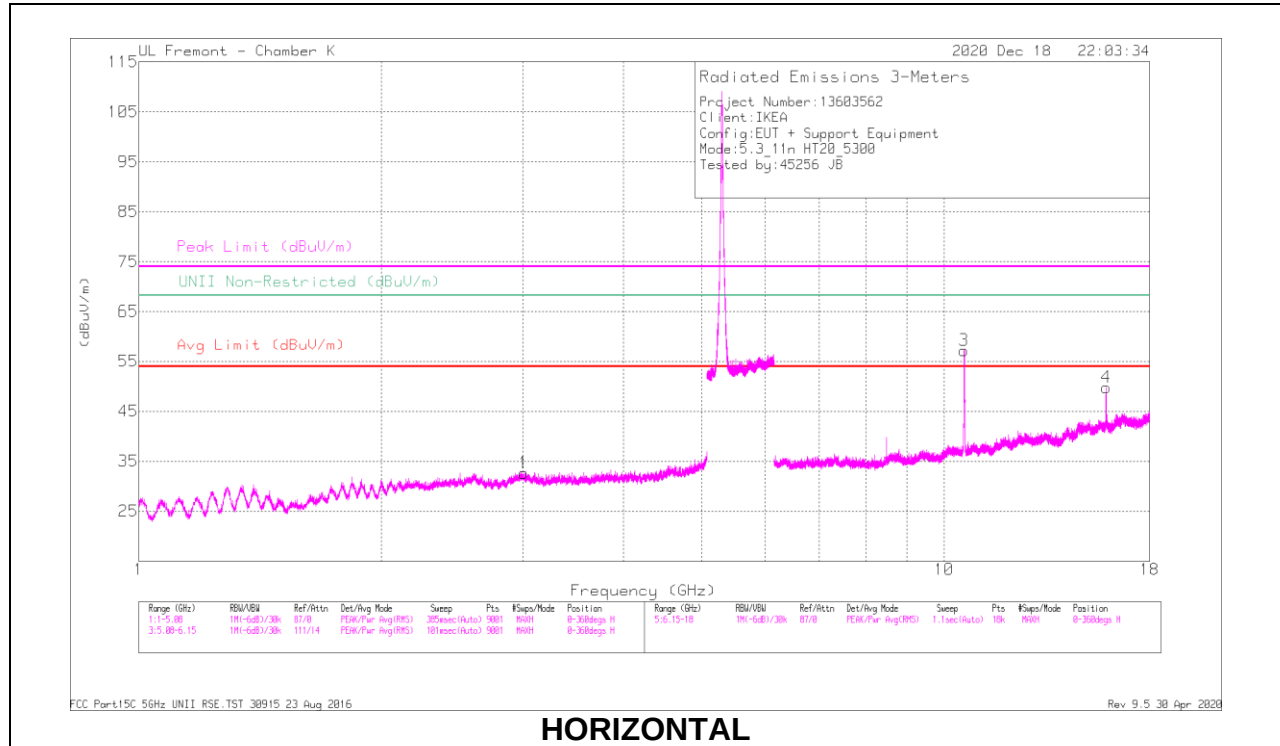

HORIZONTAL

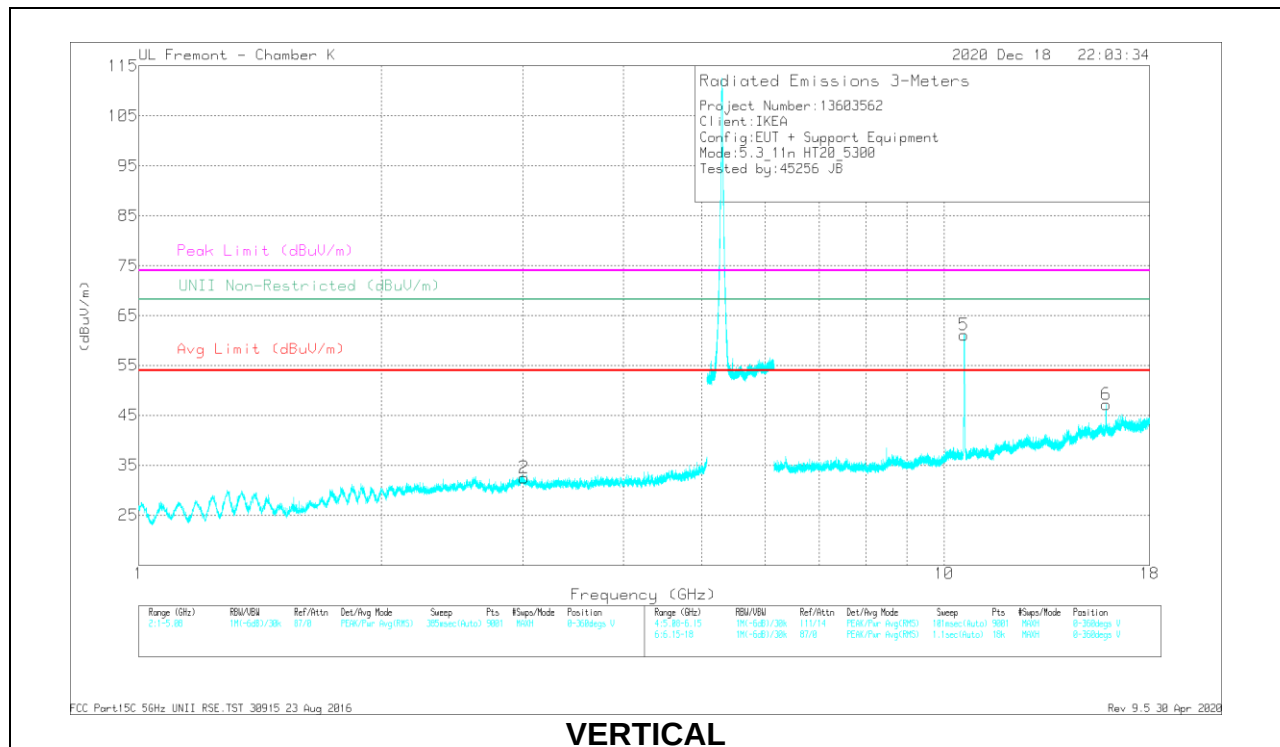

VERTICAL

RADIATED EMISSIONS



Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
3.0087	50.15	PK-U	32.8	-42.7	0	40.25	-	-	-	-	68.2	-27.95	33	198	H
3.00836	50.76	PK-U	32.8	-42.7	0	40.86	-	-	-	-	68.2	-27.34	126	144	V
10.59233	44.57	PK-U	37.8	-37.4	0	44.97	-	-	-	-	68.2	-23.23	4	192	H
* 15.90278	43.15	PK-U	40.9	-33.5	0	50.55	-	-	74	-23.44	-	-	175	105	H
* 15.90245	32.56	ADR	40.9	-33.5	0	39.86	54	-14.04	-	-	-	-	175	105	H
10.59355	62.05	PK-U	37.8	-37.4	0	63.05	-	-	-	-	68.2	-5.15	46	216	V
* 15.89521	43.48	PK-U	40.9	-33.5	0	50.88	-	-	74	-23.12	-	-	111	197	V
* 15.89519	33.48	ADR	40.9	-33.5	0	40.88	54	-13.12	-	-	-	-	111	197	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

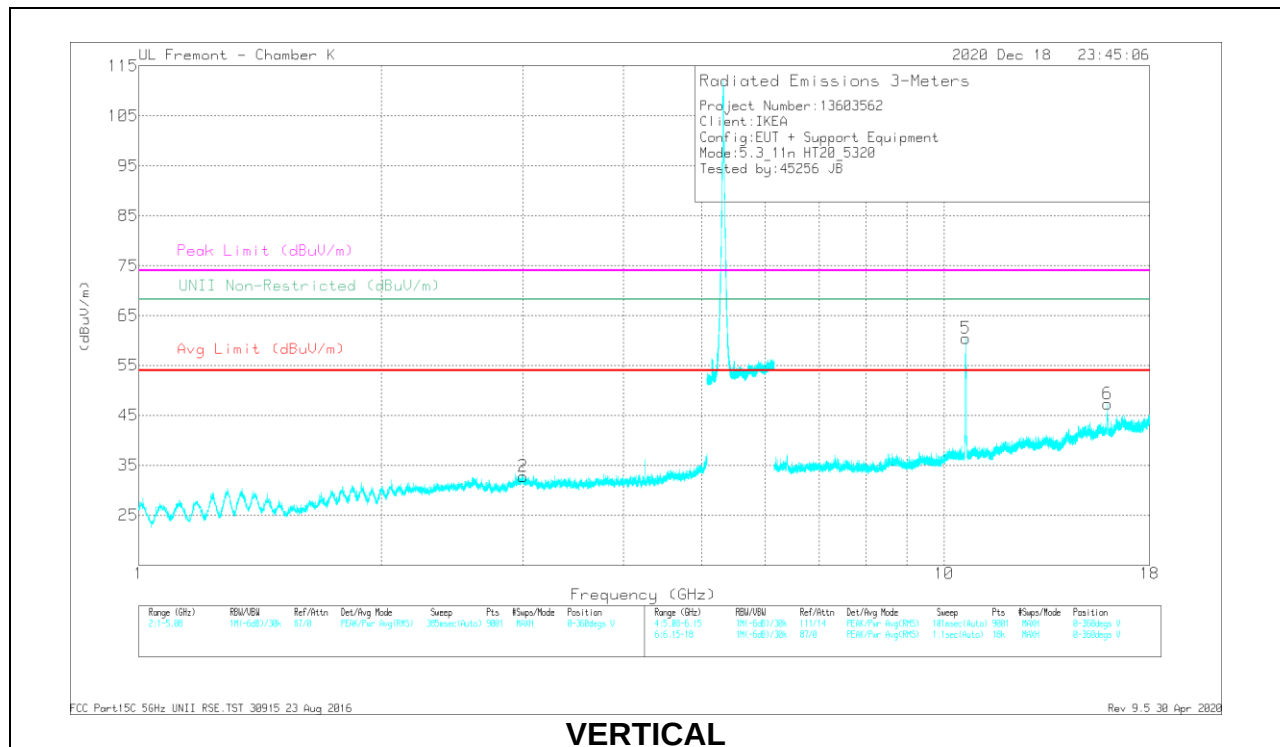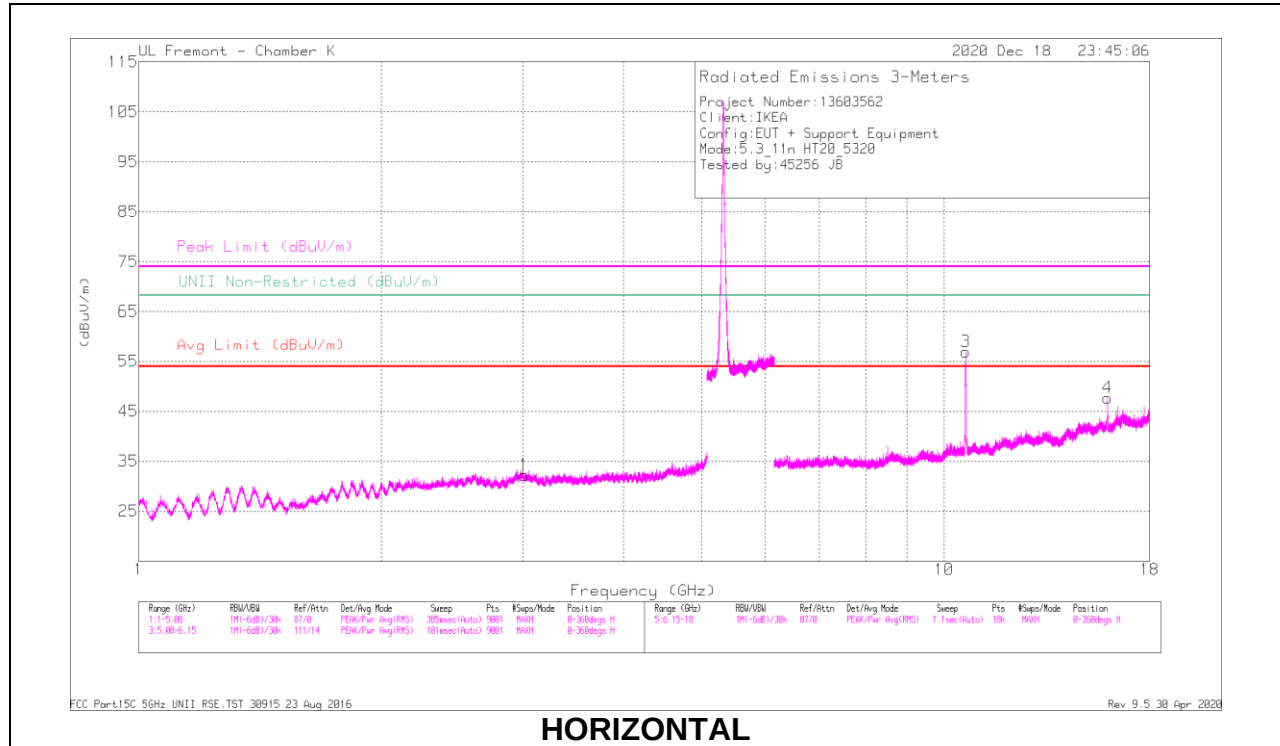

RADIATED EMISSIONS

Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB2 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
3.0099	49.59	PK-U	32.9	-42.7	0	39.79	-	-	-	-	68.2	-28.41	60	207	H
3.0081	50.02	PK-U	32.8	-42.7	0	40.12	-	-	-	-	68.2	-28.08	262	390	V
* 10.64141	44.28	PK-U	38	-37.2	0	45.08	-	-	74	-28.92	-	-	80	312	H
* 10.63969	33.26	ADR	38	-37.2	0	34.06	54	-19.94	-	-	-	-	80	312	H
* 15.95589	42.81	PK-U	41	-33.3	0	50.61	-	-	74	-23.39	-	-	80	213	H
* 15.95506	31.7	ADR	41	-33.2	0	39.5	54	-14.5	-	-	-	-	80	213	H
* 10.63993	44.09	PK-U	38	-37.2	0	44.89	-	-	74	-29.11	-	-	222	319	V
* 10.63547	33.19	ADR	37.9	-37.2	0	33.89	54	-20.11	-	-	-	-	222	319	V
* 15.96572	43.23	PK-U	41	-33.4	0	50.83	-	-	74	-23.17	-	-	151	112	V
* 15.96566	32.4	ADR	41	-33.4	0	40	54	-14	-	-	-	-	151	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.5. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

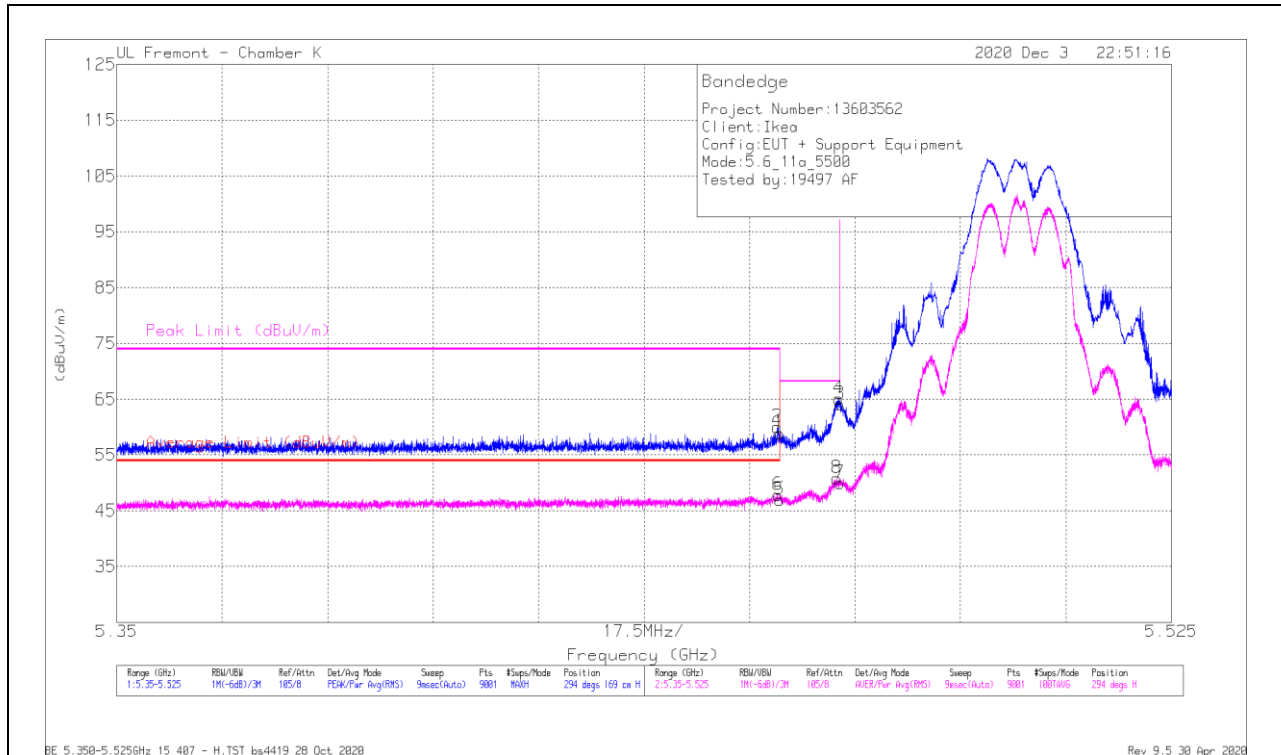

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/Ch/Filter/Par d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.45999	30.68	Pk	35.6	-7.4	0	50.88	-	-	74	-15.12	294	169	H
2	5.45957	31.81	Pk	35.6	-7.4	0	60.01	-	-	74	-13.99	294	169	H
3	5.46999	35.84	Pk	35.7	-7.4	0	64.14	-	-	68.2	-4.06	294	169	H
4	5.46979	36.84	Pk	35.7	-7.4	0	65.14	-	-	68.2	-3.06	294	169	H
5	5.45999	18.15	RMS	35.6	-7.4	0.61	46.96	54	-7.04	-	-	294	169	H
6	5.45968	19.06	RMS	35.6	-7.4	0.61	47.87	54	-6.13	-	-	294	169	H
7	5.46999	20.98	RMS	35.7	-7.4	0.61	49.89	-	-	-	-	294	169	H
8	5.46944	21.91	RMS	35.7	-7.4	0.61	50.82	-	-	-	-	294	169	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

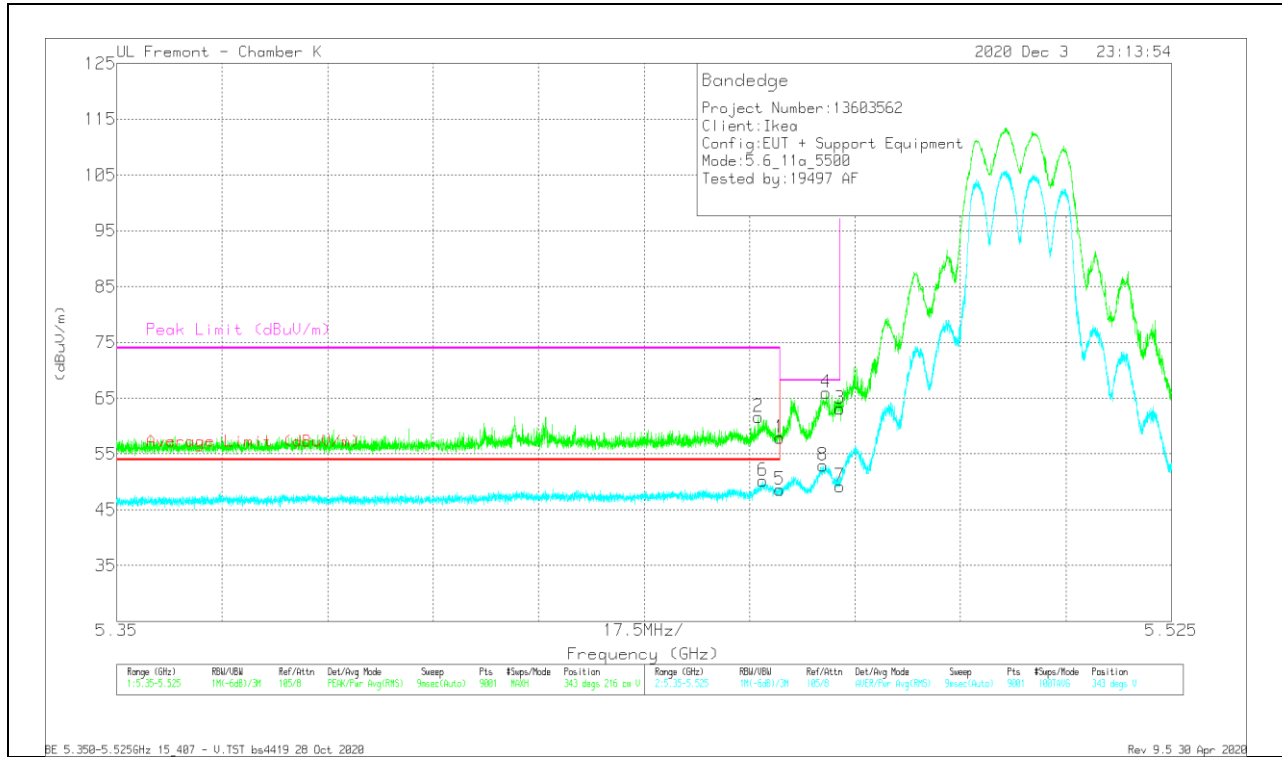


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp(Cb)/FilttrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.45999	29.77	Pk	35.6	-7.4	0	57.97	-	-	74	-16.03	343	216	V
2	5.45644	33.37	Pk	35.7	-7.4	0	61.67	-	-	74	-12.33	343	216	V
3	5.46999	34.79	Pk	35.7	-7.4	0	63.09	-	-	68.2	-5.11	343	216	V
4	5.46769	37.85	Pk	35.6	-7.4	0	66.05	-	-	68.2	-2.15	343	216	V
5	5.45999	19.72	RMS	35.6	-7.4	0.61	49.53	54	-5.47	-	-	343	216	V
6	5.45721	21.28	RMS	35.7	-7.4	0.61	50.19	54	-3.81	-	-	343	216	V
7	5.46999	20.3	RMS	35.7	-7.4	0.61	49.21	-	-	-	-	343	216	V
8	5.46721	24.09	RMS	35.6	-7.4	0.61	52.9	-	-	-	-	343	216	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

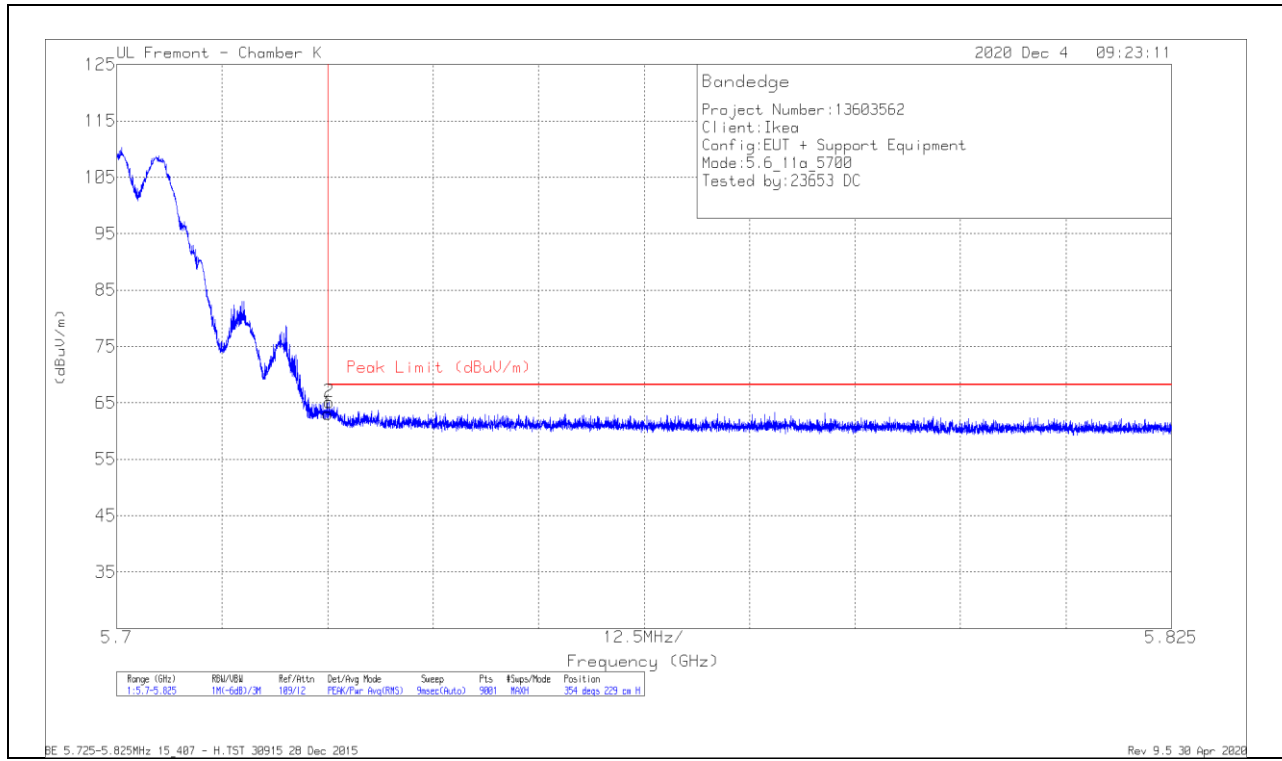

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/ Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	34.8	Pk	35.1	-6.8	63.1	68.2	-5.1	354	229	H
2	5.72517	36.91	Pk	35.1	-6.8	65.21	68.2	-2.99	354	229	H

Pk - Peak detector

VERTICAL RESULT

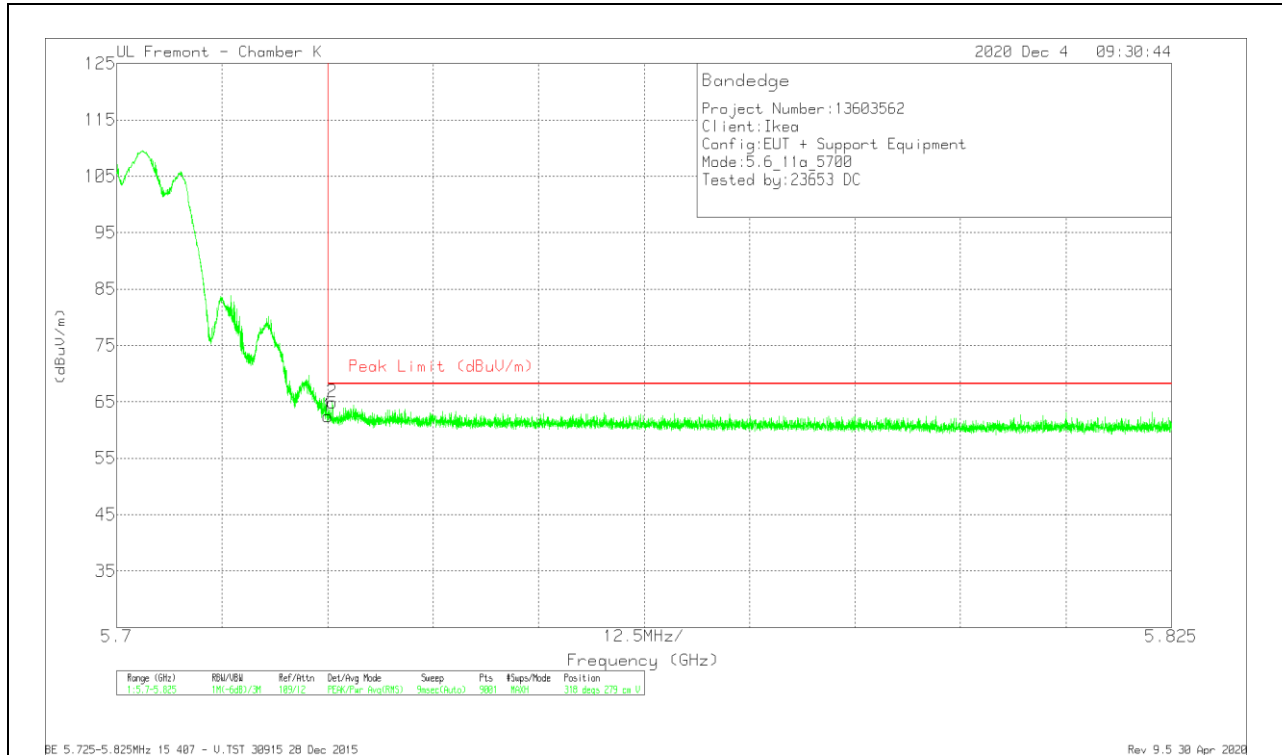


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	34.11	Pk	35.1	-6.8	0	62.41	68.2	-5.79	318	279	V
2	5.72558	36.6	Pk	35.1	-6.8	0	64.9	68.2	-3.3	318	279	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

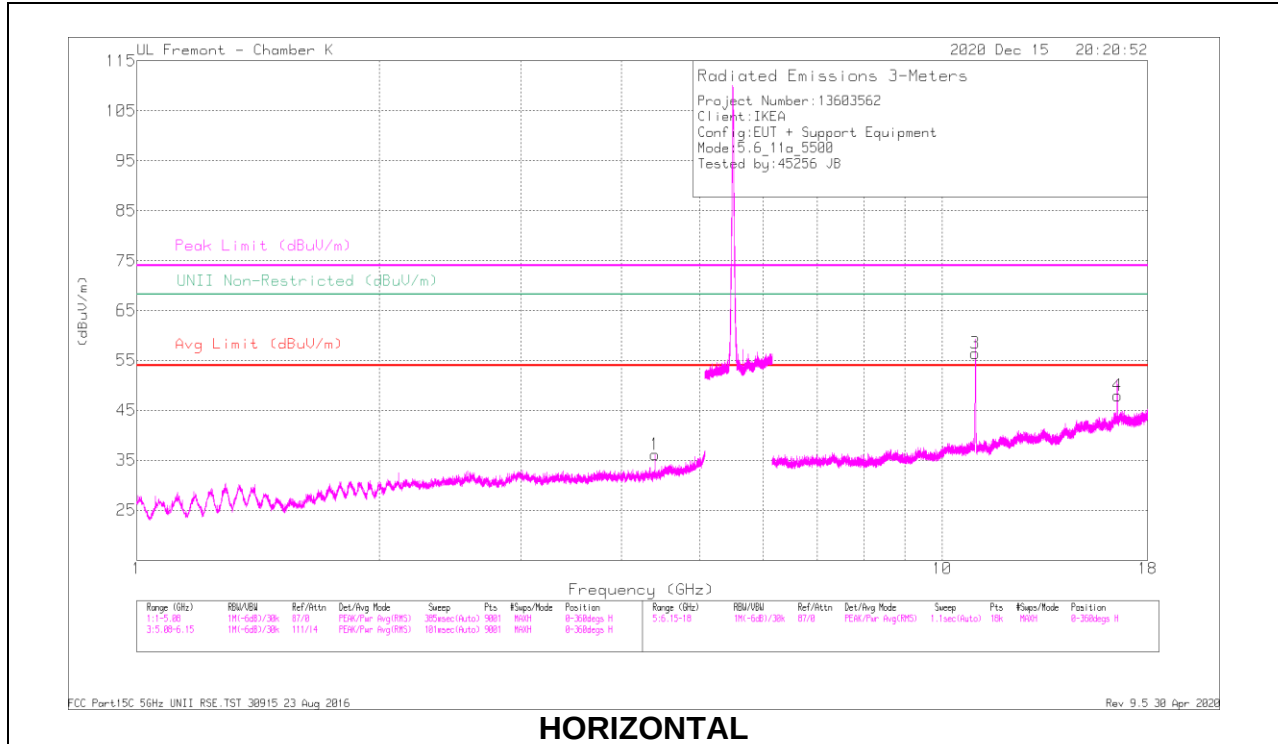

RADIATED EMISSIONS



Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
* 4.4	49.09	PK-U	33.8	-41.4	0	42.09	-	-	74	-31.91	-	-	172	391	H
* 4.39995	38.52	ADR	33.8	-41.4	0.61	31.53	54	-22.47	-	-	-	-	172	391	H
* 4.39994	51.45	PK-U	33.8	-41.4	0	43.85	-	-	74	-30.15	-	-	165	105	V
* 4.39995	41.7	ADR	33.8	-41.4	0.61	34.71	54	-19.29	-	-	-	-	165	105	V
16.50714	42.73	PK-U	42	-33.9	0	50.53	-	-	-	-	68.2	-17.27	320	220	H
* 11.00175	64.69	PK-U	37.8	-37.1	0	65.39	-	-	74	-8.61	-	-	320	228	H
* 11.00201	51.18	ADR	37.8	-37.1	0.61	52.49	54	-1.51	-	-	-	-	320	228	H
16.49628	50.73	PK-U	41.9	-33.7	0	58.93	-	-	-	-	68.2	-9.27	141	98	V
* 10.99752	64.02	PK-U	37.8	-37	0	64.82	-	-	74	-9.18	-	-	173	100	V
* 10.99781	51.43	ADR	37.8	-37	0.61	52.84	54	-1.16	-	-	-	-	173	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

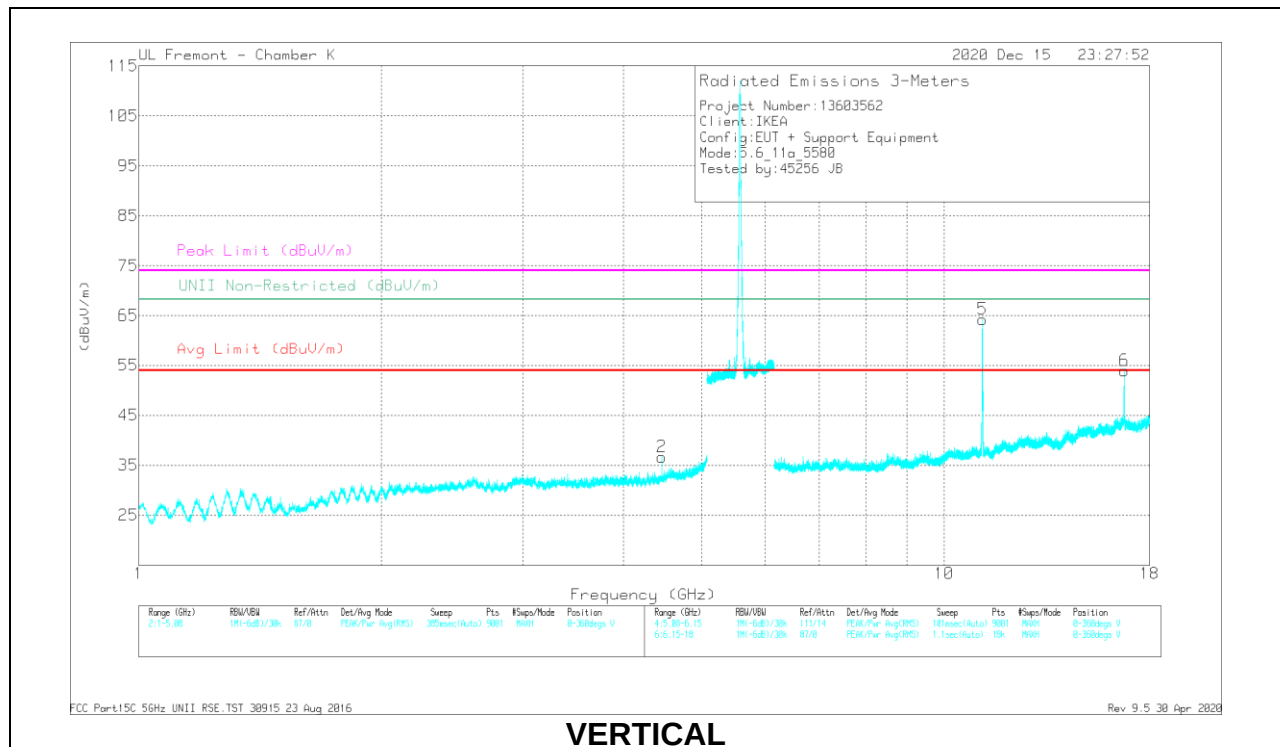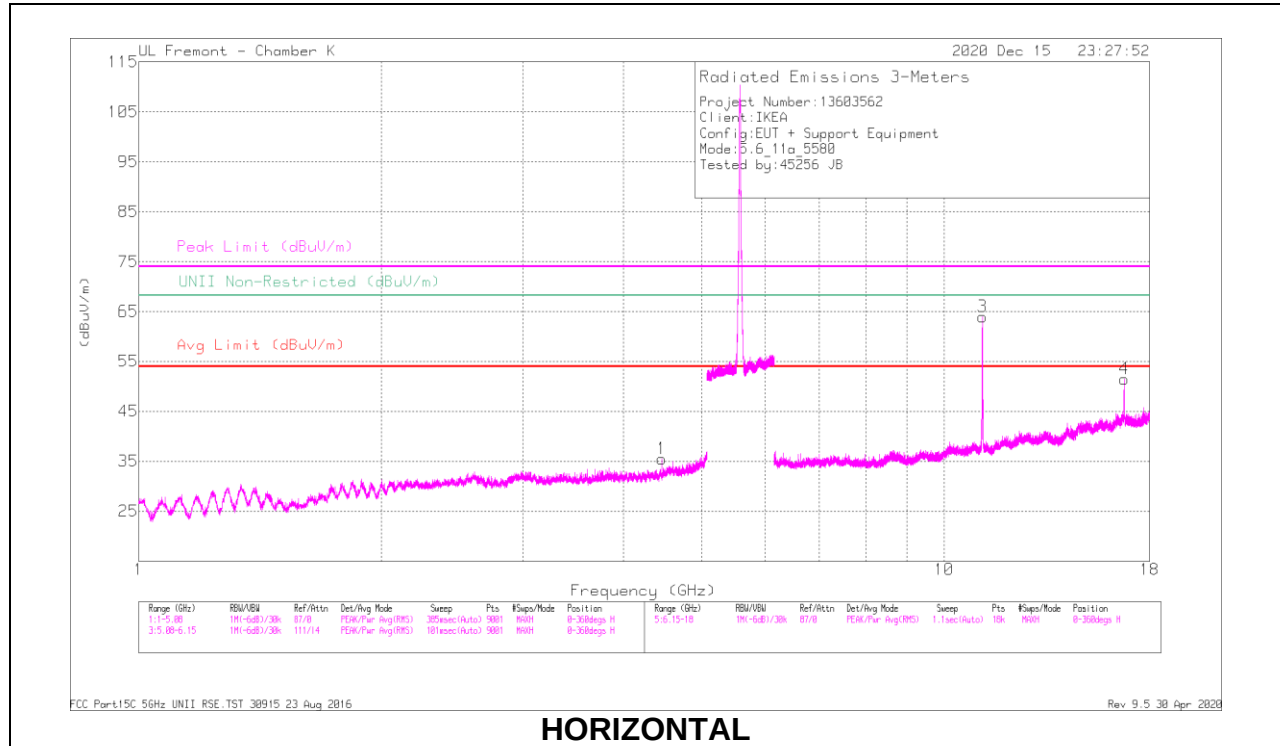

RADIATED EMISSIONS



Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Asimuth (Degs)	Height (m)	Polarity
4.46406	49.25	PK-U	34.1	-41.3	0	42.05	-	-	-	-	68.2	-26.15	351	107	H
4.46394	49.47	PK-U	34.1	-41.3	0	42.27	-	-	-	-	68.2	-25.93	166	109	V
16.74048	50.19	PK-U	42.3	-33.6	0	58.89	-	-	-	-	68.2	-9.31	139	97	H
*11.16222	63.87	PK-U	37.8	-36.7	0	64.57	-	-	74	-9.03	-	-	92	100	H
*11.16194	50.69	ADR	37.9	-36.7	0.61	52.5	54	-1.5	-	-	-	-	92	100	H
16.742	51.94	PK-U	42.3	-33.6	0	60.64	-	-	-	-	68.2	-7.56	136	101	V
*11.16222	63.64	PK-U	37.8	-36.7	0	64.74	-	-	74	-9.26	-	-	148	216	V
*11.16221	50.82	ADR	37.8	-36.7	0.61	52.53	54	-1.47	-	-	-	-	148	216	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

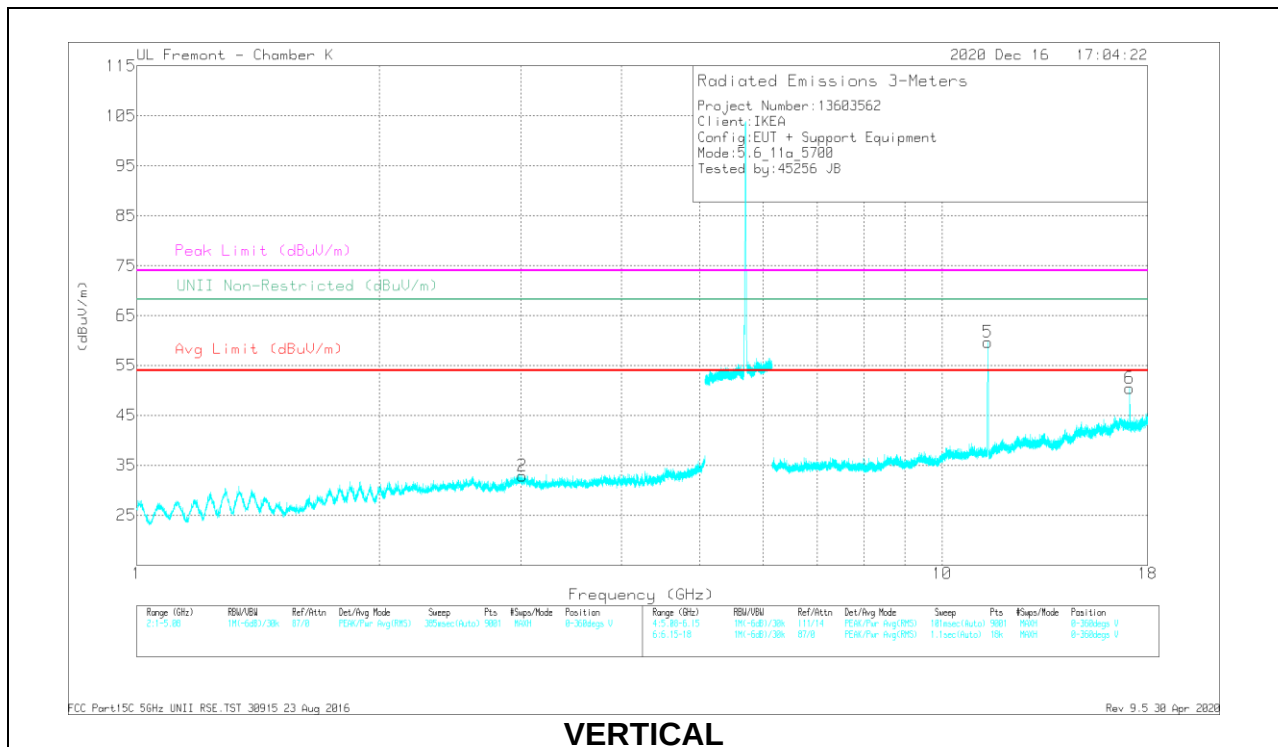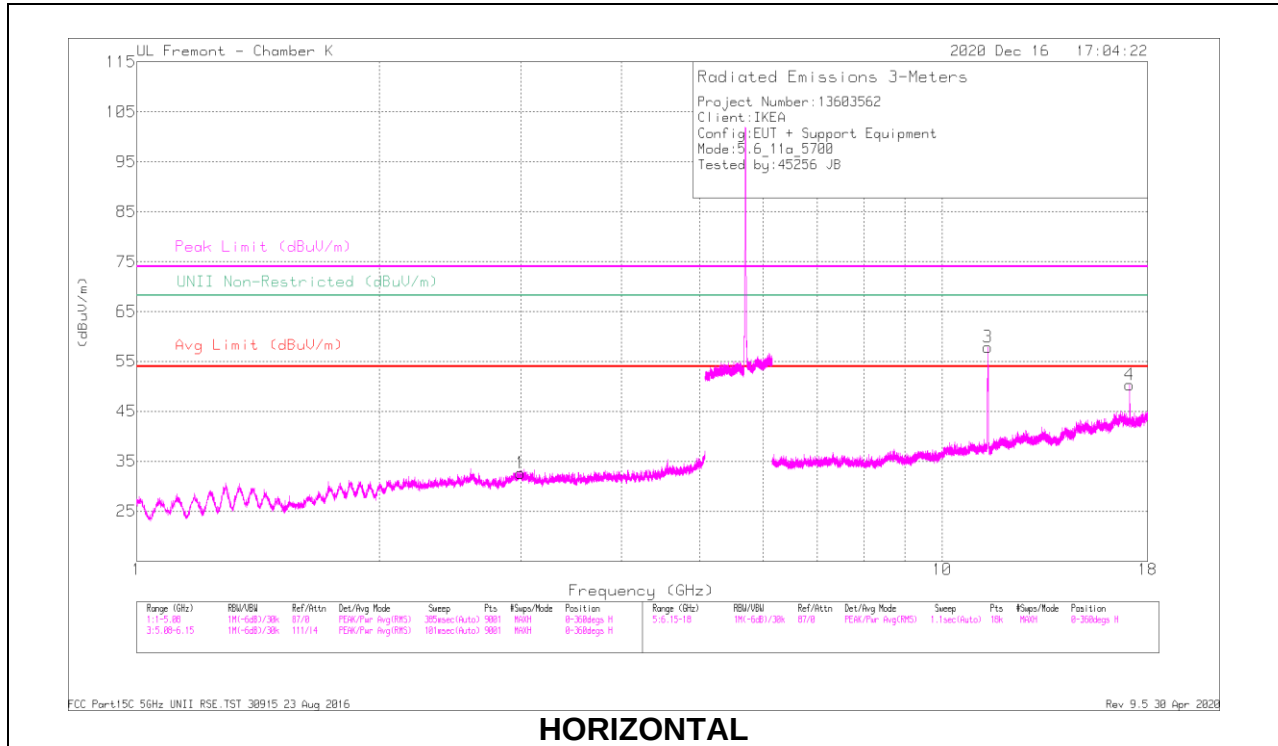

RADIATED EMISSIONS

Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
2.99623	50.4	PK-U	32.8	-42.9	0	40.4	-	-	-	-	68.2	-27.8	282	166	H
3.01198	49.94	PK-U	32.9	-42.7	0	40.14	-	-	-	-	68.2	-28.06	185	346	V
17.09933	50.97	PK-U	41.6	-33.3	0	59.27	-	-	-	-	68.2	-8.93	81	102	H
* 11.397	52.1	PK-U	38.1	-36.3	0	63.9	-	-	74	-10.1	-	-	71	100	H
* 11.39743	49.35	ADR	39.1	-36.2	0.61	52.46	54	-1.54	-	-	-	-	71	100	H
17.09916	51.23	PK-U	41.6	-33.3	0	59.53	-	-	-	-	68.2	-8.67	83	181	V
* 11.39625	50.46	PK-U	38.1	-36.3	0	62.26	-	-	74	-11.74	-	-	111	97	V
* 11.39648	46.71	ADR	38.1	-36.3	0.61	49.12	54	-4.88	-	-	-	-	111	97	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.6. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.6 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

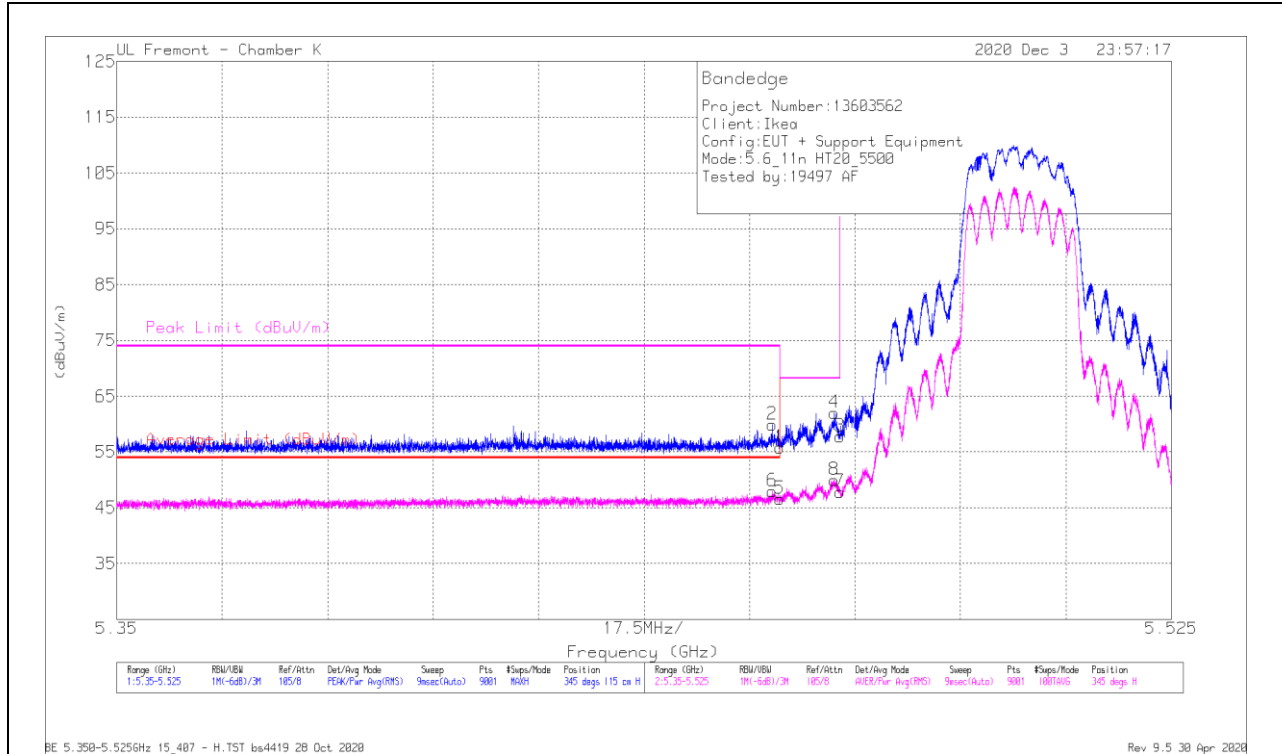

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp/CB/Fir/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.45999	27.63	Pk	35.6	-7.4	0	55.83	-	-	74	-18.17	345	115	H
2	5.45877	31.56	Pk	35.7	-7.4	0	59.86	-	-	74	-14.14	345	115	H
3	5.46999	29.55	Pk	35.7	-7.4	0	57.85	-	-	68.2	-10.35	345	115	H
4	5.46909	33.72	Pk	35.7	-7.4	0	62.02	-	-	68.2	-6.18	345	115	H
5	5.45999	18.22	RMS	35.6	-7.4	0	46.42	54	-7.58	-	-	345	115	H
6	5.45875	19.57	RMS	35.7	-7.4	0	47.87	54	-6.13	-	-	345	115	H
7	5.46999	19.43	RMS	35.7	-7.4	0	47.73	-	-	-	-	345	115	H
8	5.46906	21.54	RMS	35.7	-7.4	0	49.84	-	-	-	-	345	115	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

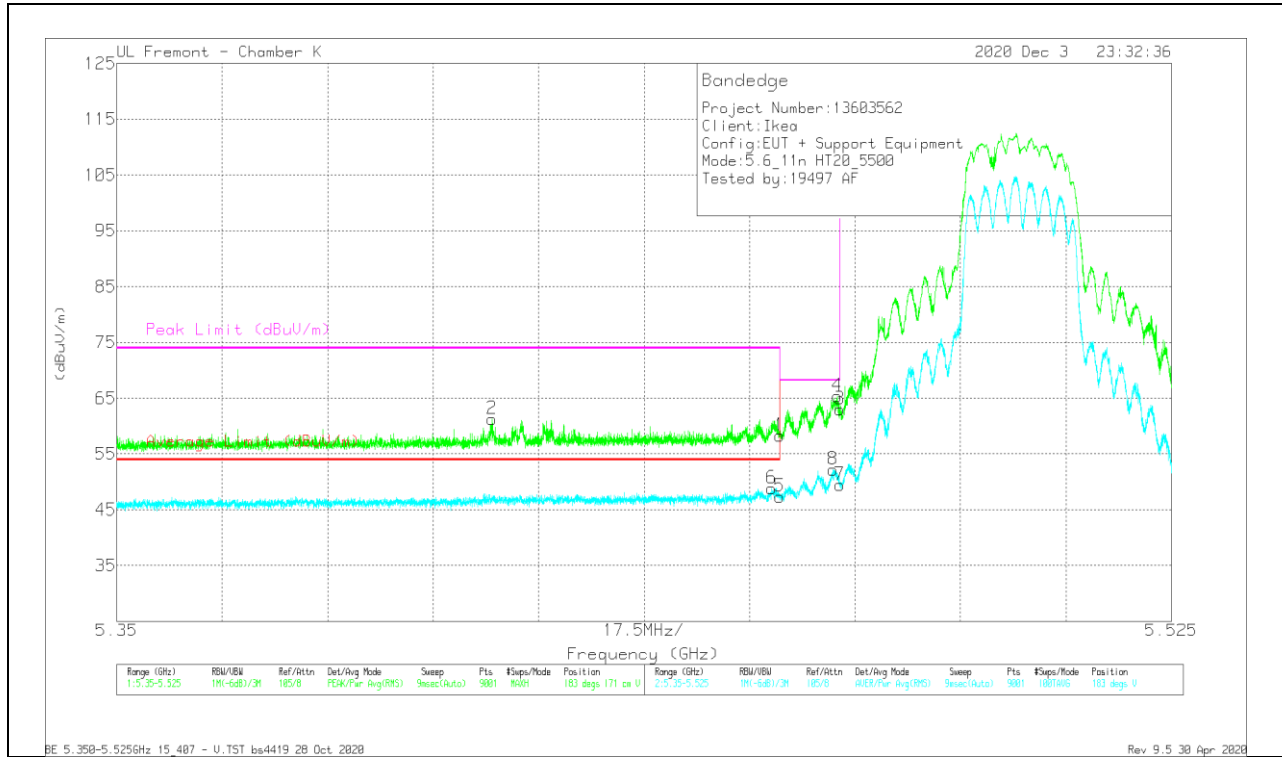


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dBm)	Amp(Cal)/FilttrPa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Amplitude (Degs)	Height (cm)	Polarity
1	5.45999	30.05	Pk	35.6	-7.4	0	58.25	-	-	74	-15.75	183	171	V
2	5.41224	33.16	Pk	35.5	-7.4	0	61.26	-	-	74	-12.74	183	171	V
3	5.46999	34.76	Pk	35.7	-7.4	0	63.06	-	-	68.2	-5.14	183	171	V
4	5.46958	37.1	Pk	35.7	-7.4	0	65.4	-	-	68.2	-2.8	183	171	V
5	5.45999	19	RMS	35.6	-7.4	0	47.2	54	-6.8	-	-	183	171	V
6	5.45869	20.46	RMS	35.7	-7.4	0	49.76	54	-5.24	-	-	183	171	V
7	5.46999	21.01	RMS	35.7	-7.4	0	49.31	-	-	-	-	183	171	V
8	5.46888	23.71	RMS	35.7	-7.4	0	52.01	-	-	-	-	183	171	V

Pk - Peak detector
RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

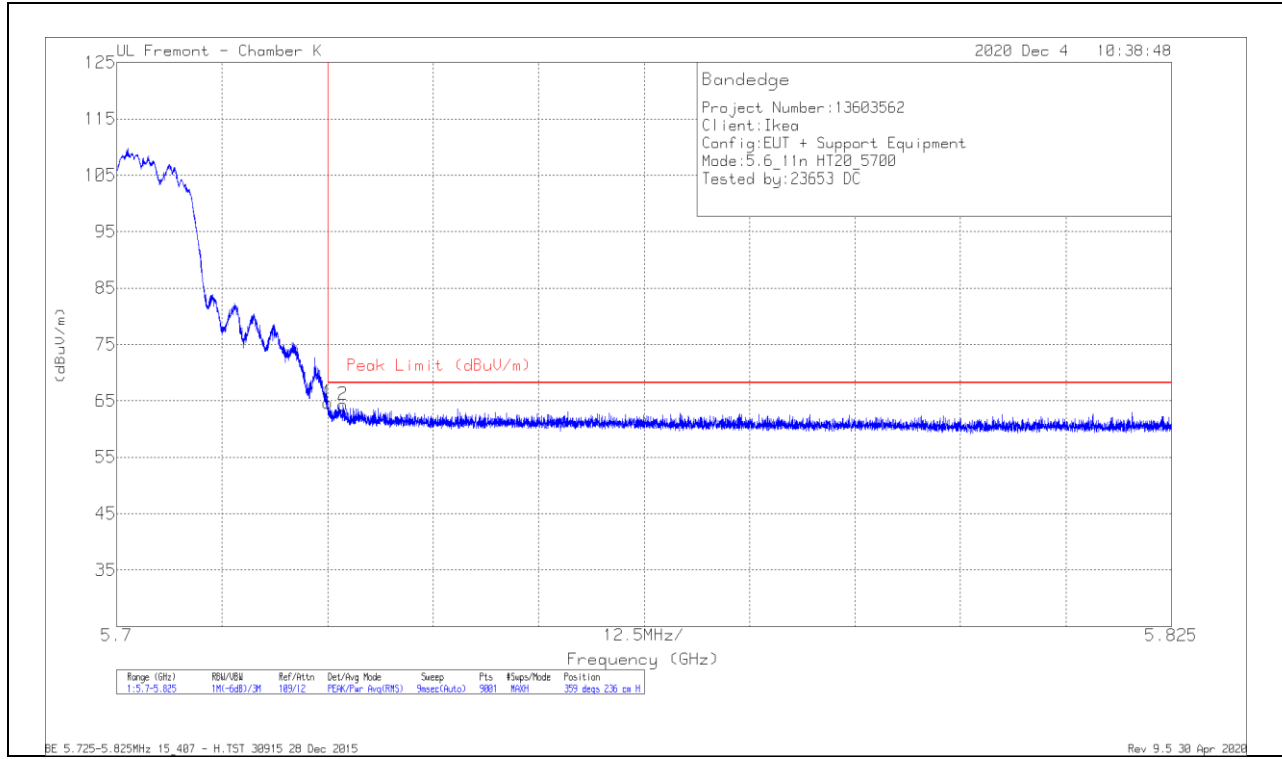

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.41	Pk	35.1	-6.8	0	64.71	68.2	-3.49	359	236	H
2	5.72683	35.98	Pk	35.1	-6.8	0	64.28	68.2	-3.92	359	236	H

Pk - Peak detector

VERTICAL RESULT


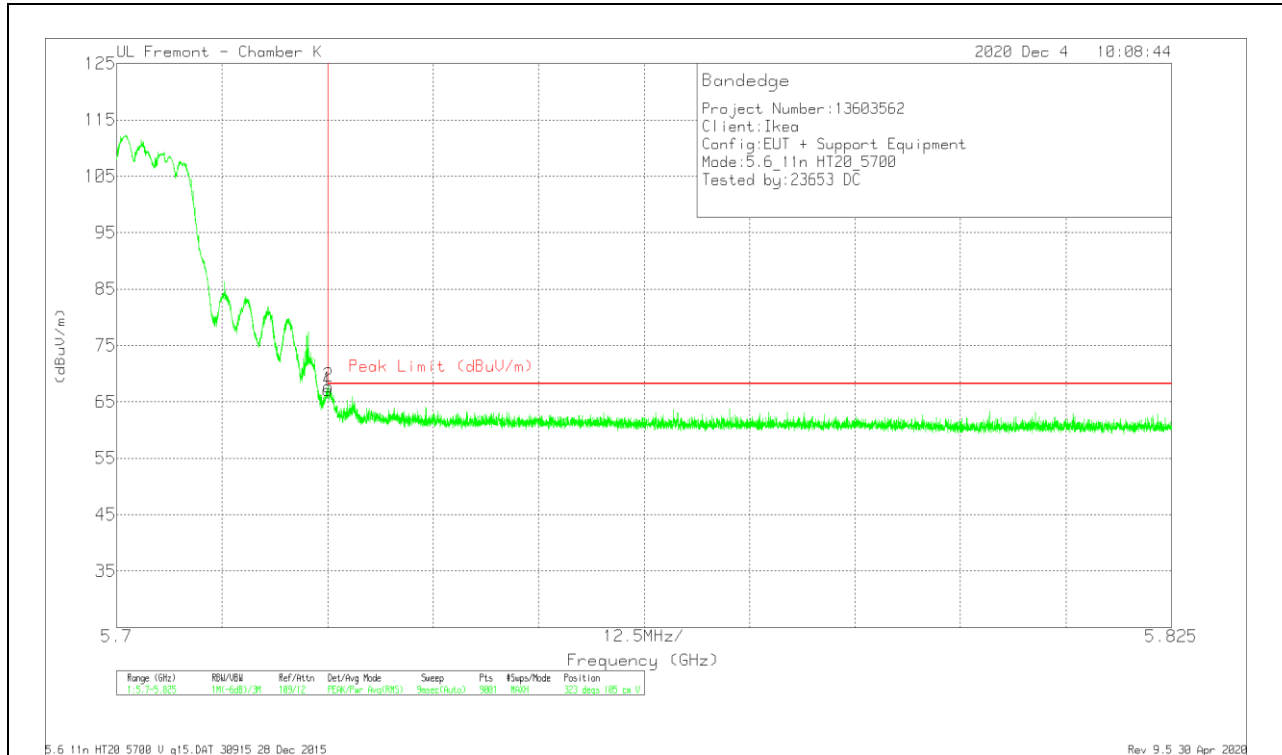


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.79	Pk	35.1	-6.8	0	67.09	68.2	-1.11	323	105	V
2	5.72507	39.5	Pk	35.1	-6.8	0	67.8	68.2	-.4	323	105	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

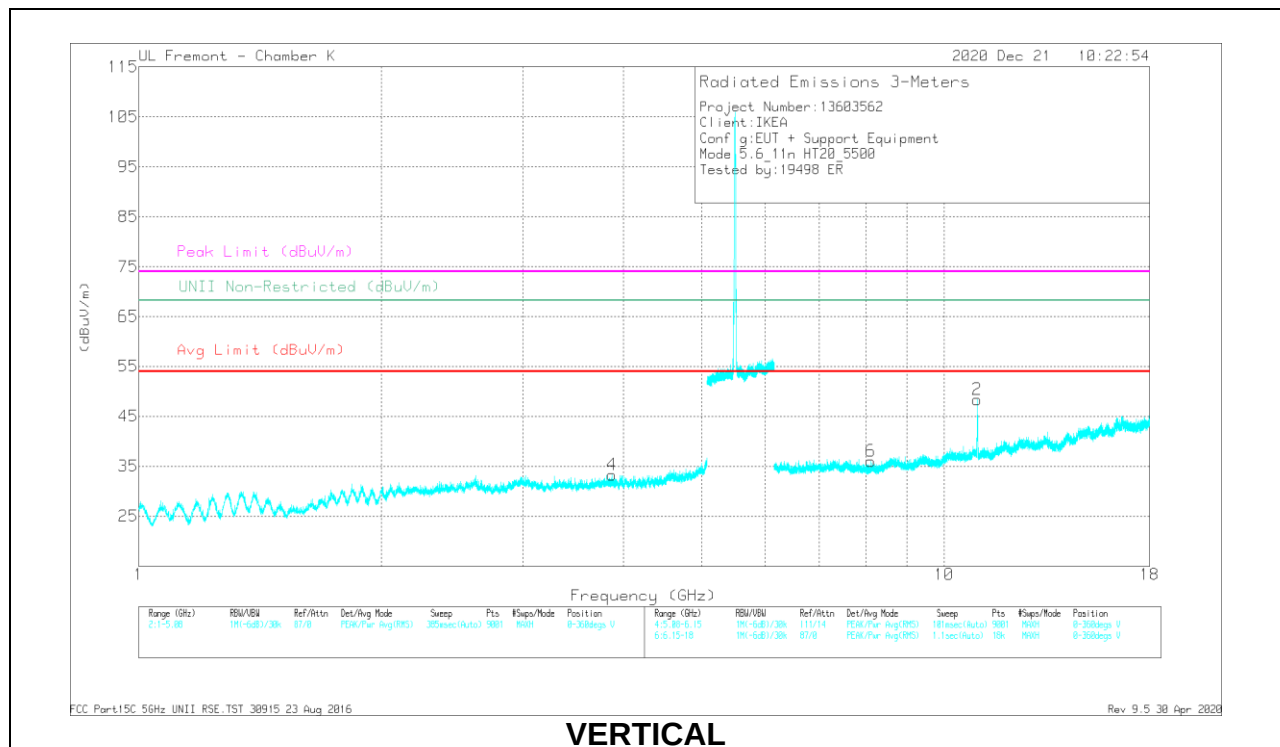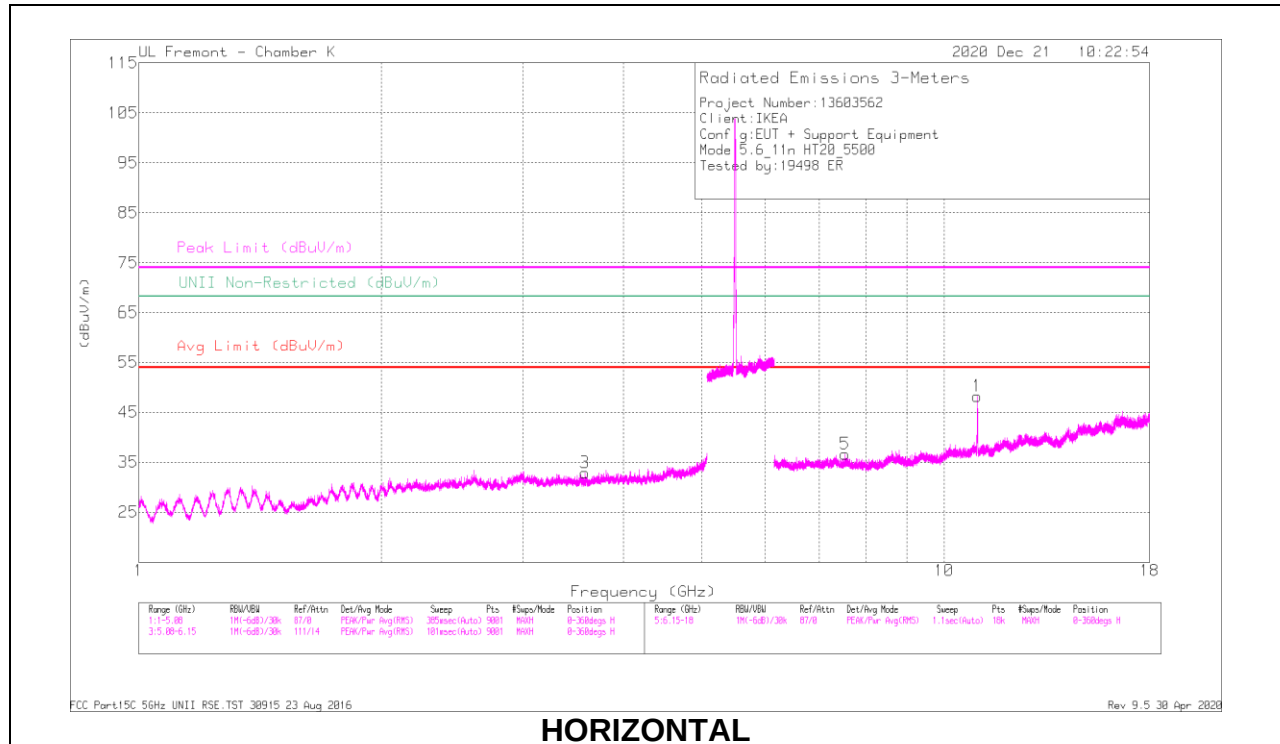

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dBm)	Amp/Cable/In/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.58066	49.08	PK-U	33.3	-42.2	40.18	-	-	74	-33.82	-	-	31	240	H
* 3.58172	36.47	ADR	33.3	-42.1	27.67	54	-26.33	-	-	-	-	31	240	H
* 3.86552	49.54	PK-U	33.6	-41.9	41.24	-	-	74	-32.76	-	-	125	405	V
* 3.86294	38.16	ADR	33.5	-41.8	29.86	54	-24.14	-	-	-	-	125	405	V
* 11.00353	58.13	PK-U	37.8	-37.1	58.83	-	-	74	-15.17	-	-	119	232	H
* 11.00358	47.02	ADR	37.8	-37.1	47.72	54	-6.28	-	-	-	-	119	232	H
* 7.52921	46.75	PK-U	36.1	-37.7	45.15	-	-	74	-28.85	-	-	306	221	H
* 7.53001	35.3	ADR	36.1	-37.8	33.6	54	-20.4	-	-	-	-	306	221	H
* 10.99593	58.26	PK-U	37.8	-37	59.06	-	-	74	-14.94	-	-	122	239	V
* 11.00108	46.64	ADR	37.8	-37.1	47.34	54	-6.66	-	-	-	-	122	239	V
* 8.11056	45.8	PK-U	36	-37.8	44	-	-	74	-30	-	-	282	329	V
* 8.11338	34.03	ADR	36	-37.8	32.23	54	-21.77	-	-	-	-	282	329	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

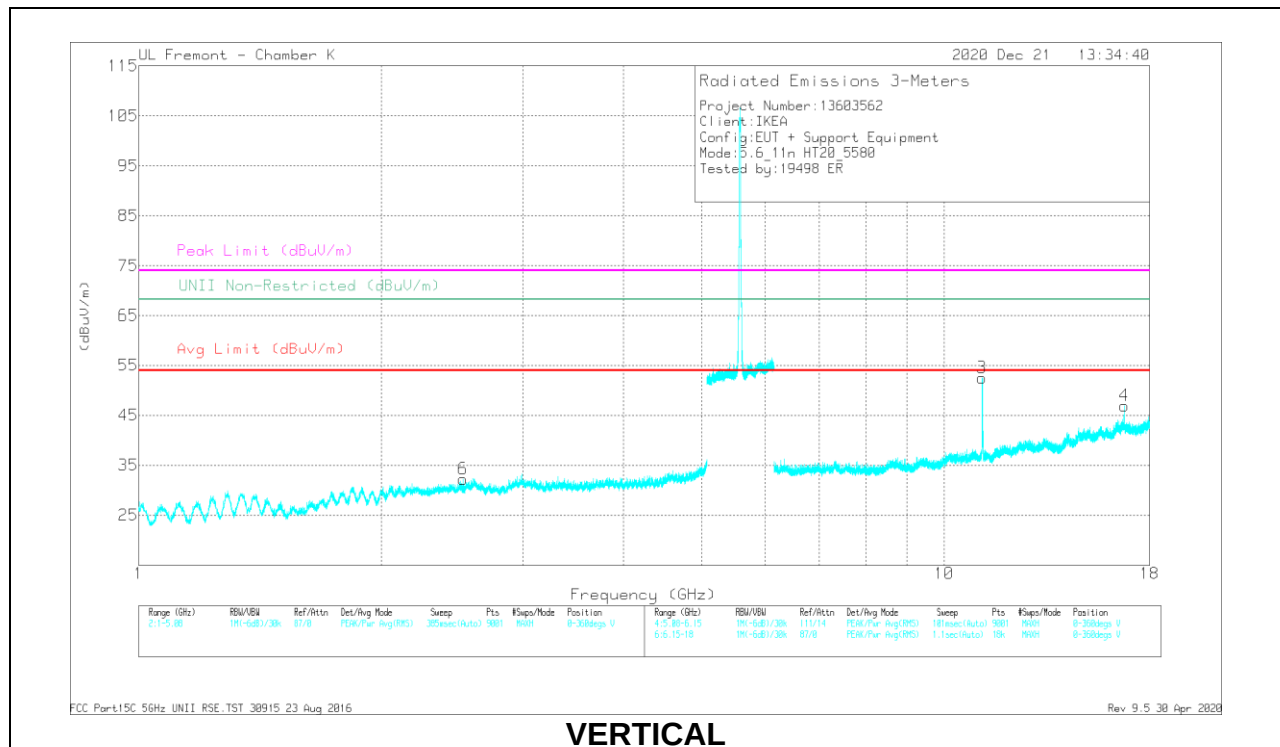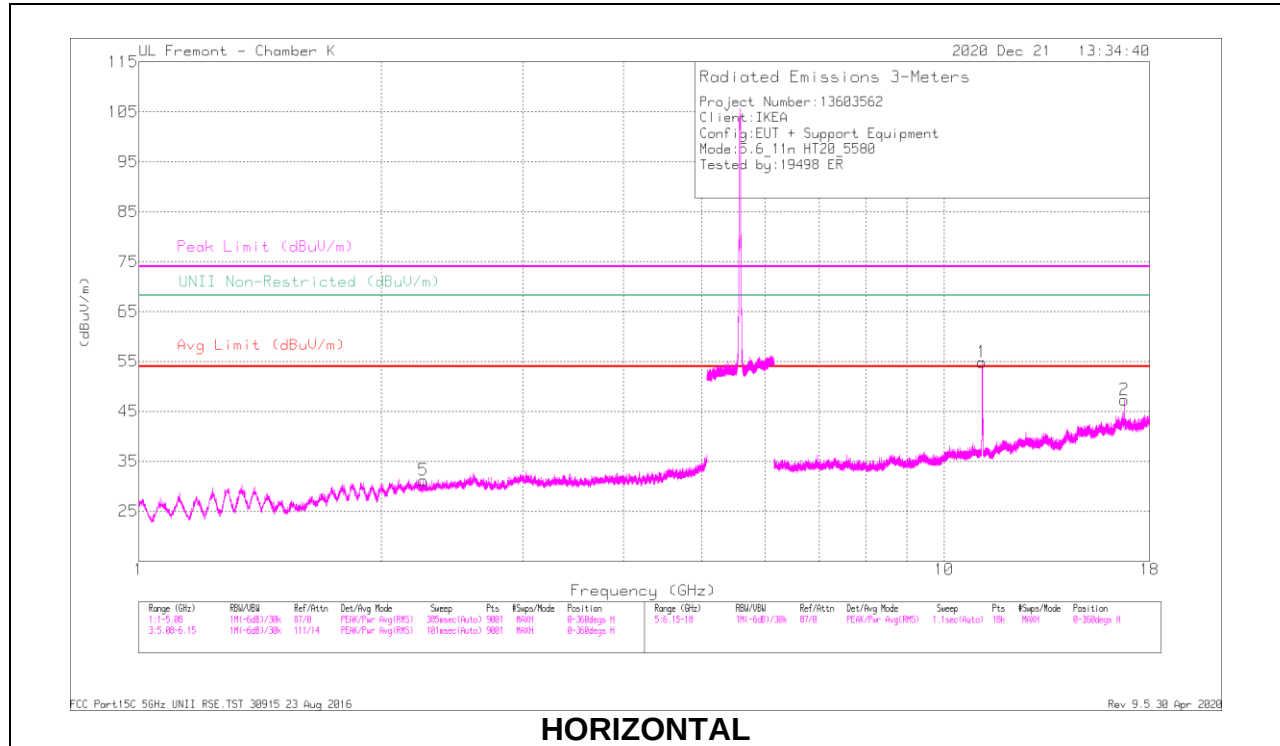

RADIATED EMISSIONS



Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dBm)	Amp/Cat/Ref/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.25414	52.05	PK-U	31.6	-45.2	38.45	-	-	74	-35.55	-	-	122	237	H
* 2.25563	40.35	ADR	31.6	-45.2	26.75	54	-27.25	-	-	-	-	122	237	H
2.51051	52.22	PK-U	32.7	-44.5	40.42	-	-	-	-	68.2	-27.78	93	145	V
* 11.16338	52.5	PK-U	37.8	-36.7	63.6	-	-	74	-10.4	-	-	105	97	H
* 11.15849	50.8	ADR	37.9	-36.7	52	54	-2	-	-	-	-	105	97	H
16.7292	47.75	PK-U	42.3	-33.5	56.55	-	-	-	-	68.2	-11.65	139	207	H
* 11.15889	63.41	PK-U	37.9	-36.7	64.61	-	-	74	-9.39	-	-	119	98	V
* 11.15865	51.54	ADR	37.9	-36.7	52.74	54	-1.26	-	-	-	-	119	98	V
16.73026	48.34	PK-U	42.3	-33.5	57.14	-	-	-	-	68.2	-11.06	141	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

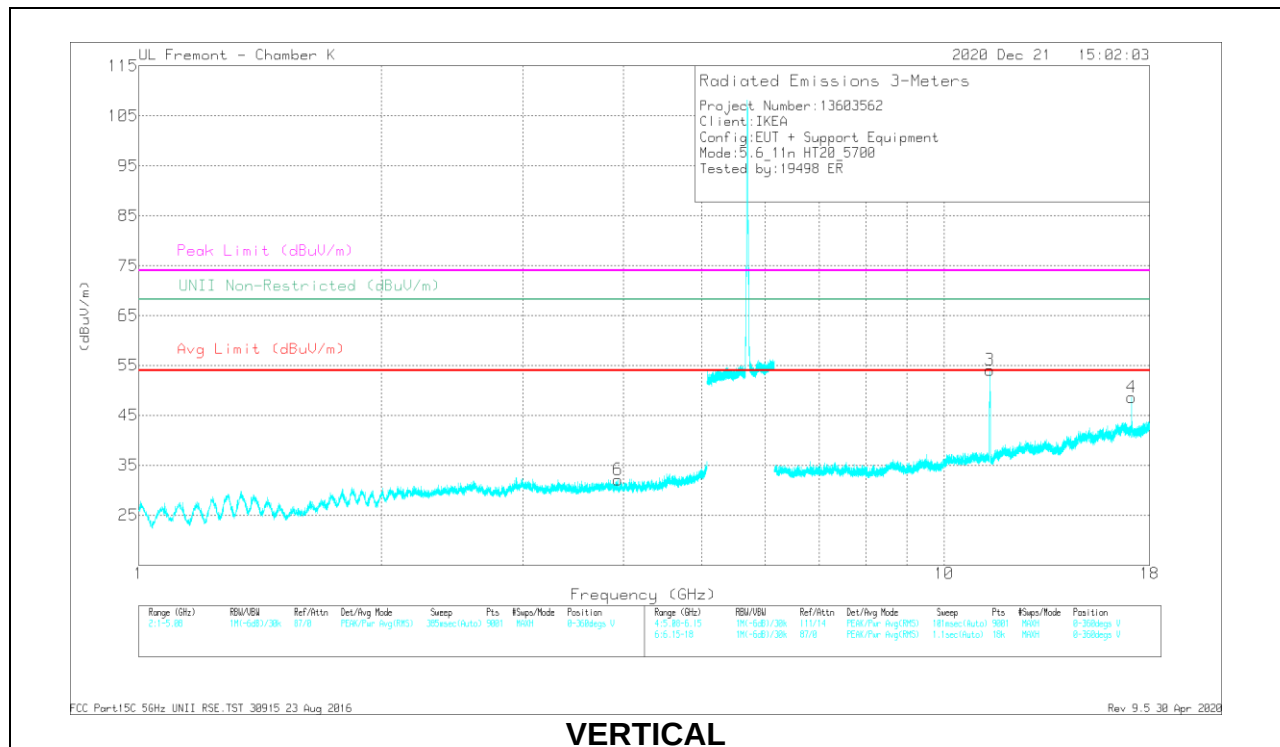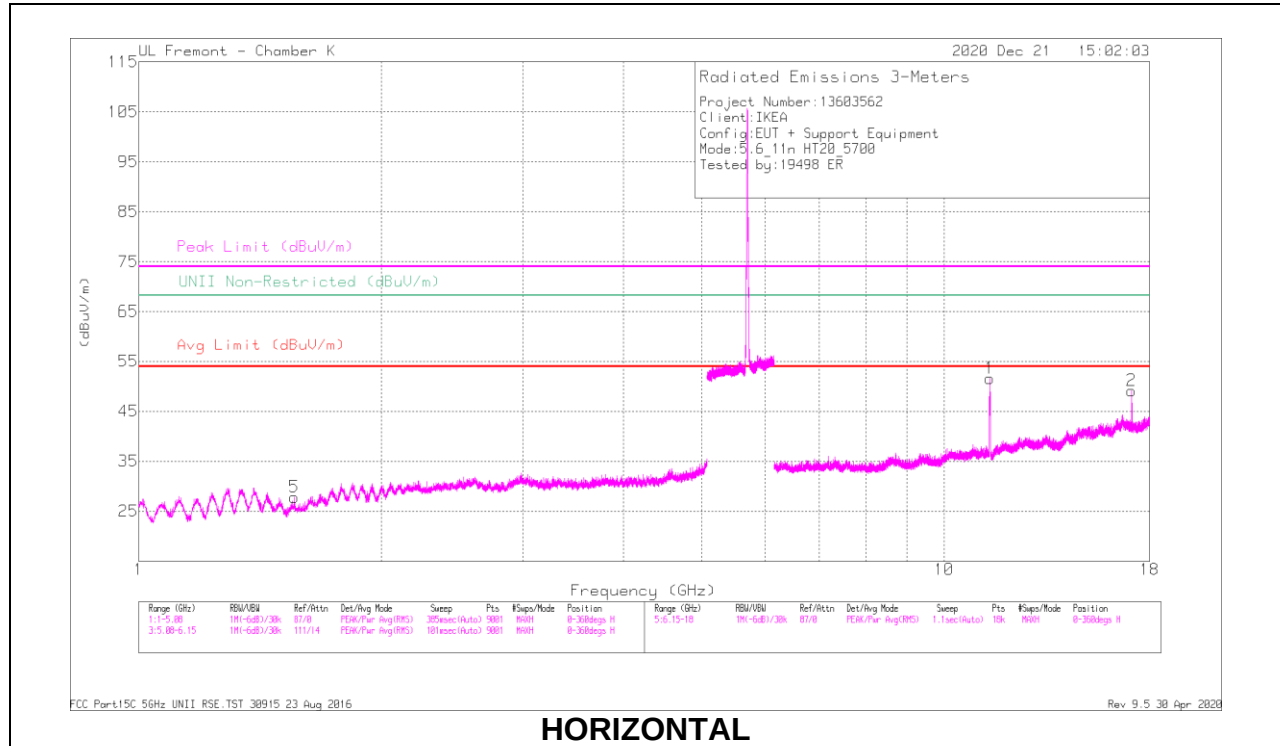

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dBm)	Amp/Cat/Ref/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
* 1.55895	54.69	PK-U	28	-46	36.69	-	-	74	-37.31	-	-	129	174	H
* 1.55473	42.86	ADR	28	-46	24.86	54	-29.14	-	-	-	-	129	174	H
* 3.93809	47.45	PK-U	33.6	-41.9	39.15	-	-	74	-34.85	-	-	51	324	V
* 3.93813	36.42	ADR	33.6	-41.9	28.12	54	-25.88	-	-	-	-	51	324	V
* 11.39817	61.63	PK-U	38.1	-36.2	63.53	-	-	74	-10.47	-	-	91	117	H
* 11.39837	49.09	ADR	38.1	-36.2	50.99	54	-3.01	-	-	-	-	91	117	H
17.10659	50.41	PK-U	41.6	-33.2	58.81	-	-	-	-	68.2	-9.39	148	205	H
* 11.39366	62.92	PK-U	38.1	-36.3	64.72	-	-	74	-9.28	-	-	115	101	V
* 11.39843	33.07	ADR	38.1	-36.3	34.87	54	-19.13	-	-	-	-	115	101	V
* 11.39362	62.9	PK-U	38.1	-36.3	64.7	-	-	74	-9.3	-	-	115	101	V
* 11.40098	49.66	ADR	38.1	-36.2	51.56	54	-2.44	-	-	-	-	115	101	V
17.10645	50.45	PK-U	41.6	-33.2	58.85	-	-	-	-	68.2	-9.35	96	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.7. TX ABOVE 1 GHz 802.11a MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

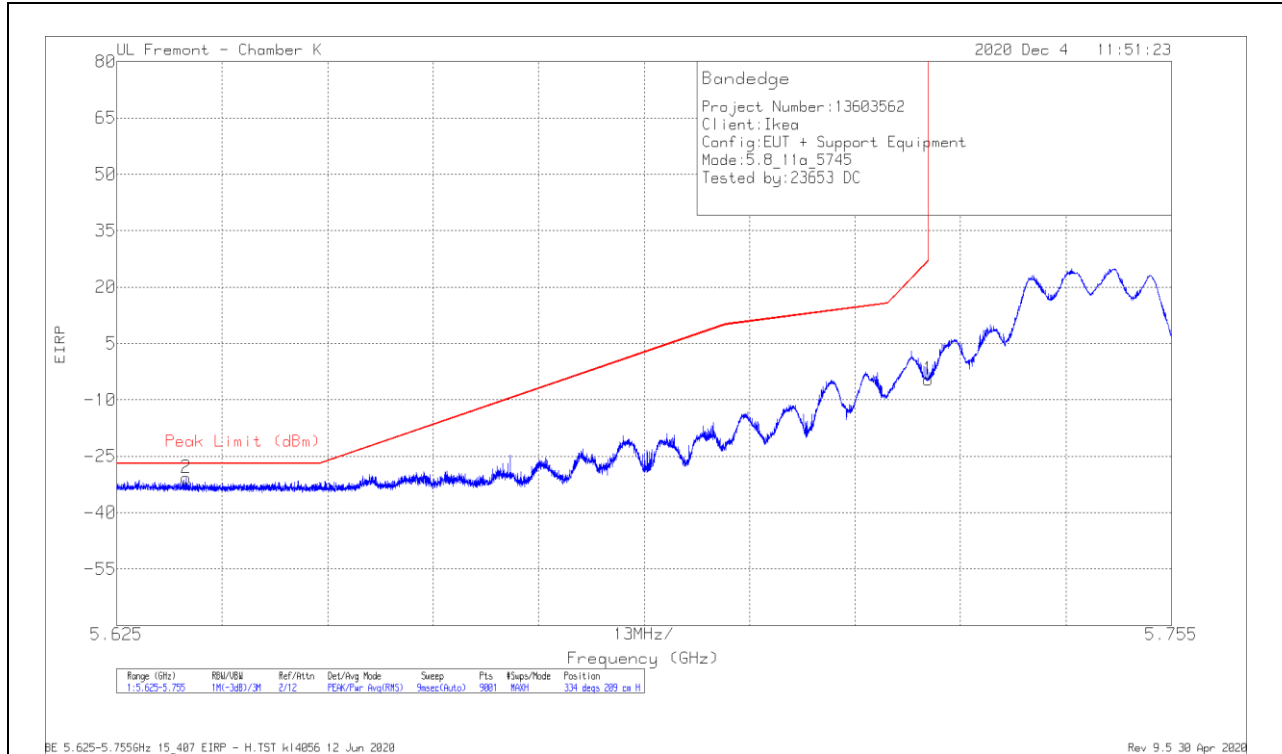

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-44.61	Pk	35.1	-6.8	11.8	-4.51	26.99	-31.5	334	209	H
2	5.63354	-71.09	Pk	35.3	-6.8	11.8	-30.79	-27	-3.79	334	209	H

Pk - Peak detector

VERTICAL RESULT

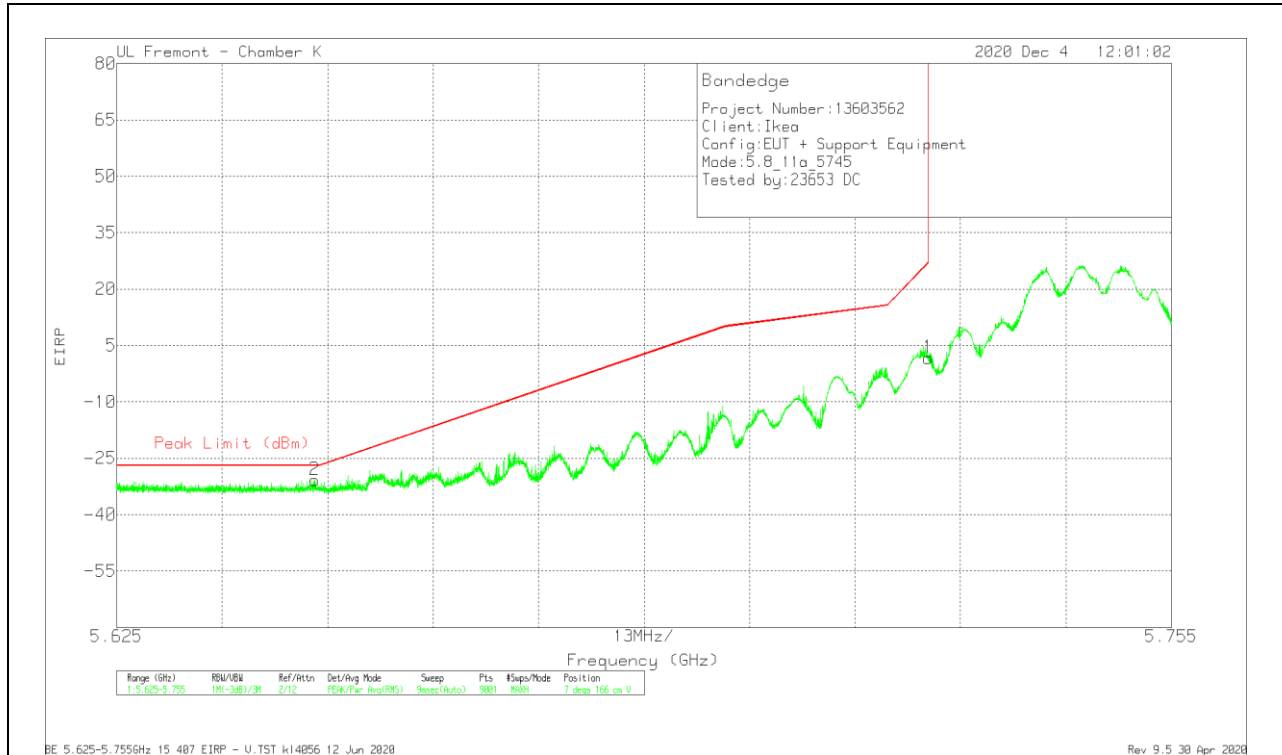


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-38.47	Pk	35.1	-6.8	11.8	1.63	26.99	-25.36	7	166	V
2	5.64942	-71.05	Pk	35.3	-6.8	11.8	-30.75	-27	-3.75	7	166	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

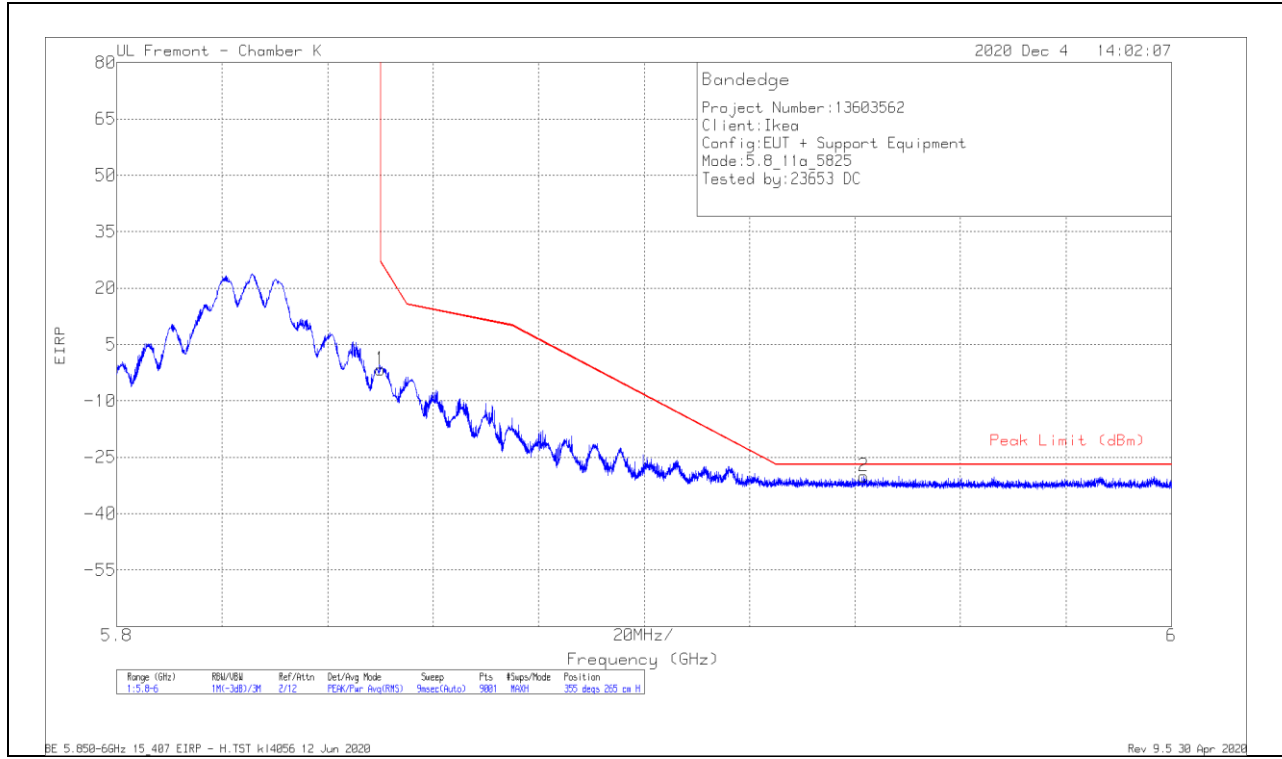

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-41.98	Pk	35.1	-6.5	11.8	-1.58	26.95	-28.53	355	265	H
2	5.94169	-70.83	Pk	35.3	-6.3	11.8	-30.03	-27	-3.03	355	265	H

Pk - Peak detector

VERTICAL RESULT


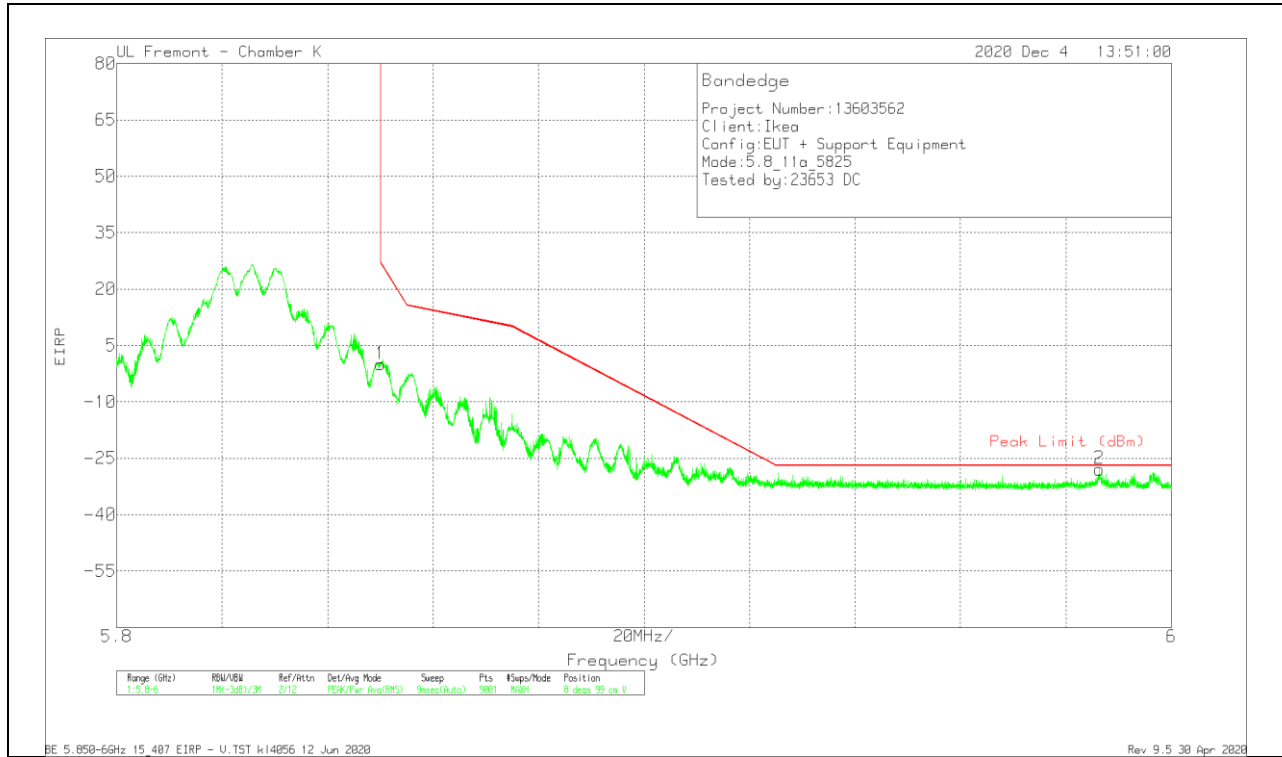


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-40.43	Pk	35.1	-6.5	11.8	-0.03	26.95	-26.98	8	99	V
2	5.98633	-68.72	Pk	35.3	-6.3	11.8	-27.92	-27	-92	8	99	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

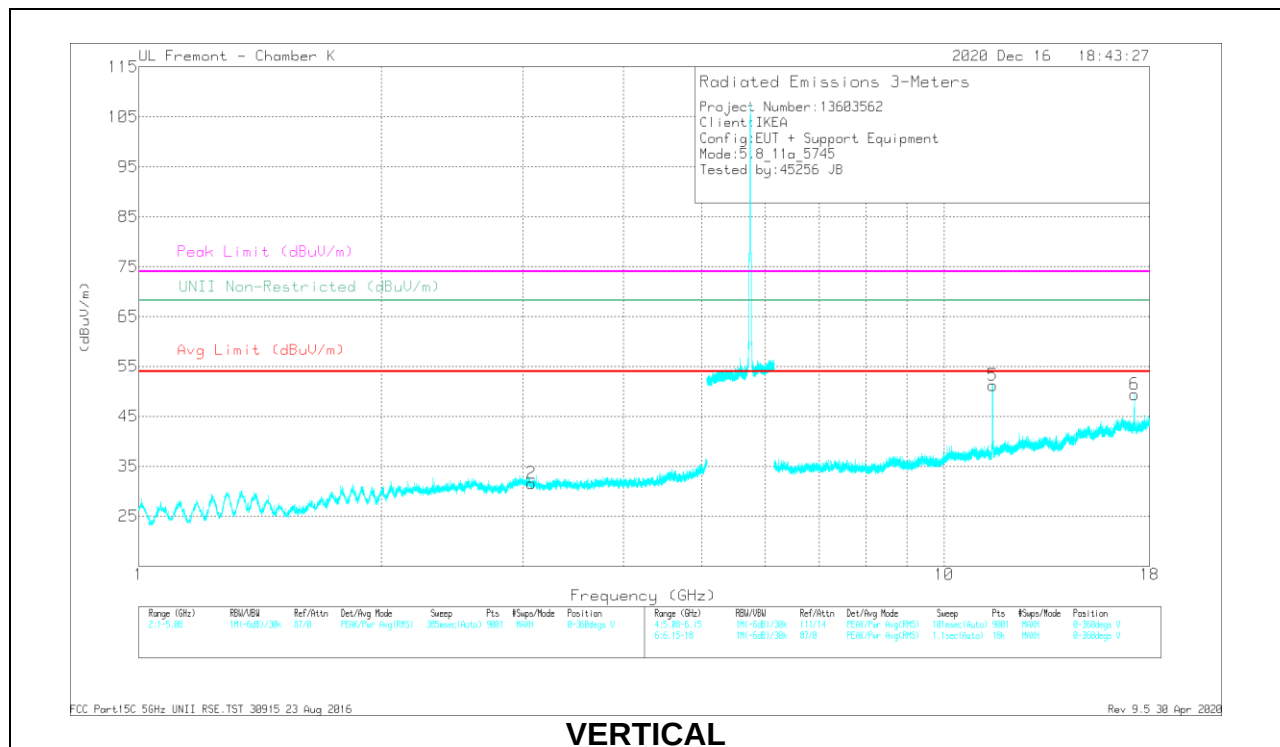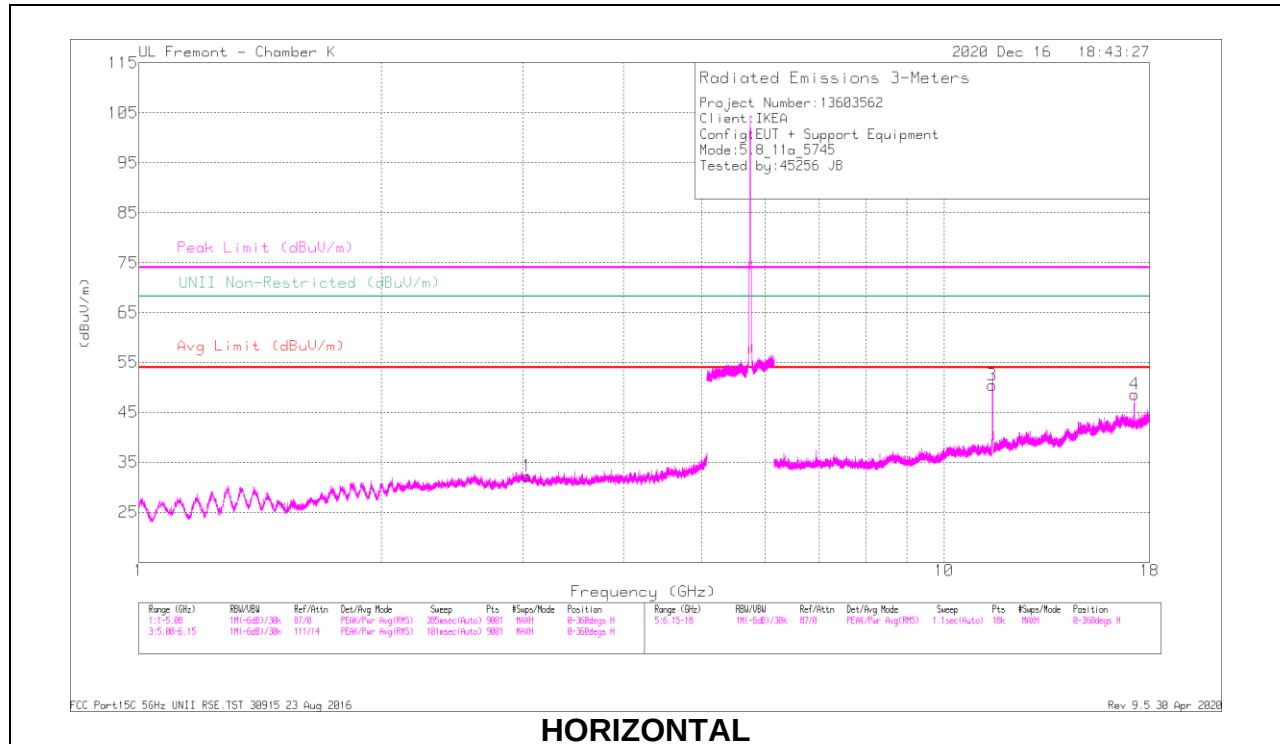

RADIATED EMISSIONS



Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB3 (dBm)	Amp/Cat/Unred (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Unl Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
3.03774	49.87	PK-U	32.9	-42.4	0	40.37	-	-	-	-	68.2	-27.83	65	103	H
3.0749	49.7	PK-U	33.1	-42.4	0	40.4	-	-	-	-	68.2	-27.8	209	215	V
17.23416	49.08	PK-U	41.5	-32.6	0	57.98	-	-	-	-	68.2	-10.22	91	96	H
* 11.48624	60.17	PK-U	38.2	-36.5	0	61.67	-	-	74	-12.13	-	-	19	100	H
* 11.48774	45.73	ADR	39.2	-36.5	0.61	48.04	54	-5.96	-	-	-	-	19	100	H
17.2371	49.76	PK-U	41.6	-32.6	0	58.76	-	-	-	-	68.2	-9.44	81	192	V
* 11.4875	66.16	PK-U	38.2	-36.5	0	67.86	-	-	74	-6.14	-	-	110	96	V
* 11.48723	50.97	ADR	38.2	-36.5	0.61	53.28	54	-0.72	-	-	-	-	110	96	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

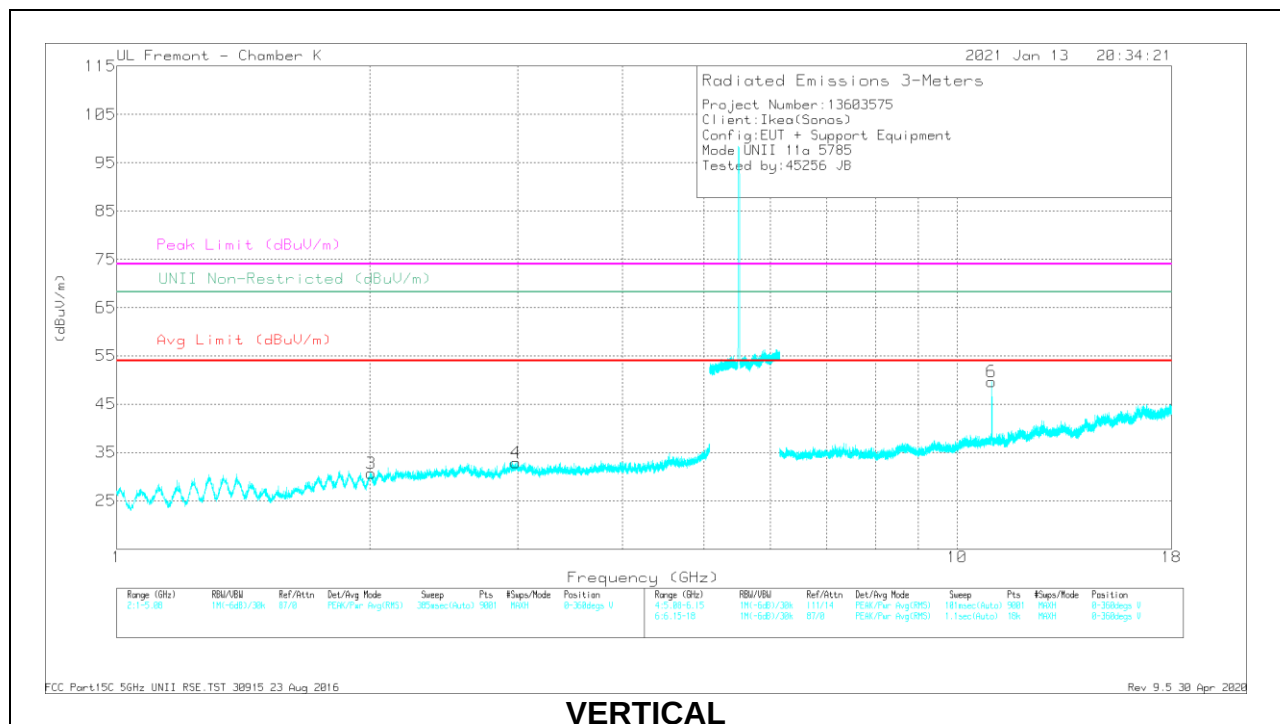
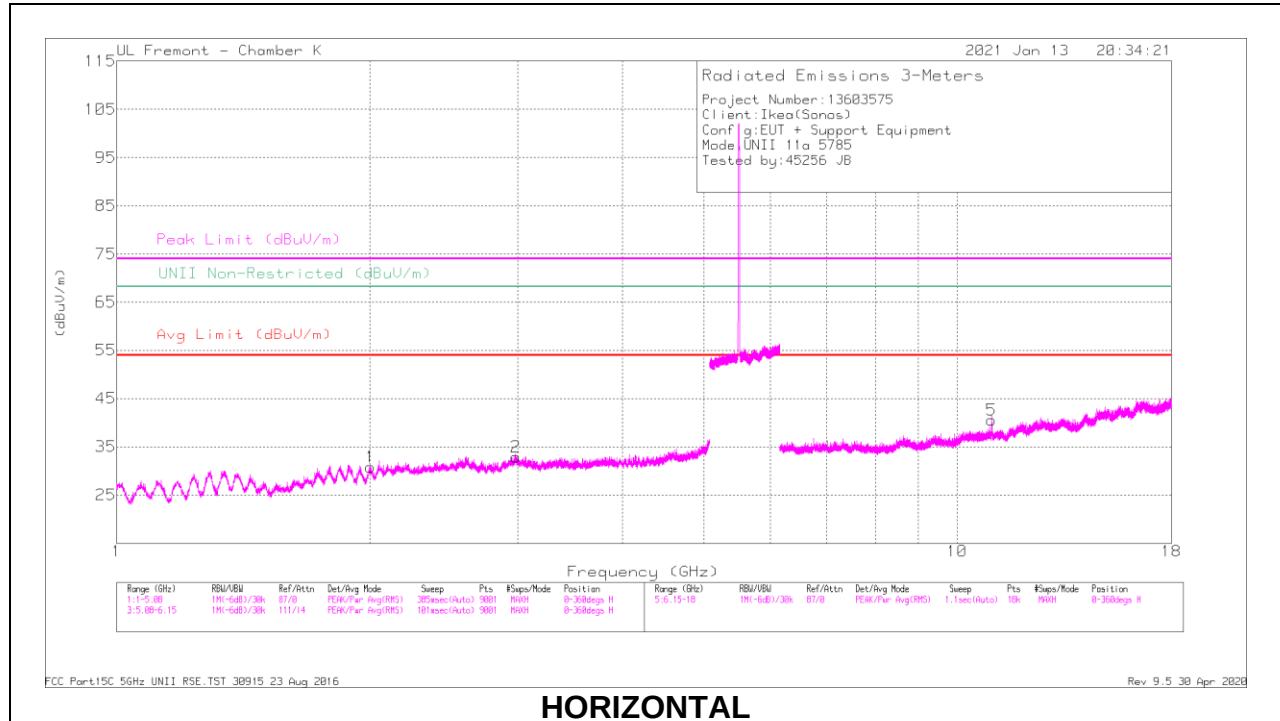


RADIATED EMISSIONS

Frequency (MHz)	Meas Reading (dBuV)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Limit Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
2.00618	53.19	PK-U	31.3	-45.9	0	38.59	-	-	-	-	68.2	-29.61	303	291	H
2.98328	50.74	PK-U	32.9	-42.8	0	40.84	-	-	-	-	68.2	-27.36	332	197	H
2.00876	53.48	PK-U	31.3	-45.9	0	38.88	-	-	-	-	68.2	-29.32	351	206	V
2.98388	50.21	PK-U	32.9	-42.8	0	40.51	-	-	-	-	68.2	-27.69	307	114	V
* 11.00344	49.22	PK-U	37.8	-37.1	0	48.82	-	-	74	-25.08	-	-	81	207	H
* 11.00218	35.76	ADR	37.8	-37.1	.61	37.07	54	-16.93	-	-	-	-	81	207	H
* 10.99799	56.82	PK-U	37.8	-37	0	57.82	-	-	74	-16.38	-	-	124	108	V
* 10.99814	43.69	ADR	37.8	-37	.61	45.1	54	-8.9	-	-	-	-	124	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak

HIGH CHANNEL RESULTS

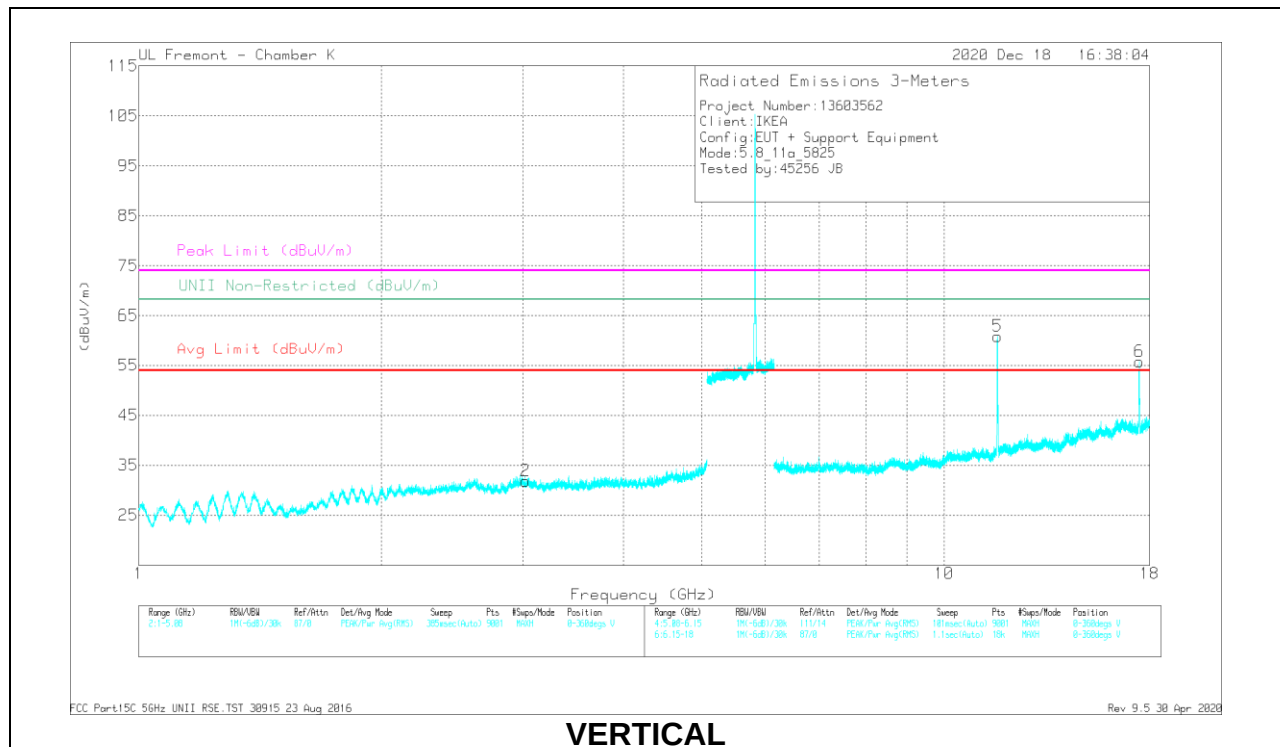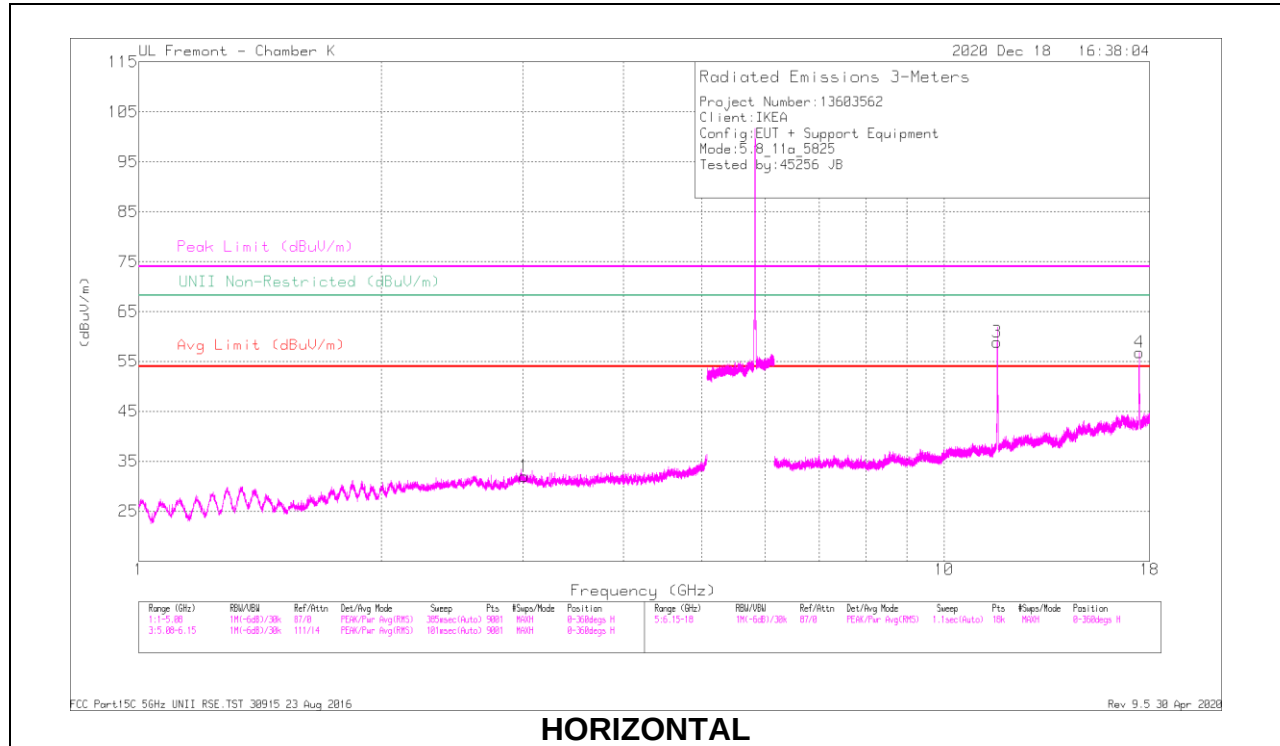

RADIATED EMISSIONS

Frequency (MHz)	Meas Reading (dBm)	Det	AF YB3 (dBm)	Amp/Cat/Ref (dB)	DC Corr (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Peak Limit (dBm)	PK Margin (dB)	Limit Non-Restricted (dBm)	PK Margin (dB)	Asimuth (Deg)	Height (m)	Polarity
3.00858	50.76	PK-U	32.8	-42.7	0	40.88	-	-	-	-	68.2	-27.34	187	366	H
3.02185	49.29	PK-U	32.9	-42.5	0	39.69	-	-	-	-	68.2	-28.51	195	196	V
17.48291	54.67	PK-U	42	-32.1	0	64.57	-	-	-	-	68.2	-3.63	65	100	H
* 11.64276	63.02	PK-U	38.5	-35.7	0	65.82	-	-	74	-8.18	-	-	31	96	H
* 11.64336	49.12	ADR	38.5	-35.7	0.61	62.83	54	-1.47	-	-	-	-	31	96	H
17.47919	54.02	PK-U	42	-32.1	0	63.92	-	-	-	-	68.2	-4.28	70	193	V
* 11.65241	61.71	PK-U	38.4	-35.8	0	64.31	-	-	74	-9.69	-	-	353	105	V
* 11.65227	48.69	ADR	38.5	-35.8	0.61	52	54	-2	-	-	-	-	353	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.8. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.8 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)


HORIZONTAL RESULT

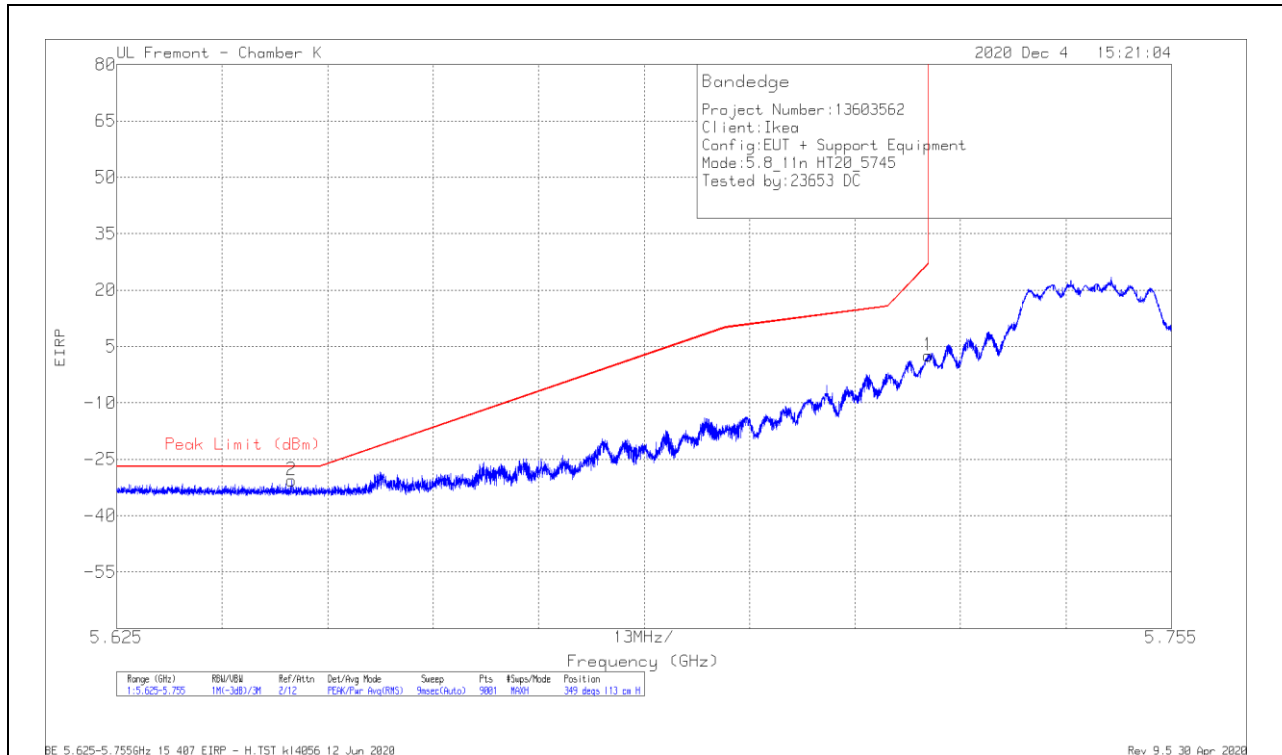

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T963 (dB/m)	Ampl/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-37.59	Pk	35.1	-6.8	11.8	2.51	26.99	-24.48	349	113	H
2	5.64656	-70.91	Pk	35.3	-6.8	11.8	-30.61	-27	-3.61	349	113	H

Pk - Peak detector

VERTICAL RESULT

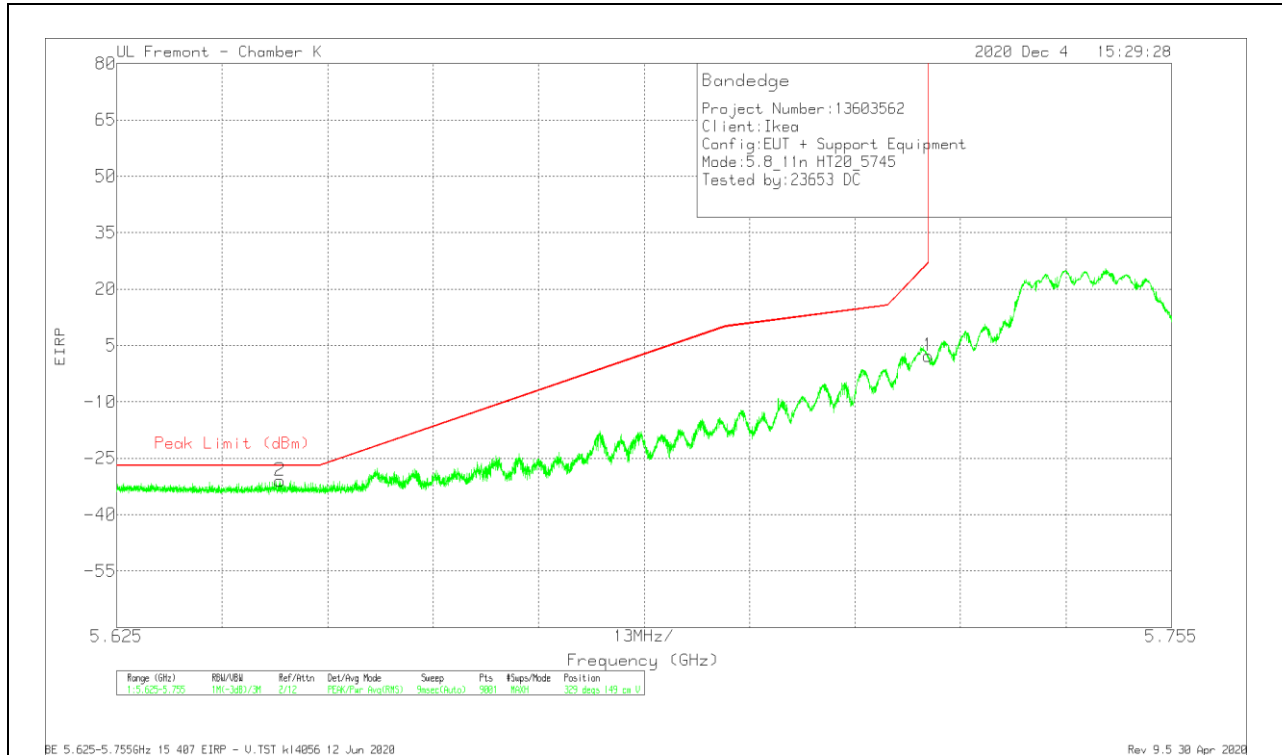


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-37.87	Pk	35.1	-6.8	11.8	2.23	26.99	-24.76	329	149	V
2	5.64512	-71.21	Pk	35.3	-6.8	11.8	-30.91	-27	-3.91	329	149	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

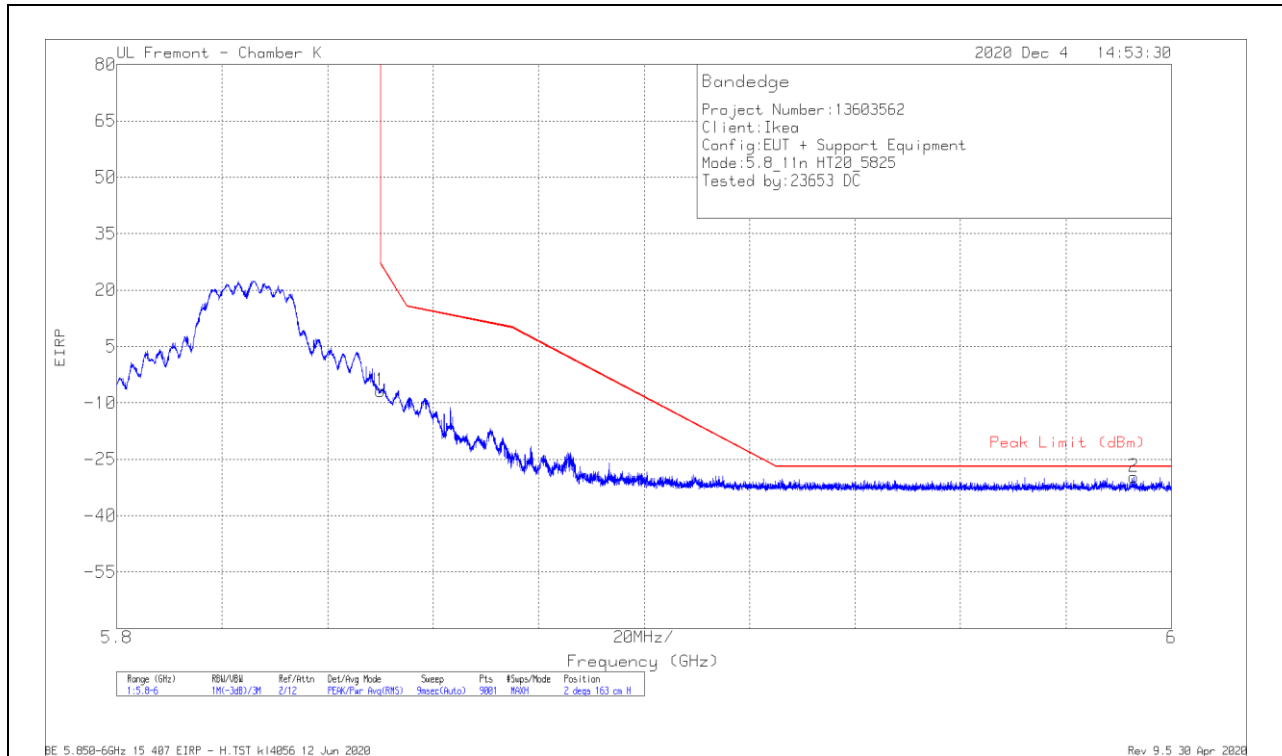

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-47.23	Pk	35.1	-6.5	11.8	-6.83	26.95	-33.78	2	163	H
2	5.99291	-70.66	Pk	35.4	-6.3	11.8	-29.76	-27	-2.76	2	163	H

Pk - Peak detector

VERTICAL RESULT

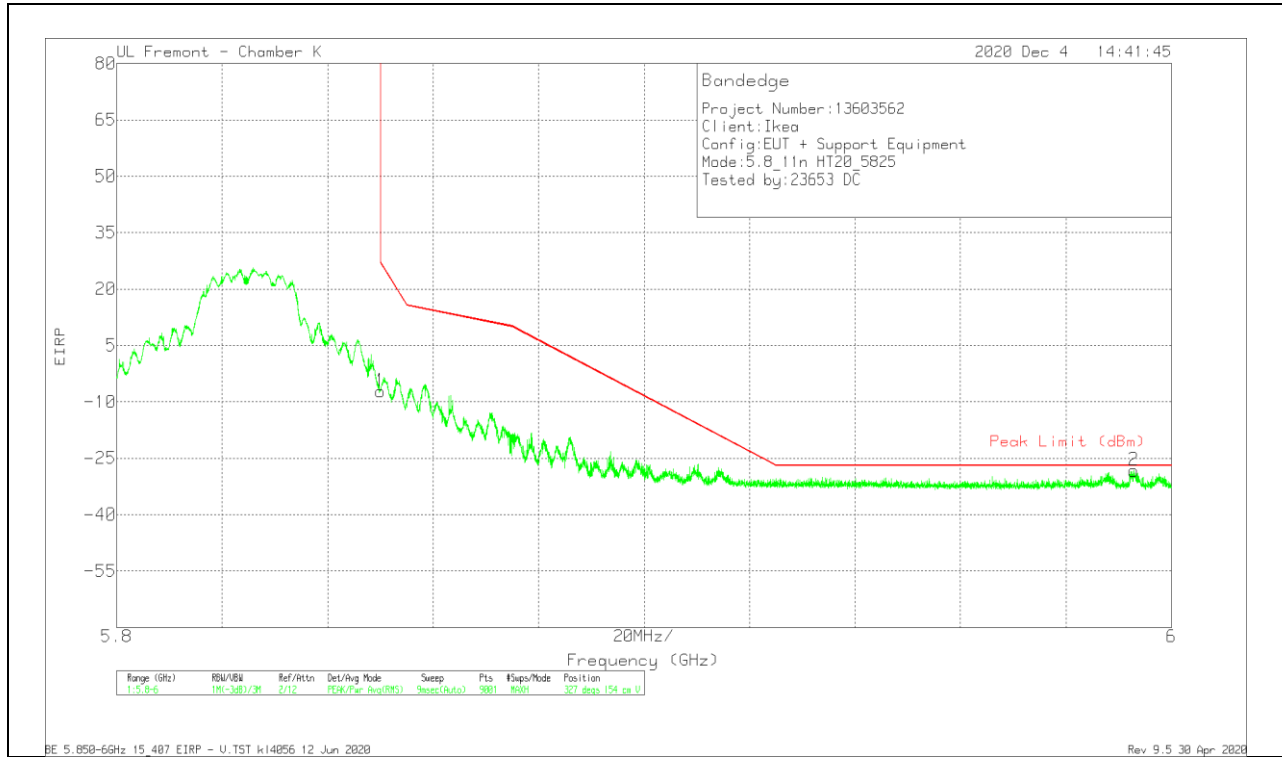

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85002	-47.64	Pk	35.1	-6.5	11.8	-7.24	26.95	-34.19	327	154	V
2	5.99286	-69.19	Pk	35.4	-6.3	11.8	-28.29	-27	-1.29	327	154	V

Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

