


RADIATED EMISSIONS


Frequency (MHz)	Meas Reading (dBµV)	Det	AF Tilt3 (dBm)	Amp/Cat/Prot/Fed (dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNEI Non-Restricted (dBµV/m)	PK Margin (dB)	Altitude (Drops)	Height (m)	Polarity
3.04845	49.36	PK-U	33	-42.3	0	40.56	-	-	-	-	68.2	-27.64	155	155	H
3.05147	49.99	PK-U	33	-42.4	0	40.49	-	-	-	-	68.2	-27.71	259	227	V
* 11.49347	63.8	PK-U	38.2	-36.5	0	65.5	-	-	74	-8.5	-	-	117	100	H
* 11.49319	51.42	ADR	38.2	-36.5	0	53.12	54	-0.88	-	-	-	-	117	100	H
9.31663	44.38	PK-U	37	-37	0	44.98	-	-	-	-	68.2	-23.22	37	108	H
* 11.48888	51.26	PK-U	38.2	-36.4	0	53.06	-	-	74	-20.94	-	-	114	98	V
* 11.48922	38.9	ADR	38.2	-36.4	0	40.7	54	-13.3	-	-	-	-	114	98	V
9.98127	45.13	PK-U	37.1	-37.1	0	45.13	-	-	-	-	68.2	-23.07	281	127	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

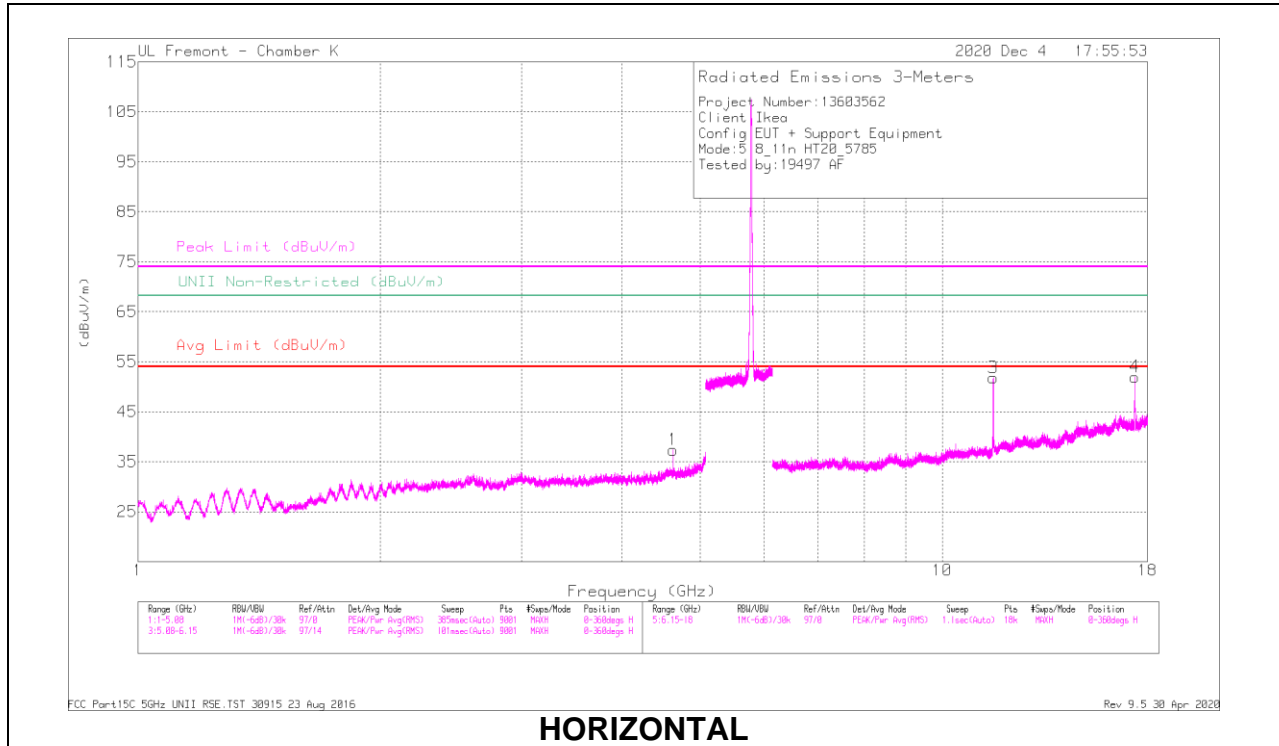

HORIZONTAL

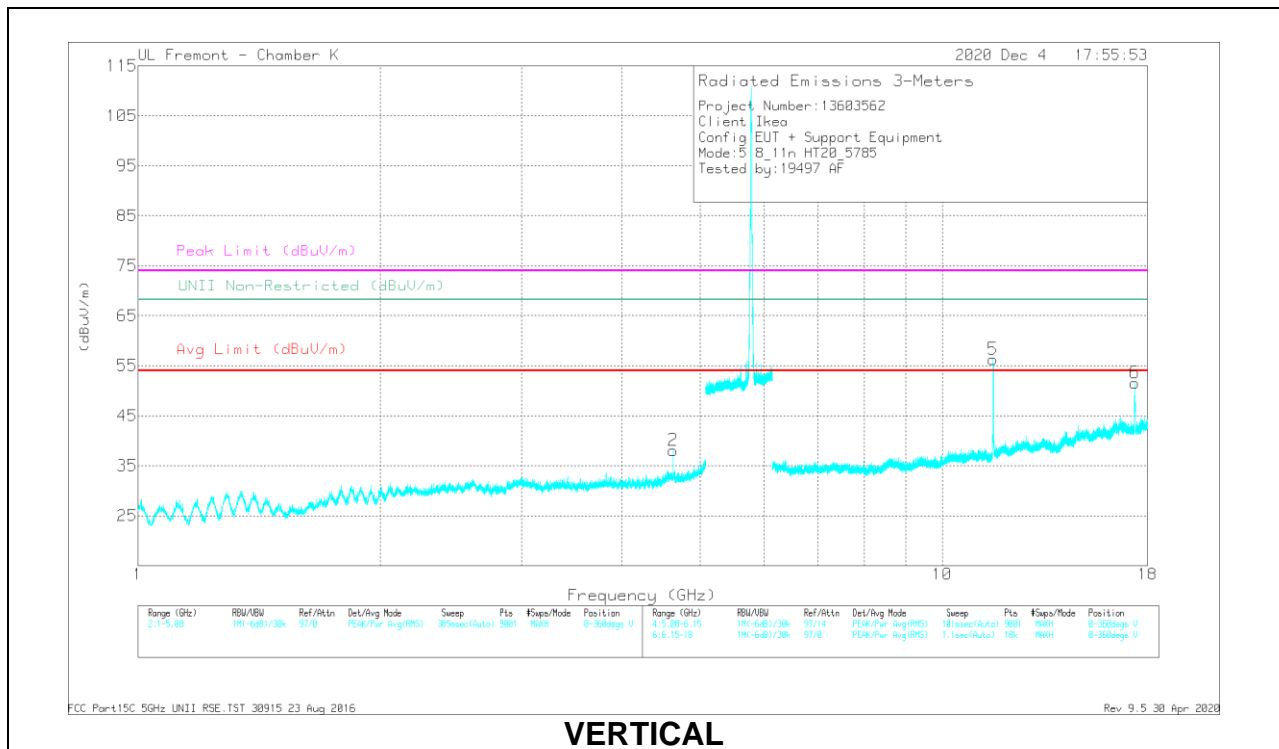


VERTICAL

RADIATED EMISSIONS


Frequency (MHz)	Meas Reading (dBµV)	Det	AF Tilt3 (dBm)	Amp/Cat/Port/Pad (dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNE Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
* 4.62788	50.61	PK-U	34.4	-41.1	0	43.91	-	-	74	-30.09	-	-	333	105	H
* 4.62797	42.01	ADR	34.4	-41.1	0	35.31	54	-18.69	-	-	-	-	333	105	H
* 4.62779	50.79	PK-U	34.4	-41.1	0	44.09	-	-	74	-29.91	-	-	216	120	V
* 4.628	42.81	ADR	34.4	-41.1	0	36.11	54	-17.89	-	-	-	-	216	120	V
* 11.57171	61.52	PK-U	38.3	-36.2	0	63.62	-	-	74	-10.38	-	-	127	97	H
* 11.5714	48.73	ADR	38.3	-36.2	0	50.83	54	-3.17	-	-	-	-	127	97	H
17.35161	50.96	PK-U	41.8	-32.4	0	60.36	-	-	-	-	68.2	-7.84	143	201	H
* 11.56897	64.38	PK-U	38.3	-36.2	0	66.48	-	-	74	-7.52	-	-	102	213	V
* 11.56851	48.49	ADR	38.3	-36.2	0	50.59	54	-3.41	-	-	-	-	102	213	V
17.36152	51.22	PK-U	41.7	-32.2	0	60.72	-	-	-	-	68.2	-7.48	176	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

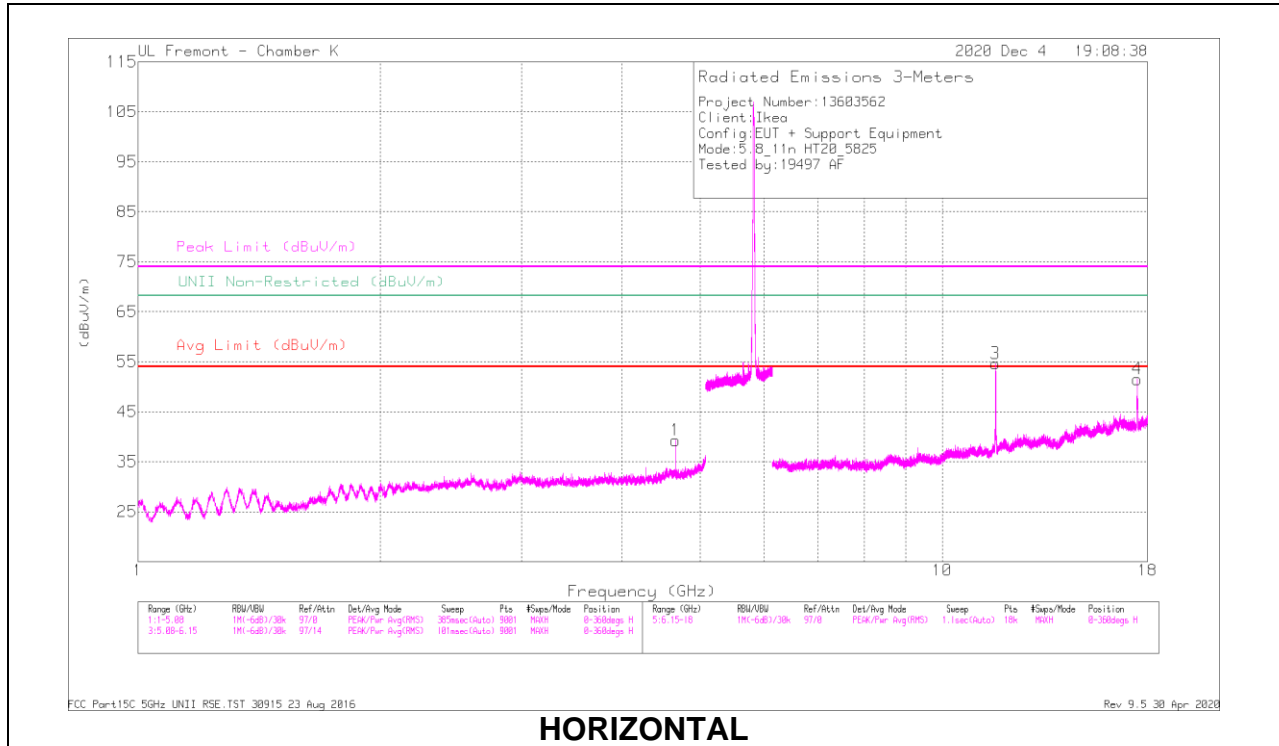

HORIZONTAL

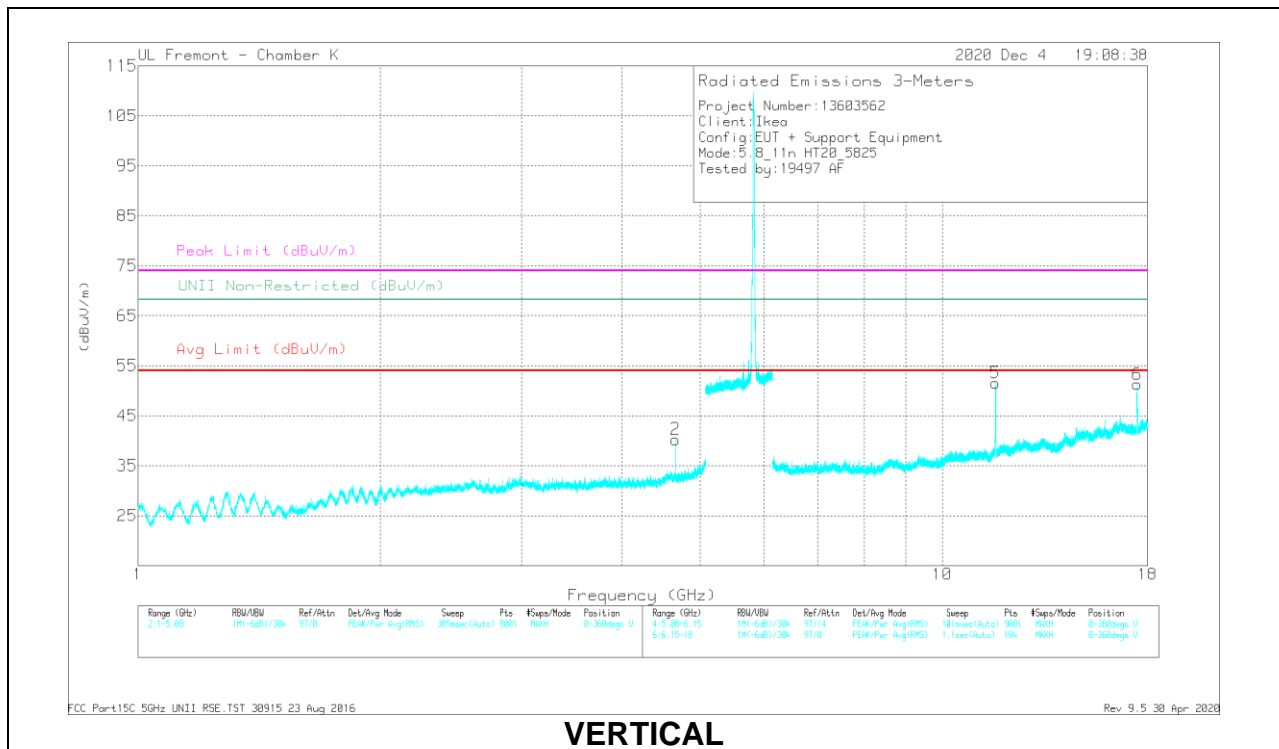

VERTICAL


RADIATED EMISSIONS

Frequency (MHz)	Meas Reading (dBµV)	Det	AF Tilt3 (dBm)	Amp/Cat/Pwr/Fed (dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNE Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
* 4.65005	50.07	PK-U	34.4	-40.9	0	43.57	-	-	74	-30.43	-	-	335	114	H
* 4.65995	42.08	ADR	34.4	-40.9	0	35.58	54	-18.42	-	-	-	-	335	114	H
* 4.65998	51.26	PK-U	34.4	-40.9	0	44.76	-	-	74	-29.24	-	-	172	112	V
* 4.65994	43.7	ADR	34.4	-40.9	0	37.2	54	-16.8	-	-	-	-	172	112	V
* 11.8487	63.69	PK-U	38.5	-35.8	0	68.39	-	-	74	-7.61	-	-	84	97	H
* 11.84852	49.74	ADR	38.5	-35.7	0	52.54	54	-1.46	-	-	-	-	84	97	H
17.47384	53.46	PK-U	42	-32	0	63.46	-	-	-	-	68.2	-4.74	128	103	H
* 11.84605	60.12	PK-U	38.5	-35.7	0	62.92	-	-	74	-11.08	-	-	96	194	V
* 11.84625	47.48	ADR	38.5	-35.7	0	50.28	54	-3.72	-	-	-	-	96	194	V
17.47446	53.52	PK-U	41.9	-32	0	63.42	-	-	-	-	68.2	-4.78	169	217	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.2. WORST CASE BELOW 30MHZ

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

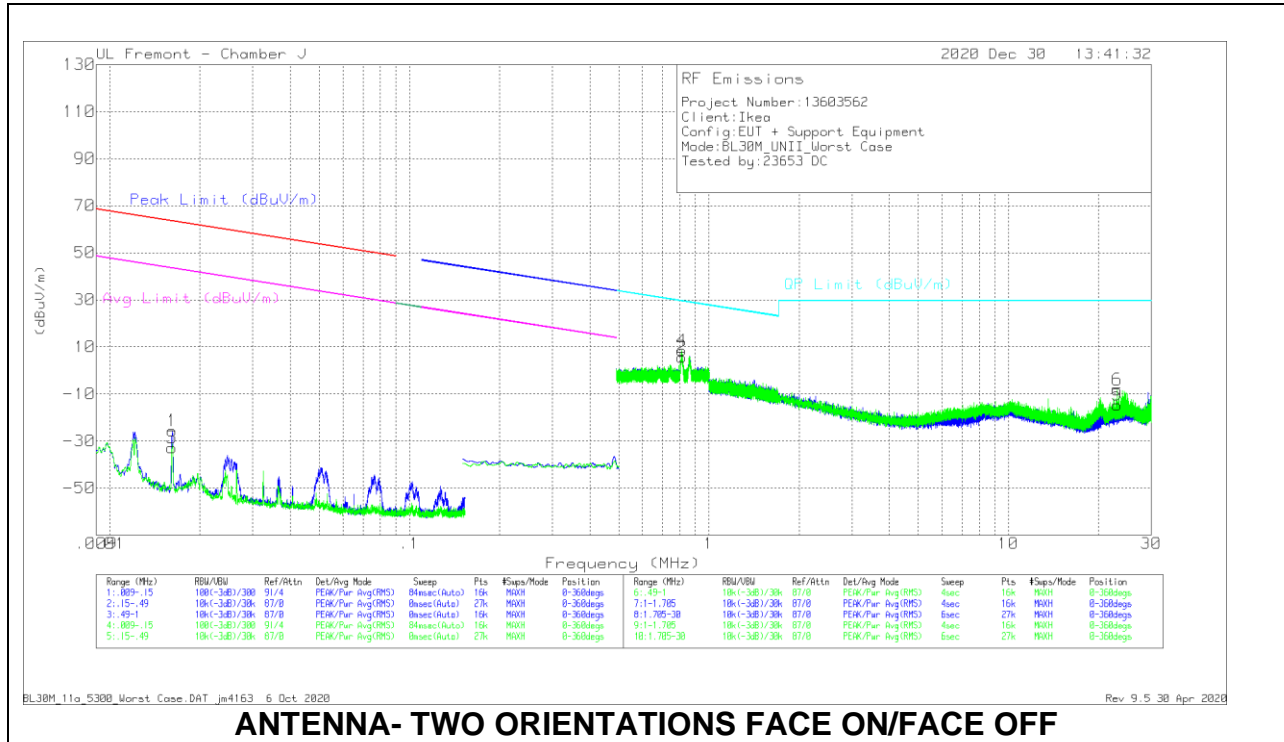

ANTENNA- TWO ORIENTATIONS FACE ON/FACE OFF

Below 30MHz Data

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (E ACF)	Amp/Cbl (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.01614	23.54	Pk	59.3	-28.5	-80	-25.66	63.43	-89.09	43.43	-69.09	0-360
3	.0161	16.43	Pk	59.3	-28.5	-80	-32.77	63.45	-96.22	43.45	-76.22	0-360

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (E ACF)	Amp/Cbl (dB)	Dist Corr 30m (dB) 40Log	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
2	.8108	18.1	Pk	56	-28.5	-40	5.6	29.44	-23.84	0-360
4	.81163	20.95	Pk	56	-28.5	-40	8.45	29.43	-20.98	0-360
5	23.12612	19.04	Pk	34	-27.7	-40	-14.66	29.5	-44.16	0-360
6	23.12717	25.46	Pk	34	-27.7	-40	-8.24	29.5	-37.74	0-360


Pk - Peak detector

NOTE: The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table), using the free space impedance of 377 Ohms. For example the measurement at frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

10.3. WORST CASE BELOW 1 GHZ

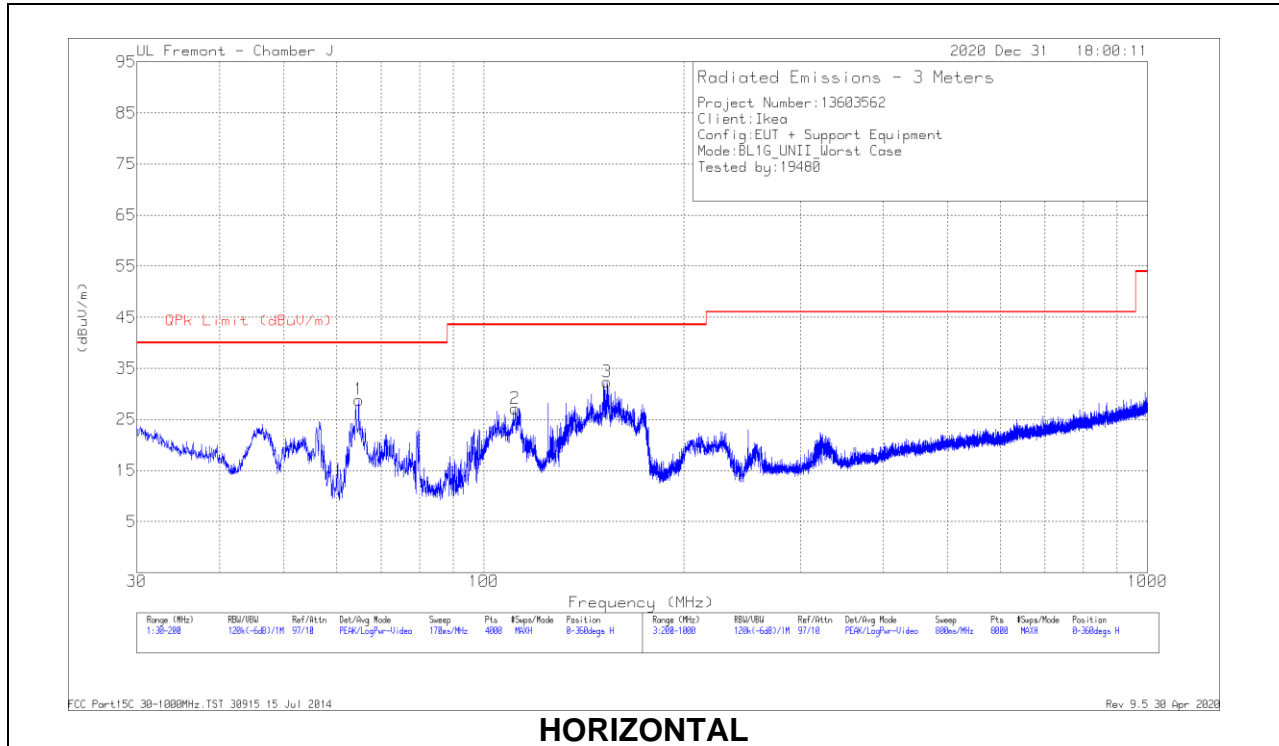

HORIZONTAL

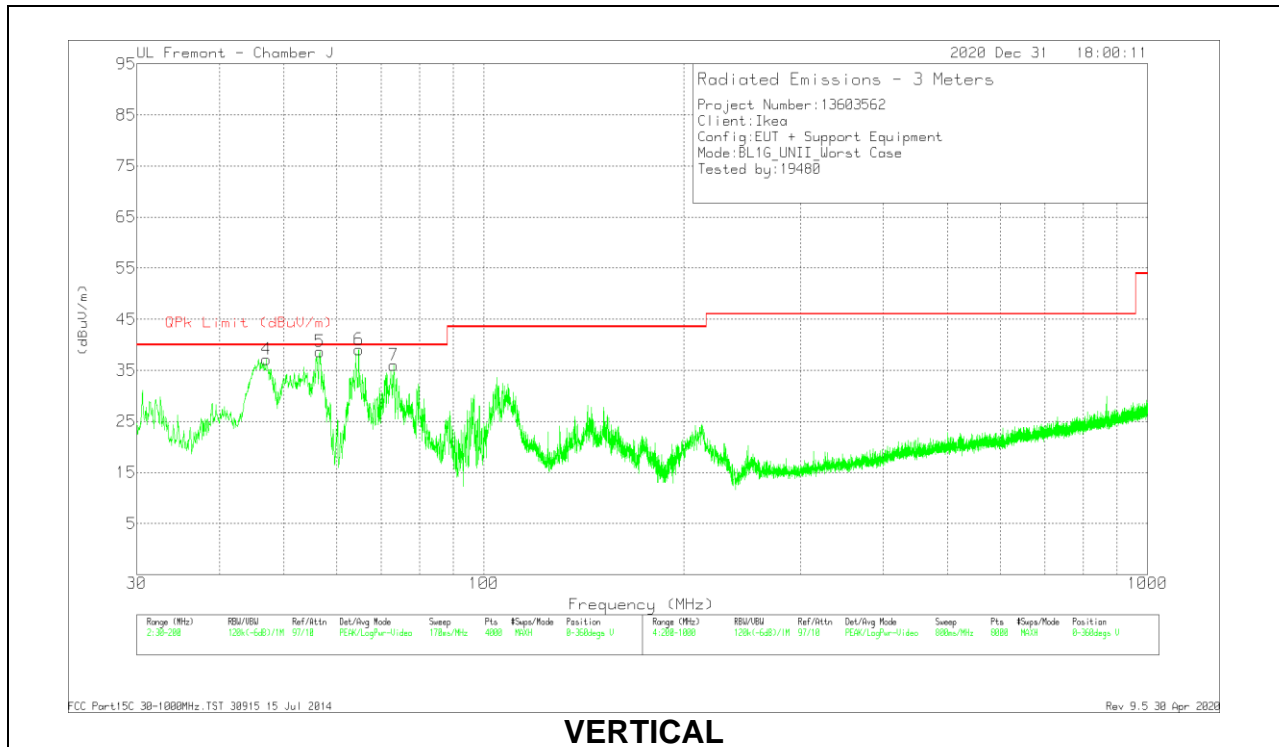

VERTICAL

Below 1GHz DATA


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T900 (dB/m)	Amp Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	64.774	46.24	Pk	13.9	-31.3	28.84	40	-11.16	0-360	293	H
2	* 111.5361	39.49	Pk	18.5	-30.9	27.09	43.52	-16.43	0-360	293	H
3	153.3244	44.91	Pk	18.1	-30.7	32.31	43.52	-11.21	0-360	196	H
4	47.0469	52.3	Pk	15	-31.4	35.9	40	-4.1	74	100	V
	47.0469	48.86	Qp	15	-31.4	32.46	40	-7.54	74	100	V
5	56.5195	58.26	Pk	13	-31.3	39.96	40	-.04	68	131	V
	56.5195	54.63	Qp	13	-31.3	36.33	40	-3.67	68	131	V
6	64.7639	56.75	Pk	13.9	-31.3	39.35	40	-.65	48	116	V
	64.7639	54.43	Qp	13.9	-31.3	37.03	40	-2.97	48	116	V
7	* 73.1823	54.51	Pk	13.9	-31.2	37.21	40	-2.79	354	118	V
	* 73.1823	51.6	Qp	13.9	-31.2	34.3	40	-5.7	354	118	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

Qp - Quasi-Peak detector

10.4. WORST CASE 18-26 GHZ

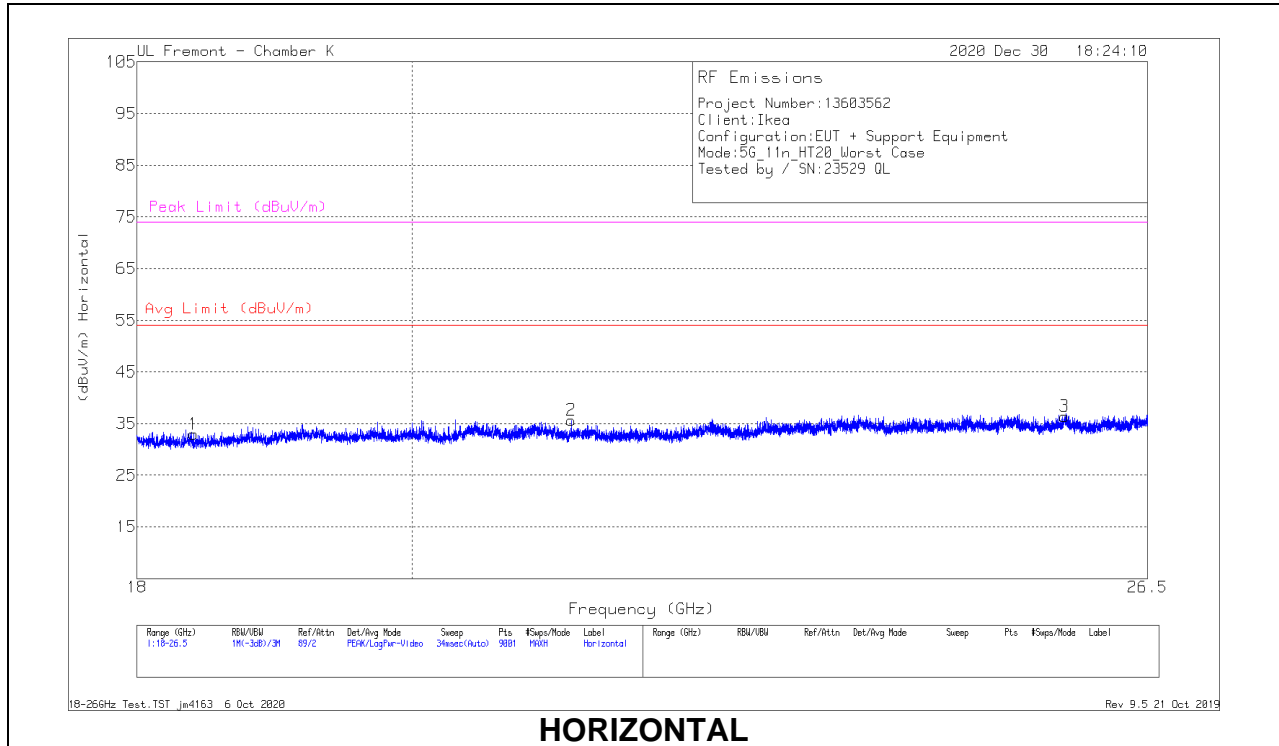

HORIZONTAL

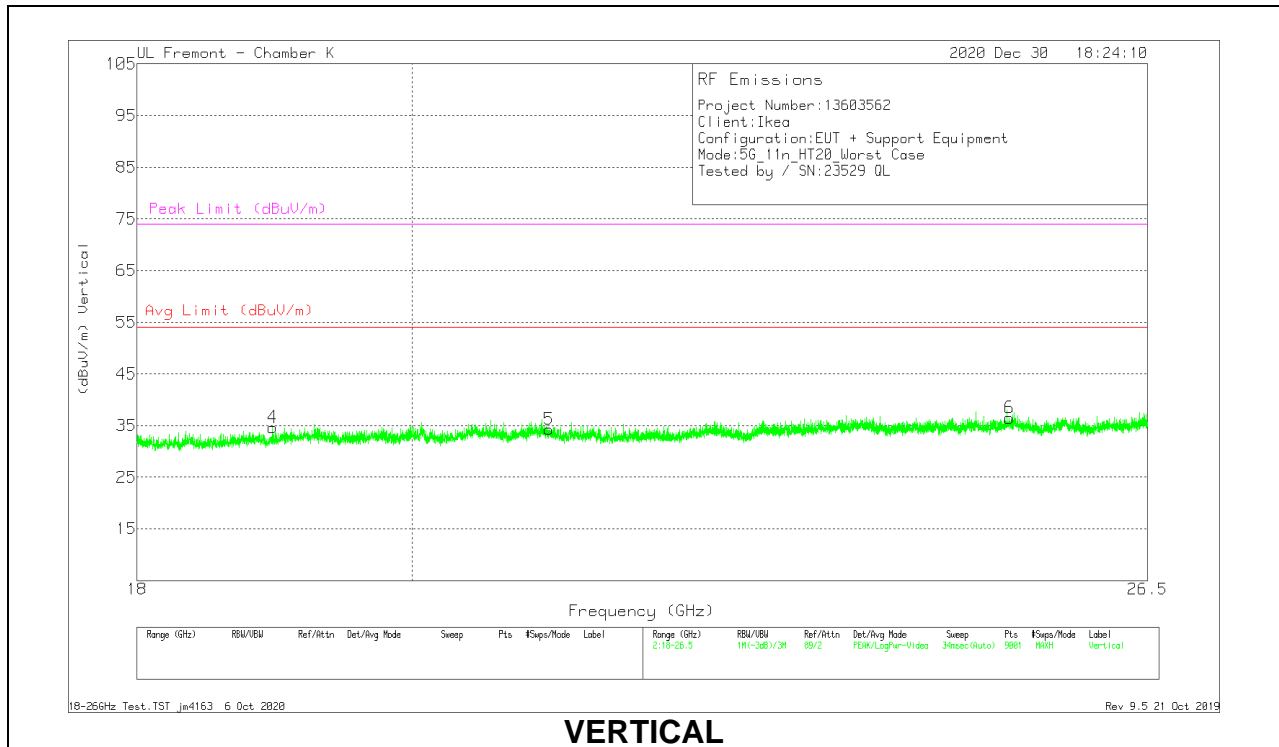


VERTICAL


18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T447 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	18.39289	69.76	Pk	32.3	-59.6	-9.5	32.96	54	-21.04	74	-41.04
2	21.25361	69.13	Pk	33.1	-57.1	-9.5	35.63	54	-18.37	74	-38.37
3	25.67172	66.29	Pk	34.4	-54.8	-9.5	36.39	54	-17.61	74	-37.61
4	18.95861	69.53	Pk	32.5	-57.9	-9.5	34.63	54	-19.37	74	-39.37
5	21.07228	67.66	Pk	33.2	-57.1	-9.5	34.26	54	-19.74	74	-39.74
6	25.13433	66.55	Pk	34.6	-55.2	-9.5	36.45	54	-17.55	74	-37.55

10.5. WORST CASE 26-40 GHZ

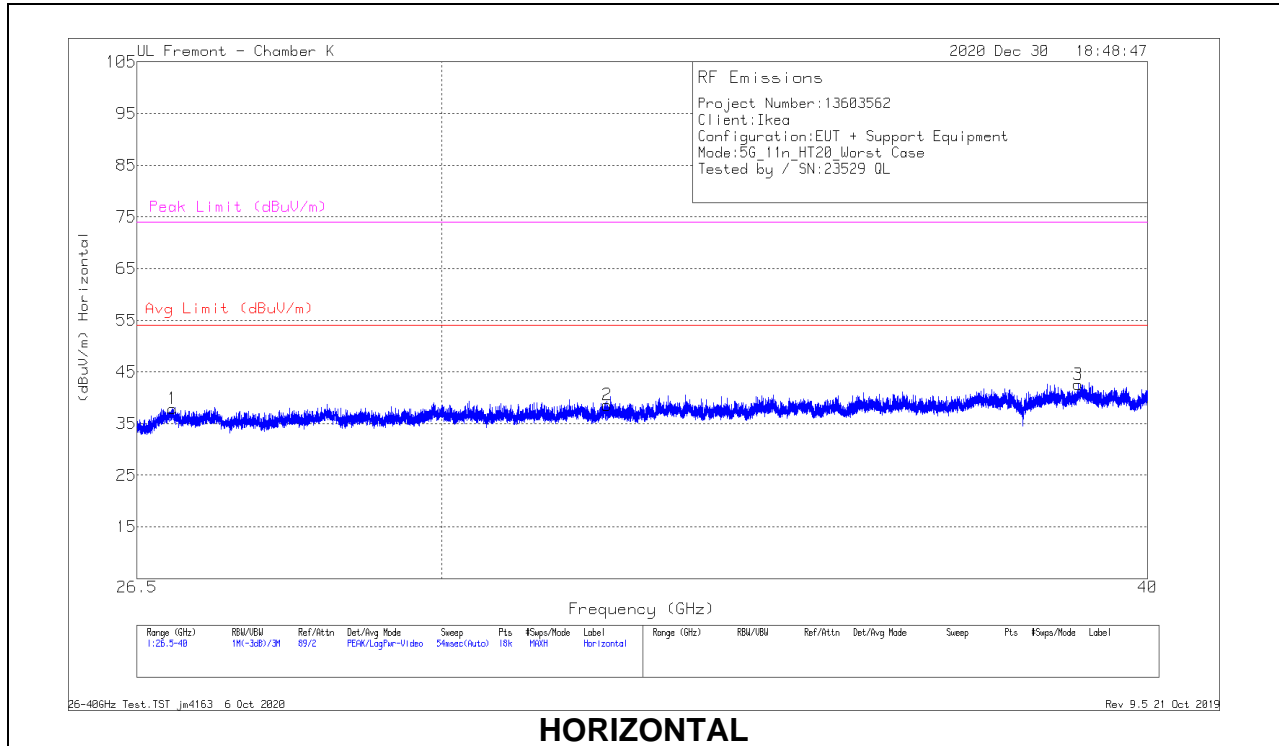

HORIZONTAL

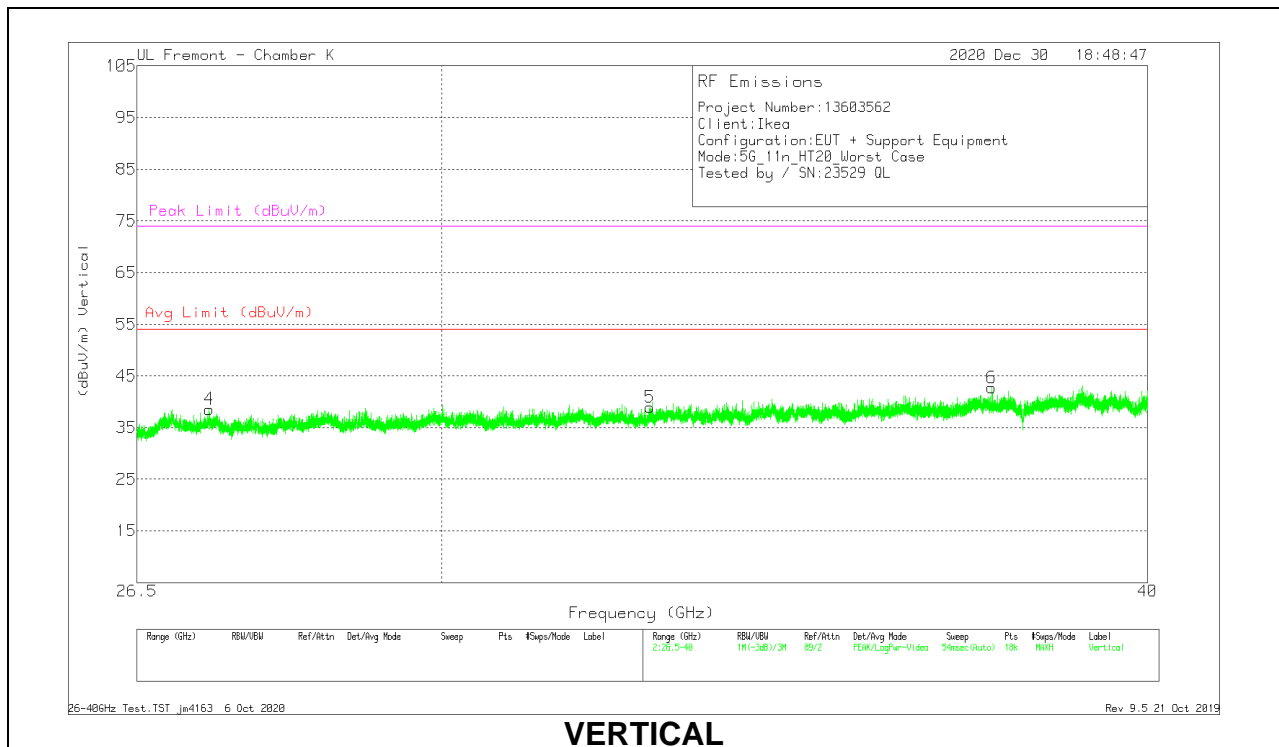

VERTICAL

26 – 40GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T446 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	26.887	67.49	Pk	36.1	-56.2	-9.5	37.89	54	-16.11	74	-36.11
2	32.09425	64.57	Pk	36.9	-53.4	-9.5	38.57	54	-15.43	74	-35.43
3	38.887	67.78	Pk	38.9	-54.6	-9.5	42.58	54	-11.42	74	-31.42
4	27.2905	67.54	Pk	36.2	-55.7	-9.5	38.54	54	-15.46	74	-35.46
5	32.656	64.73	Pk	37.5	-53.8	-9.5	38.93	54	-15.07	74	-35.07
6	37.537	68.73	Pk	38.6	-55.1	-9.5	42.73	54	-11.27	74	-31.27

Pk - Peak detector

11. RADIATED TEST RESULTS – E1922 ANTENNA


11.1. TRANSMITTER ABOVE 1 GHz

11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

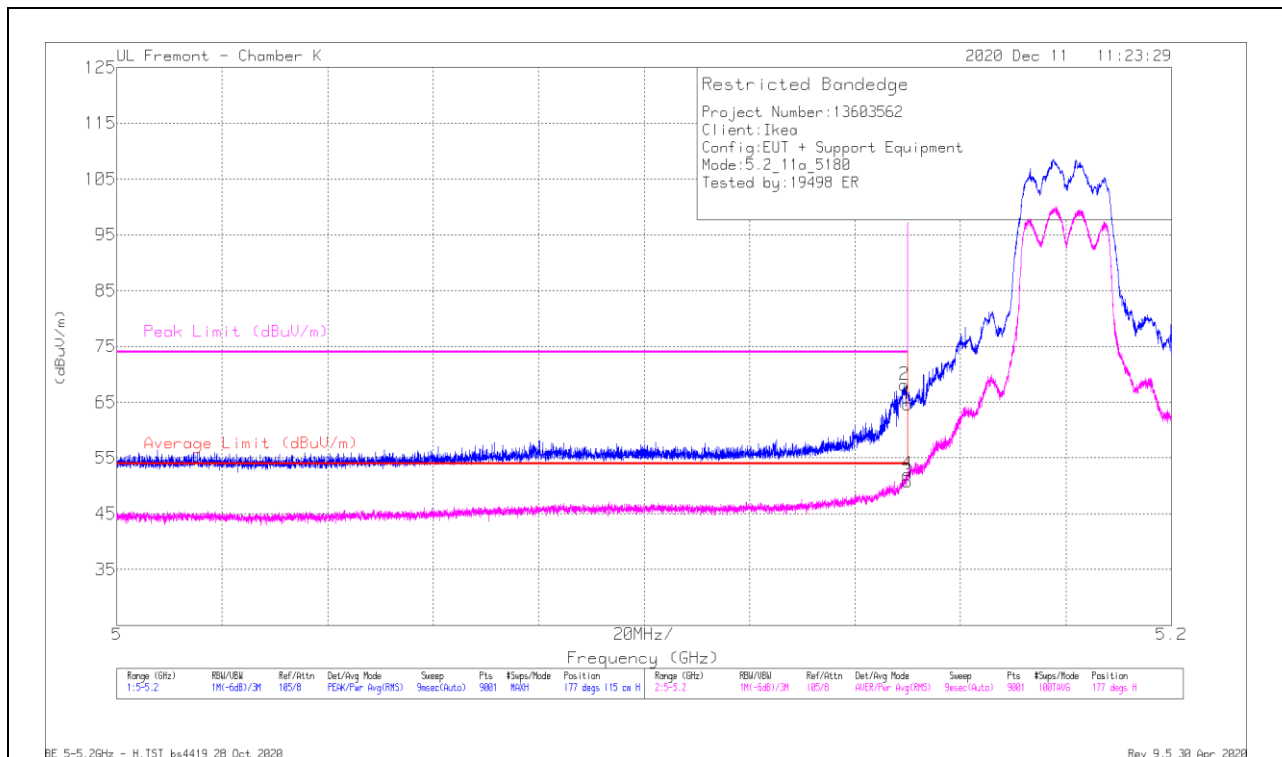


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuW/m)	Average Limit (dBuW/m)	Margin (dB)	Peak Limit (dBuW/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	37.59	Pk	34.6	-7.6	0	64.59	-	-	74	-8.41	177	115	H
2	* 5.14933	41.05	Pk	34.6	-7.6	0	68.05	-	-	74	-5.95	177	115	H
3	* 5.15	23.19	RMS	34.6	-7.6	.61	50.8	54	-3.2	-	-	177	115	H
4	* 5.14995	24.46	RMS	34.6	-7.6	.61	52.07	54	-1.93	-	-	177	115	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

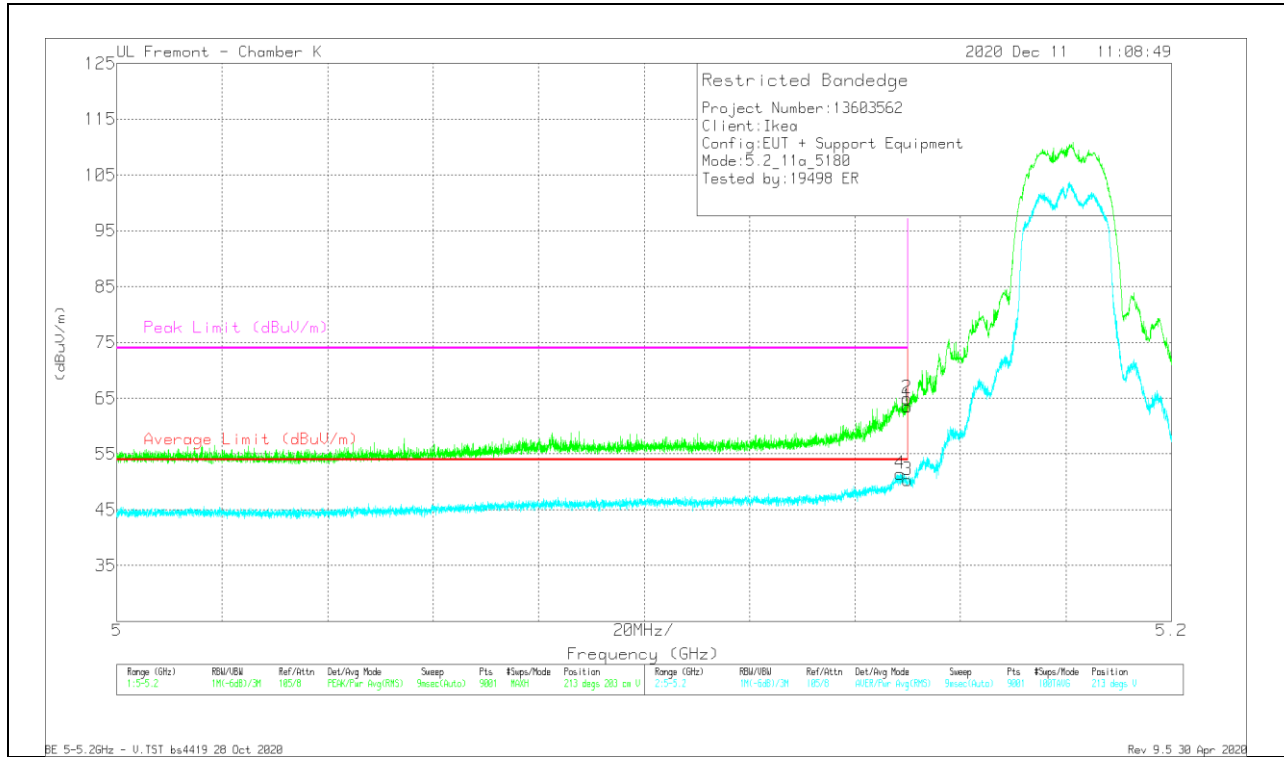


Marker	Frequency (GHz)	Meter Reading (dBu)	Det	AF T863 (dBm)	Amp/Cal/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	36.46	PK	34.6	-7.6	0	33.46	-	-	74	-10.54	213	203	V
2	* 5.1498	38.06	PK	34.6	-7.6	0	35.06	-	-	74	-8.94	213	203	V
3	* 5.15	22.67	RMS	34.6	-7.6	.61	50.28	54	-3.72	-	-	213	203	V
4	* 5.14853	23.96	RMS	34.5	-7.6	.61	51.47	54	-2.53	-	-	213	203	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

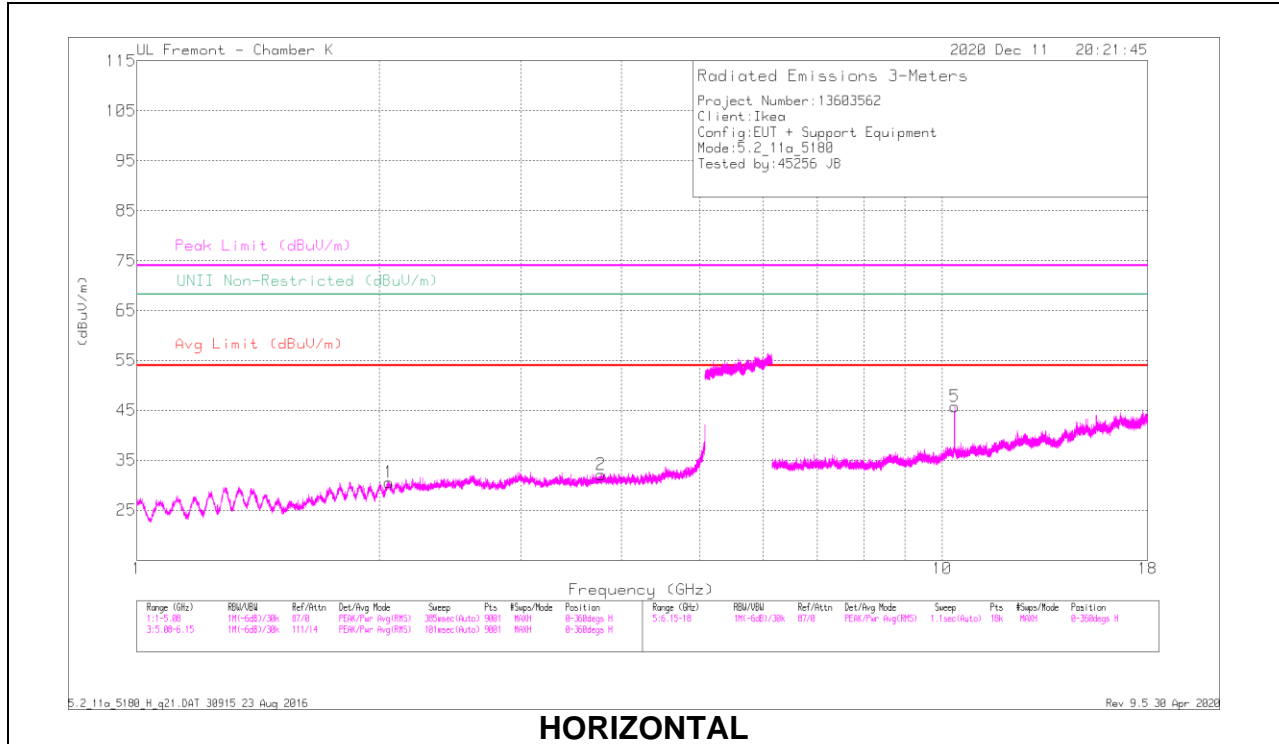

HORIZONTAL

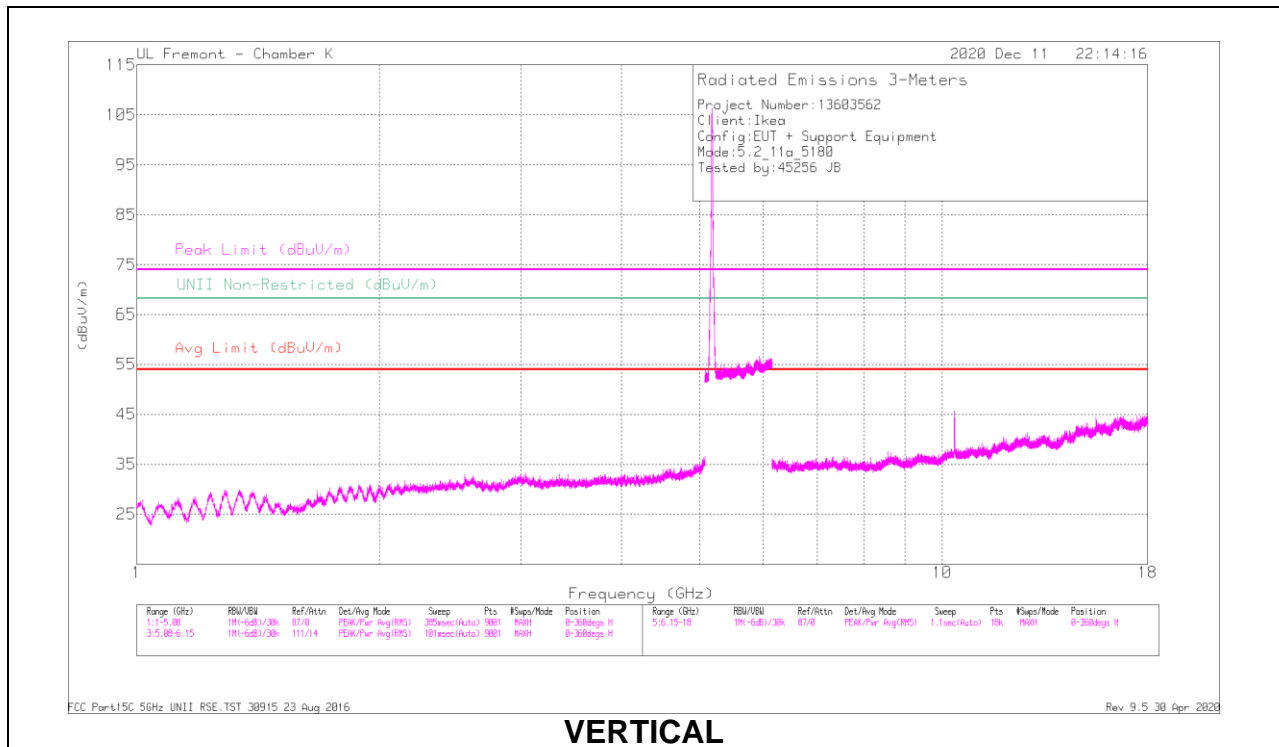


VERTICAL

RADIATED EMISSIONS


Frequency (MHz)	Mean Reading (dBµV)	Dist	AF 100 (dBm)	AmpCoeff (dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNEI Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
2.05582	53.45	PK-U	31.4	-45.9	0	33.95	-	-	-	-	68.2	-20.25	65	355	H
* 3.77071	48.03	PK-U	33.6	-42	0	39.63	-	-	74	-34.37	-	-	28	321	H
* 3.76953	37.43	ADR	33.6	-42	.61	29.64	54	-24.36	-	-	-	-	28	321	H
2.05601	53.3	PK-U	31.4	-45.9	0	38.8	-	-	-	-	68.2	-29.4	91	339	V
* 3.81801	48.89	PK-U	33.5	-42	0	40.39	-	-	74	-33.62	-	-	78	105	V
* 3.81734	37.22	ADR	33.5	-42	.61	29.33	54	-24.67	-	-	-	-	78	105	V
10.36466	45.09	PK-U	37.6	-37.2	0	45.49	-	-	-	-	68.2	-22.71	37	99	H
10.36436	33.65	ADR	37.6	-37.2	.61	34.66	-	-	-	-	-	-	37	99	H
10.36389	62.96	PK-U	37.6	-37.2	0	63.28	-	-	-	-	68.2	-4.94	210	104	V
10.36054	50.31	ADR	37.6	-37.2	.61	51.32	-	-	-	-	-	-	210	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

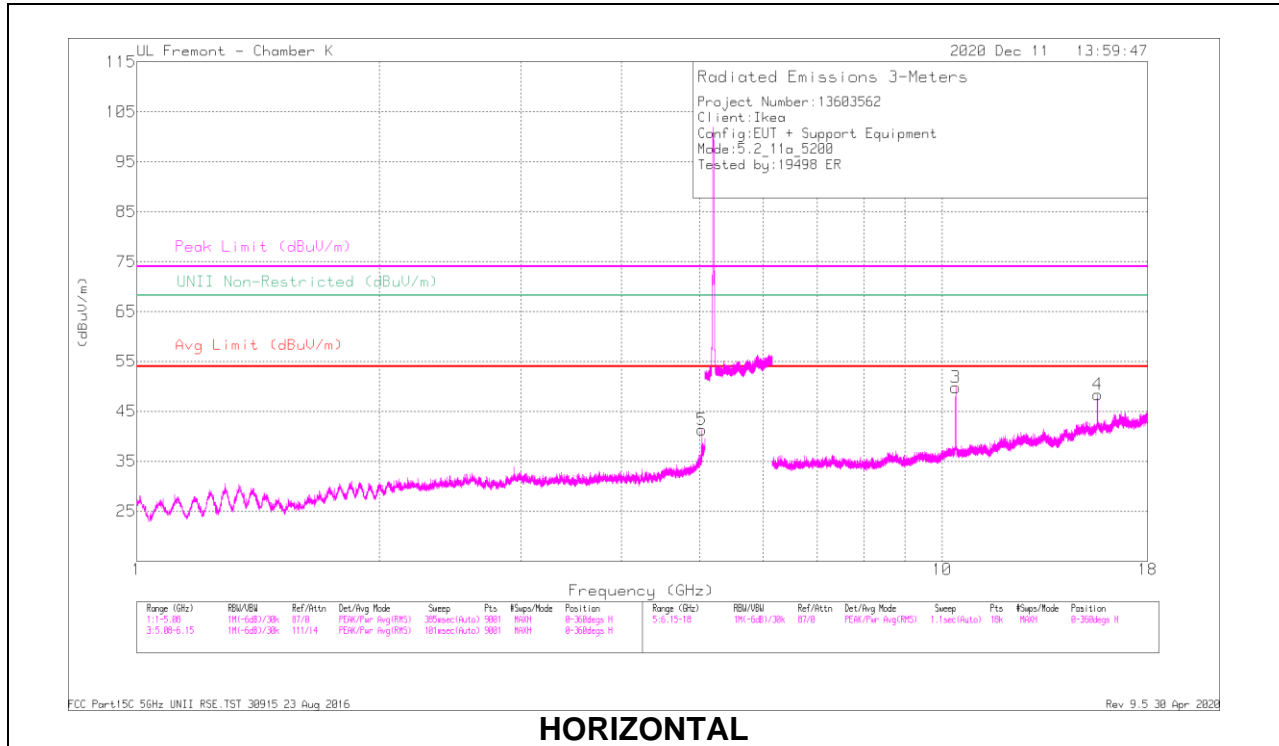

HORIZONTAL

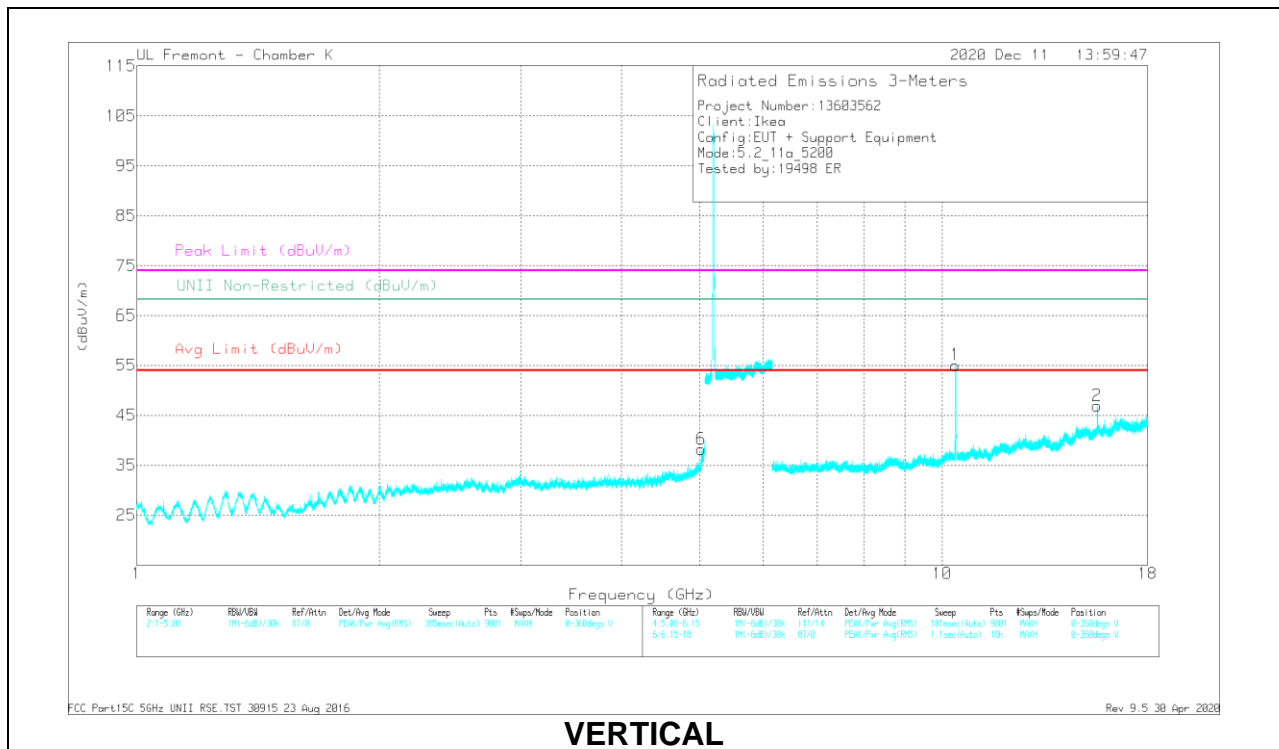


VERTICAL

RADIATED EMISSIONS


Frequency (MHz)	Meas Reading (dBµV)	Det	AF Tilt (dBm)	Amp/Cat/Pwr/Fed (dB)	DC Corr (dB)	Corrected Reading (dBµV)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNI Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
* 5.03236	60.37	PK-U	34.4	-39	0	56.37	-	-	74	-17.63	-	-	141	116	H
* 5.03731	44.15	ADR	34.3	-38.9	.61	40.16	54	-13.84	-	-	-	-	141	116	H
* 5.03604	58.2	PK-U	34.3	-38.9	0	53.6	-	-	74	-20.4	-	-	137	232	V
* 5.03644	41.87	ADR	34.3	-38.9	.61	37.88	54	-16.12	-	-	-	-	137	232	V
* 15.60027	49.85	PK-U	40.9	-33.5	0	57.25	-	-	74	-16.75	-	-	44	109	H
* 15.59963	37.99	ADR	40.9	-33.5	.61	45.9	54	-8.1	-	-	-	-	44	109	H
10.40279	57.95	PK-U	37.7	-37.2	0	58.45	-	-	-	-	68.2	-9.75	39	96	H
10.39681	63.27	PK-U	37.7	-37.2	0	63.77	-	-	-	-	68.2	-4.43	201	131	V
* 15.59659	50.85	PK-U	40.9	-33.5	0	58.65	-	-	74	-15.95	-	-	206	396	V
* 15.6015	39.26	ADR	40.9	-33.5	.61	47.27	54	-6.73	-	-	-	-	206	396	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

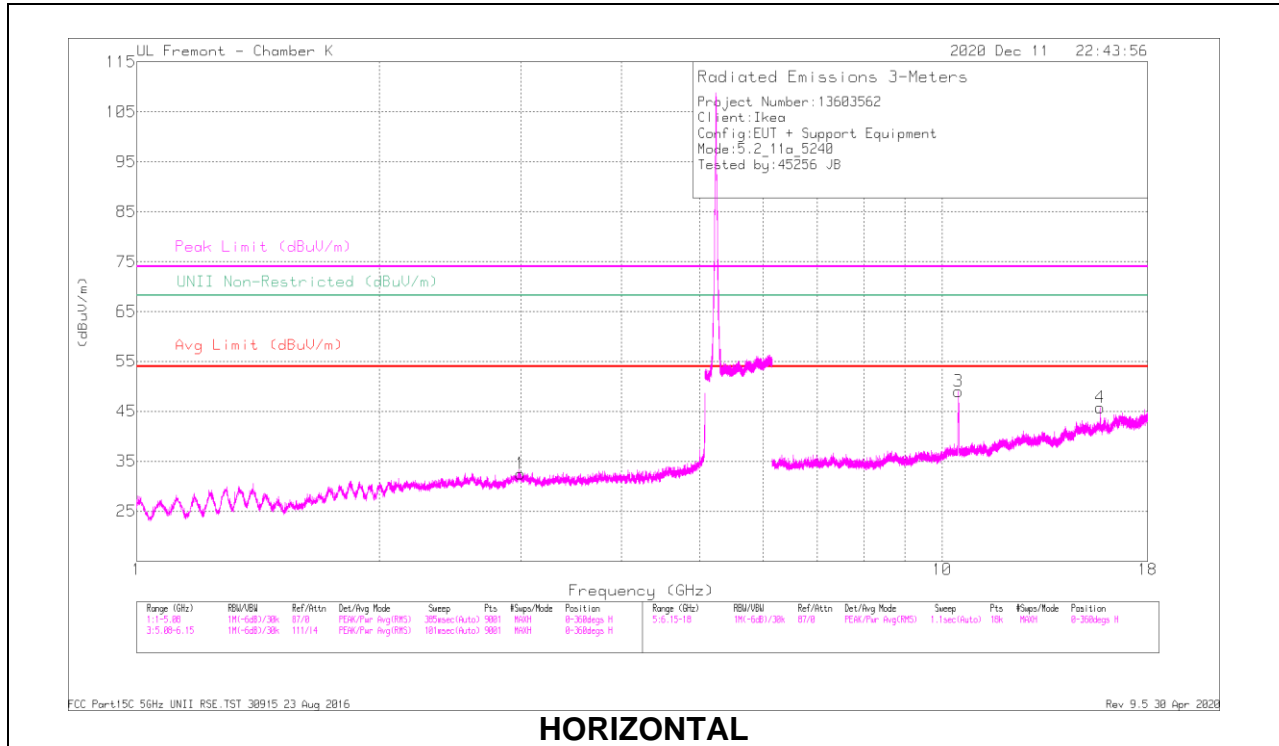

HORIZONTAL

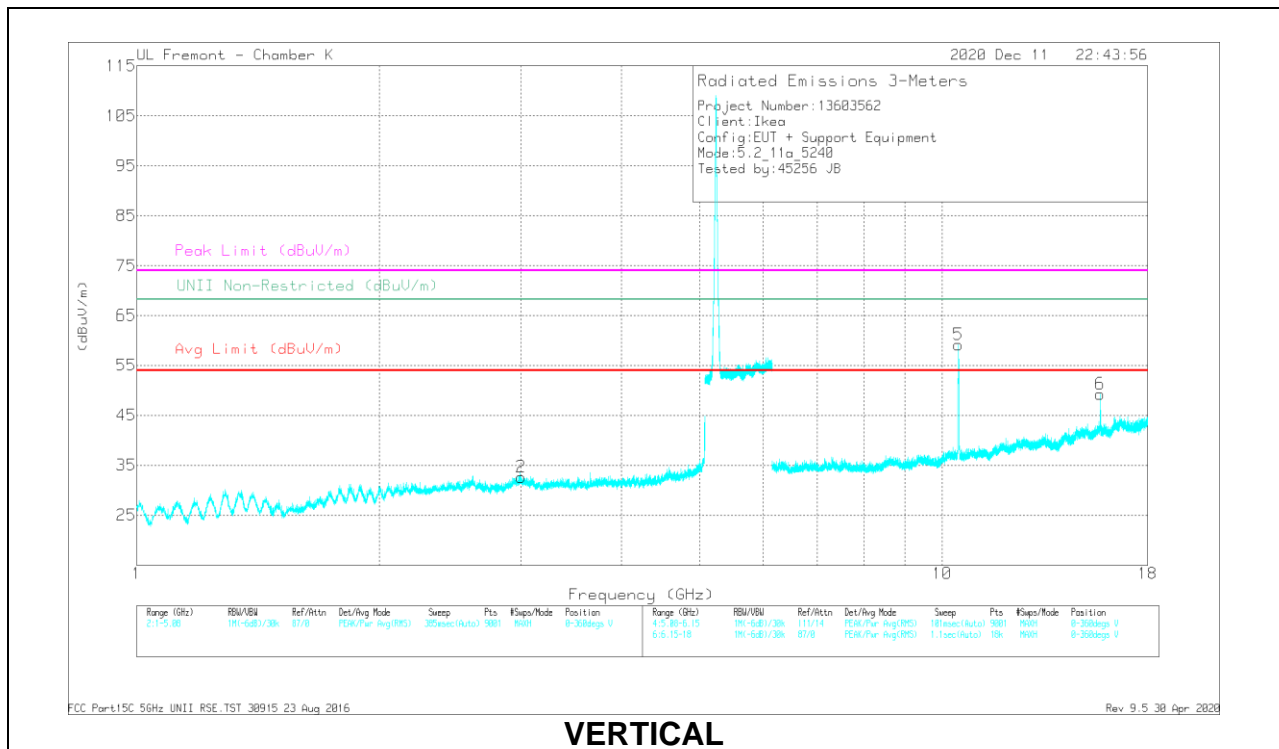

VERTICAL

RADIATED EMISSIONS

Frequency (MHz)	Meas Reading (dBµV)	Det	AF T/R3 (dBm)	Amp/Cat/Prot/Ref (dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNEI Non-Restricted (dBµV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
2.99729	50.23	PK-U	32.8	-42.7	0	40.33	-	-	-	-	68.2	-27.87	132	224	H
3.00177	50.36	PK-U	32.8	-42.7	0	40.46	-	-	-	-	68.2	-27.74	51	229	V
10.48271	56.7	PK-U	37.8	-37.2	0	57.3	-	-	-	-	68.2	-10.9	40	106	H
*15.7249	47.67	PK-U	40.9	-34.2	0	54.37	-	-	74	-19.63	-	-	46	109	H
*15.72227	35.48	ADR	40.9	-34.2	.61	42.79	54	-11.21	-	-	-	-	46	109	H
10.48308	63.91	PK-U	37.8	-37.2	0	64.51	-	-	-	-	68.2	-3.69	189	121	V
*15.72014	50.6	PK-U	40.9	-34.2	0	57.3	-	-	74	-16.7	-	-	132	96	V
*15.71986	37.32	ADR	40.9	-34.2	.61	44.63	54	-9.37	-	-	-	-	132	96	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

11.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

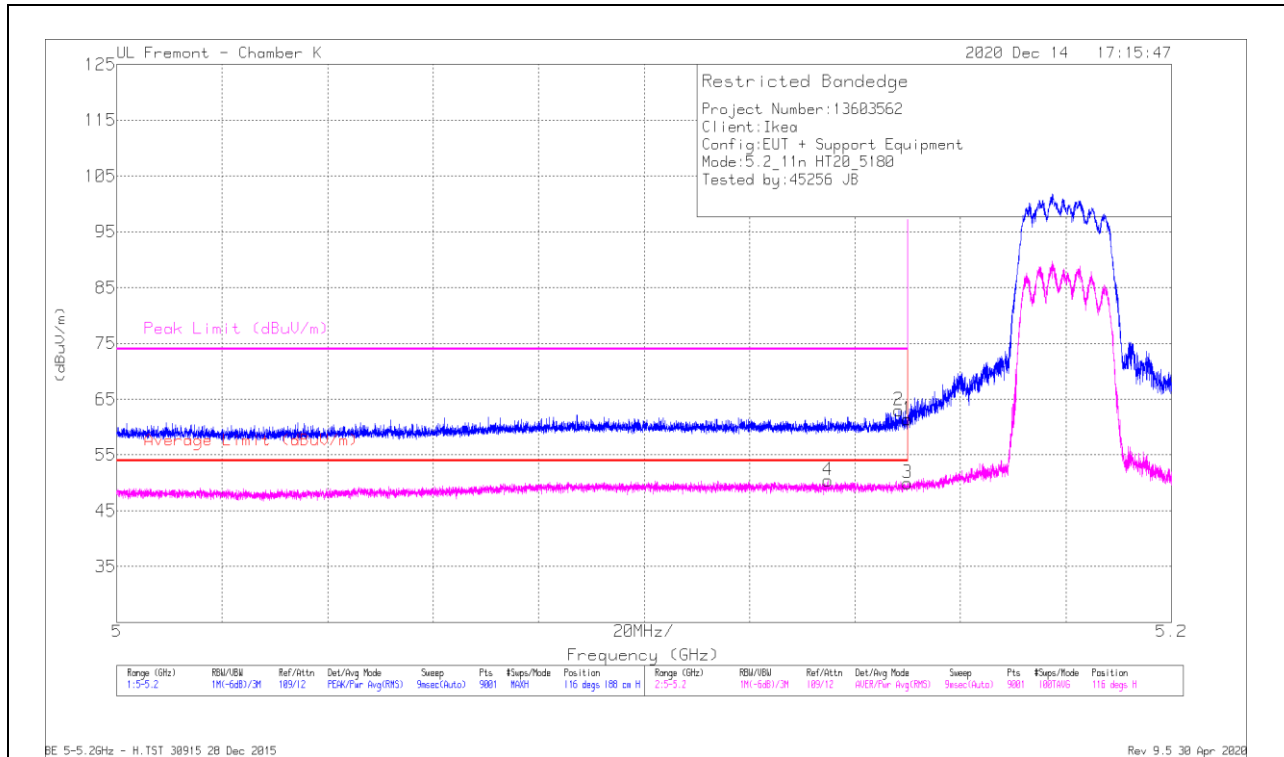


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T83 (dB/m)	Amp/CD/FRR/Psd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	34.42	Pk	34.6	-7.6	0	61.42	-	-	74	-12.58	116	188	H
2	* 5.14827	36.09	Pk	34.5	-7.6	0	62.99	-	-	74	-11.01	116	188	H
3	* 5.15	22.97	RMS	34.6	-7.6	0	49.97	54	-4.03	-	-	116	188	H
4	* 5.13482	23.52	RMS	34.6	-7.7	0	50.42	54	-3.58	-	-	116	188	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

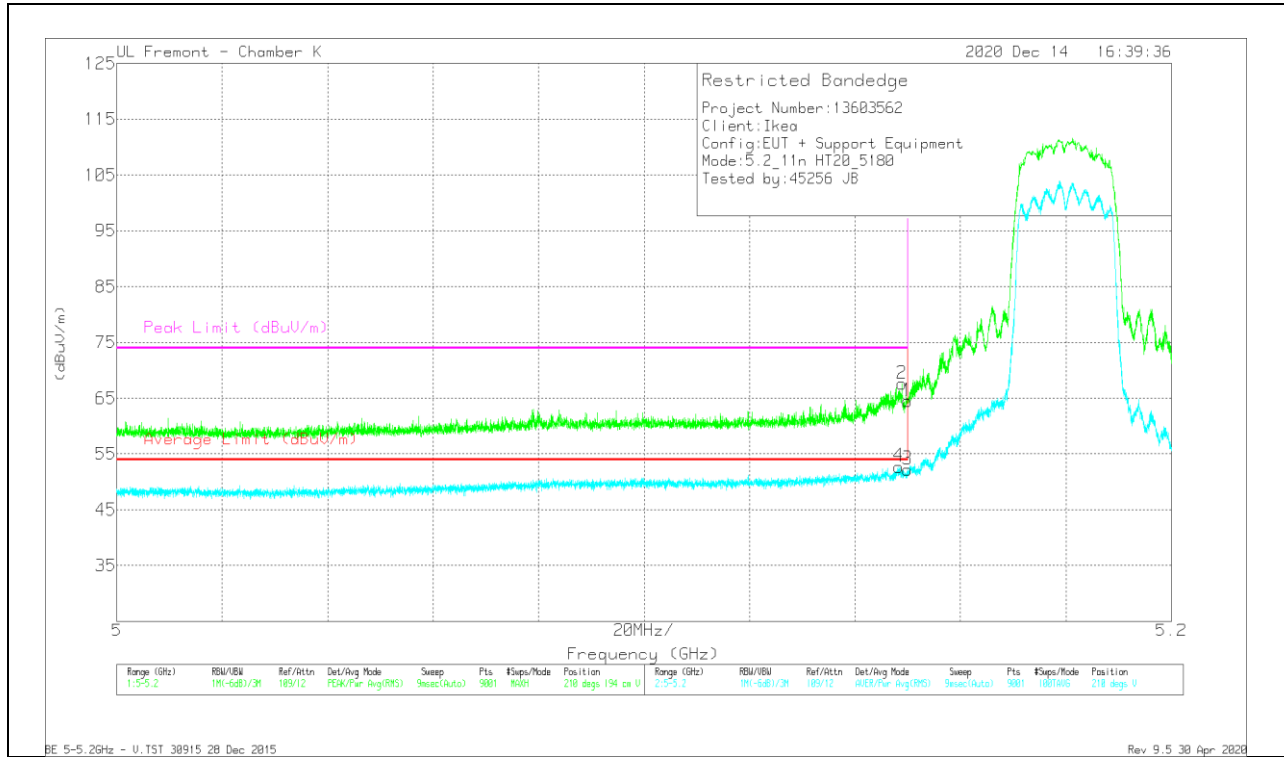

Marker	Frequency (GHz)	Meter Reading (dBu)	Det	AF 1863 (dBm)	Amp/Coil/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	37.55	PK	34.6	-7.6	0	64.55	-	-	74	-9.45	210	194	V
2	* 5.14893	40.88	PK	34.5	-7.6	0	67.58	-	-	74	-6.42	210	194	V
3	* 5.15	25.26	RMS	34.6	-7.6	0	52.26	54	-1.74	-	-	210	194	V
4	* 5.14829	25.86	RMS	34.5	-7.6	0	52.76	54	-1.24	-	-	210	194	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

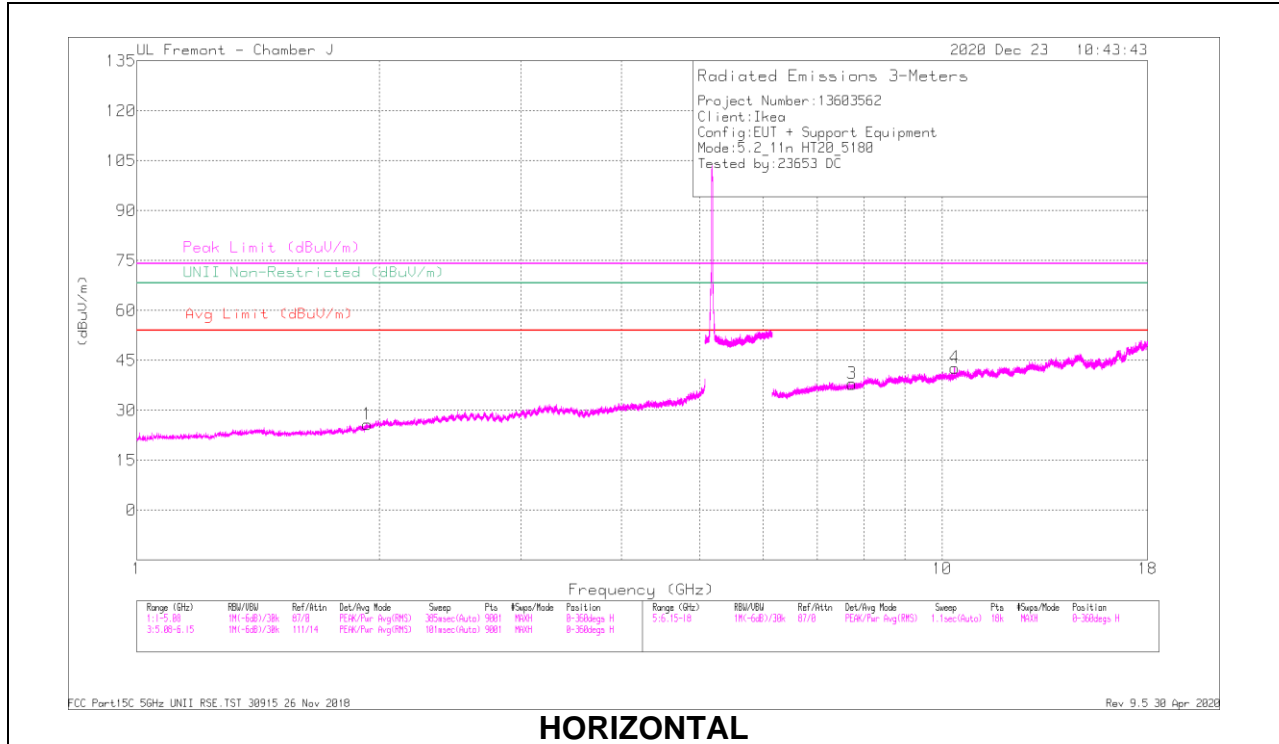

HORIZONTAL

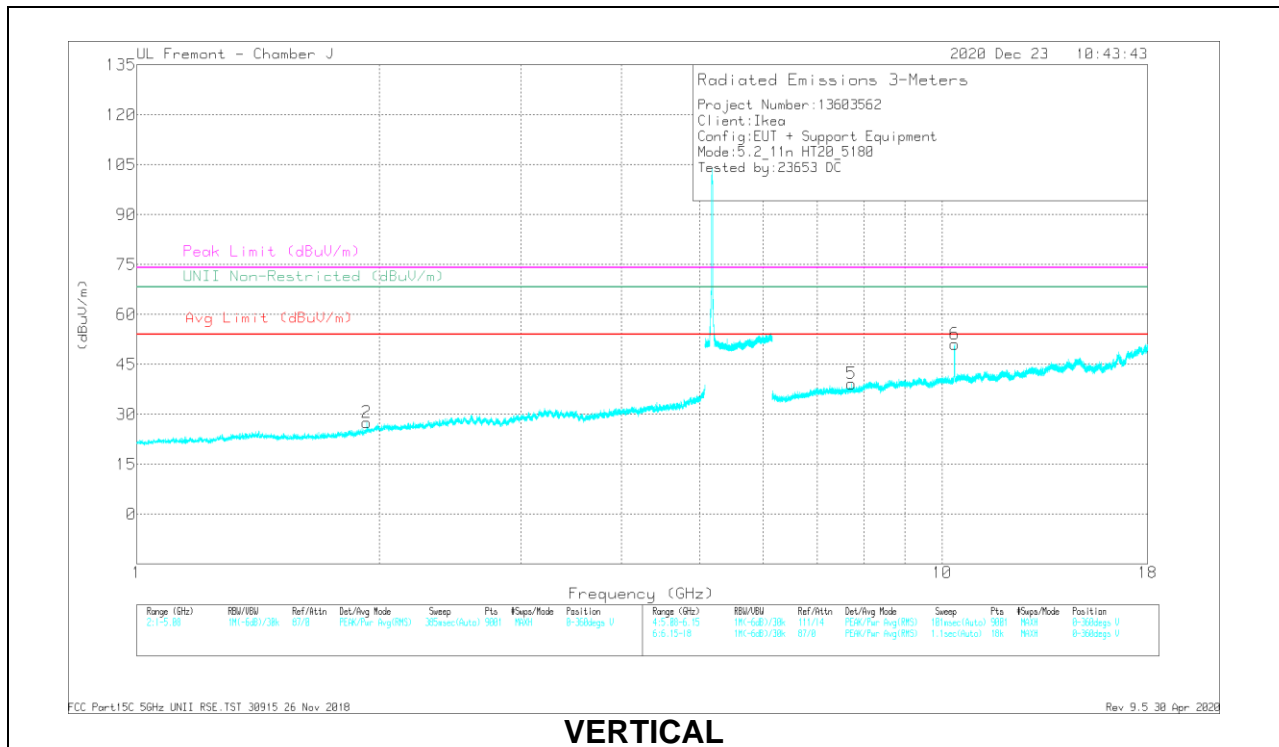

VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.93161	42.15	PK-U	26.9	-35.3	33.75	-	-	-	-	68.2	-34.45	77	147	H
1.93029	42.3	PK-U	26.9	-35.3	33.9	-	-	-	-	68.2	-34.3	346	132	V
* 7.72791	34.6	PK-U	37.2	-26.3	45.5	-	-	74	-28.5	-	-	205	266	H
* 7.72901	23.86	ADR	37.2	-26.3	34.76	54	-19.24	-	-	-	-	205	266	H
10.36453	35.92	PK-U	39.3	-24.5	50.72	-	-	-	-	68.2	-17.46	288	129	H
* 7.72513	35.1	PK-U	37.2	-26.3	46	-	-	74	-28	-	-	57	188	V
* 7.72533	23.34	ADR	37.2	-26.3	34.24	54	-19.76	-	-	-	-	57	188	V
10.35875	47.32	PK-U	39.3	-24.5	62.12	-	-	-	-	68.2	-6.08	279	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

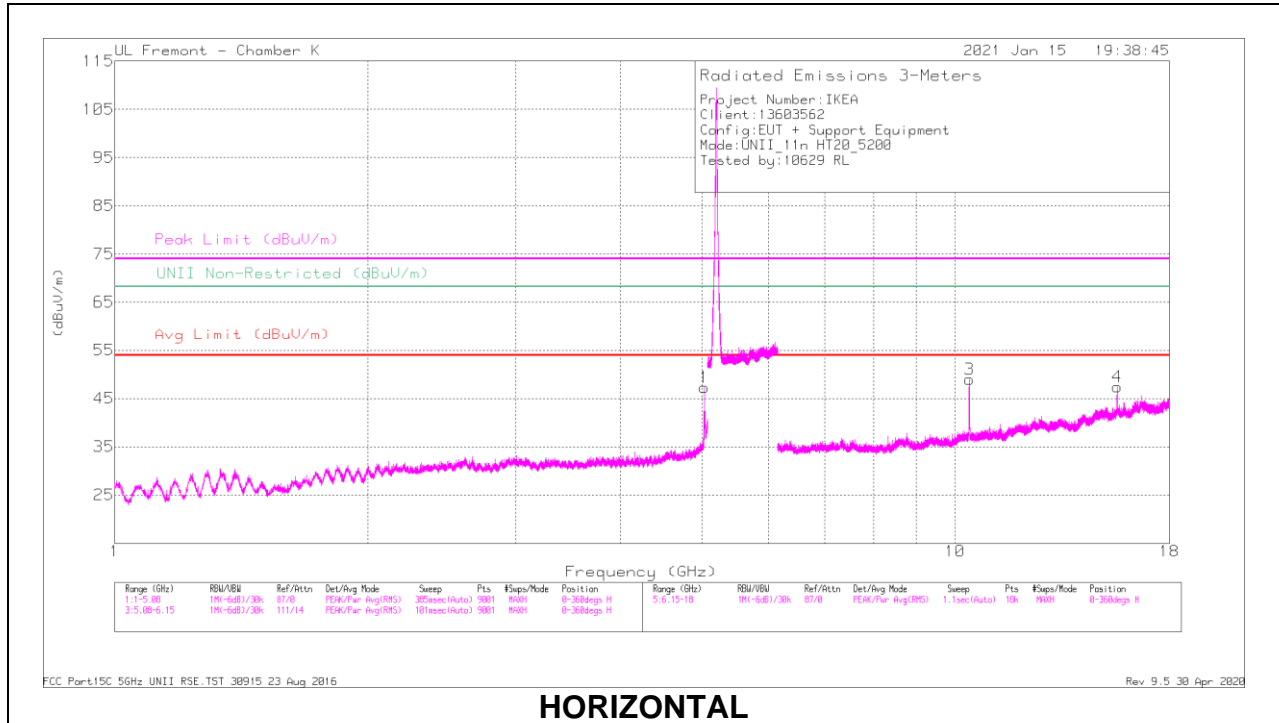

HORIZONTAL

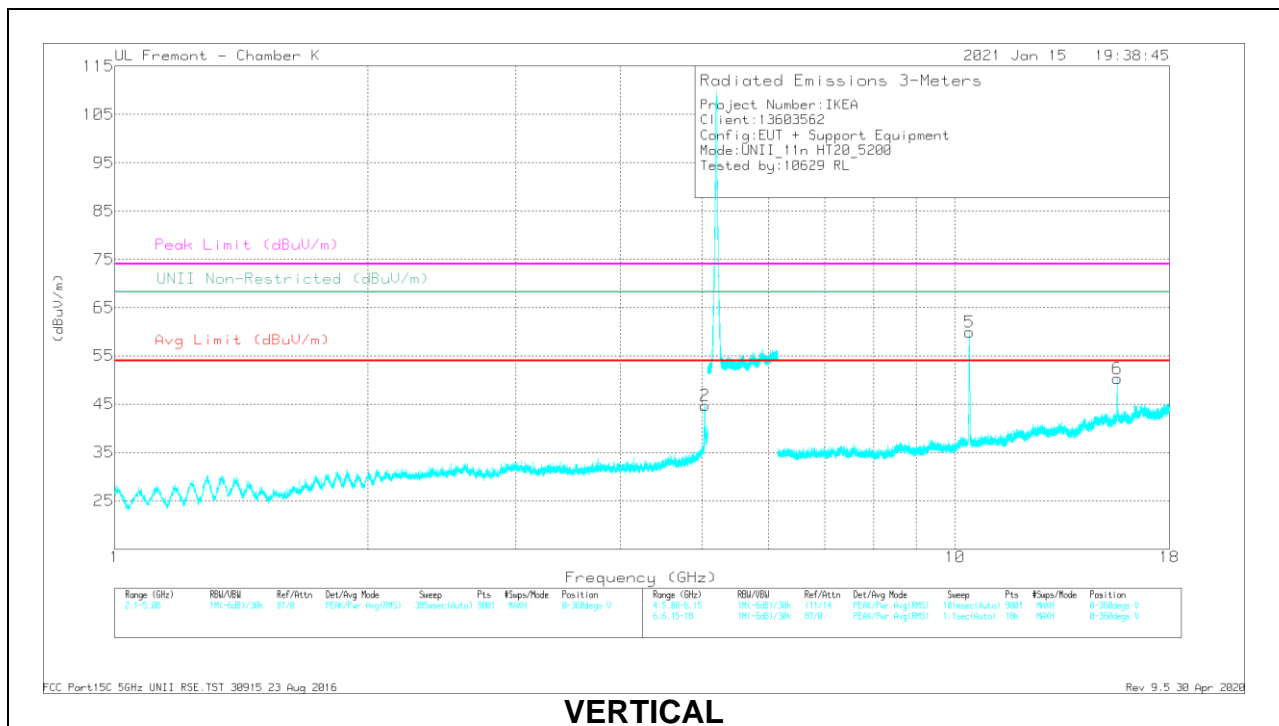


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T663 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.03612	63.29	PK-U	34.3	-38.9	58.69	-	-	74	-15.31	-	-	144	210	H
* 5.03618	45.59	ADR	34.3	-38.9	40.99	54	-13.01	-	-	-	-	144	210	H
* 5.03488	64.52	PK-U	34.4	-38.9	60.02	-	-	74	-13.98	-	-	105	111	V
* 5.03468	47.37	ADR	34.4	-38.9	42.77	54	-11.23	-	-	-	-	105	111	V
10.40428	59.4	PK-U	37.7	-37.2	59.9	-	-	-	-	68.2	-8.3	10	102	H
* 15.60089	50.26	PK-U	40.9	-33.5	57.66	-	-	74	-16.34	-	-	47	95	H
* 15.59596	38.63	ADR	40.9	-33.5	46.03	54	-7.97	-	-	-	-	47	95	H
* 15.60645	51.98	PK-U	40.9	-33.6	59.28	-	-	74	-14.72	-	-	217	276	V
* 15.60387	40.22	ADR	40.9	-33.6	47.52	54	-6.48	-	-	-	-	217	276	V
10.40377	67.61	PK-U	37.7	-37.2	68.11	-	-	-	-	68.2	-09	330	99	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

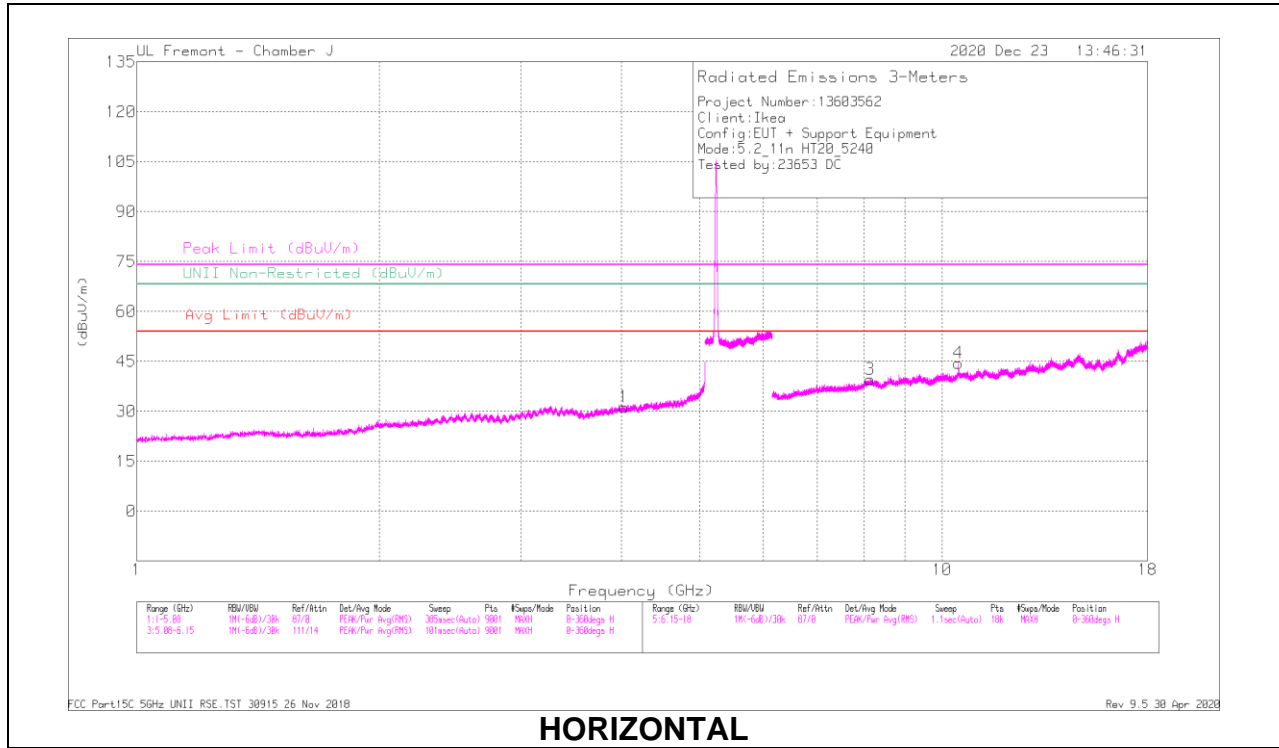

HORIZONTAL

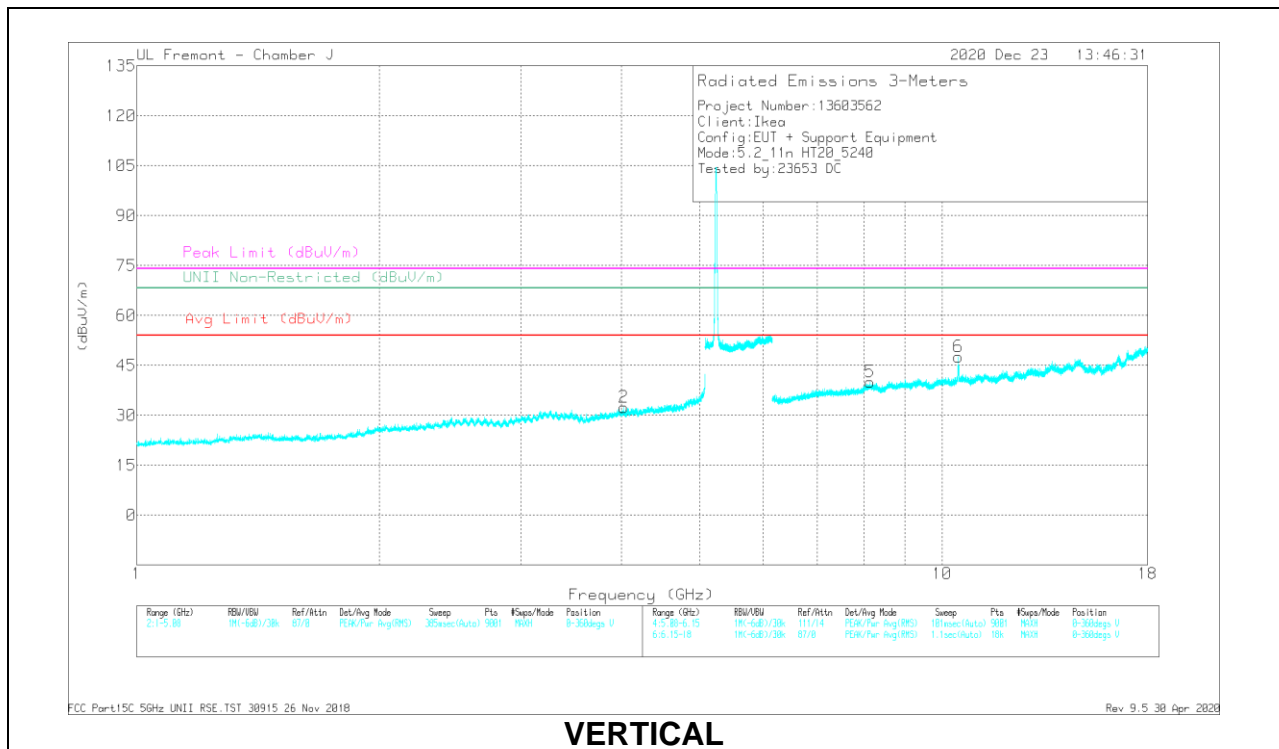

VERTICAL

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T963 (dB/m)	Amp/Cb/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.02739	38.75	PK-U	31.6	-31.7	38.65	-	-	74	-35.35	-	-	130	168	H
* 4.02551	28.55	ADR	31.7	-31.7	28.55	54	-25.45	-	-	-	-	130	168	H
* 4.02864	39.19	PK-U	31.7	-31.7	39.19	-	-	74	-34.81	-	-	223	228	V
* 4.0244	28.39	ADR	31.7	-31.7	28.39	54	-25.61	-	-	-	-	223	228	V
* 8.13574	35.83	PK-U	37.6	-26.4	47.03	-	-	74	-26.97	-	-	305	114	H
* 8.13447	24.67	ADR	37.6	-26.4	36.87	54	-18.13	-	-	-	-	305	114	H
10.48403	38.64	PK-U	39.6	-24.3	53.94	-	-	-	-	68.2	-14.26	305	111	H
* 8.13878	35.33	PK-U	37.6	-26.3	46.63	-	-	74	-27.37	-	-	245	231	V
* 8.138	24.91	ADR	37.6	-26.4	36.11	54	-17.89	-	-	-	-	245	231	V
10.47902	43.44	PK-U	39.5	-24.3	58.64	-	-	-	-	68.2	-9.56	199	186	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

11.1.3. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

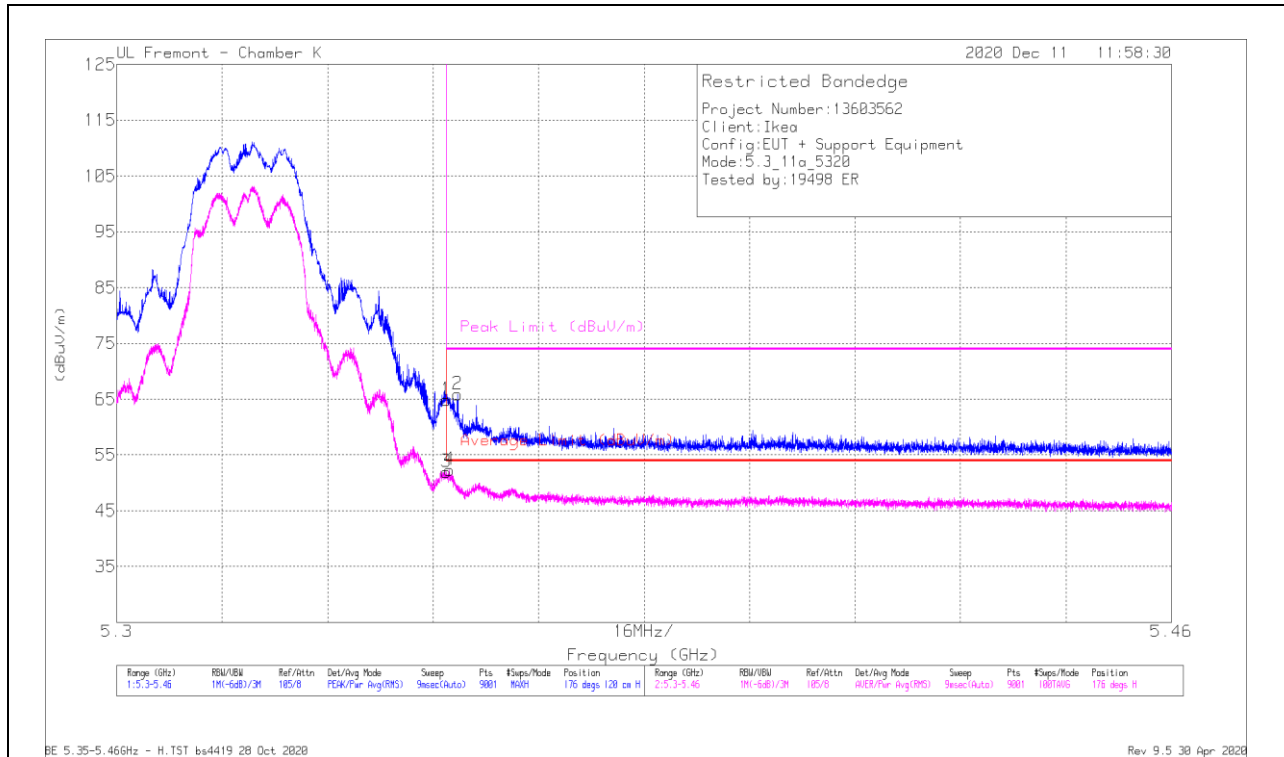

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CD/Freq/Psd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	36.93	Pk	35.2	-7.2	0	64.93	-	-	74	-9.07	176	120	H
2	* 5.35172	37.86	Pk	35.2	-7.2	0	65.86	-	-	74	-8.14	176	120	H
3	* 5.35001	23.38	RMS	35.2	-7.2	.61	51.99	54	-2.01	-	-	176	120	H
4	* 5.35045	23.66	RMS	35.2	-7.2	.61	52.27	54	-1.73	-	-	176	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

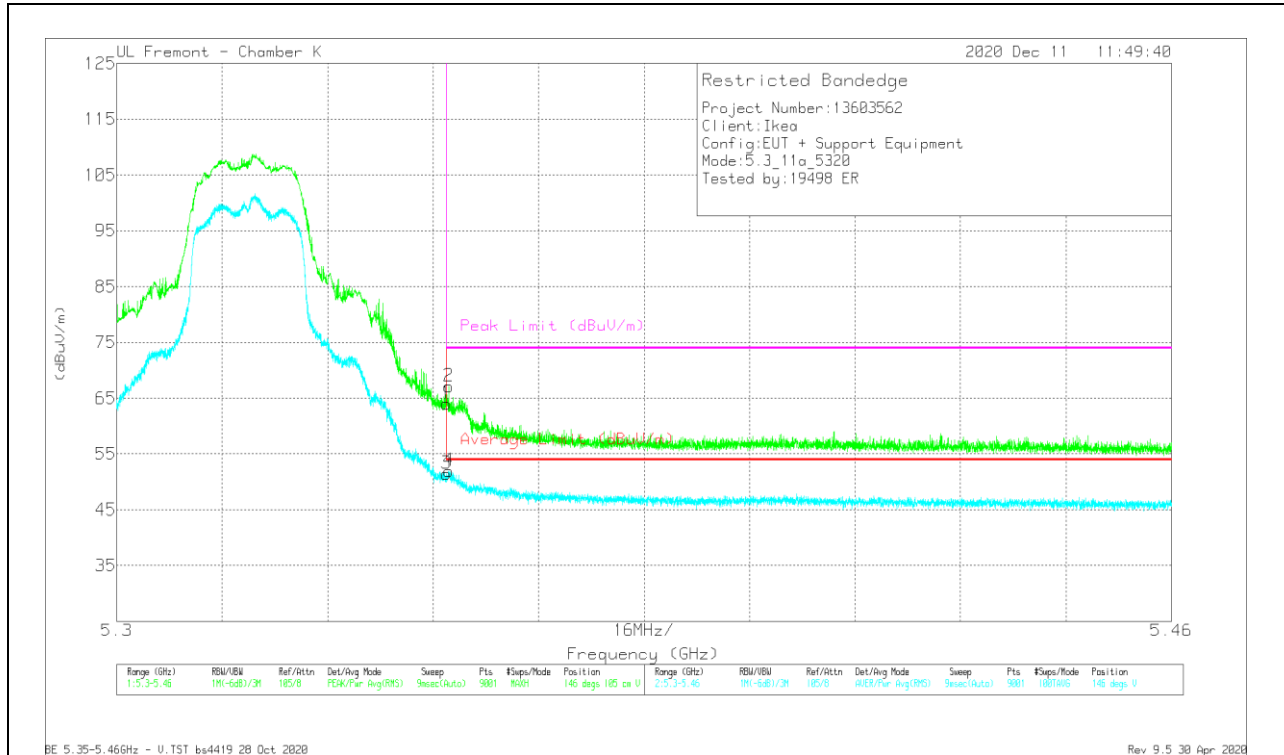

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dB/m)	Amp/Cal/Fix/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	35.36	Pk	35.2	-7.2	0	33.36	-	-	74	-10.04	146	105	V
2	* 5.35037	39.07	Pk	35.2	-7.2	0	67.07	-	-	74	-6.93	146	105	V
3	* 5.35001	22.82	RMS	35.2	-7.2	.61	51.43	54	-2.57	-	-	146	105	V
4	* 5.35042	23.36	RMS	35.2	-7.2	.61	51.97	54	-2.03	-	-	146	105	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

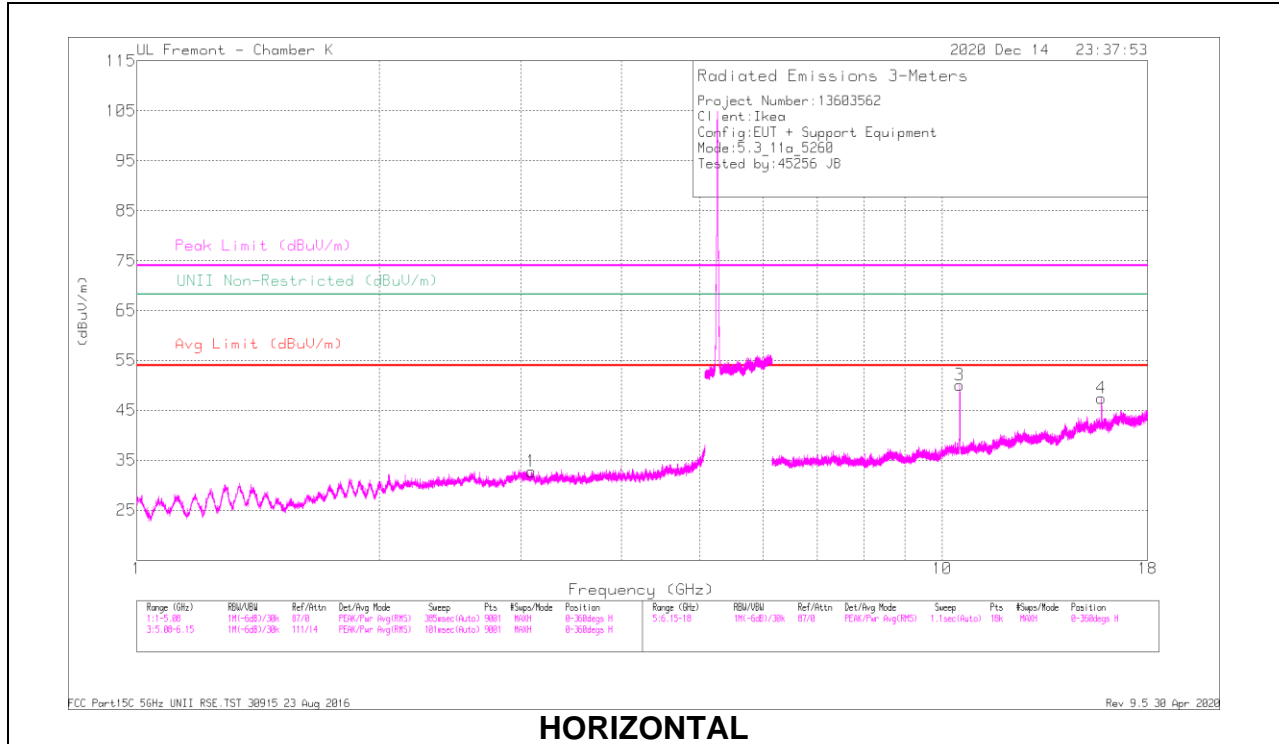

HORIZONTAL

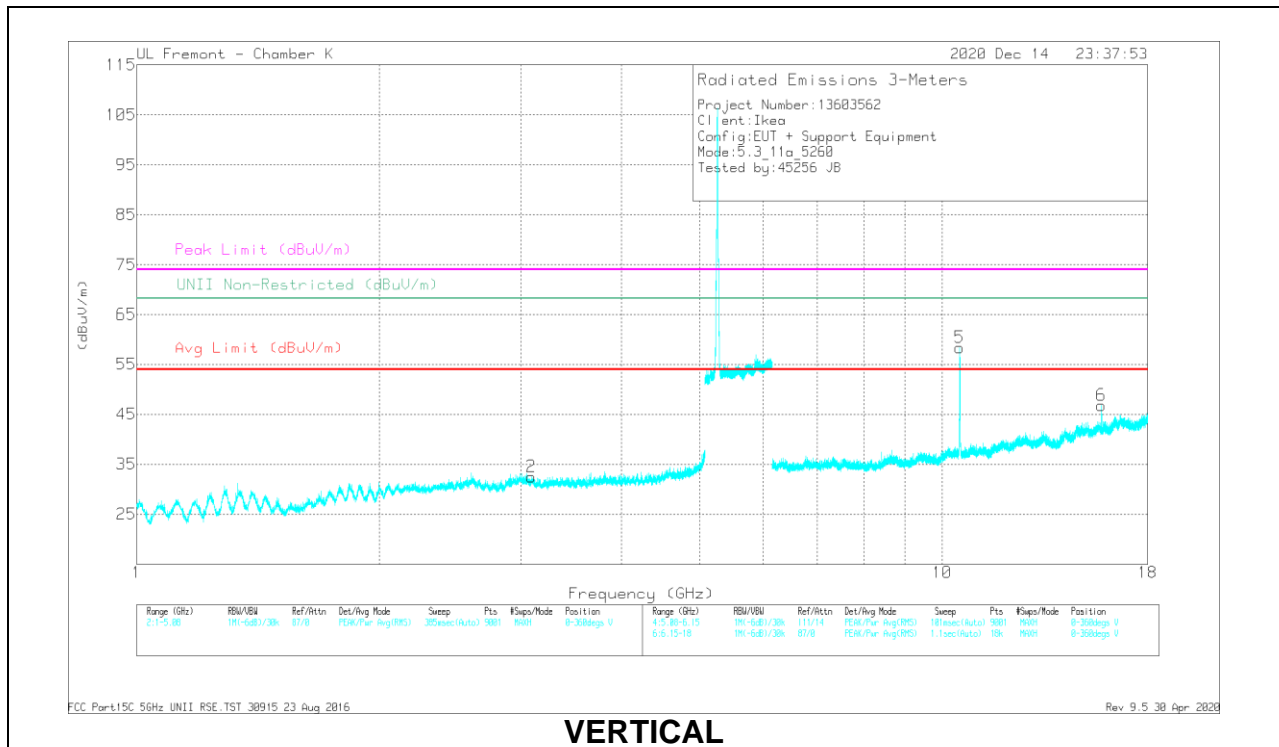


VERTICAL

RADIATED EMISSIONS


Frequency (MHz)	Meas Reading (dBµV)	Det	AF Tilt (dB)	Amp/Cat/Pwr/Fed (dB)	DC Corr (dB)	Corrected Reading (dBµV)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNEI Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
3.09057	49.83	PK-U	33.3	-42.3	0	40.83	-	-	-	-	68.2	-27.37	171	204	H
3.08965	49.42	PK-U	33.3	-42.3	0	40.42	-	-	-	-	68.2	-27.78	32	380	V
10.51737	45.72	PK-U	37.8	-37.4	0	46.12	-	-	-	-	68.2	-22.08	11	213	H
* 15.77983	43.71	PK-U	40.8	-34	0	50.51	-	-	74	-23.49	-	-	221	181	H
* 15.77932	32.47	ADR	40.8	-34	.61	38.88	54	-14.12	-	-	-	-	221	181	H
10.52237	45.14	PK-U	37.8	-37.4	0	45.54	-	-	-	-	68.2	-22.66	351	110	V
* 15.77938	50.03	PK-U	40.8	-34	0	56.83	-	-	74	-17.17	-	-	314	378	V
* 15.7801	36.83	ADR	40.8	-34	.61	44.24	54	-9.76	-	-	-	-	314	378	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

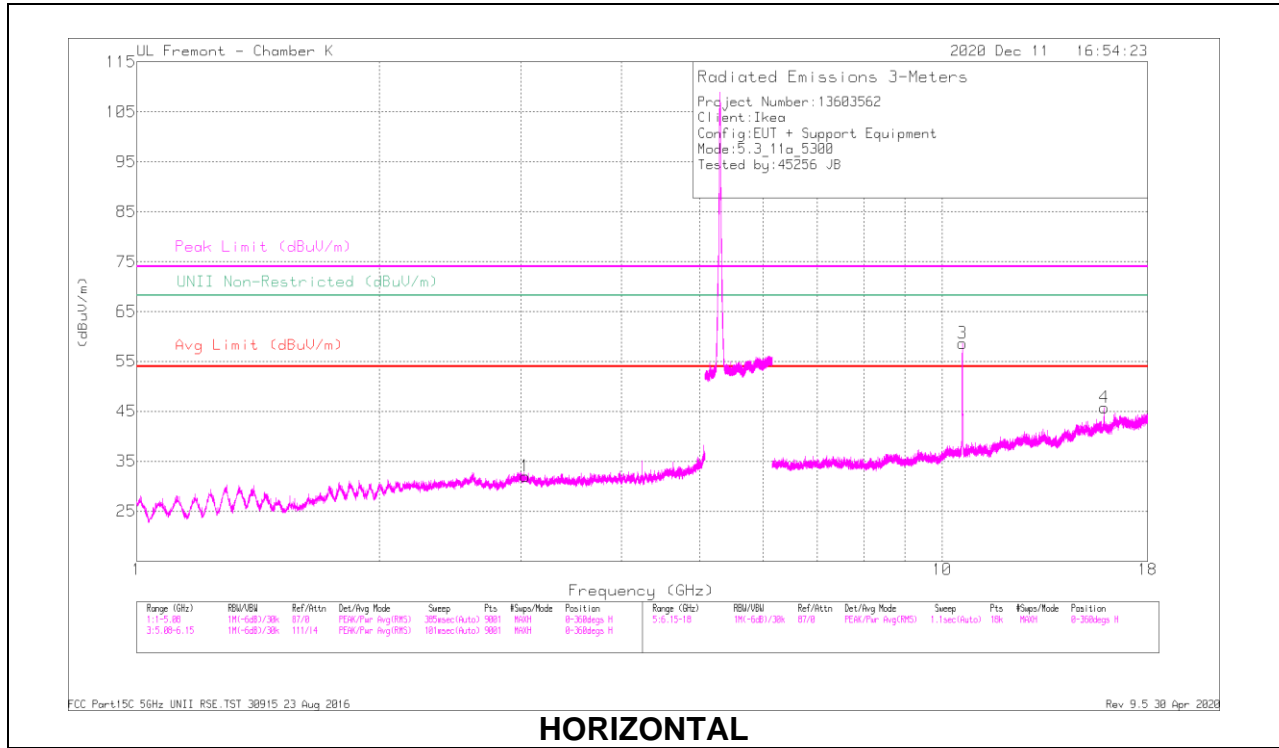

HORIZONTAL

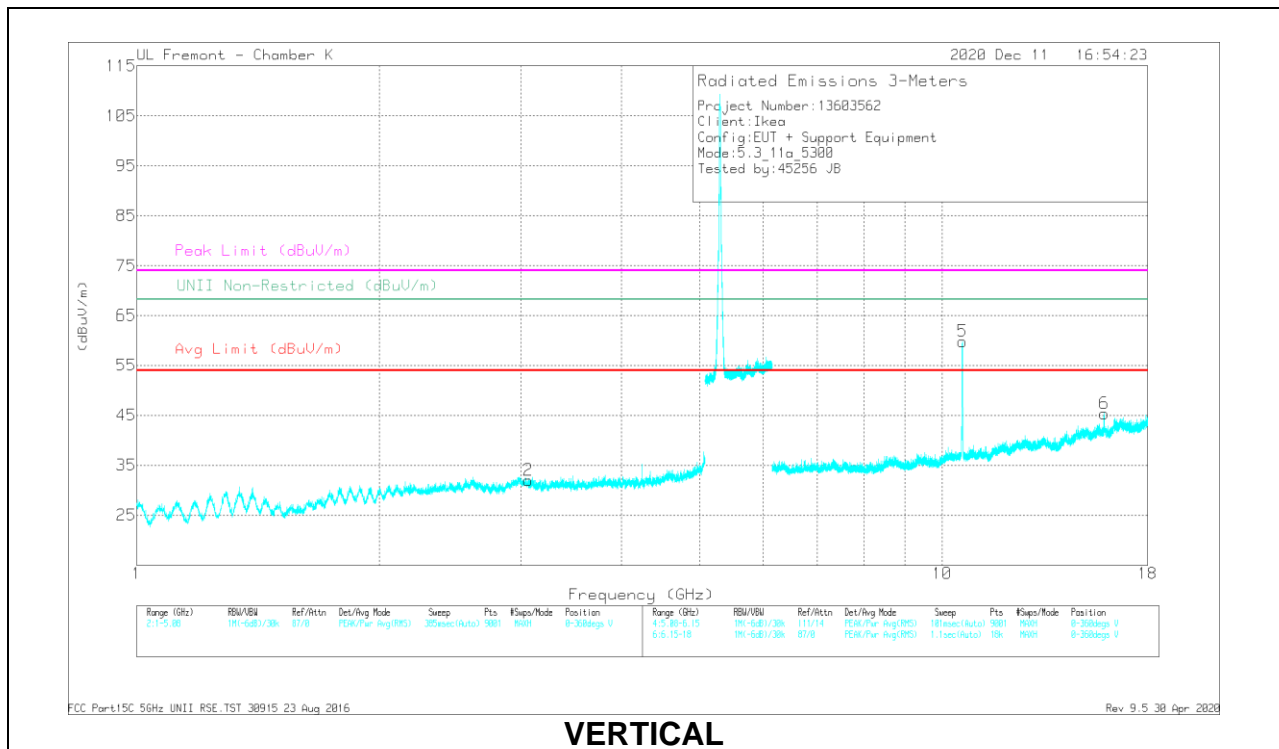


VERTICAL

RADIATED EMISSIONS


Frequency (MHz)	Meas Reading (dBµV)	Det	AF Tilt3 (dBm)	Amp/Cat/Prot/Pad (dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNI Non-Restricted (dBµV/m)	PK Margin (dB)	Altitude (Degs)	Height (m)	Polarity
3.03851	50.51	PK-U	32.9	-42.4	0	41.01	-	-	-	-	68.2	-27.19	51	123	H
3.06079	48.95	PK-U	33	-42.4	0	39.55	-	-	-	-	68.2	-28.66	7	100	V
* 15.89797	47.05	PK-U	40.9	-33.5	0	54.45	-	-	74	-19.65	-	-	45	108	H
* 15.89923	34.34	ADR	40.9	-33.5	.61	42.35	54	-11.65	-	-	-	-	45	108	H
* 10.60089	63.49	PK-U	37.9	-37.4	0	63.99	-	-	74	-10.01	-	-	60	111	H
* 10.60017	51.91	ADR	37.9	-37.4	.61	53.02	54	-98	-	-	-	-	60	111	H
* 10.60258	65.43	PK-U	38	-37.4	0	66.03	-	-	74	-7.97	-	-	262	184	V
* 10.60197	52.64	ADR	37.9	-37.4	.61	53.75	54	-25	-	-	-	-	262	184	V
* 15.90444	44.21	PK-U	41	-33.6	0	51.61	-	-	74	-22.39	-	-	344	371	V
* 15.90568	32.25	ADR	41	-33.6	.61	40.26	54	-13.74	-	-	-	-	344	371	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

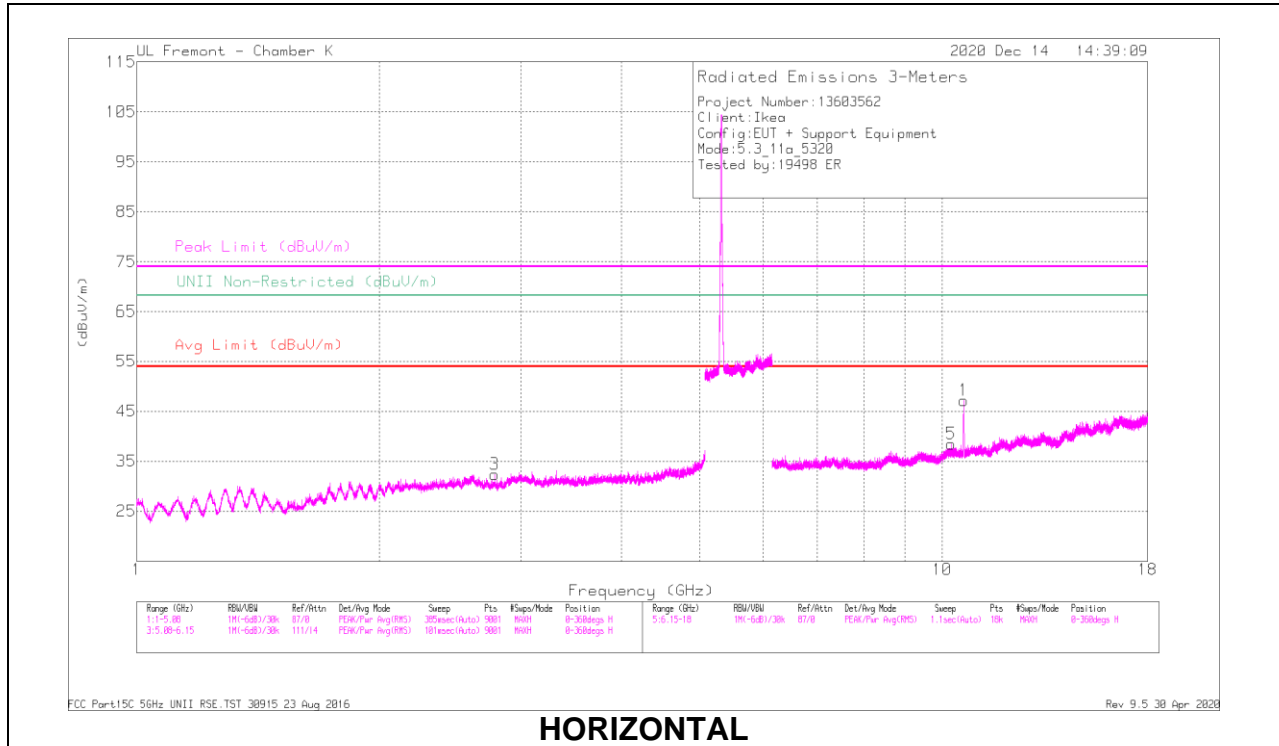

HORIZONTAL

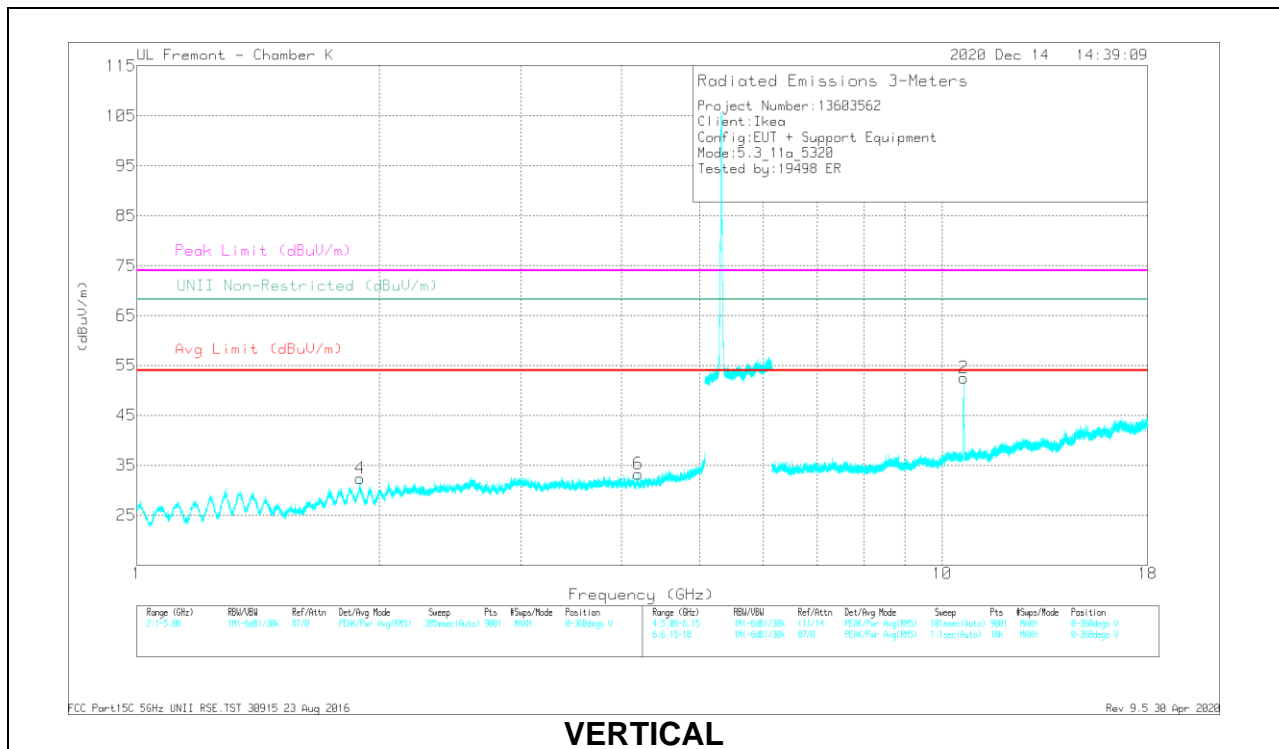

VERTICAL

RADIATED EMISSIONS

Frequency (MHz)	Meas Reading (dBuV)	Det	AF Tm3 (dBm)	Amp/Cat/Pwr/Fed (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNI Non-Restricted (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (m)	Polarity
* 2.77598	51.48	PK-U	32.5	-43.6	0	40.38	-	-	74	-33.62	-	-	102	173	H
* 2.77247	40.19	ADR	32.5	-43.6	.61	29.7	54	-24.3	-	-	-	-	102	173	H
* 4.18824	49.59	PK-U	33.6	-41.7	0	41.49	-	-	74	-32.51	-	-	91	289	V
* 4.18587	38.17	ADR	33.6	-41.7	.61	30.68	54	-23.32	-	-	-	-	91	289	V
1.89139	55.19	PK-U	31	-45.7	0	40.48	-	-	-	-	68.2	-27.72	308	277	V
* 10.64107	55.58	PK-U	38	-37.2	0	56.38	-	-	74	-17.62	-	-	35	229	H
* 10.63843	44.07	ADR	38	-37.2	.61	45.48	54	-8.52	-	-	-	-	35	229	H
10.27029	46.58	PK-U	37.5	-37.1	0	46.58	-	-	-	-	68.2	-21.22	180	337	H
* 10.63746	61.25	PK-U	38	-37.2	0	62.65	-	-	74	-11.95	-	-	74	221	V
* 10.63655	50.21	ADR	38	-37.2	.61	51.62	54	-2.38	-	-	-	-	74	221	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

11.1.4. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

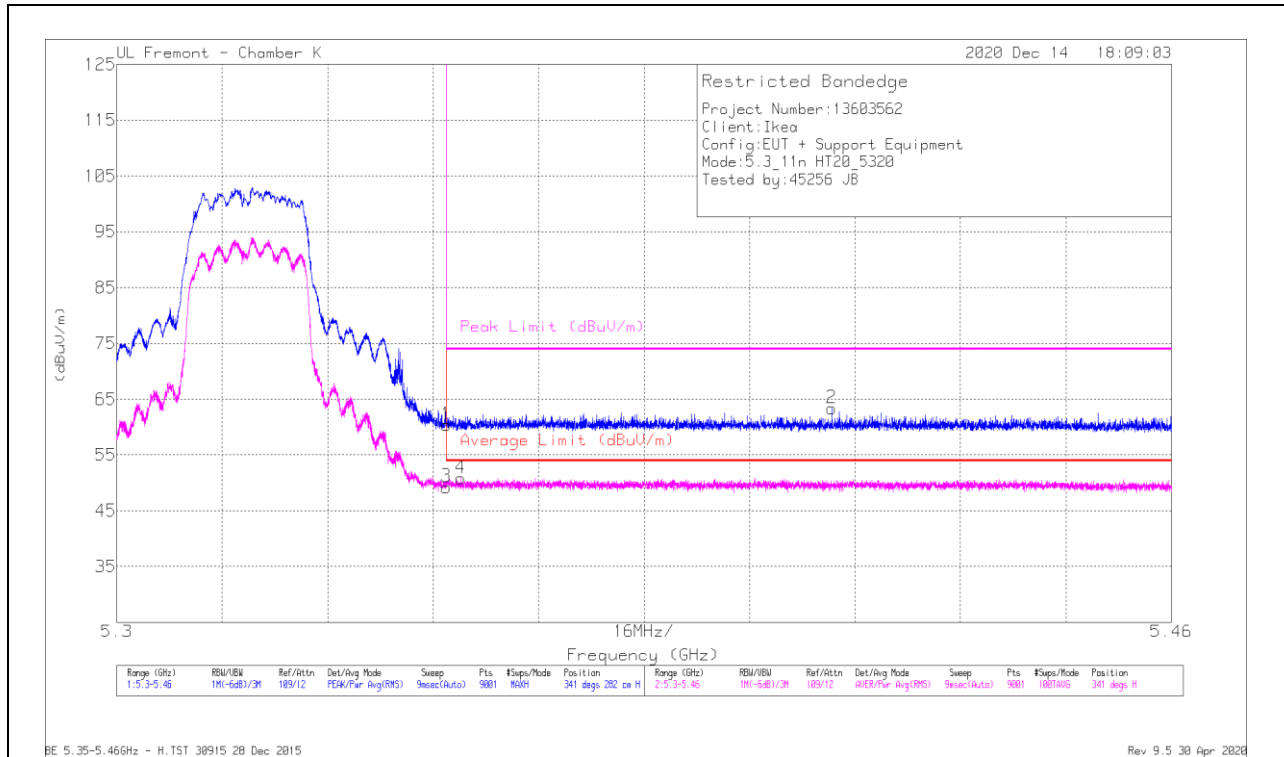

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T83 (dB/m)	Amp/CD/FR/Psd (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	32.43	Pk	35.2	-7.2	0	60.43	-	-	74	-13.57	341	282	H
2	* 5.40845	35.33	Pk	35.4	-7.4	0	63.33	-	-	74	-10.67	341	282	H
3	* 5.35001	21.28	RMS	35.2	-7.2	0	49.28	54	-4.72	-	-	341	282	H
4	* 5.35221	22.8	RMS	35.2	-7.2	0	50.8	54	-3.2	-	-	341	282	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

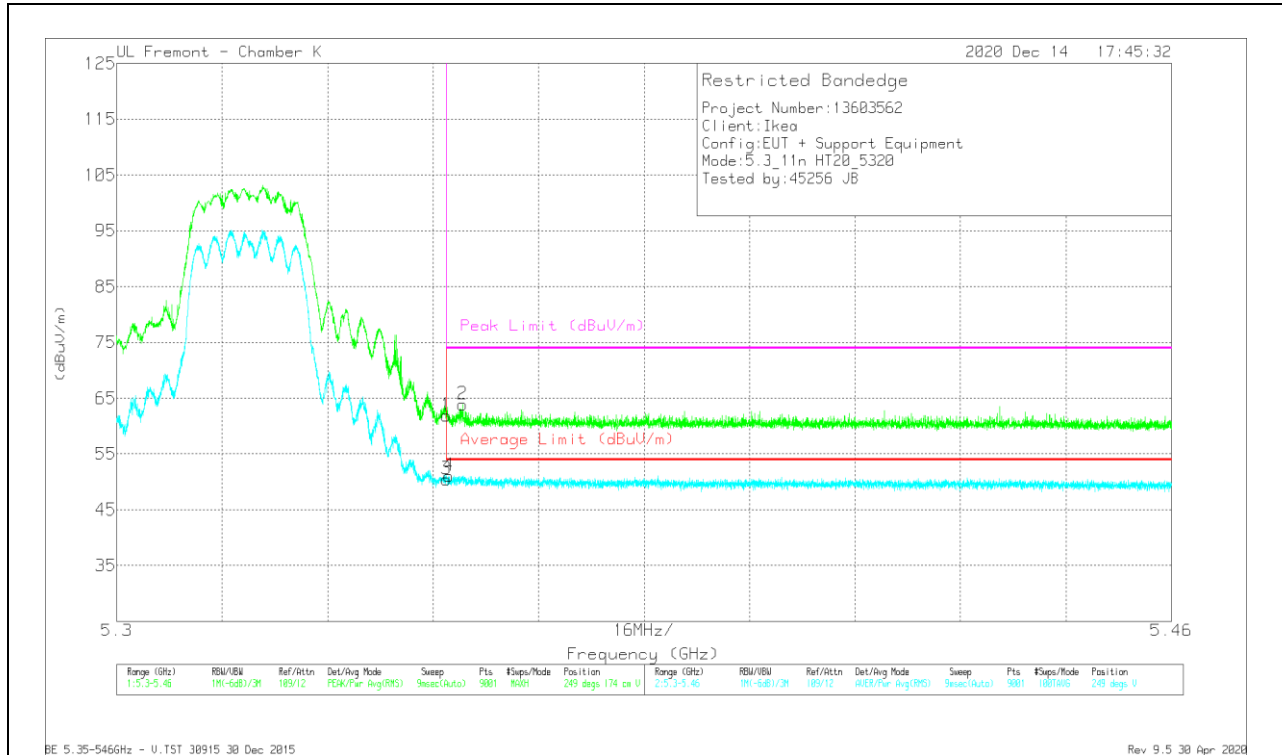

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dB/m)	Amp/Cal/Fix/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	33.85	PK	35.2	-7.2	0	61.85	-	-	74	-12.15	249	174	V
2	* 5.3525	35.86	PK	35.2	-7.2	0	63.86	-	-	74	-10.14	249	174	V
3	* 5.35001	22.48	RMS	35.2	-7.2	0	50.48	54	-3.52	-	-	249	174	V
4	* 5.35038	23.14	RMS	35.2	-7.2	0	51.14	54	-2.86	-	-	249	174	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

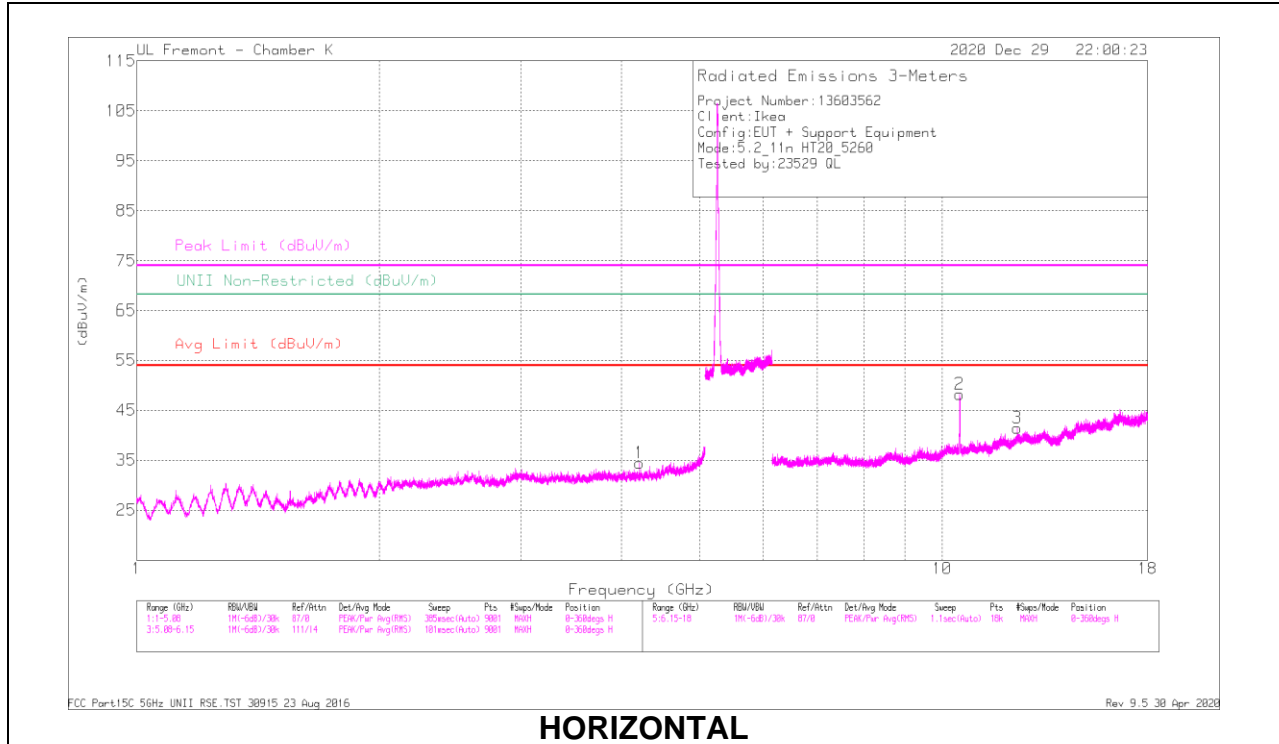

HORIZONTAL

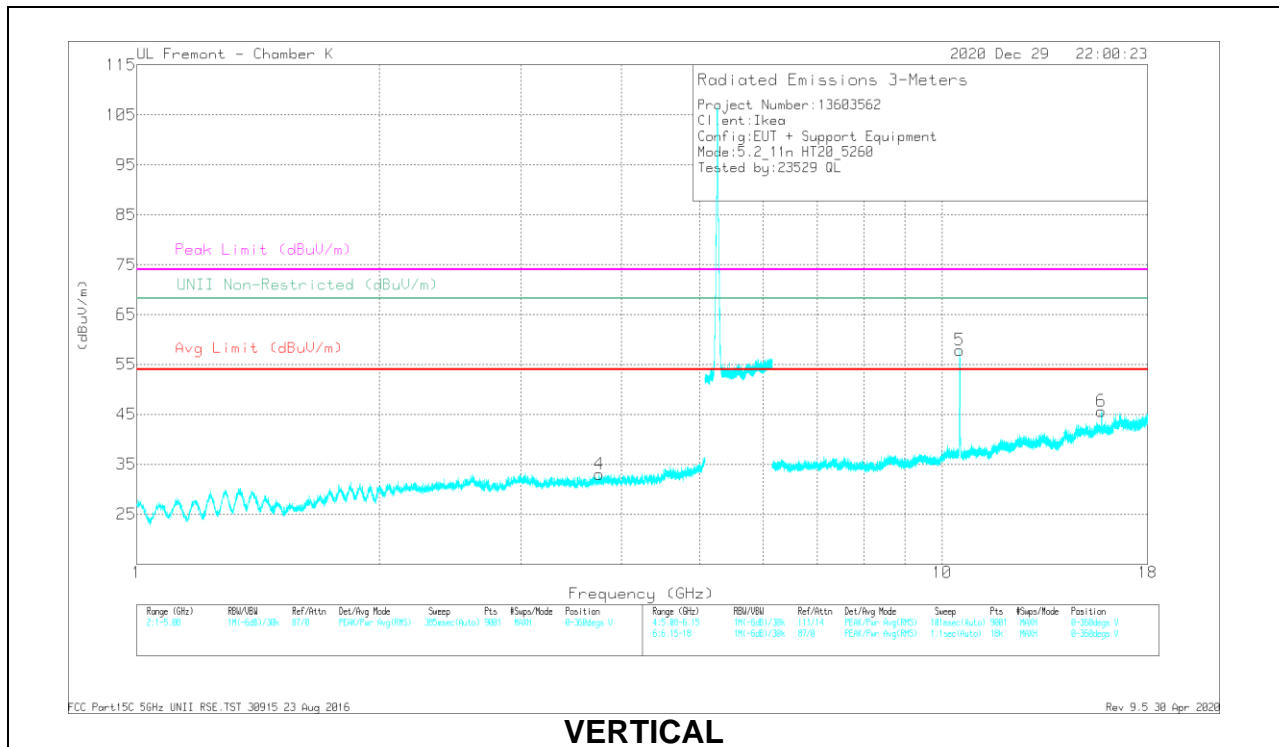


VERTICAL

RADIATED EMISSIONS


Frequency (GHz)	Meas Reading (dBuV)	Det	AF T663 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.20986	47.65	PK-U	33.6	-41.7	39.55	-	-	74	-34.45	-	-	27	206	H
* 4.20774	36.82	ADR	33.6	-41.7	28.72	54	-25.28	-	-	-	-	27	206	H
* 3.75228	49.01	PK-U	33.7	-42.1	40.61	-	-	74	-33.39	-	-	184	113	V
* 3.75009	37.55	ADR	33.7	-42	29.25	54	-24.75	-	-	-	-	184	113	V
10.5191	58.77	PK-U	37.8	-37.4	59.17	-	-	-	-	68.2	-9.03	341	175	H
* 12.4075	43.85	PK-U	39.4	-34.6	48.65	-	-	74	-25.35	-	-	215	298	H
* 12.40695	32.25	ADR	39.3	-34.6	36.95	54	-17.05	-	-	-	-	215	298	H
10.51884	66.7	PK-U	37.8	-37.4	67.1	-	-	-	-	68.2	-1.1	352	100	V
* 15.78126	50.49	PK-U	40.9	-34	57.39	-	-	74	-16.61	-	-	201	203	V
* 15.78094	38.71	ADR	40.9	-34	45.61	54	-8.39	-	-	-	-	201	203	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

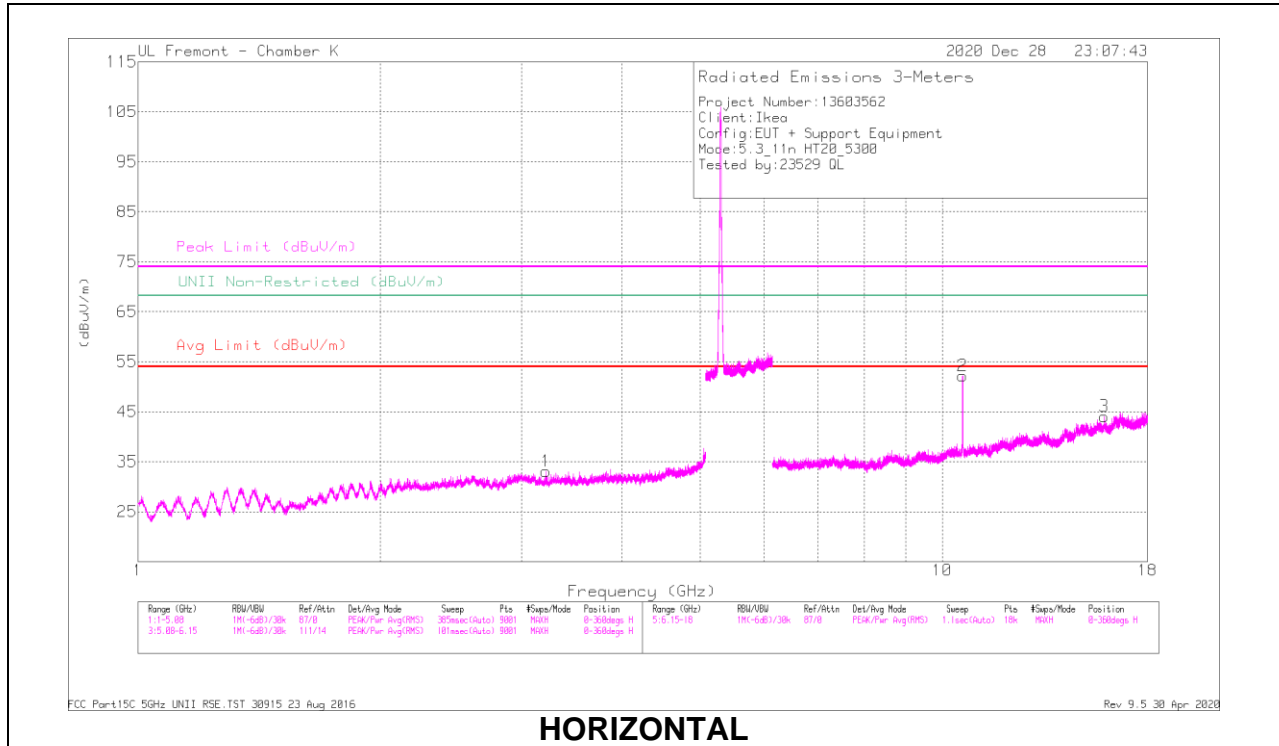

HORIZONTAL

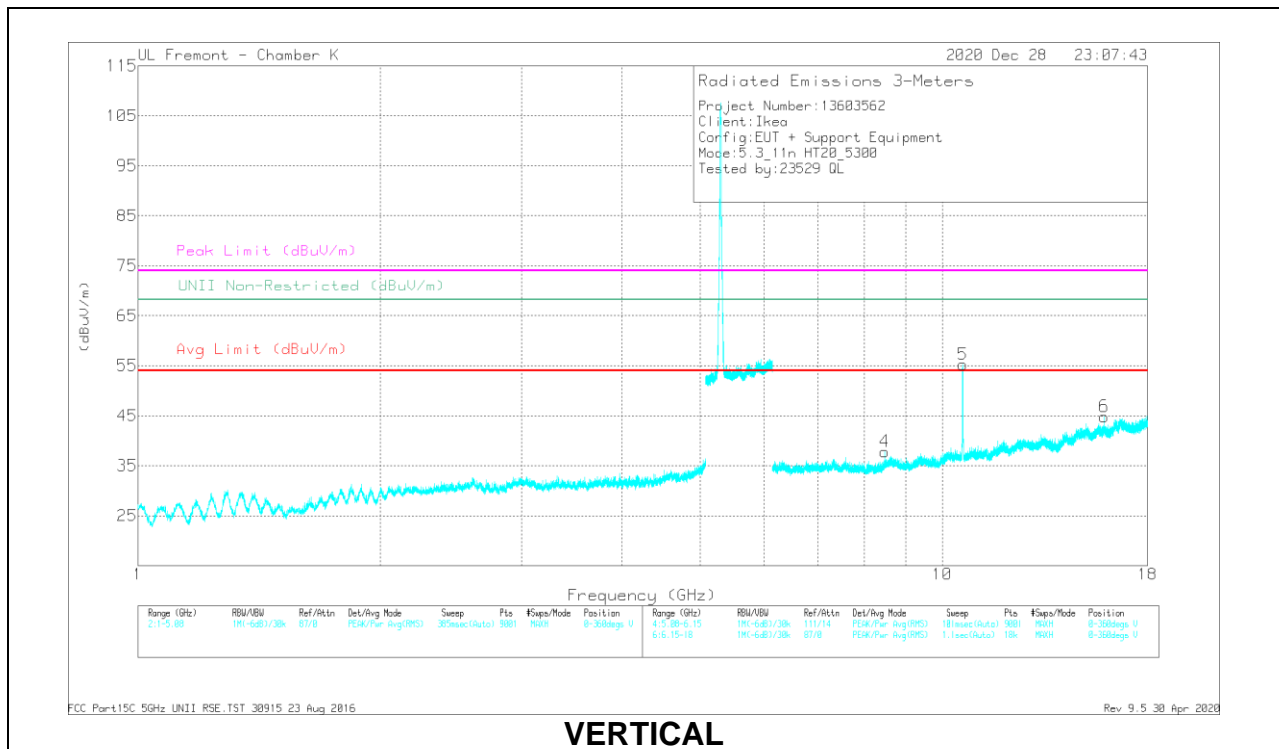


VERTICAL

RADIATED EMISSIONS


Frequency (MHz)	Meas Reading (dBµV)	Det	AF Tilt3 (dBm)	Amp/Cat/Pwr/Fed (dB)	DC Corr (dB)	Corrected Reading (dBµV/m)	Avg Limit (dBµV/m)	Margin (dB)	Peak Limit (dBµV/m)	PK Margin (dB)	UNE Non-Restricted (dBµV/m)	PK Margin (dB)	Azimuth (Degs)	Height (m)	Polarity
3.21341	48.04	PK-U	33.2	-42	0	39.24	-	-	-	-	68.2	-28.96	252	148	H
* 10.60014	64.98	PK-U	37.9	-37.4	0	65.48	-	-	74	-8.52	-	-	82	205	H
* 10.60018	52.99	ADR	37.9	-37.4	0	53.49	54	-51	-	-	-	-	82	205	H
* 15.90699	47.17	PK-U	41	-33.6	0	54.57	-	-	74	-19.43	-	-	310	204	H
* 15.90964	35.78	ADR	40.9	-33.5	0	43.18	54	-10.82	-	-	-	-	310	204	H
* 15.95229	46.26	PK-U	40.9	-33.5	0	53.66	-	-	74	-20.34	-	-	333	386	V
* 15.8561	33.36	ADR	40.9	-33.5	0	40.76	54	-13.24	-	-	-	-	333	386	V
* 10.60128	64.76	PK-U	37.9	-37.4	0	65.26	-	-	74	-8.74	-	-	155	126	V
* 10.60137	52.51	ADR	37.9	-37.4	0	53.01	54	-99	-	-	-	-	155	126	V
* 8.48038	44.51	PK-U	36.1	-37.2	0	43.41	-	-	74	-30.59	-	-	351	185	V
* 8.48009	34.4	ADR	36.1	-37.2	0	33.3	54	-20.7	-	-	-	-	351	185	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

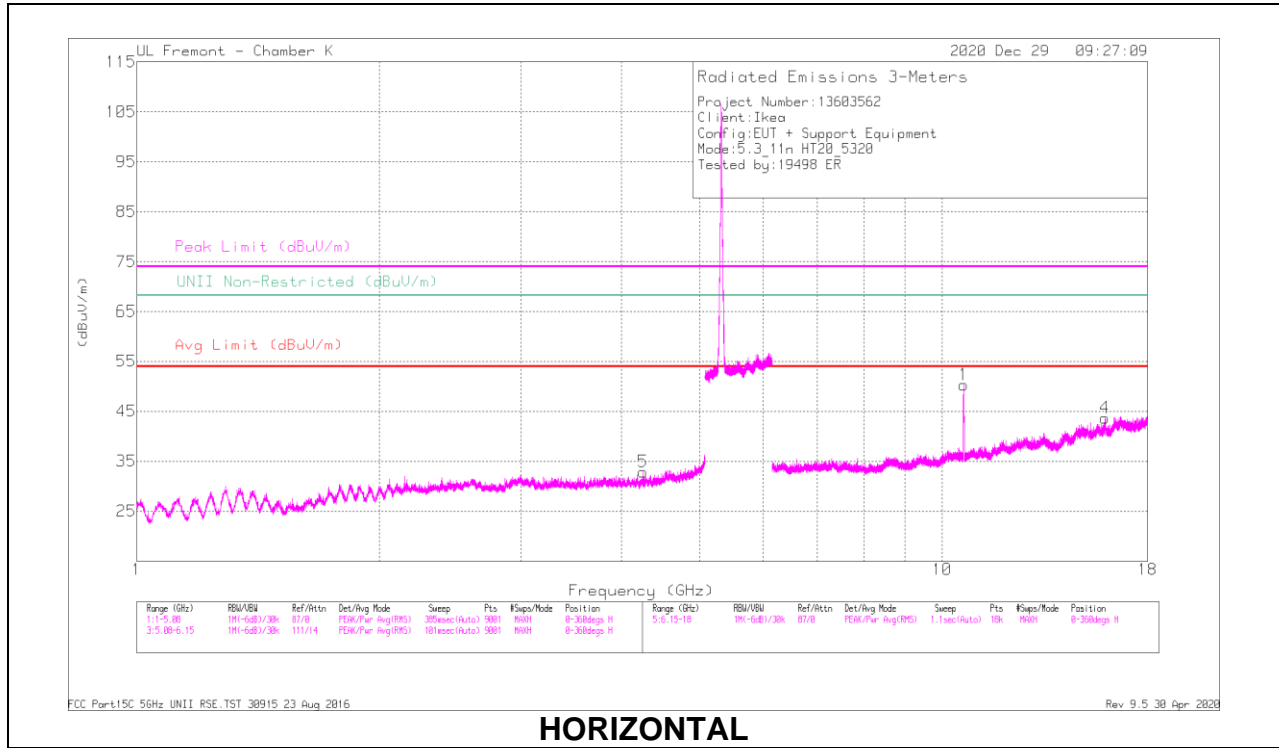

HORIZONTAL

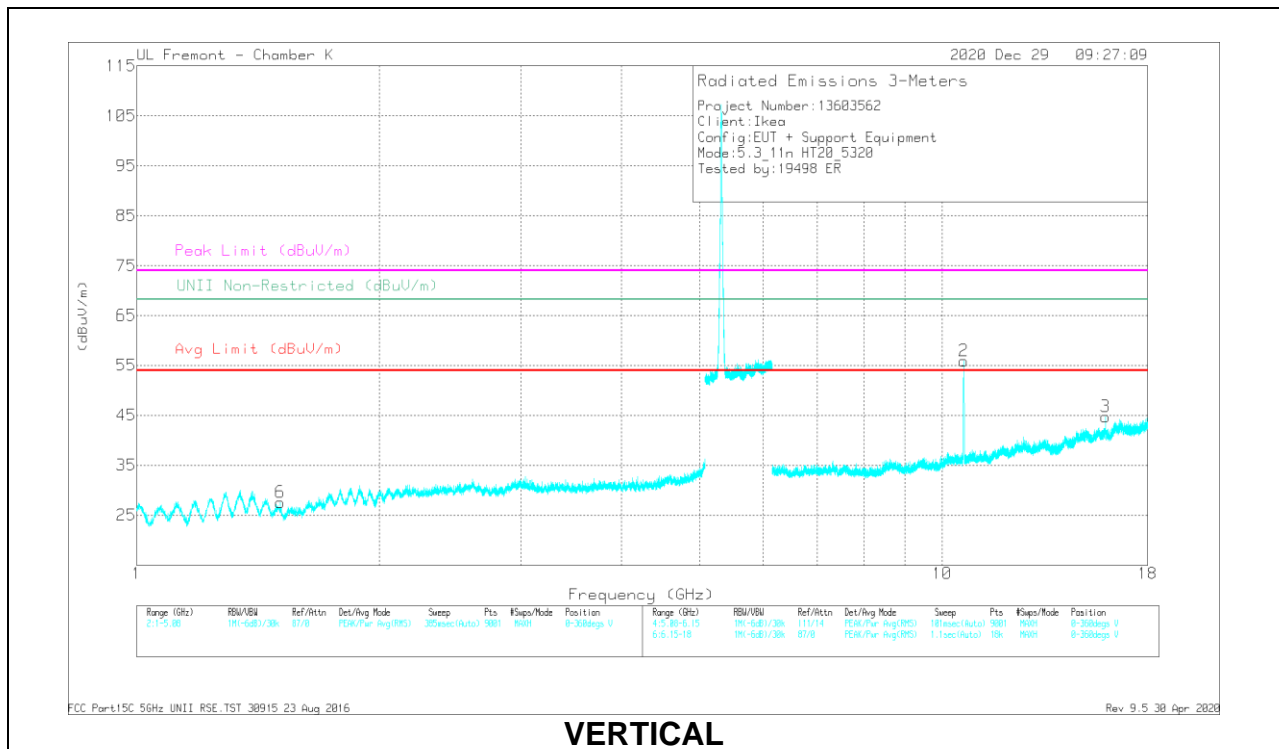

VERTICAL

RADIATED EMISSIONS

Frequency (GHz)	Meas Reading (dBuV)	Det	AF T663 (dBm)	Amp/Cab/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.25604	50.08	PK-U	33.5	-41.8	41.78	-	-	74	-32.22	-	-	329	112	H
* 4.25591	39.76	ADR	33.5	-41.8	31.46	54	-22.54	-	-	-	-	329	112	H
* 1.50769	33.5	PK-U	27.6	-46.1	35	-	-	74	-39	-	-	128	103	V
* 1.50857	41.99	ADR	27.6	-46.1	23.49	54	-30.51	-	-	-	-	128	103	V
* 10.64004	61.69	PK-U	38	-37.2	62.49	-	-	74	-11.51	-	-	23	237	H
* 10.63709	49.66	ADR	38	-37.2	50.46	54	-3.54	-	-	-	-	23	237	H
* 15.93924	43.71	PK-U	40.9	-33.4	51.21	-	-	74	-22.79	-	-	131	382	H
* 15.94412	32.72	ADR	40.9	-33.4	40.32	54	-13.68	-	-	-	-	131	382	H
* 10.63795	64.4	PK-U	38	-37.2	65.2	-	-	74	-8.8	-	-	77	279	V
* 10.63847	51.98	ADR	38	-37.2	52.78	54	-1.22	-	-	-	-	77	279	V
* 15.96346	46.73	PK-U	41	-33.4	54.33	-	-	74	-19.67	-	-	265	208	V
* 15.95882	35.35	ADR	41	-33.4	43.05	54	-10.95	-	-	-	-	265	208	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

11.1.5. TX ABOVE 1 GHz 802.11a MODE IN THE 5.6 GHz BAND

2TX Antenna 1 + Antenna 2 CDD MODE

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

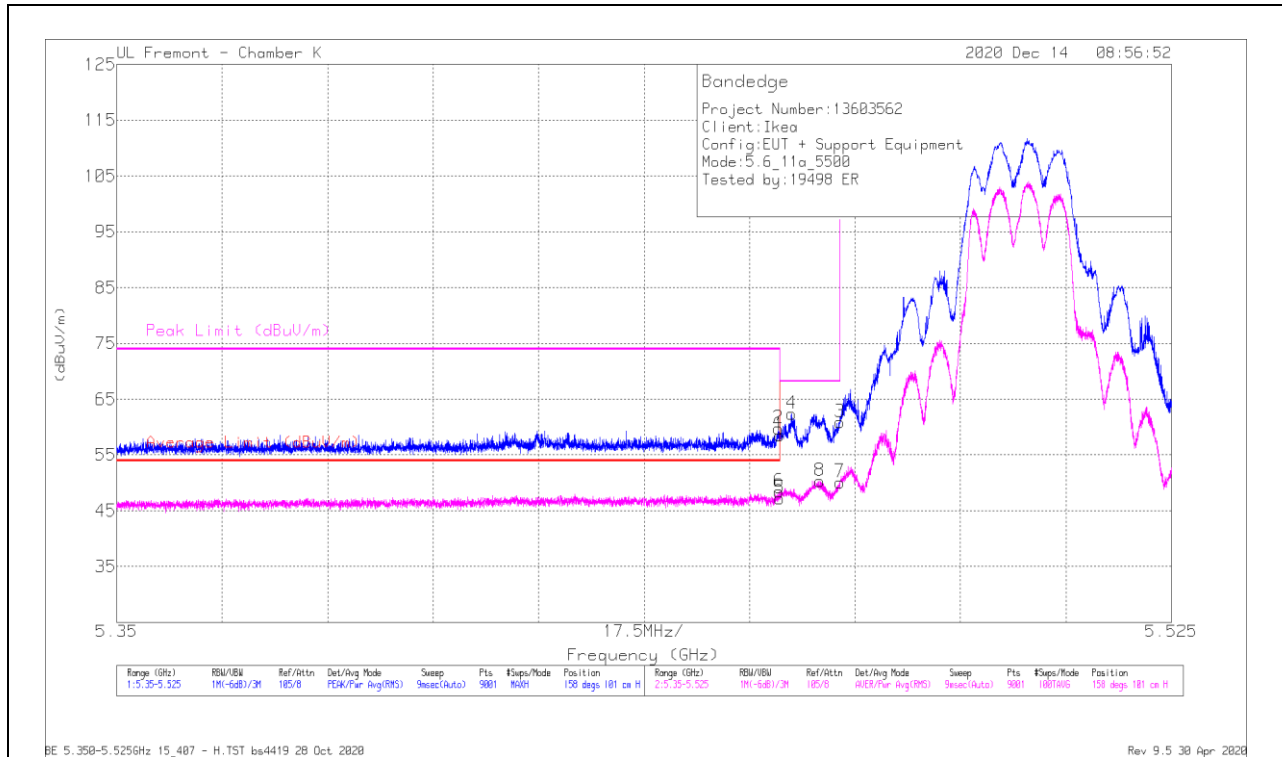


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/CD/FR/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	30.33	Pk	35.6	-7.4	0	58.53	-	-	74	-15.47	158	101	H
2	* 5.45982	31.57	Pk	35.6	-7.4	0	59.77	-	-	74	-14.23	158	101	H
3	5.46999	32.59	Pk	35.7	-7.4	0	60.89	-	-	68.2	-7.31	158	101	H
4	5.46194	34.25	Pk	35.6	-7.4	0	62.45	-	-	68.2	-5.75	158	101	H
5	* 5.45999	18.47	RMS	35.6	-7.4	.61	47.28	54	-6.72	-	-	158	101	H
6	* 5.45994	19.67	RMS	35.6	-7.4	.61	48.48	54	-5.52	-	-	158	101	H
7	5.46999	21.24	RMS	35.7	-7.4	.61	50.15	-	-	-	-	158	101	H
8	5.4667	21.49	RMS	35.6	-7.4	.61	50.3	-	-	-	-	158	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

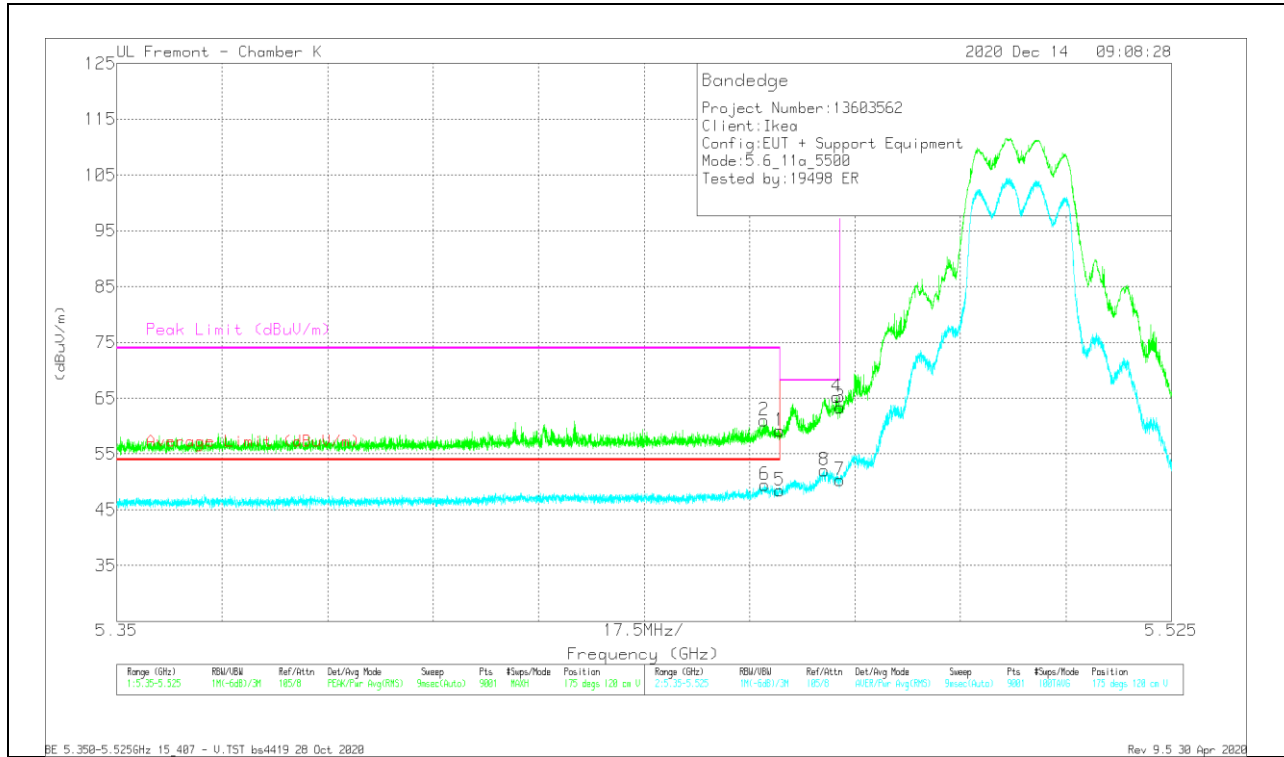


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1863 (dBm)	Amp/Cal/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.45999	30.39	Pk	35.6	-7.4	0	39.19	-	-	74	-14.81	175	120	V
2	* 5.45738	32.68	Pk	35.7	-7.4	0	40.98	-	-	74	-13.02	175	120	V
3	5.46999	35.05	Pk	35.7	-7.4	0	63.35	-	-	68.2	-4.85	175	120	V
4	5.46946	36.96	Pk	35.7	-7.4	0	65.26	-	-	68.2	-2.94	175	120	V
5	* 5.45999	19.71	RMS	35.6	-7.4	.61	48.52	54	-5.48	-	-	175	120	V
6	* 5.45756	20.54	RMS	35.7	-7.4	.61	49.45	54	-4.55	-	-	175	120	V
7	5.48999	21.42	RMS	35.7	-7.4	.61	50.33	-	-	-	-	175	120	V
8	5.46738	23.24	RMS	35.6	-7.4	.61	52.05	-	-	-	-	175	120	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

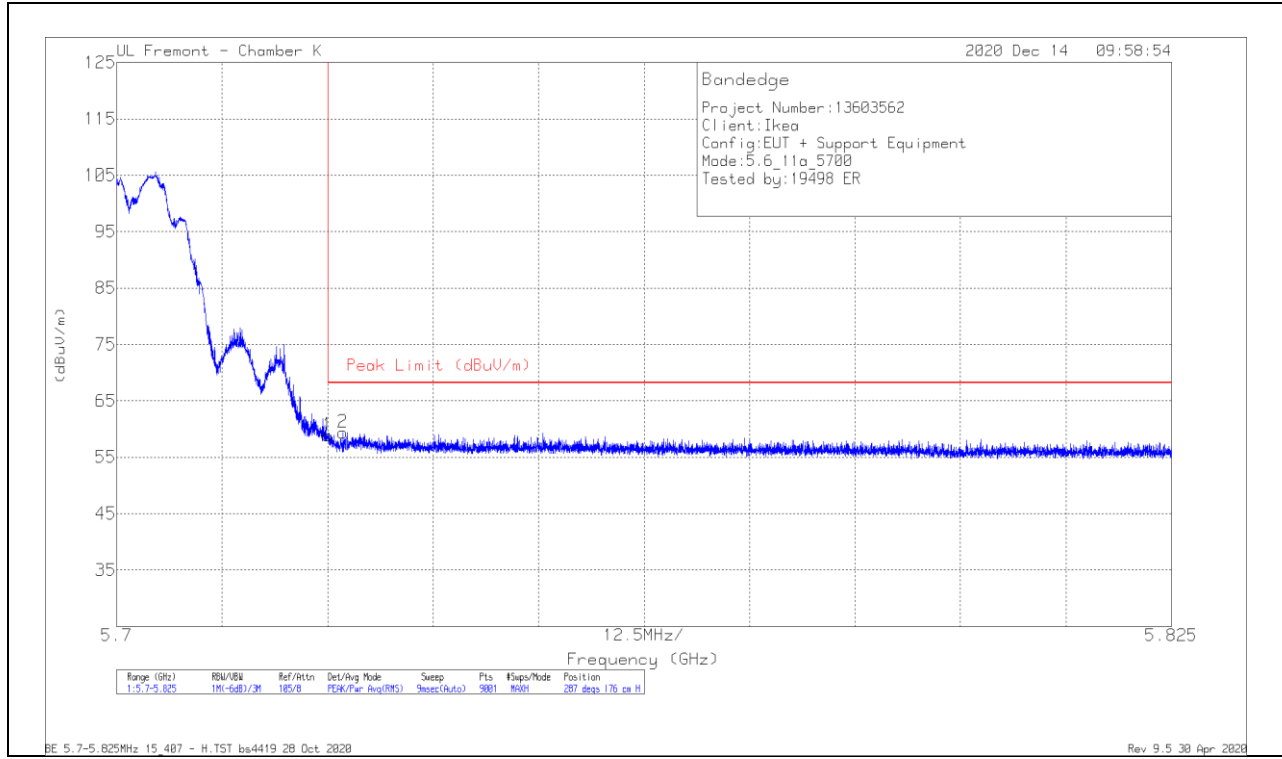

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	30.61	Pk	35.1	-6.8	58.91	68.2	-9.29	287	176	H
2	5.72682	31.11	Pk	35.1	-6.8	59.41	68.2	-8.79	287	176	H

Pk - Peak detector

VERTICAL RESULT

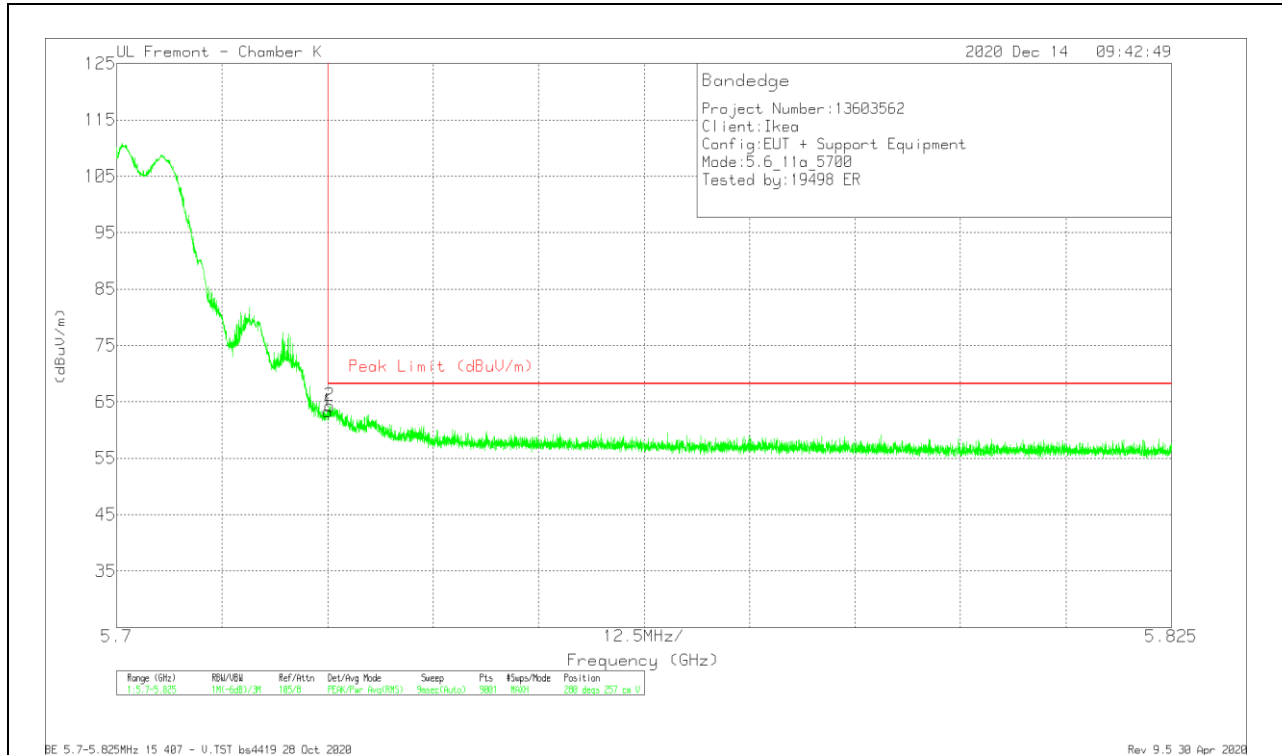


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	35.05	Pk	35.1	-6.8	63.35	68.2	-4.85	280	257	V
2	5.72525	36.04	Pk	35.1	-6.8	64.34	68.2	-3.86	280	257	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

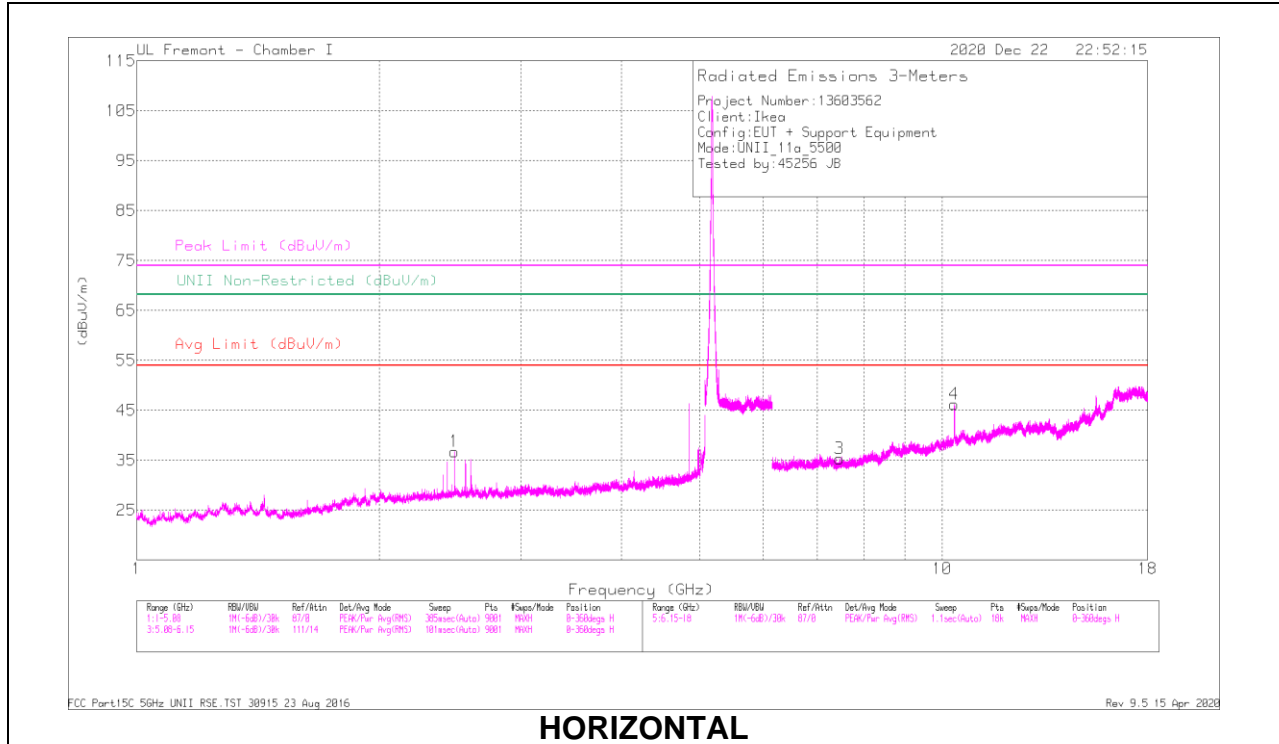

HORIZONTAL

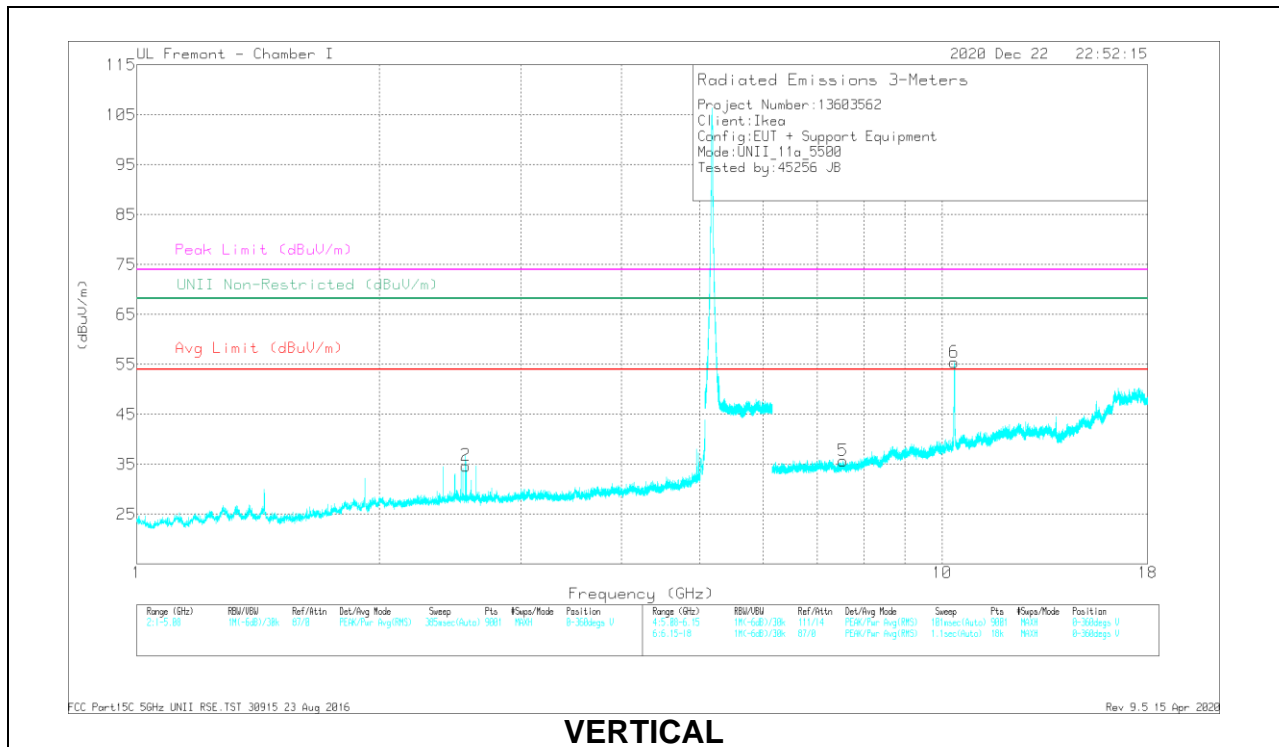

VERTICAL