



DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

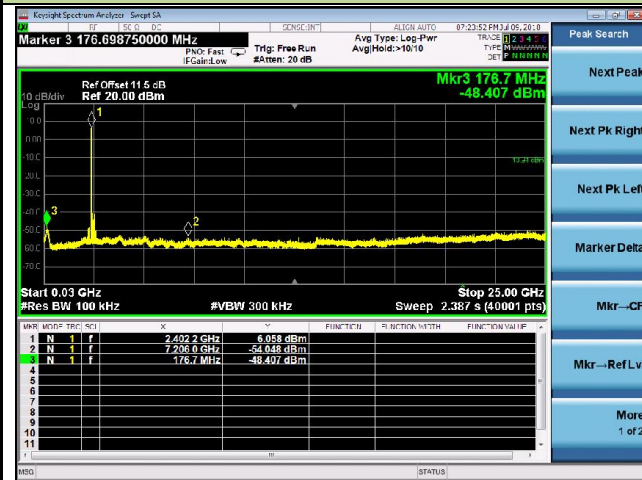

Channel 39 (2441MHz)

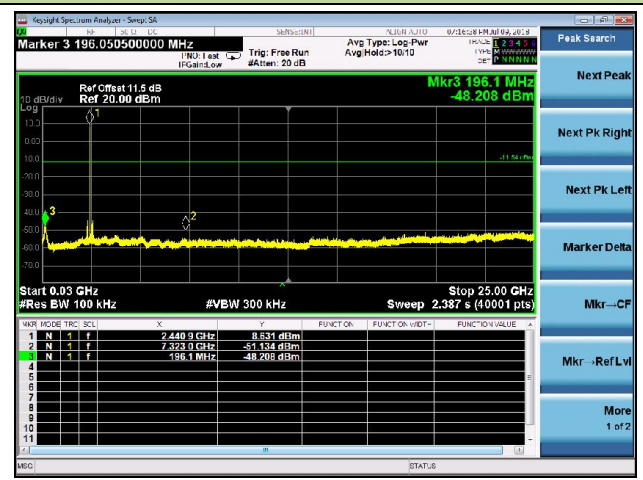

Channel 78 (2480MHz)

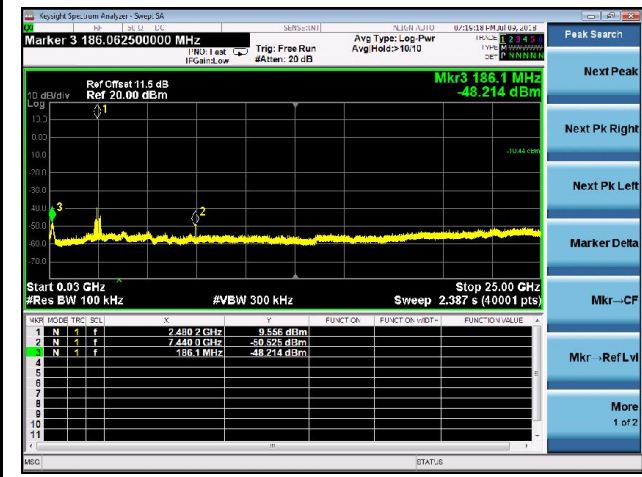


--


--

2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

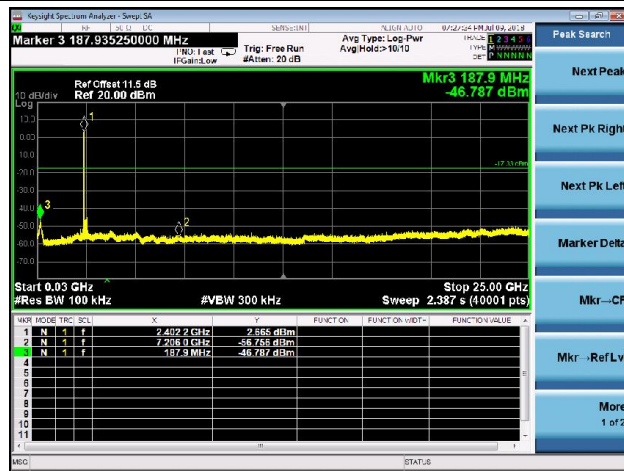

Channel 39 (2441MHz)

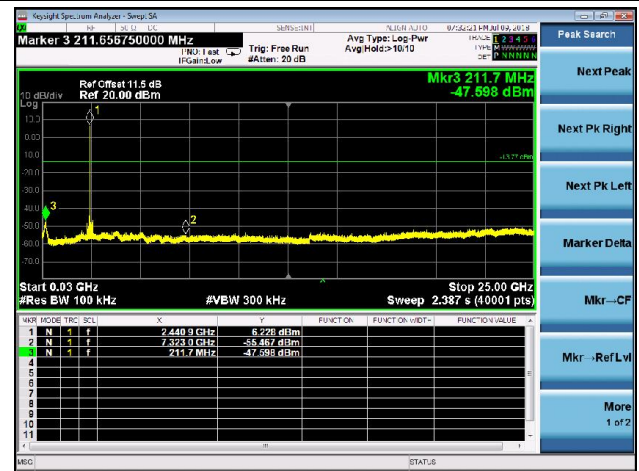

Channel 78 (2480MHz)

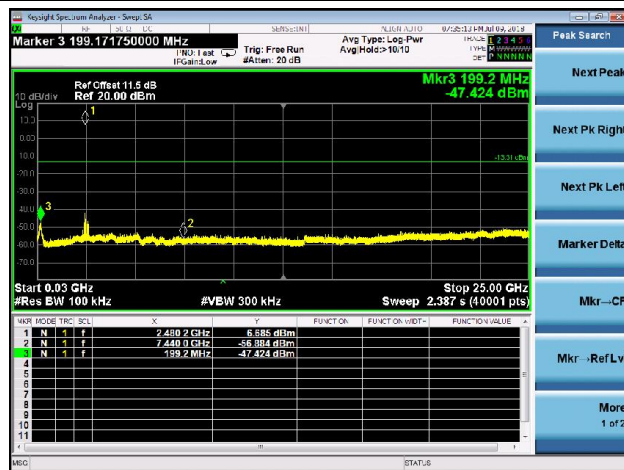


--


--

3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

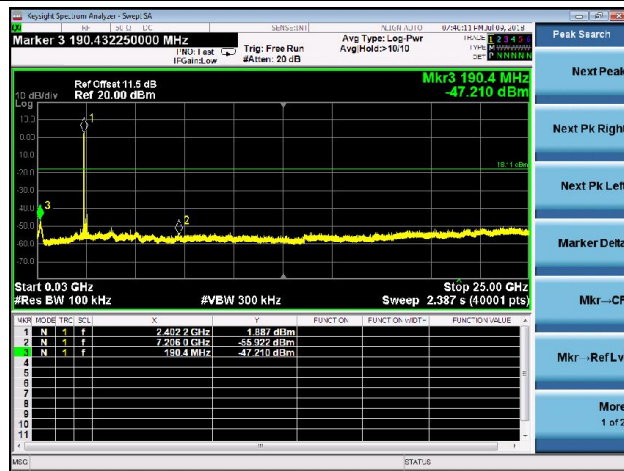

Channel 39 (2441MHz)

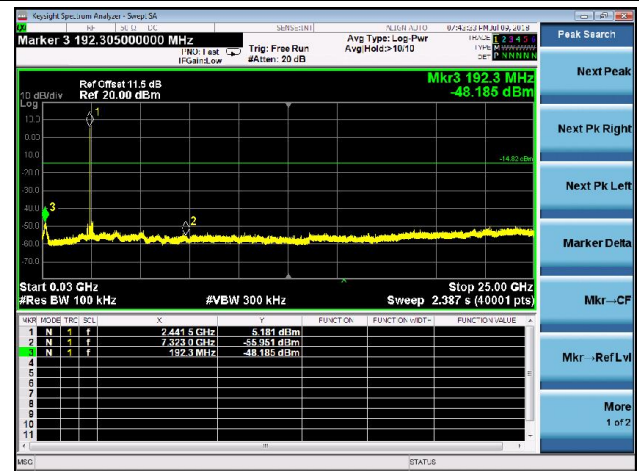

Channel 78 (2480MHz)

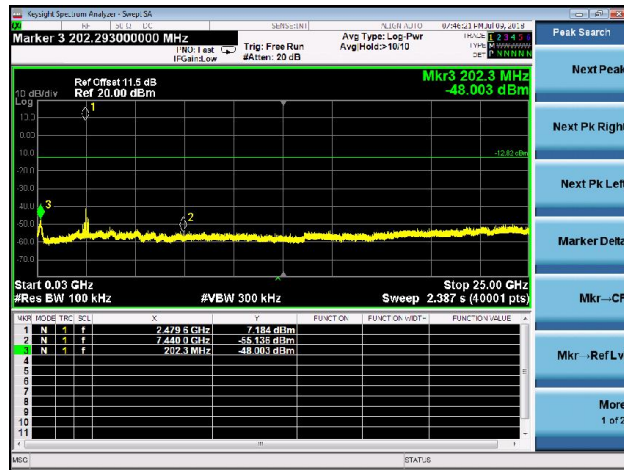

--

--

7.9. Radiated Spurious Emission Measurement

7.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.9.3. Test Setting

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.9.4. Test Setup


9kHz ~ 30MHz Test Setup:

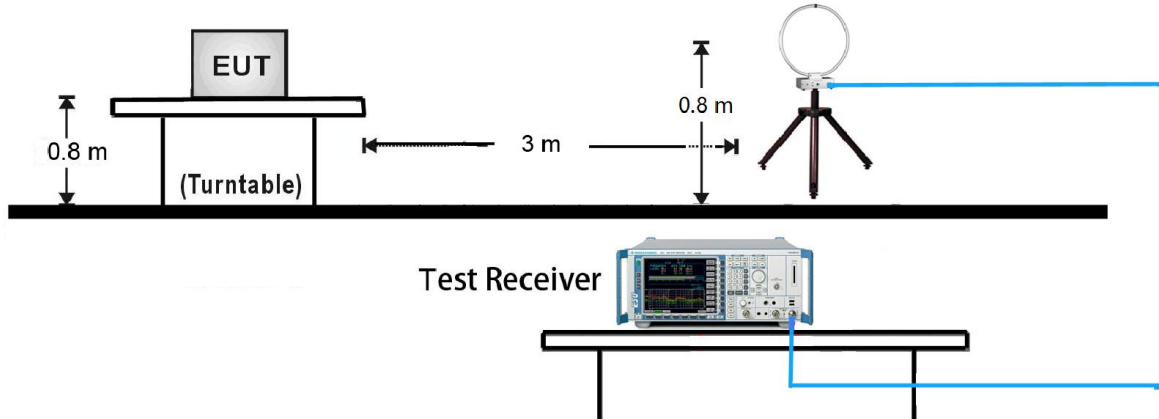


30MHz ~ 1GHz Test Setup:

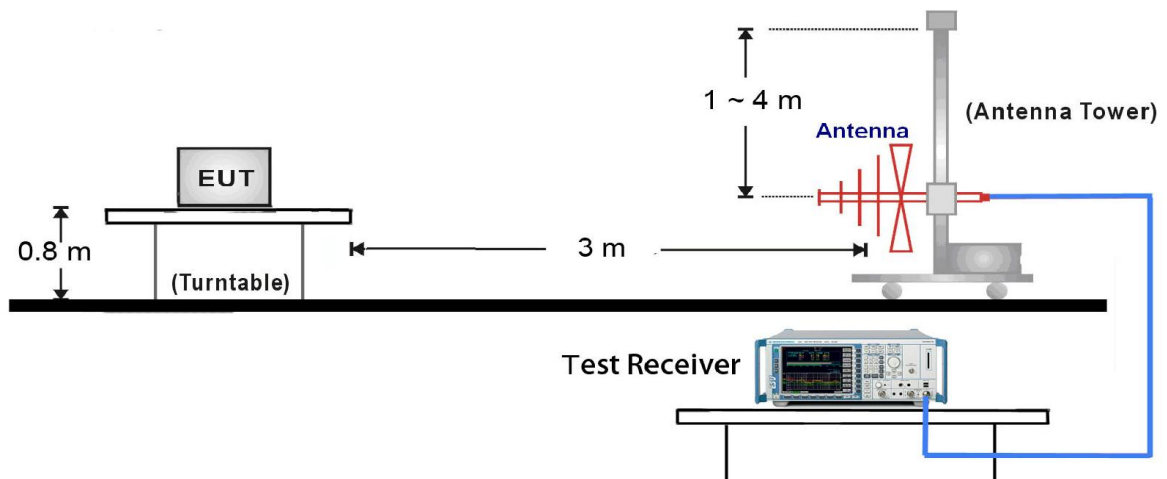

1GHz ~ 18GHz Test Setup:

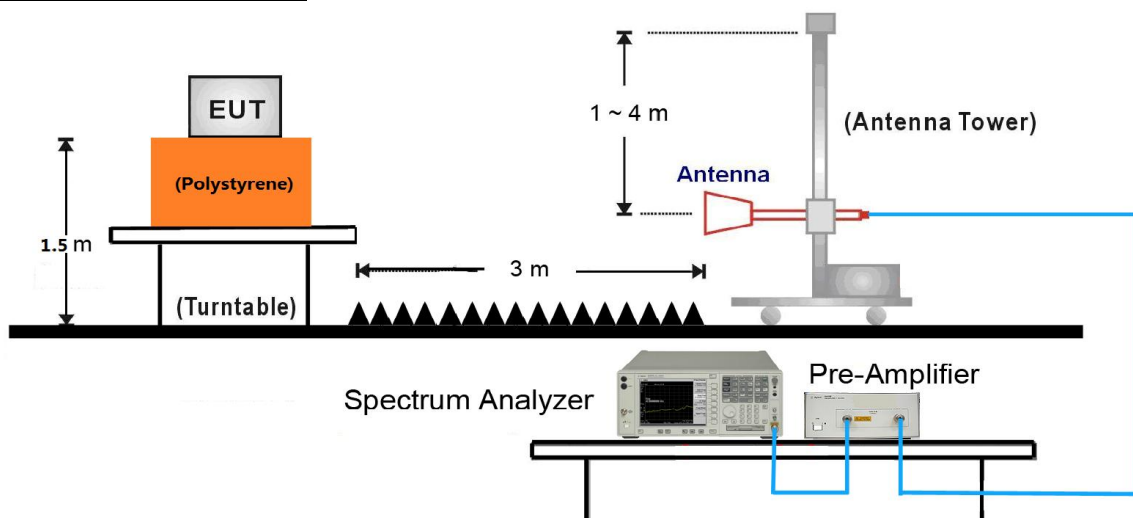

18GHz ~25GHz Test Setup:

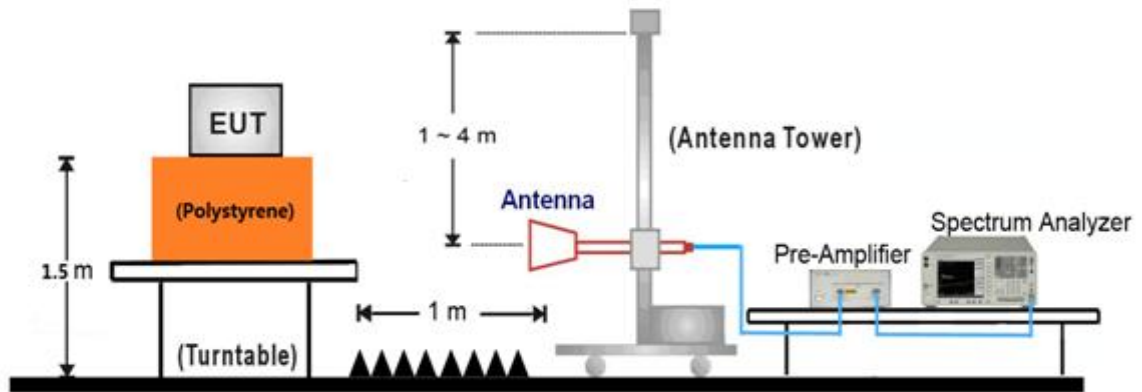

7.9.5. Test Result

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4808.0	45.5	5.9	51.4	74.0	-22.6	Peak	Horizontal
	5394.5	34.6	6.6	41.2	74.0	-32.8	Peak	Horizontal
*	7205.0	36.3	12.6	48.9	76.1	-27.2	Peak	Horizontal
*	8650.0	35.4	13.0	48.4	76.1	-27.7	Peak	Horizontal
	3915.5	36.0	3.2	39.2	74.0	-34.8	Peak	Vertical
	4808.0	40.5	5.9	46.4	74.0	-27.6	Peak	Vertical
*	7205.0	36.7	12.6	49.3	76.1	-26.8	Peak	Vertical
*	8845.5	34.3	13.3	47.6	76.1	-28.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (96.1dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4884.5	45.2	6.0	51.2	74.0	-22.8	Peak	Horizontal
	7324.0	38.3	12.6	50.9	74.0	-23.1	Peak	Horizontal
*	7970.0	35.1	13.6	48.7	76.3	-27.6	Peak	Horizontal
*	8633.0	36.1	12.9	49.0	76.3	-27.3	Peak	Horizontal
	4884.5	43.9	6.0	49.9	74.0	-24.1	Peak	Vertical
	7324.0	38.8	12.6	51.4	74.0	-22.6	Peak	Vertical
*	8004.0	35.5	13.7	49.2	76.3	-27.1	Peak	Vertical
*	8675.5	34.6	13.0	47.6	76.3	-28.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (96.3dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4961.0	45.3	6.1	51.4	74.0	-22.6	Peak	Horizontal
	7443.0	37.9	12.9	50.8	74.0	-23.2	Peak	Horizontal
*	7987.0	34.3	13.7	48.0	75.8	-27.8	Peak	Horizontal
*	8769.0	34.2	13.2	47.4	75.8	-28.4	Peak	Horizontal
	4961.0	42.8	6.1	48.9	74.0	-25.1	Peak	Vertical
	7443.0	37.9	12.9	50.8	74.0	-23.2	Peak	Vertical
*	7953.0	34.7	13.5	48.2	75.8	-27.6	Peak	Vertical
*	8735.0	34.6	13.0	47.6	75.8	-28.2	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (95.8dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	2DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4221.5	36.5	4.1	40.6	74.0	-33.4	Peak	Horizontal
	4808.0	40.6	5.9	46.5	74.0	-27.5	Peak	Horizontal
*	5904.5	35.8	7.8	43.6	74.0	-30.4	Peak	Horizontal
*	7035.0	35.9	11.6	47.5	74.0	-26.5	Peak	Horizontal
	4213.0	36.4	4.0	40.4	74.0	-33.6	Peak	Vertical
	4876.0	34.8	6.0	40.8	74.0	-33.2	Peak	Vertical
*	5709.0	35.0	7.2	42.2	74.0	-31.8	Peak	Vertical
*	6907.5	35.4	10.8	46.2	74.0	-27.8	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (93.9dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	2DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4213.0	36.8	4.0	40.8	74.0	-33.2	Peak	Horizontal
	4884.5	41.6	6.0	47.6	74.0	-26.4	Peak	Horizontal
*	6023.5	35.3	7.9	43.2	74.2	-31.0	Peak	Horizontal
*	8692.5	34.2	13.0	47.2	74.2	-27.0	Peak	Horizontal
	4884.5	40.9	6.0	46.9	74.0	-27.1	Peak	Vertical
	7664.0	36.6	12.8	49.4	74.0	-24.6	Peak	Vertical
*	7944.5	35.6	13.5	49.1	74.2	-25.1	Peak	Vertical
*	8896.5	34.5	13.2	47.7	74.2	-26.5	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.2dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	2DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3924.0	37.0	3.2	40.2	74.0	-33.8	Peak	Horizontal
	4884.5	41.2	6.0	47.2	74.0	-26.8	Peak	Horizontal
*	5760.0	34.6	7.4	42.0	74.4	-32.4	Peak	Horizontal
*	6907.5	35.5	10.8	46.3	74.4	-28.1	Peak	Horizontal
	3898.5	38.5	3.1	41.6	74.0	-32.4	Peak	Vertical
	4884.5	40.5	6.0	46.5	74.0	-27.5	Peak	Vertical
*	6193.5	36.0	8.4	44.4	74.4	-30.0	Peak	Vertical
*	6916.0	36.2	10.9	47.1	74.4	-27.3	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.4dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	3DH5	Test Channel:	00
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3983.5	36.9	3.2	40.1	74.0	-33.9	Peak	Horizontal
	4808.0	39.4	5.9	45.3	74.0	-28.7	Peak	Horizontal
*	5683.5	35.6	7.1	42.7	74.5	-31.8	Peak	Horizontal
*	6831.0	35.5	10.5	46.0	74.5	-28.5	Peak	Horizontal
	3932.5	37.0	3.2	40.2	74.0	-33.8	Peak	Vertical
	4808.0	36.9	5.9	42.8	74.0	-31.2	Peak	Vertical
*	6533.5	35.8	10.0	45.8	74.5	-28.7	Peak	Vertical
*	8811.5	35.1	13.3	48.4	74.5	-26.1	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.5dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	3DH5	Test Channel:	39
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	4136.5	36.5	3.8	40.3	74.0	-33.7	Peak	Horizontal
	4884.5	41.9	6.0	47.9	74.0	-26.1	Peak	Horizontal
*	5802.5	35.2	7.6	42.8	74.6	-31.8	Peak	Horizontal
*	6576.0	35.5	10.2	45.7	74.6	-28.9	Peak	Horizontal
	4323.5	36.9	4.4	41.3	74.0	-32.7	Peak	Vertical
	4884.5	41.9	6.0	47.9	74.0	-26.1	Peak	Vertical
*	6023.5	35.5	7.9	43.4	74.6	-31.2	Peak	Vertical
*	6814.0	36.5	10.4	46.9	74.6	-27.7	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Wireless Speaker ENEBY Built-in	Temperature	25°C
Test Engineer	Cat Hu	Relative Humidity	56%
Test Site	AC1	Test Date	2018/07/07
Test Mode:	3DH5	Test Channel:	78
Remark:	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	3966.5	37.8	3.1	40.9	74.0	-33.1	Peak	Horizontal
	4961.0	40.9	6.1	47.0	74.0	-27.0	Peak	Horizontal
*	6100.0	35.4	8.1	43.5	74.6	-31.1	Peak	Horizontal
*	7171.0	35.7	12.5	48.2	74.6	-26.4	Peak	Horizontal
	4238.5	36.7	4.1	40.8	74.0	-33.2	Peak	Vertical
	4961.0	38.8	6.1	44.9	74.0	-29.1	Peak	Vertical
*	5887.5	34.4	7.8	42.2	74.6	-32.4	Peak	Vertical
*	6593.0	35.5	10.2	45.7	74.6	-28.9	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is 20dBc of the fundamental emission level (94.6dBμV/m) or 15.209 which is higher.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: AC1	Time: 2018/07/13 - 22:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Worst Case Mode: Transmit by DH5 at channel 2402MHz	

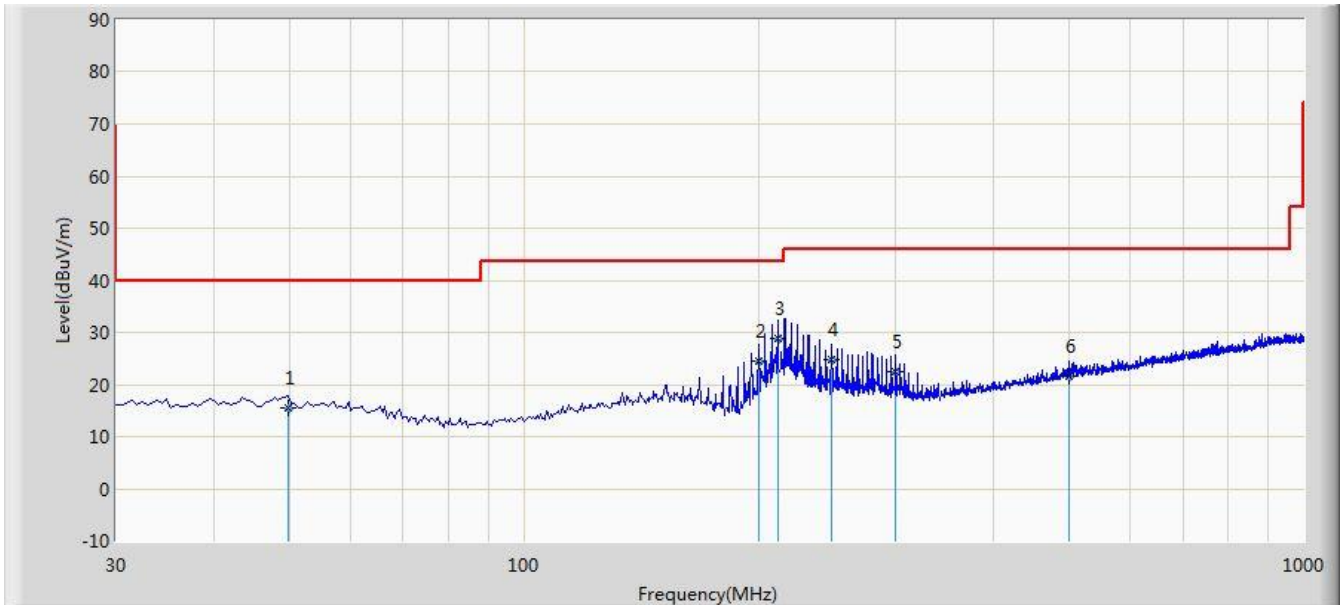


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			49.885	15.492	1.305	-24.508	40.000	14.187	QP
2			199.750	24.459	13.237	-19.041	43.500	11.222	QP
3		*	211.875	28.818	17.304	-14.682	43.500	11.515	QP
4			247.765	24.713	11.726	-21.287	46.000	12.987	QP
5			300.145	22.535	8.134	-23.465	46.000	14.401	QP
6			499.965	21.506	2.937	-24.494	46.000	18.570	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

Site: AC1	Time: 2018/07/13 - 22:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Cloud Guo
Probe: VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Worst Case Mode: Transmit by DH5 at channel 2402MHz	

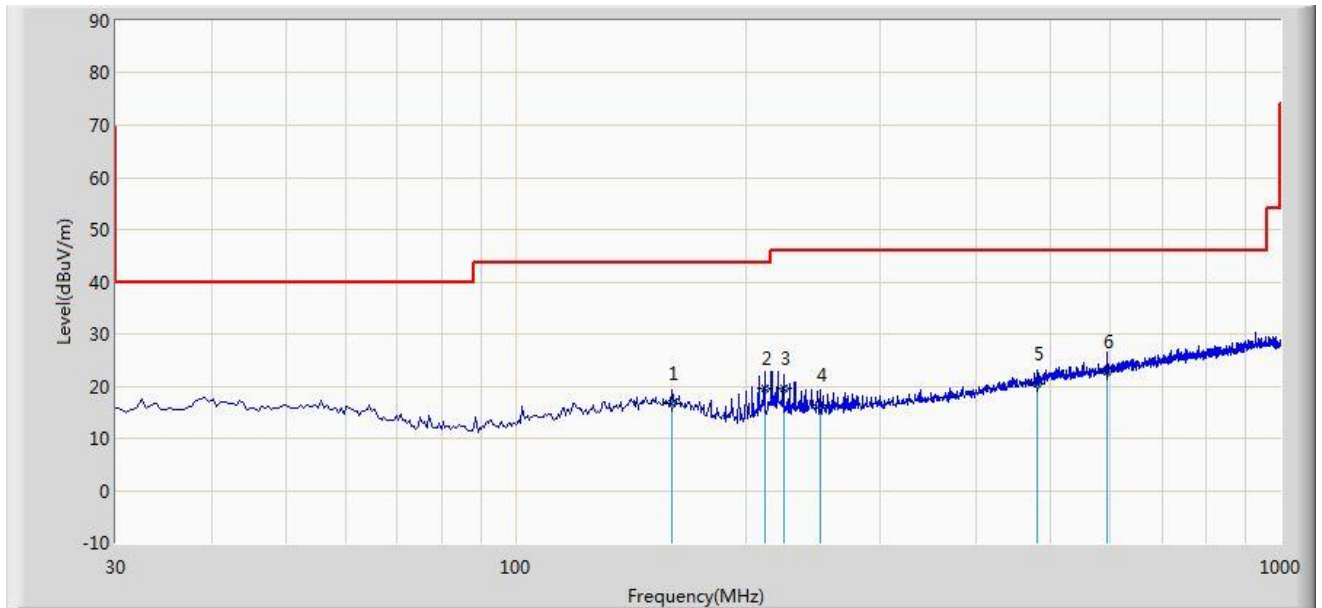

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			159.980	16.695	1.426	-26.805	43.500	15.269	QP
2			211.875	19.557	8.043	-23.943	43.500	11.515	QP
3			224.000	19.547	7.305	-26.453	46.000	12.241	QP
4			250.190	16.300	3.273	-29.700	46.000	13.028	QP
5			480.080	20.389	2.106	-25.611	46.000	18.283	QP
6		*	594.055	22.893	2.437	-23.107	46.000	20.456	QP

Note 1: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

7.10. Radiated Restricted Band Edge Measurement

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.009 - 0.110	149.9 -150.5	9.0 - 9.2
0.495 -0.505	156.52475 - 156.525225	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 -1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 -2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 -13.41	3260 - 3267	
16.42 - 16.423	3332 -3339	
16.69475 - 16.69525	334.5 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9			
Frequency [MHz]	Magnetic field strength (H-Field) [$\mu\text{A/m}$]	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 - 0.490	$6.37/F$ (F in kHz)	N/A	300
0.490 - 1.705	$63.7/F$ (F in kHz)	N/A	30
1.705 - 30	0.08	N/A	30
30 - 88	N/A	100	3
88 - 216	N/A	150	3
216 - 960	N/A	200	3
Above 960	N/A	500	3

7.10.1. Test Procedure Used

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

7.10.2. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.10.3. Test Setup

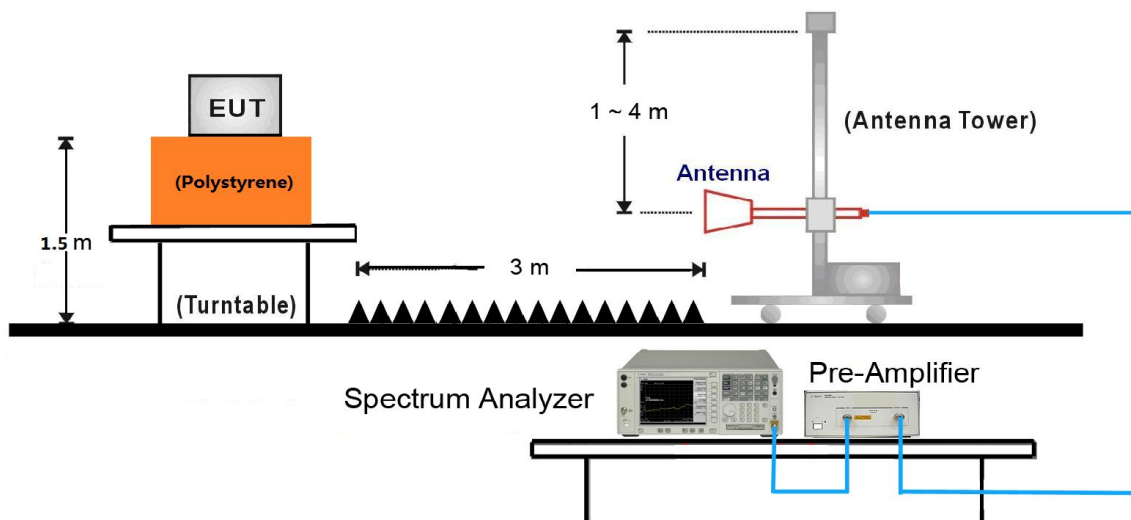

7.10.4. Test Result

Site: AC1	Time: 2018/07/07 - 01:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

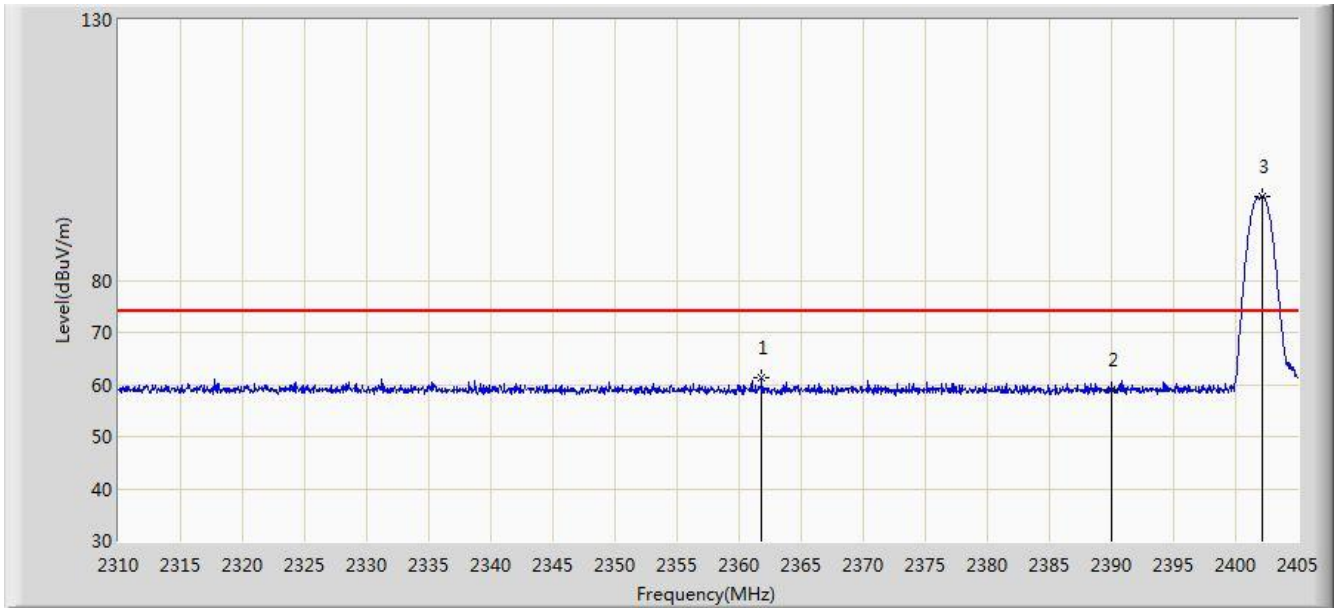


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2361.823	61.368	28.995	-12.632	74.000	32.373	PK
2			2390.000	59.055	26.728	-14.945	74.000	32.327	PK
3		*	2402.150	96.075	63.771	N/A	N/A	32.304	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

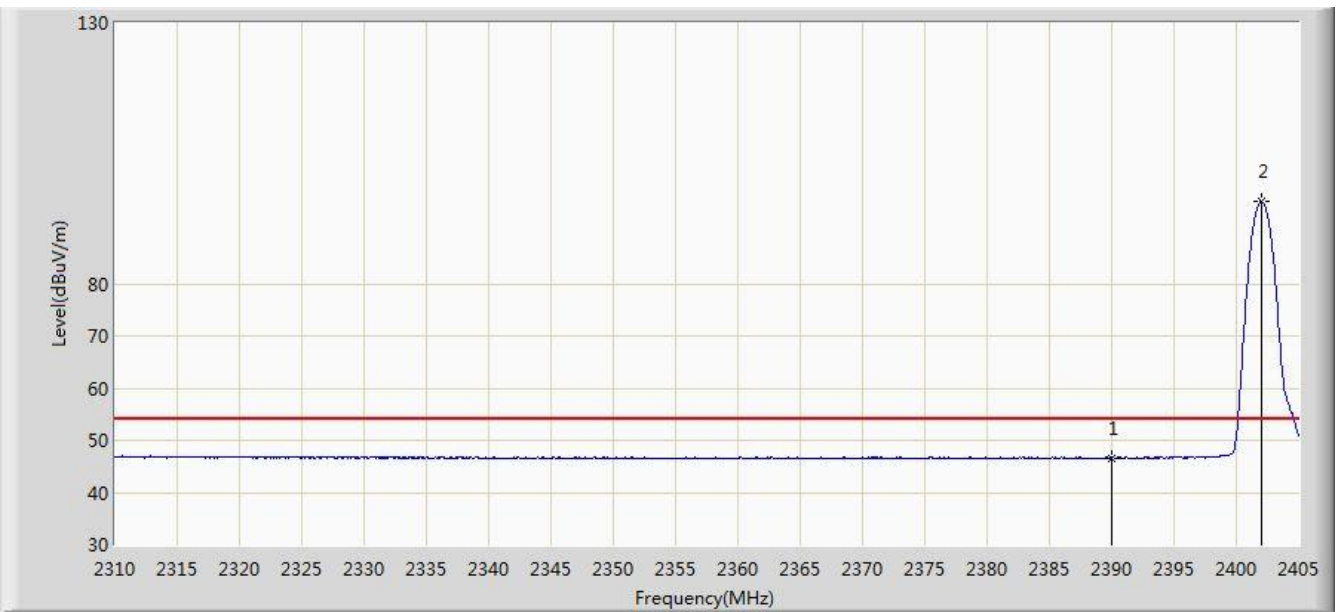


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.666	14.339	-7.334	54.000	32.327	AV
2		*	2402.008	95.688	63.384	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

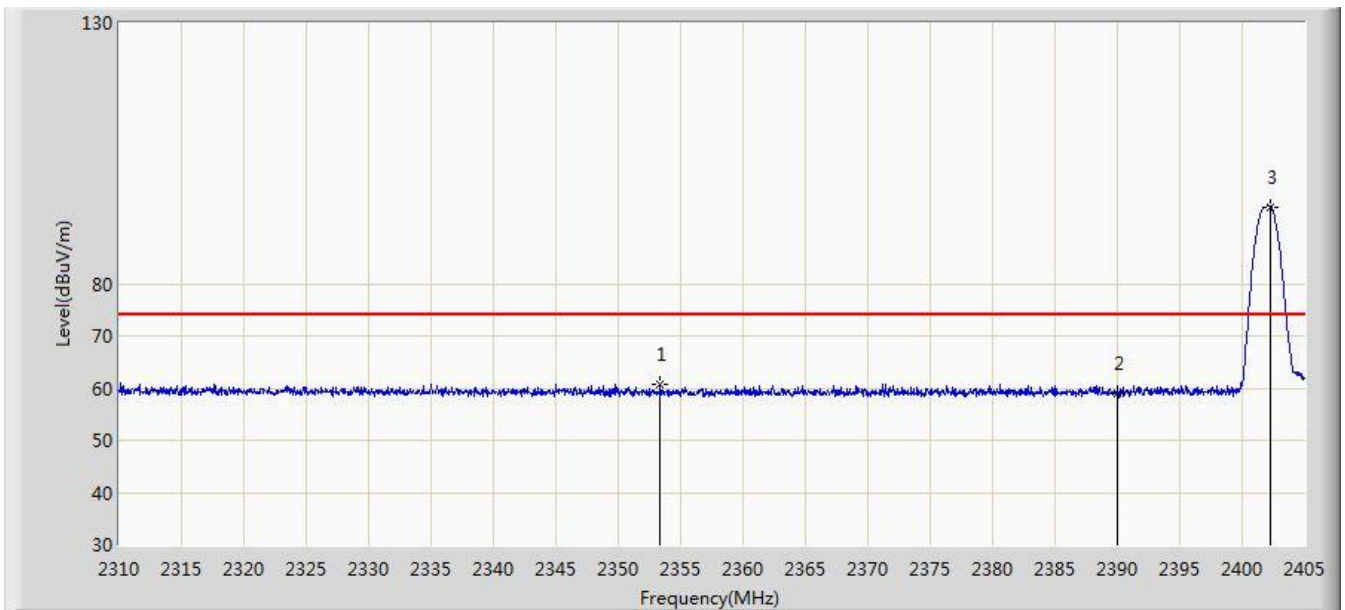


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2353.367	60.684	28.293	-13.316	74.000	32.391	PK
2			2390.000	58.894	26.567	-15.106	74.000	32.327	PK
3		*	2402.292	94.753	62.449	N/A	N/A	32.304	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by DH5 at channel 2402MHz	

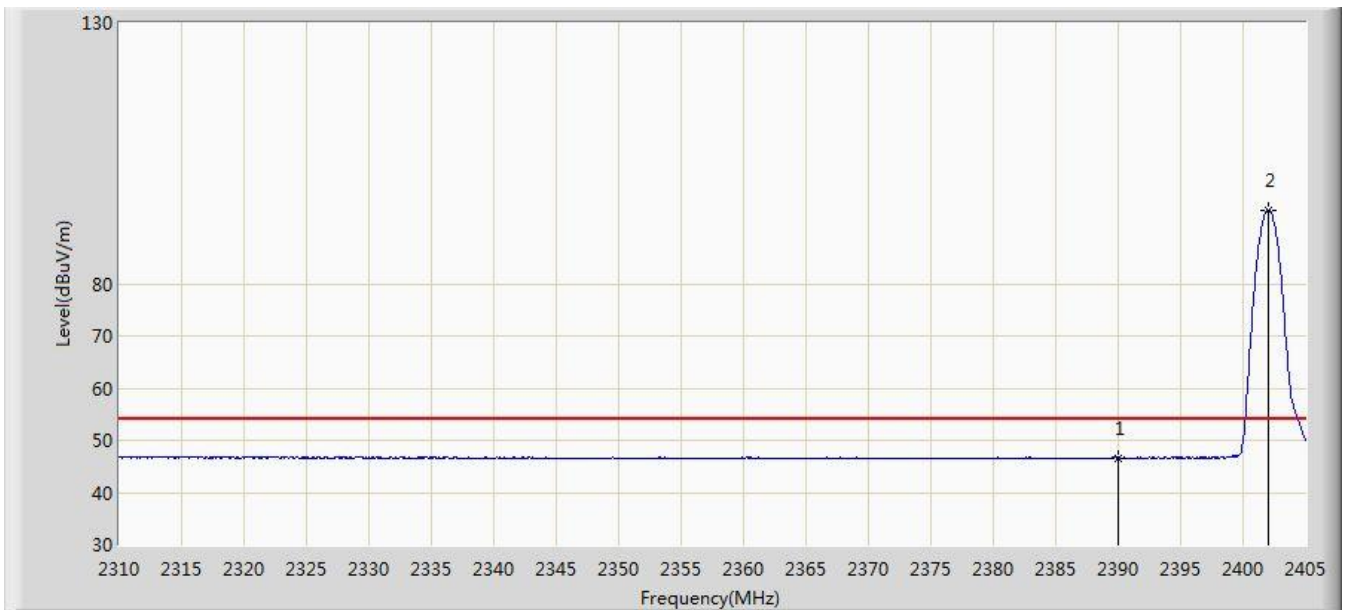


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.627	14.300	-7.373	54.000	32.327	AV
2		*	2402.008	94.135	61.831	N/A	N/A	32.305	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

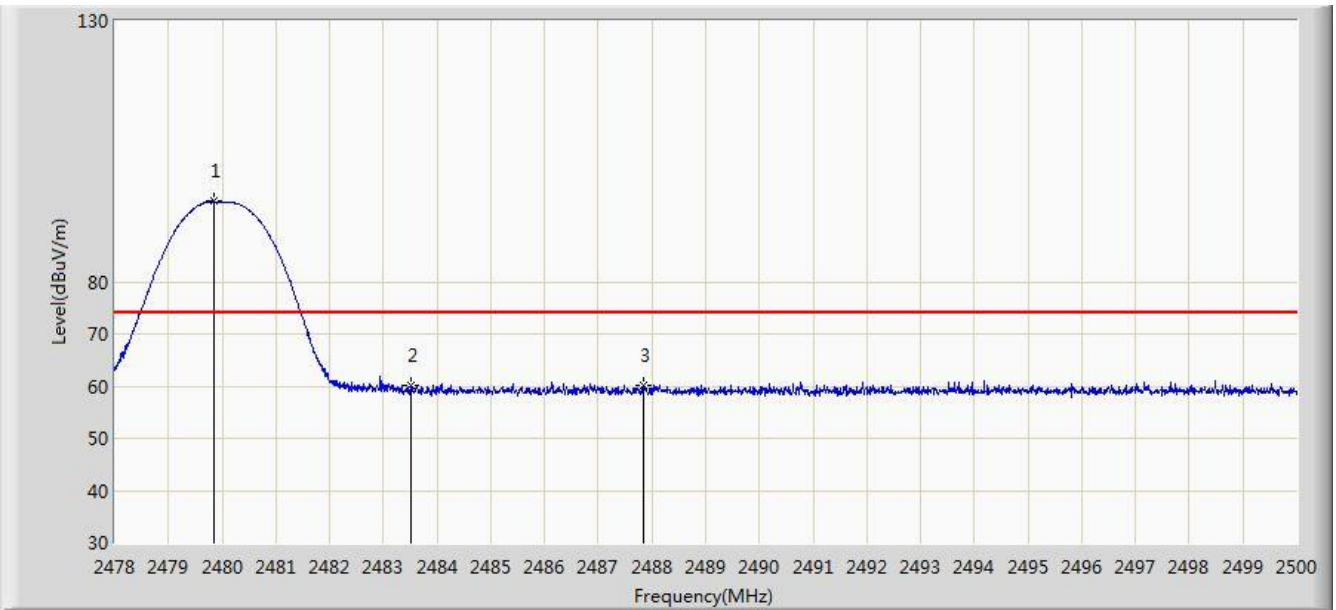

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.837	95.373	63.048	N/A	N/A	32.325	PK
2			2483.500	60.089	27.750	-13.911	74.000	32.340	PK
3			2487.845	60.281	27.925	-13.719	74.000	32.356	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	94.963	62.637	N/A	N/A	32.325	AV
2			2483.500	47.073	14.734	-6.927	54.000	32.340	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

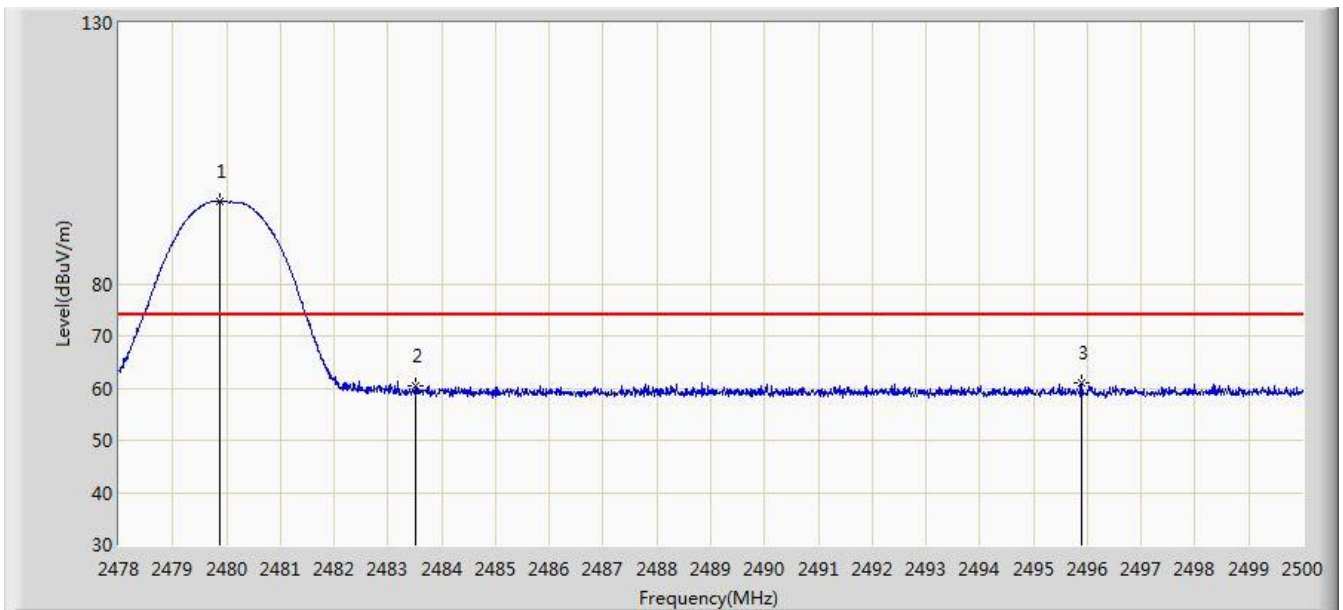


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.870	95.774	63.449	N/A	N/A	32.325	PK
2			2483.500	60.551	28.212	-13.449	74.000	32.340	PK
3			2495.886	60.945	28.557	-13.055	74.000	32.388	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by DH5 at channel 2480MHz	

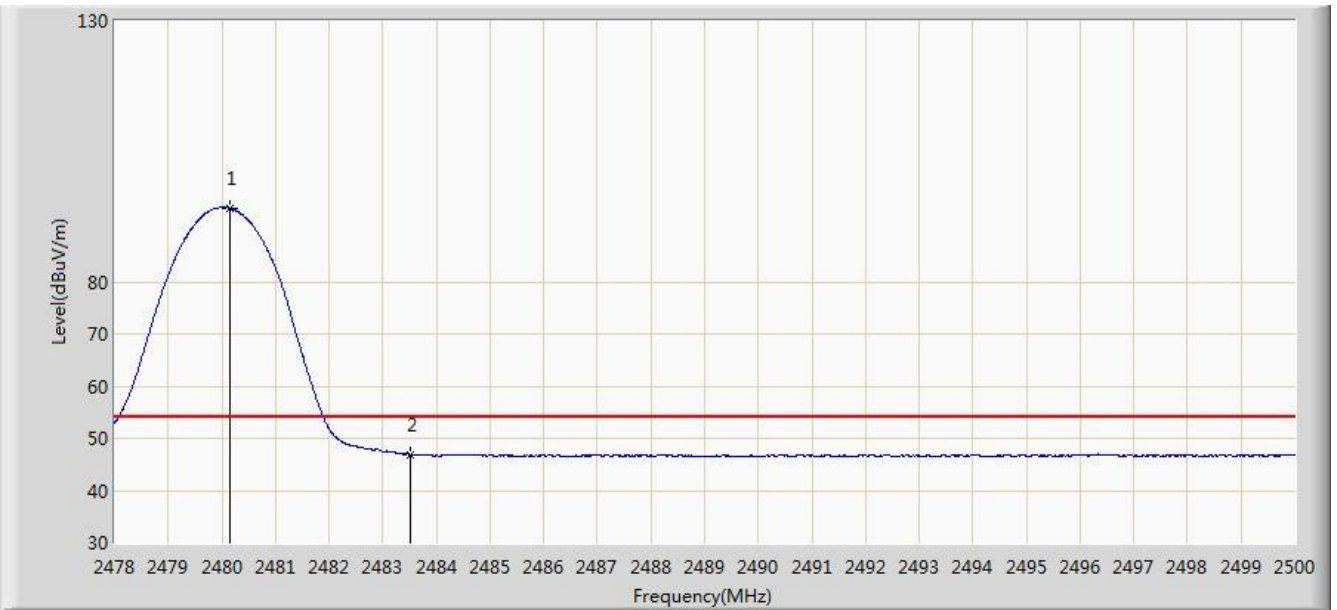


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.145	94.133	61.807	N/A	N/A	32.326	AV
2			2483.500	46.917	14.578	-7.083	54.000	32.340	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

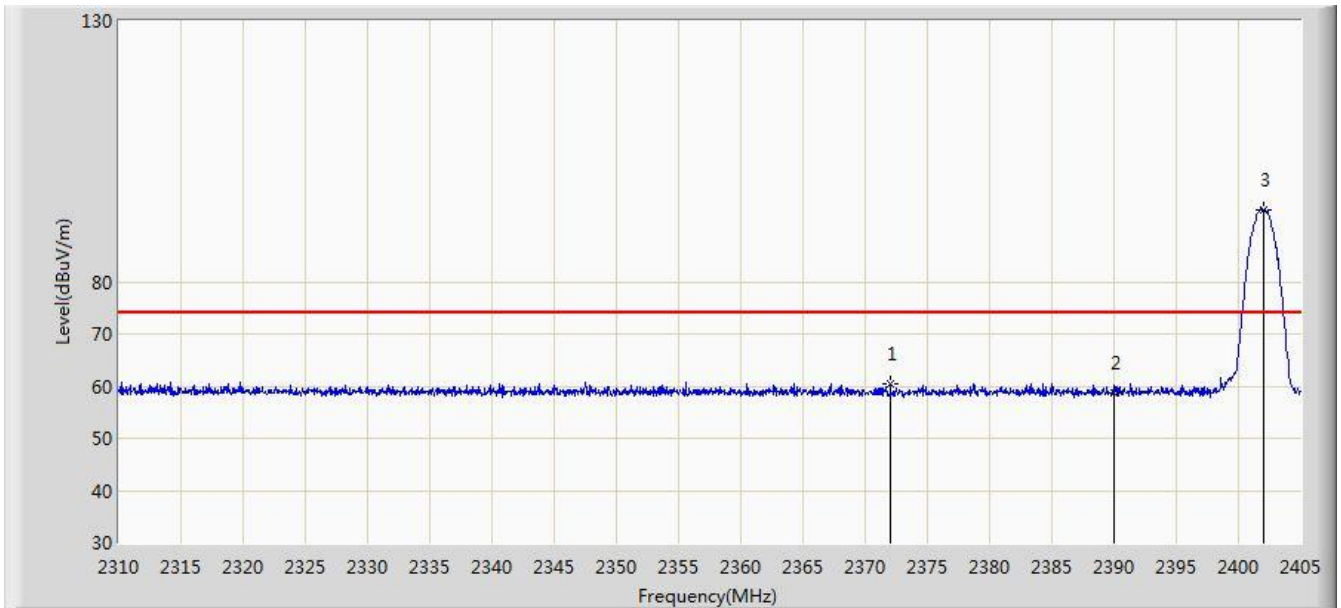


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2372.035	60.356	28.002	-13.644	74.000	32.353	PK
2			2390.000	58.617	26.290	-15.383	74.000	32.327	PK
3		*	2402.055	93.856	61.552	N/A	N/A	32.304	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

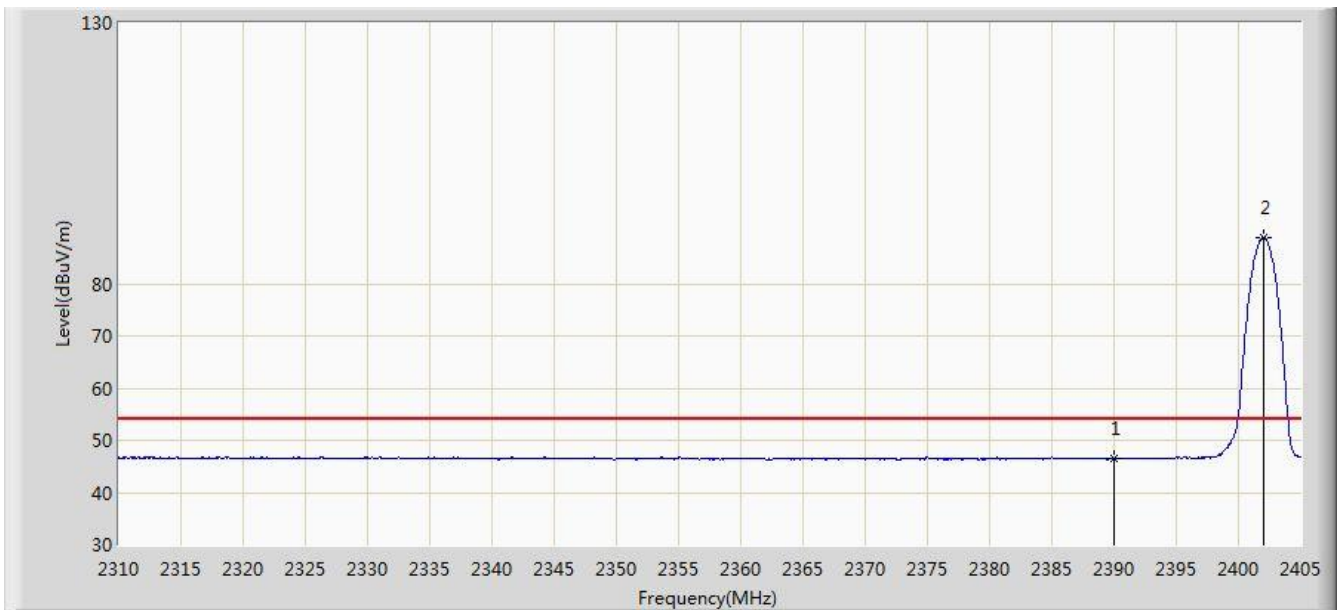


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.588	14.261	-7.412	54.000	32.327	AV
2		*	2402.008	88.936	56.632	N/A	N/A	32.305	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

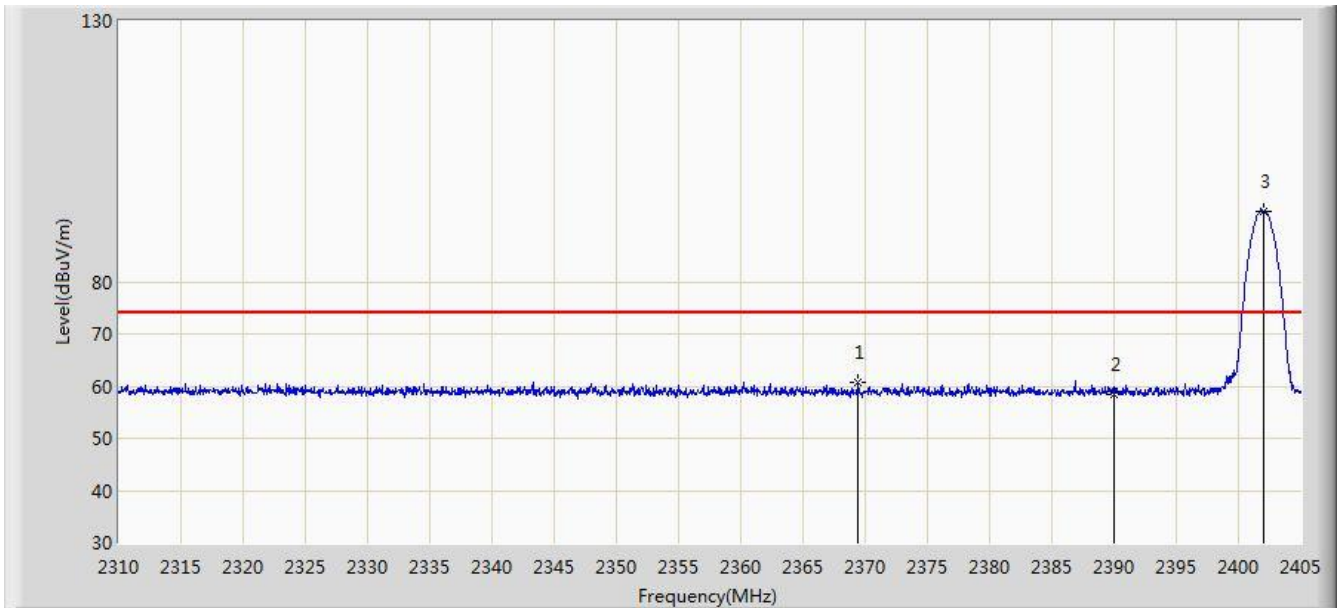


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2369.423	60.751	28.392	-13.249	74.000	32.359	PK
2			2390.000	58.292	25.965	-15.708	74.000	32.327	PK
3		*	2402.055	93.513	61.209	N/A	N/A	32.304	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2402MHz	

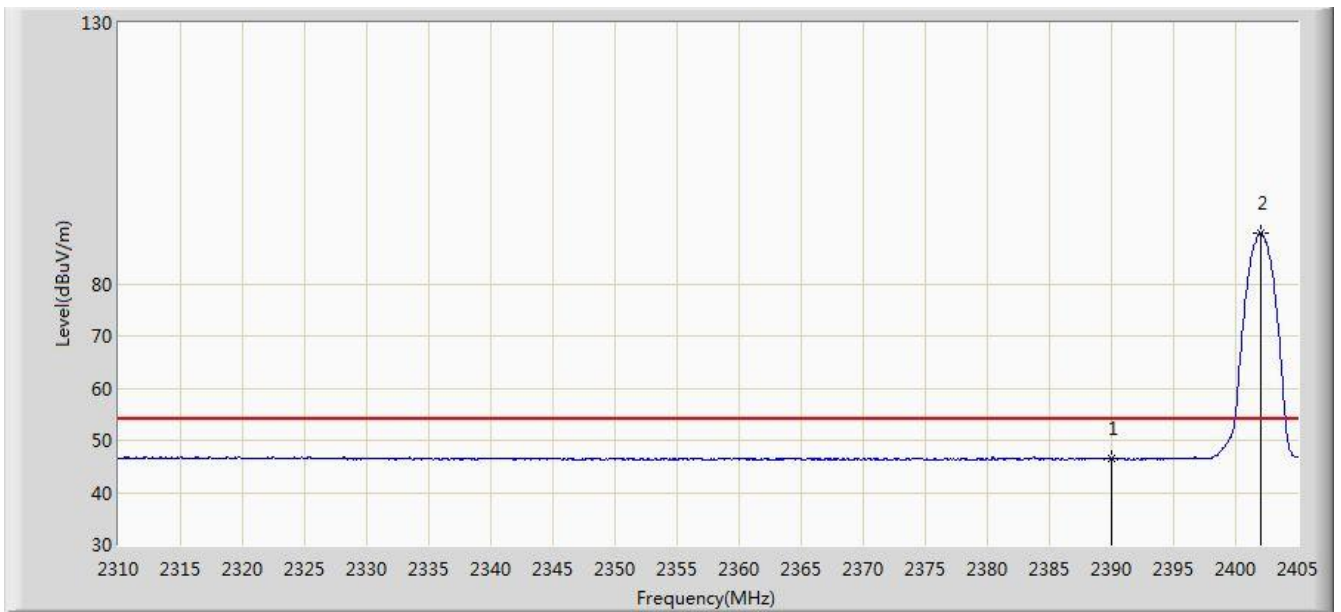


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.492	14.165	-7.508	54.000	32.327	AV
2		*	2402.008	89.821	57.517	N/A	N/A	32.305	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 14:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

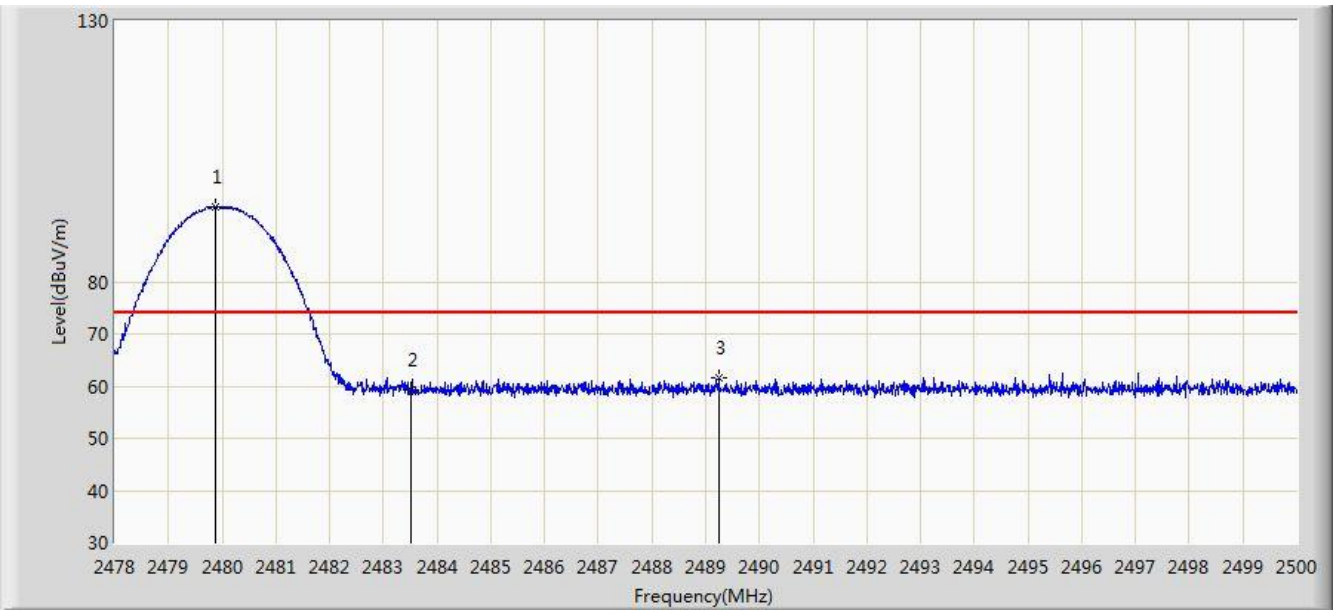


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.870	94.446	62.121	N/A	N/A	32.325	PK
2			2483.500	59.295	26.956	-14.705	74.000	32.340	PK
3			2489.242	61.663	29.301	-12.337	74.000	32.362	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 14:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

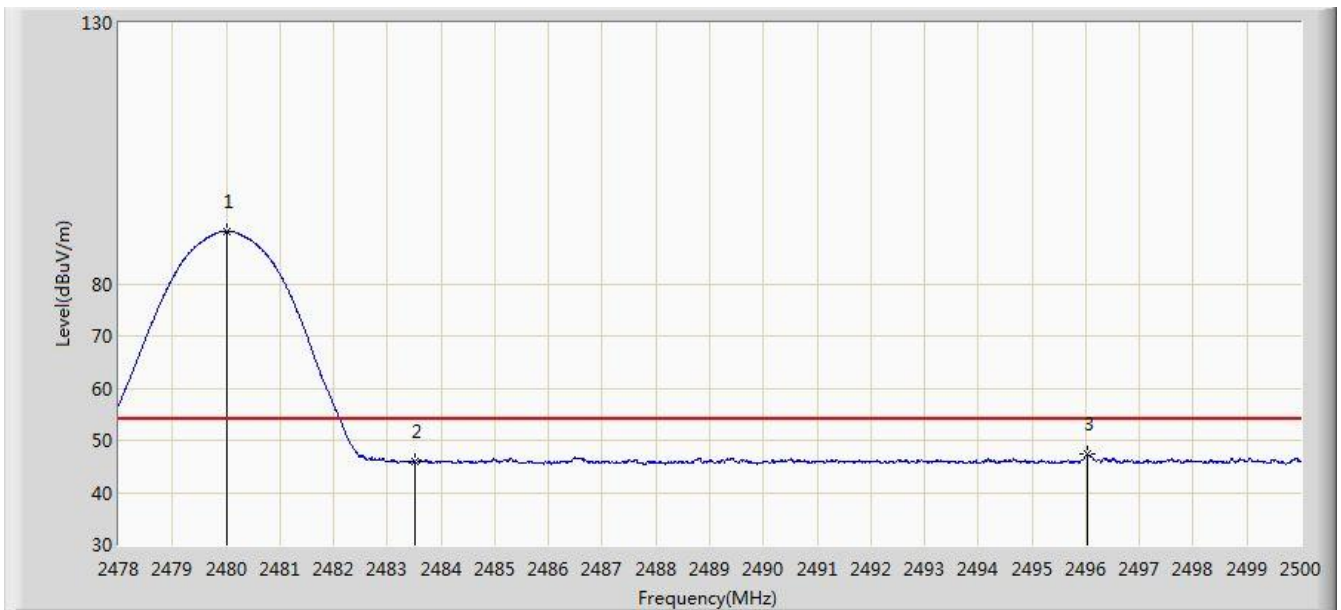


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	90.129	57.804	N/A	N/A	32.325	AV
2			2483.500	45.852	13.513	-8.148	54.000	32.340	AV
3			2496.018	47.260	14.872	-6.740	54.000	32.388	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 14:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

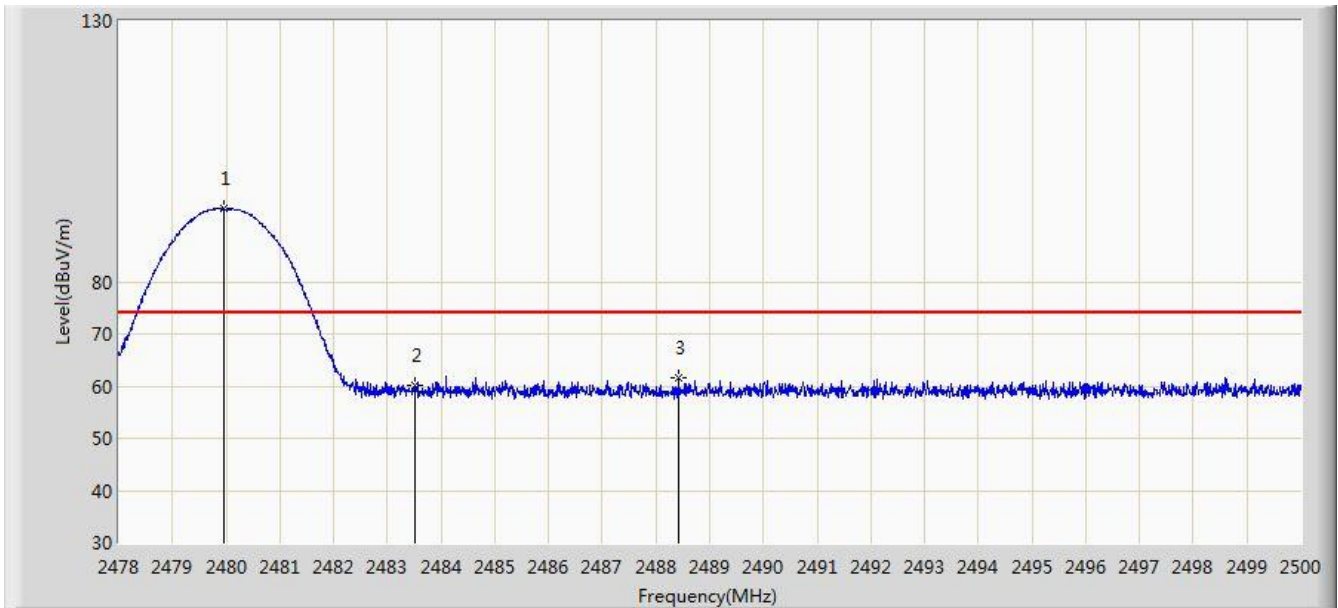


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.958	94.138	61.813	N/A	N/A	32.325	PK
2			2483.500	60.036	27.697	-13.964	74.000	32.340	PK
3			2488.417	61.630	29.272	-12.370	74.000	32.359	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 15:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 2DH5 at channel 2480MHz	

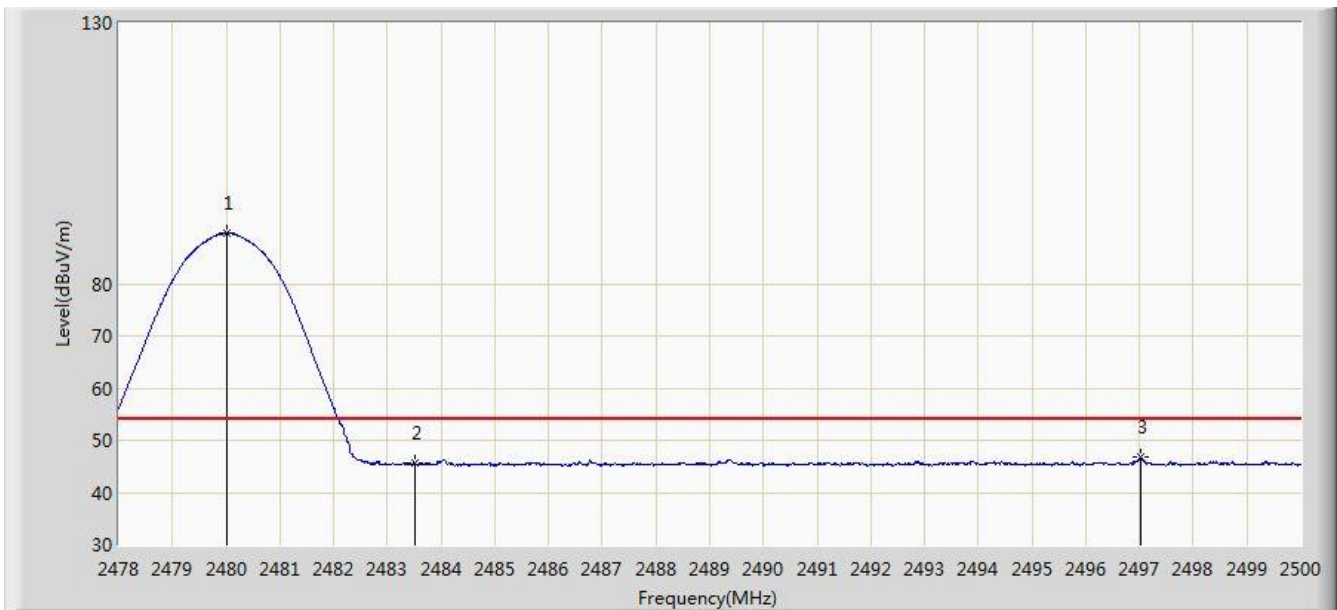


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	89.697	57.372	N/A	N/A	32.325	AV
2			2483.500	45.569	13.230	-8.431	54.000	32.340	AV
3			2497.030	46.772	14.382	-7.228	54.000	32.390	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 01:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

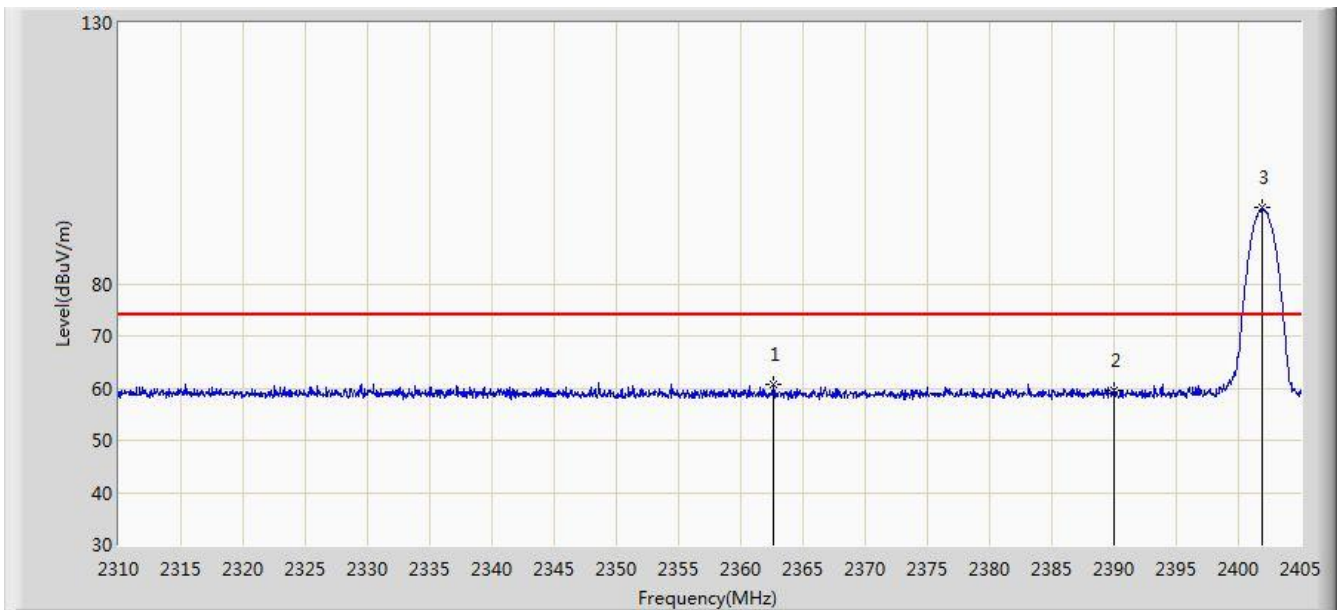


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2362.630	60.778	28.406	-13.222	74.000	32.372	PK
2			2390.000	59.429	27.102	-14.571	74.000	32.327	PK
3		*	2401.960	94.500	62.195	N/A	N/A	32.305	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 02:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

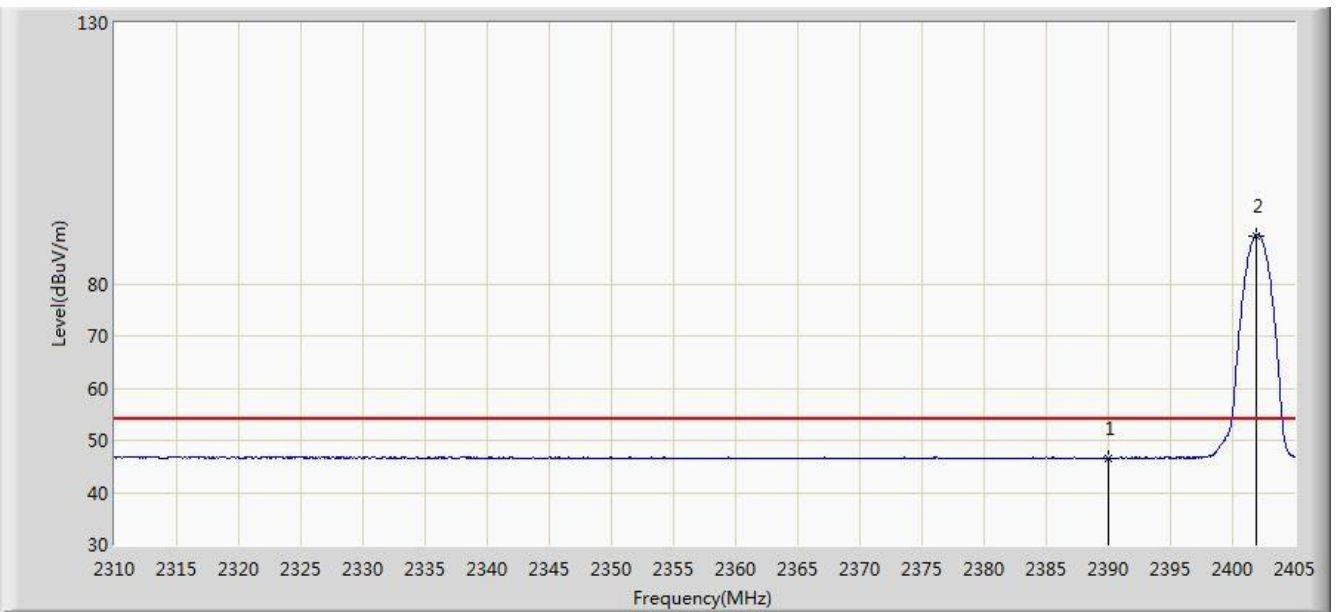


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.591	14.264	-7.409	54.000	32.327	AV
2		*	2401.865	89.215	56.910	N/A	N/A	32.305	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 02:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

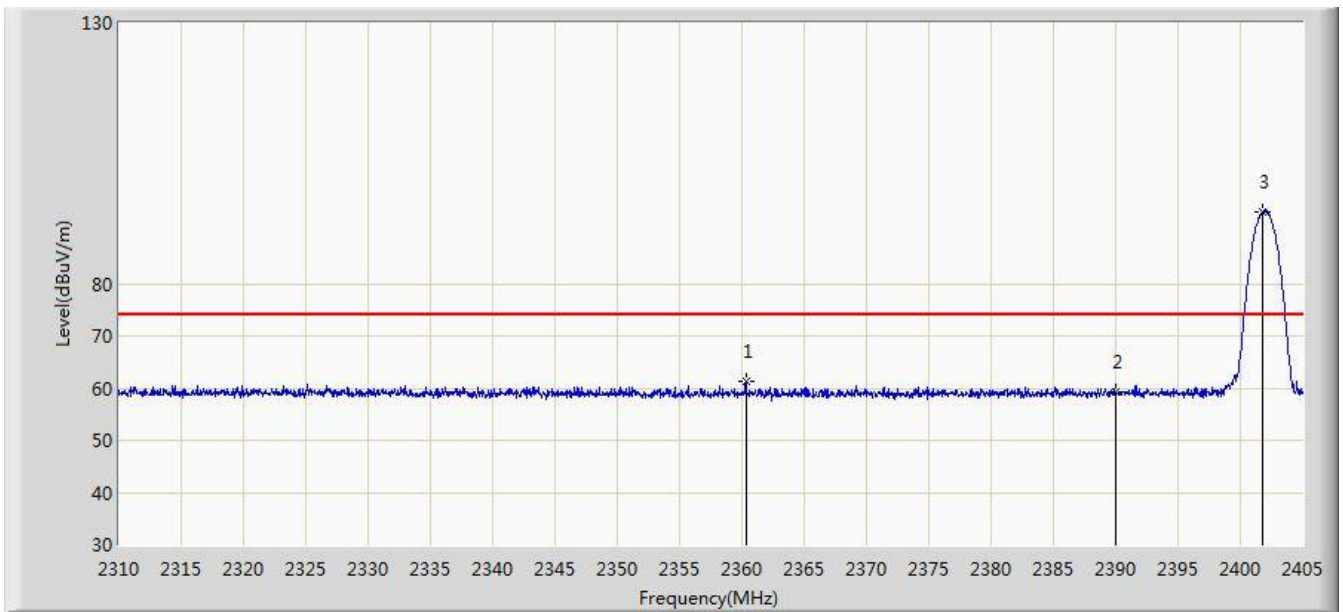


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2360.350	61.266	28.890	-12.734	74.000	32.376	PK
2			2390.000	59.147	26.820	-14.853	74.000	32.327	PK
3		*	2401.770	93.824	61.519	N/A	N/A	32.305	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 02:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2402MHz	

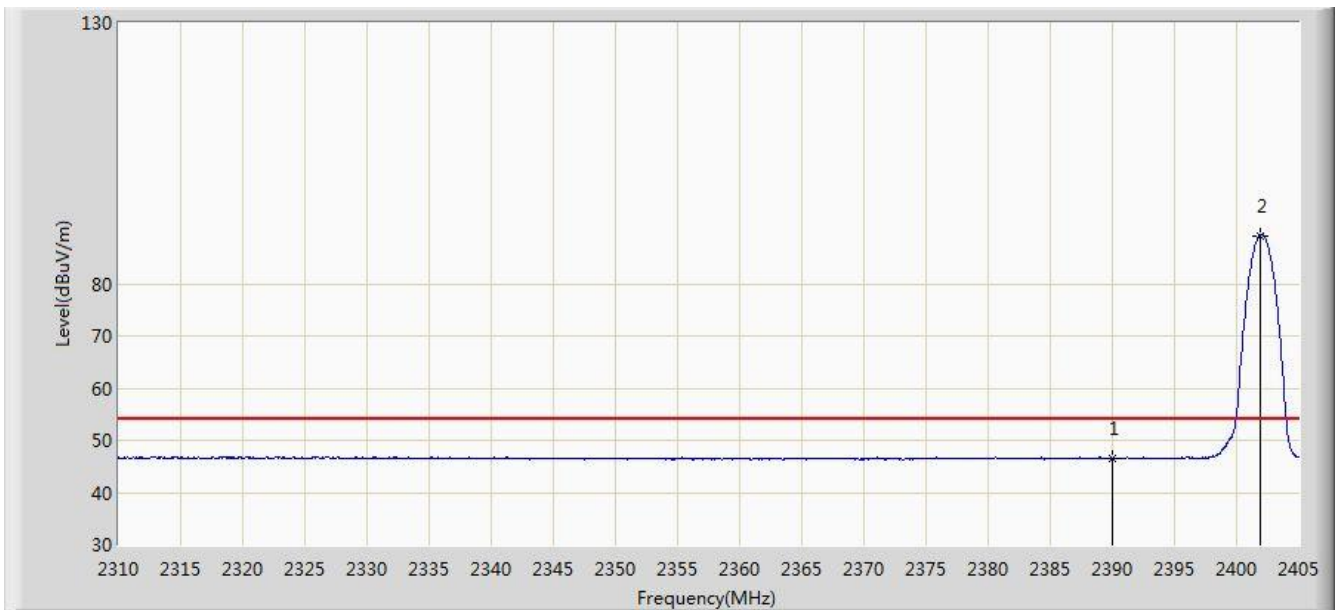


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.602	14.275	-7.398	54.000	32.327	AV
2		*	2401.865	89.208	56.903	N/A	N/A	32.305	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 15:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

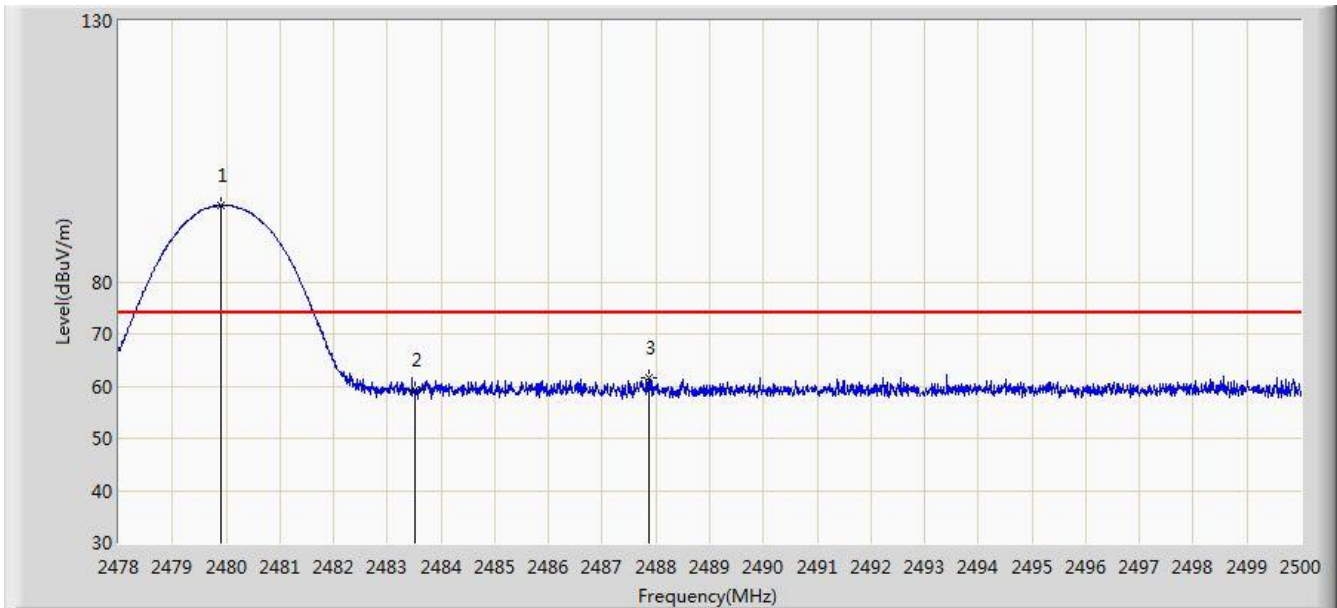


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	94.614	62.289	N/A	N/A	32.325	PK
2			2483.500	59.214	26.875	-14.786	74.000	32.340	PK
3			2487.856	61.645	29.289	-12.355	74.000	32.356	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 15:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

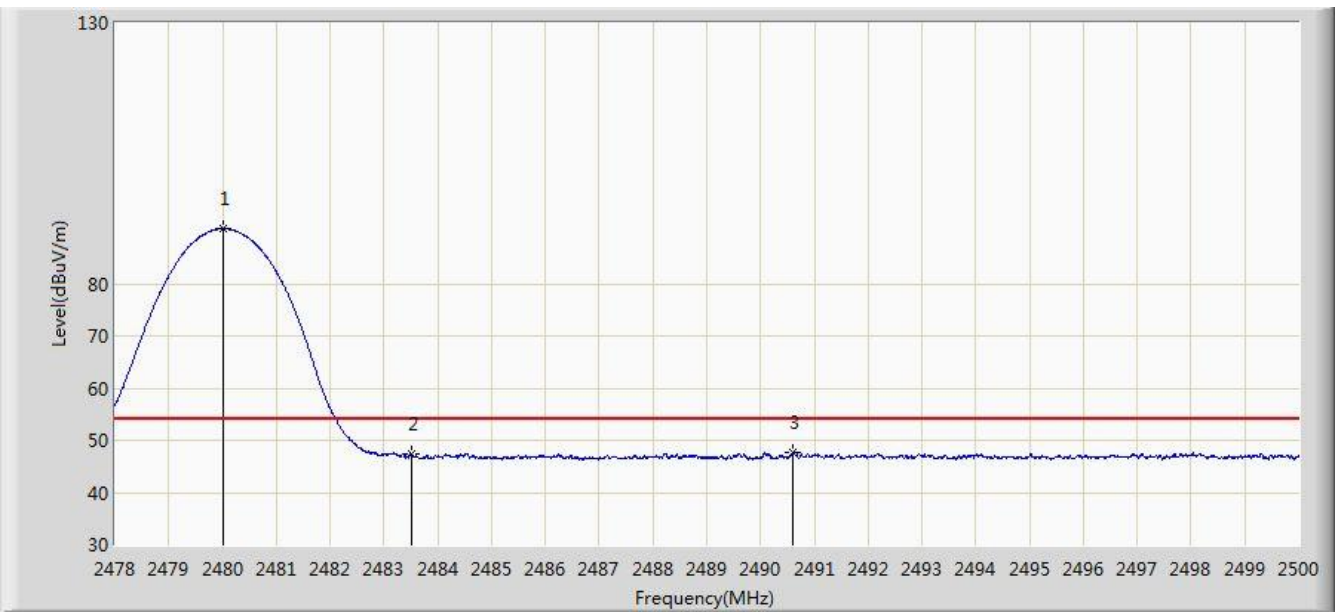


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	90.536	58.211	N/A	N/A	32.325	AV
2			2483.500	47.267	14.928	-6.733	54.000	32.340	AV
3			2490.606	47.584	15.217	-6.416	54.000	32.367	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 15:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

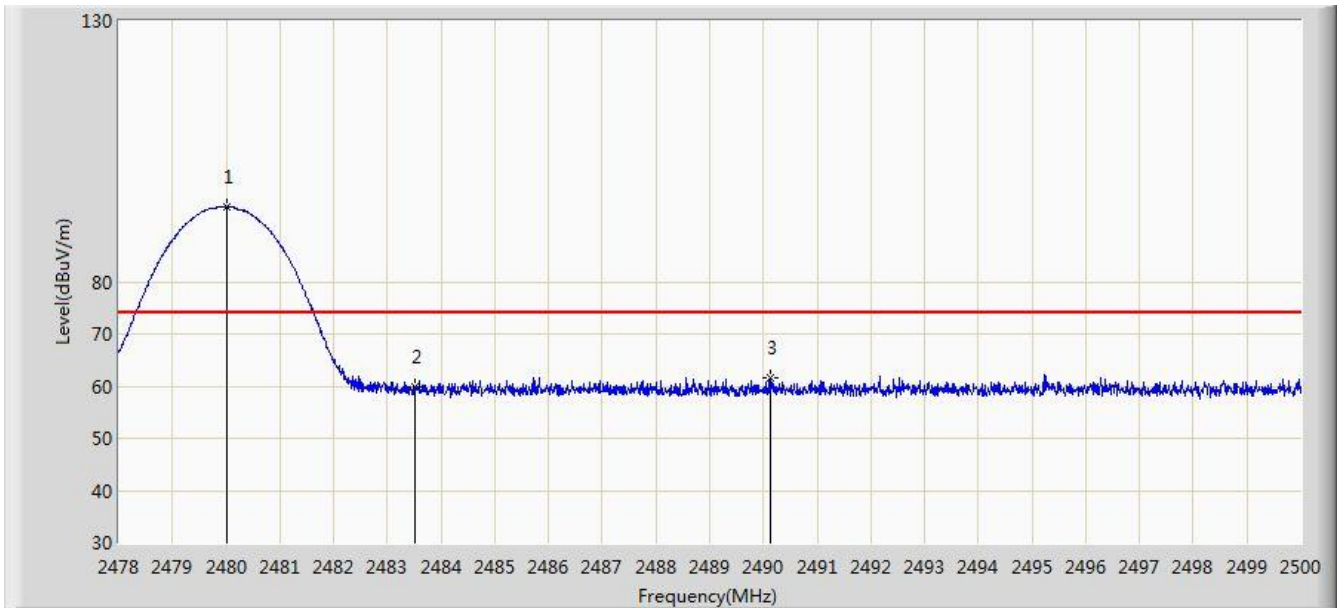


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	94.465	62.140	N/A	N/A	32.325	PK
2			2483.500	59.752	27.413	-14.248	74.000	32.340	PK
3			2490.144	61.639	29.274	-12.361	74.000	32.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2018/07/07 - 15:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Cat Hu
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Speaker ENEBY Built-in	Power: By Battery
Test Mode: Transmit by 3DH5 at channel 2480MHz	

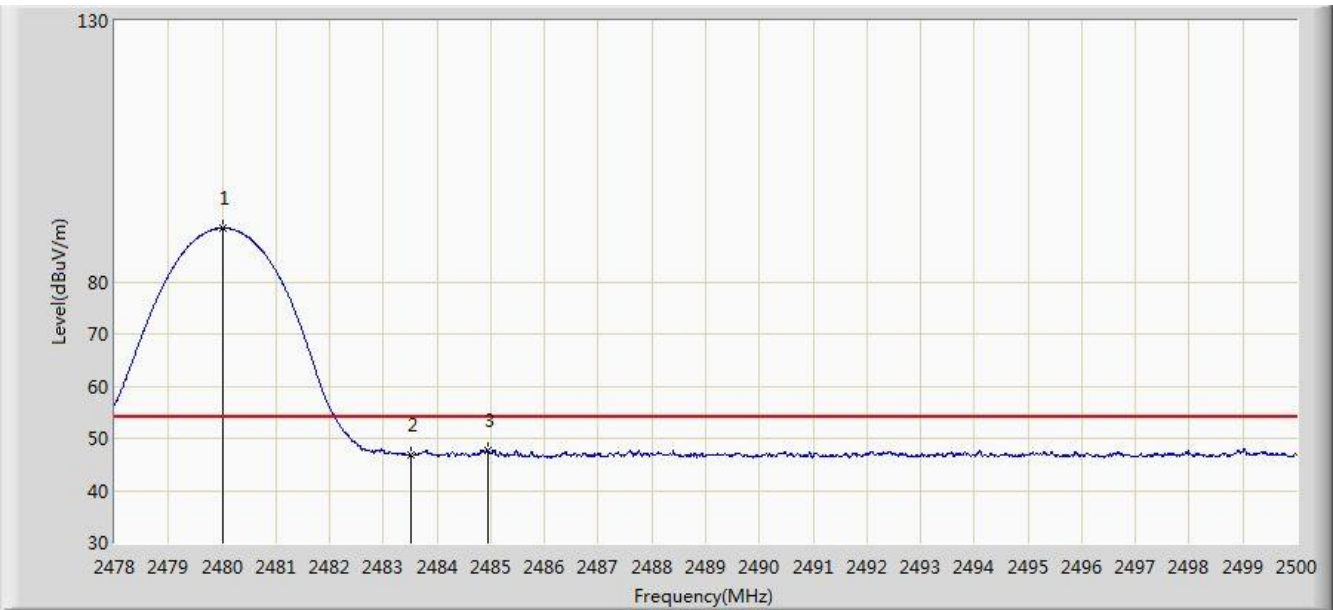

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.024	90.288	57.963	N/A	N/A	32.325	AV
2			2483.500	46.853	14.514	-7.147	54.000	32.340	AV
3			2484.941	47.587	15.242	-6.413	54.000	32.345	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.11. AC Conducted Emissions Measurement


7.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.11.2. Test Setup

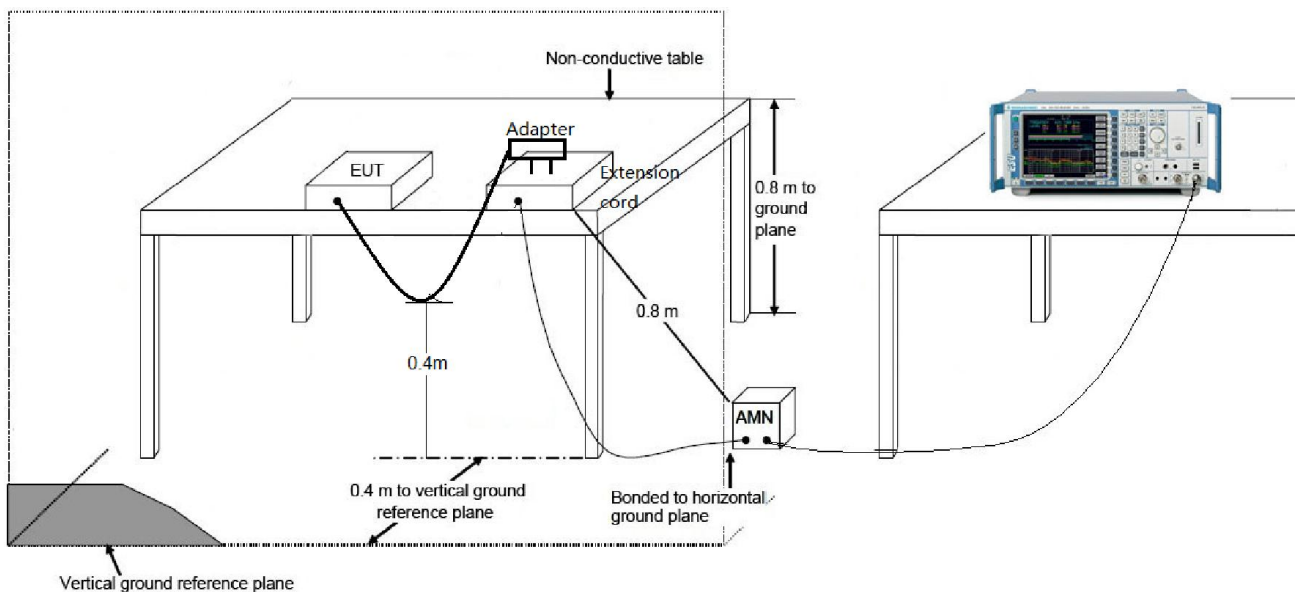

7.11.3. Test Result

Site: SR2	Time: 2018/07/12 - 17:46
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Wireless Speaker ENEBY Built-in	Power: AC 120V/60Hz
Worst Case Mode: Transmit by DH5 at channel 2402MHz	

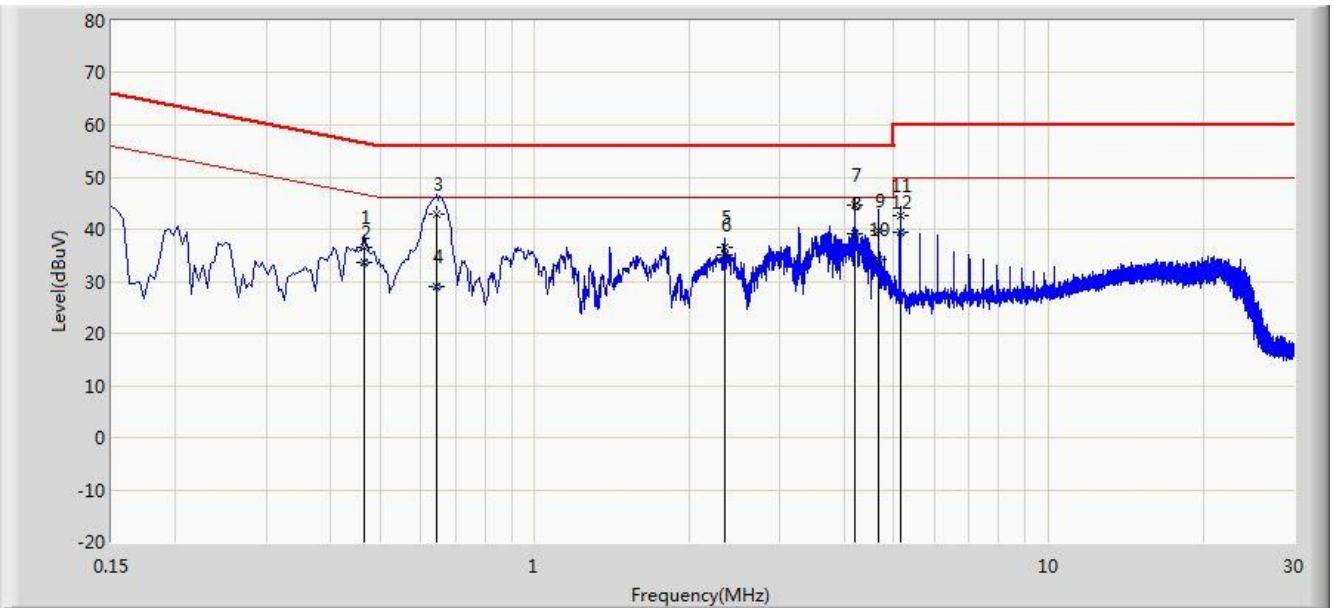


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.466	36.651	26.512	-19.934	56.585	10.139	QP
2			0.466	33.751	23.612	-12.834	46.585	10.139	AV
3			0.646	42.982	32.891	-13.018	56.000	10.091	QP
4			0.646	28.895	18.804	-17.105	46.000	10.091	AV
5			2.338	36.463	26.600	-19.537	56.000	9.862	QP
6			2.338	34.964	25.101	-11.036	46.000	9.862	AV
7			4.206	44.669	34.692	-11.331	56.000	9.977	QP
8		*	4.206	38.986	29.009	-7.014	46.000	9.977	AV
9			4.674	39.845	29.841	-16.155	56.000	10.004	QP
10			4.674	34.196	24.191	-11.804	46.000	10.004	AV
11			5.142	42.751	32.703	-17.249	60.000	10.048	QP
12			5.142	39.452	29.404	-10.548	50.000	10.048	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2018/07/12 - 17:50
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Wireless Speaker ENEBY Built-in	Power: AC 120V/60Hz
Worst Case Mode: Transmit by DH5 at channel 2402MHz	

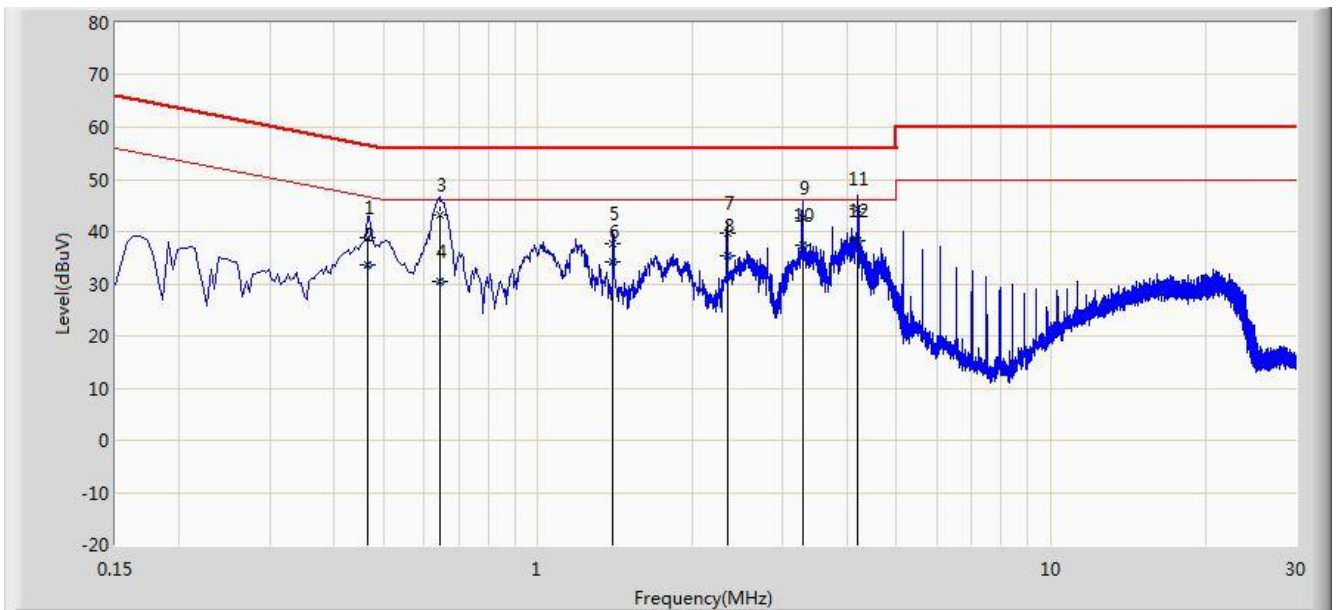

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.466	38.968	28.806	-17.617	56.585	10.162	QP
2			0.466	33.731	23.569	-12.854	46.585	10.162	AV
3			0.642	43.143	33.035	-12.857	56.000	10.108	QP
4			0.642	30.333	20.226	-15.667	46.000	10.108	AV
5			1.402	37.679	27.786	-18.321	56.000	9.894	QP
6			1.402	34.217	24.323	-11.783	46.000	9.894	AV
7			2.338	39.584	29.719	-16.416	56.000	9.865	QP
8			2.338	35.493	25.628	-10.507	46.000	9.865	AV
9			3.274	42.680	32.790	-13.320	56.000	9.890	QP
10			3.274	37.385	27.495	-8.615	46.000	9.890	AV
11			4.210	44.377	34.392	-11.623	56.000	9.985	QP
12		*	4.210	38.378	28.393	-7.622	46.000	9.985	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Wireless Speaker ENEBY Built-in** is in compliance with Part 15C of the FCC rules and RSS-247 of IC rules.

The End

Appendix A – Test Setup Photograph

Refer to “1807WSU002-UT” file.

Appendix B – EUT Photograph

Refer to “1807WSU002-UE” file.