

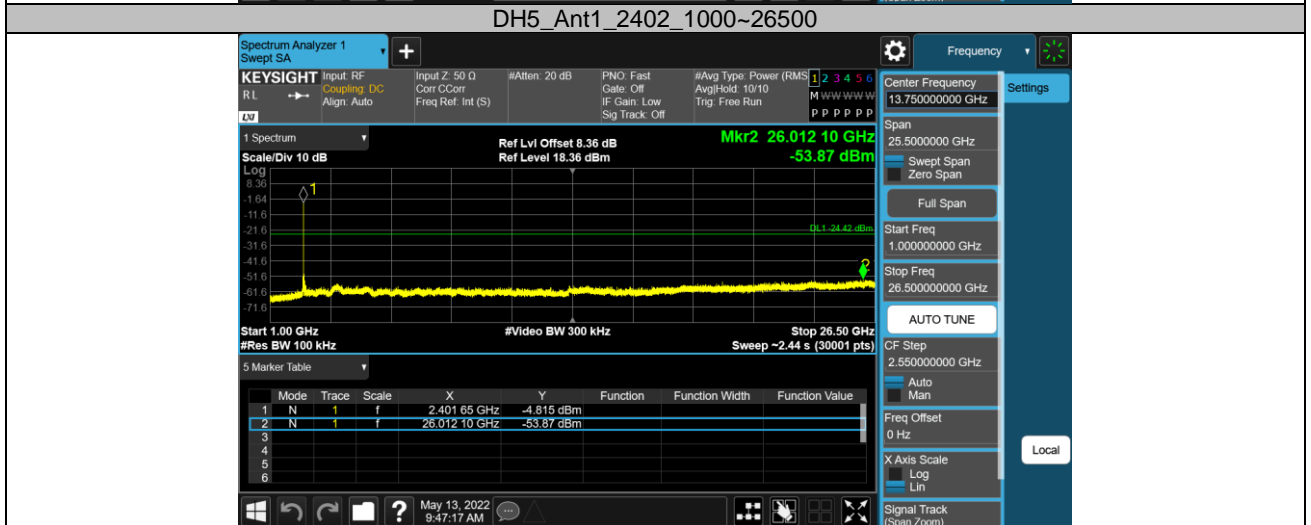
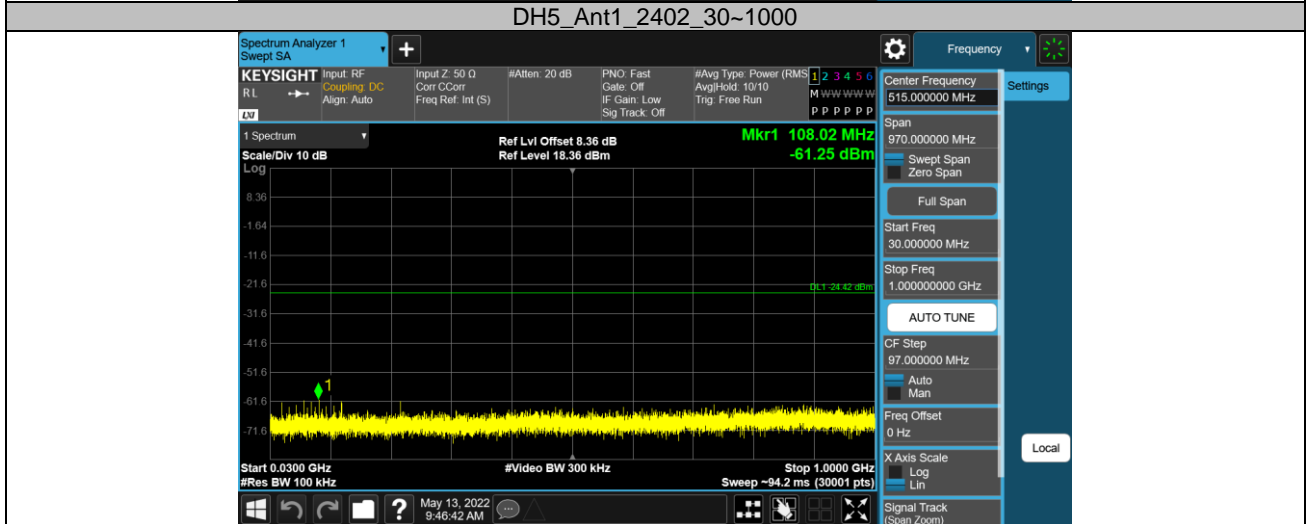
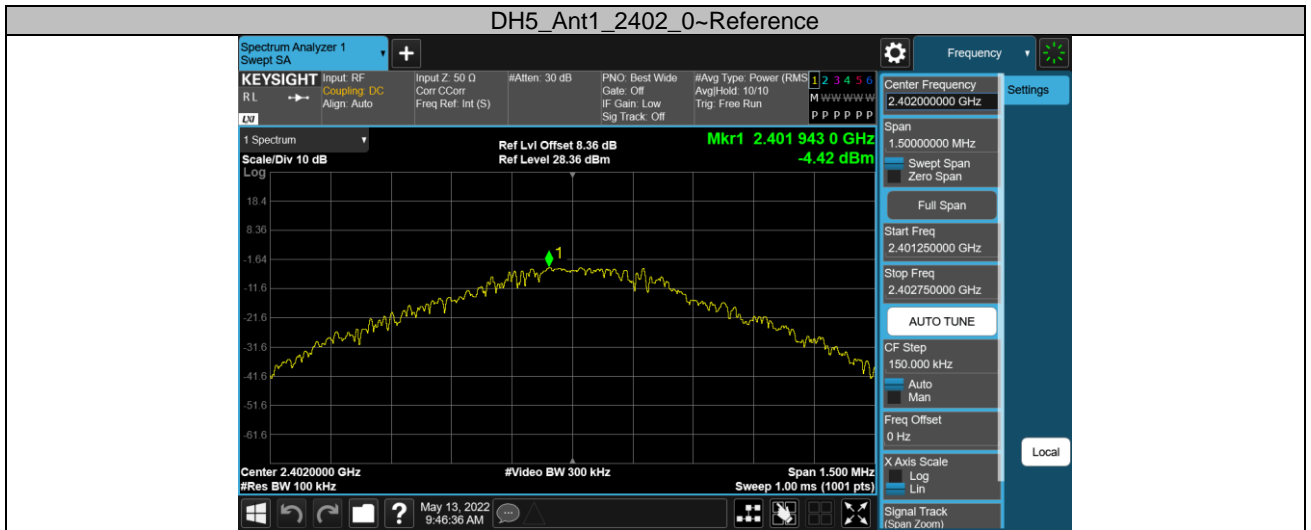
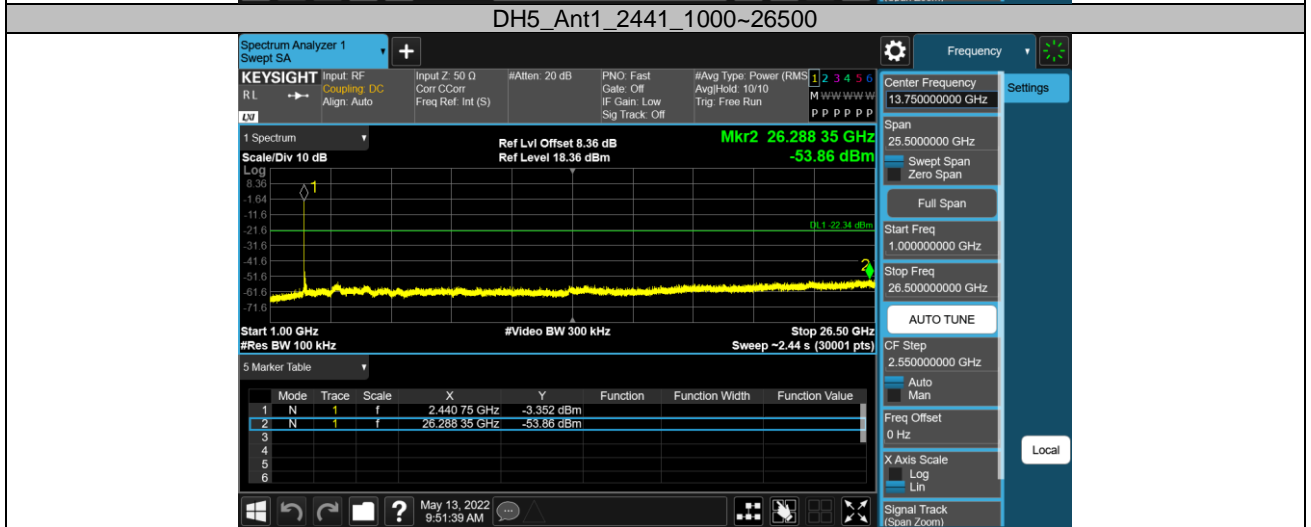





Appendix B.6: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth




Conducted Spurious Emission




TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-4.42	-4.42	---	PASS
			30~1000	-4.42	-61.25	≤-24.42	PASS
			1000~26500	-4.42	-53.87	≤-24.42	PASS
		2441	Reference	-2.34	-2.34	---	PASS
			30~1000	-2.34	-56.92	≤-22.34	PASS
			1000~26500	-2.34	-53.86	≤-22.34	PASS
		2480	Reference	-2.05	-2.05	---	PASS
			30~1000	-2.05	-59.87	≤-22.05	PASS
			1000~26500	-2.05	-52.71	≤-22.05	PASS
3DH5	Ant1	2402	Reference	-6.62	-6.62	---	PASS
			30~1000	-6.62	-58.8	≤-26.62	PASS
			1000~26500	-6.62	-52.79	≤-26.62	PASS
		2441	Reference	-3.32	-3.32	---	PASS
			30~1000	-3.32	-59.48	≤-23.32	PASS
			1000~26500	-3.32	-52.84	≤-23.32	PASS
		2480	Reference	-5.05	-5.05	---	PASS
			30~1000	-5.05	-58.38	≤-25.05	PASS
			1000~26500	-5.05	-52.88	≤-25.05	PASS



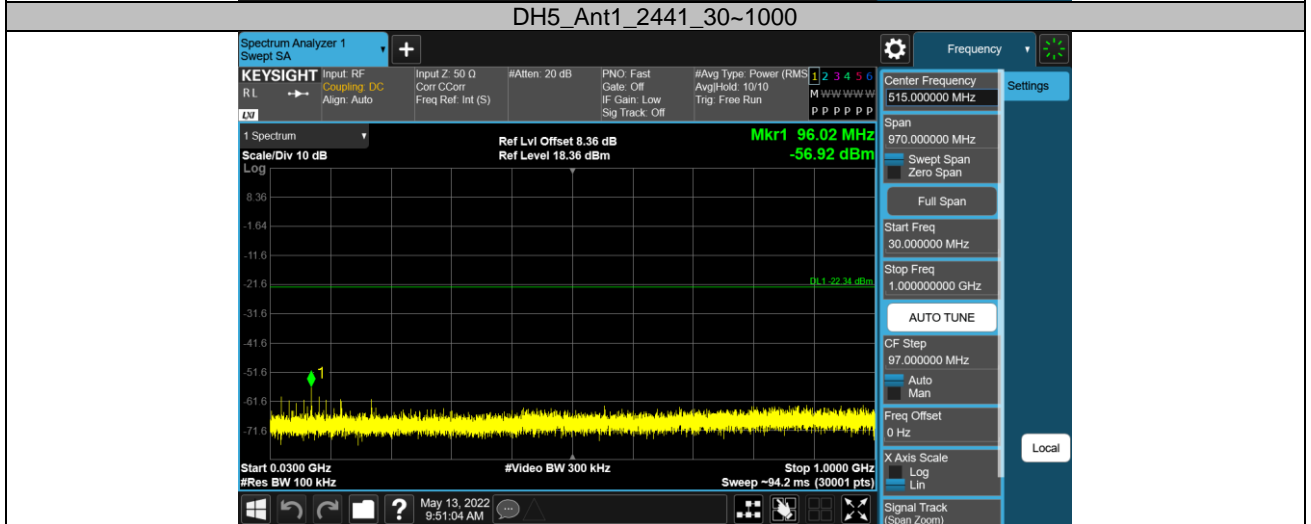


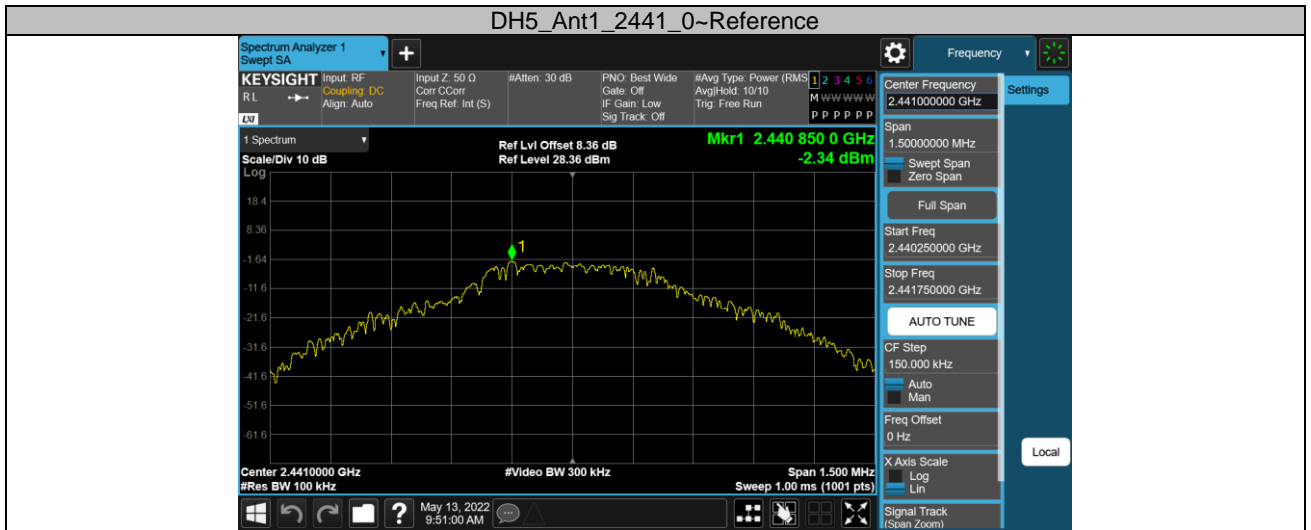

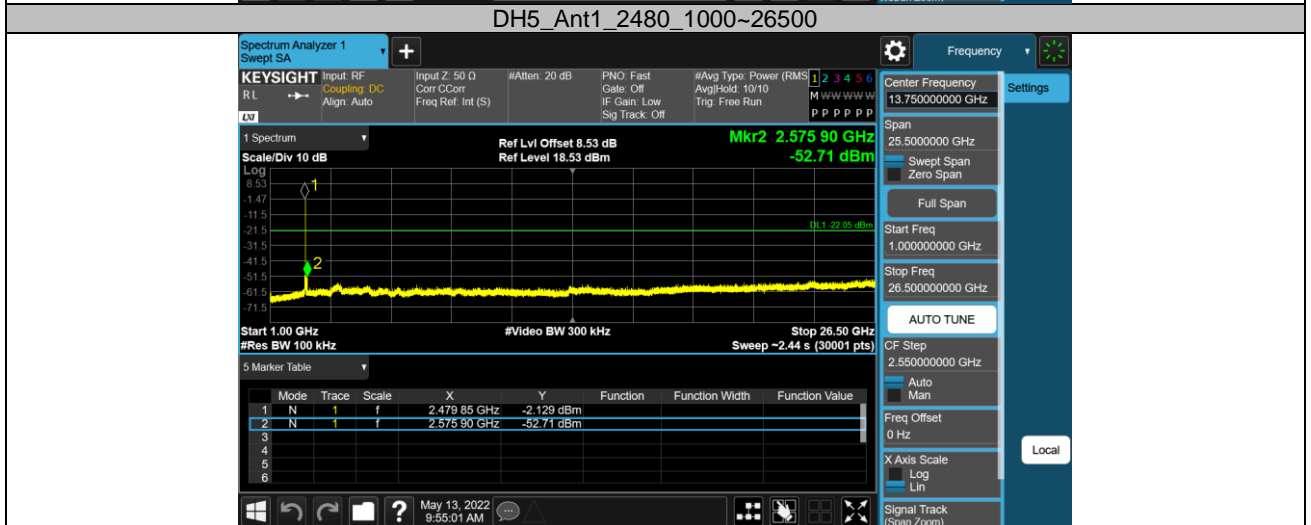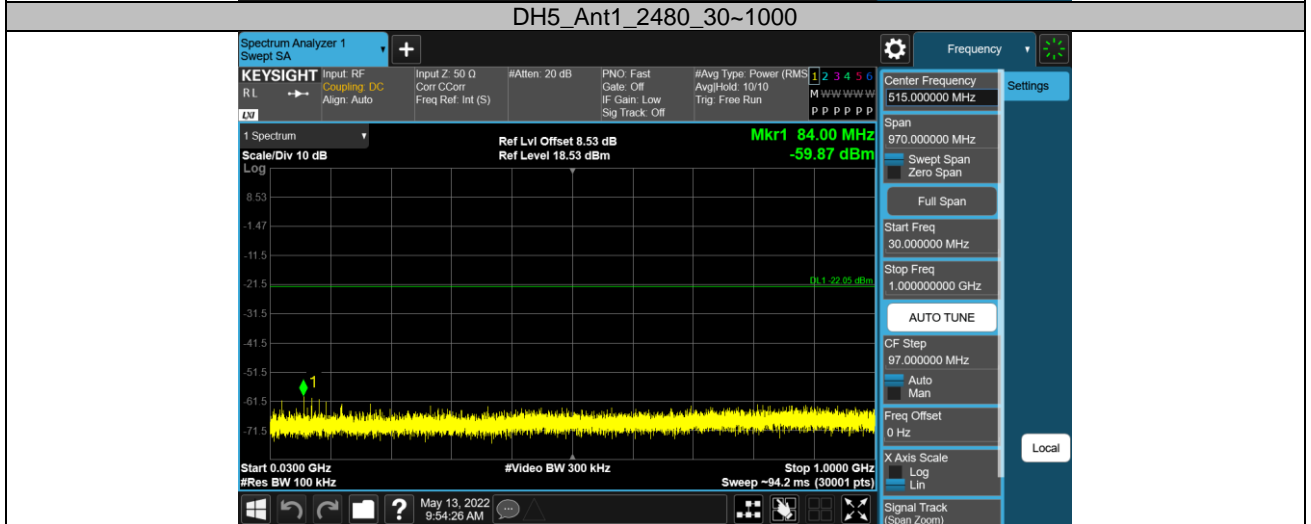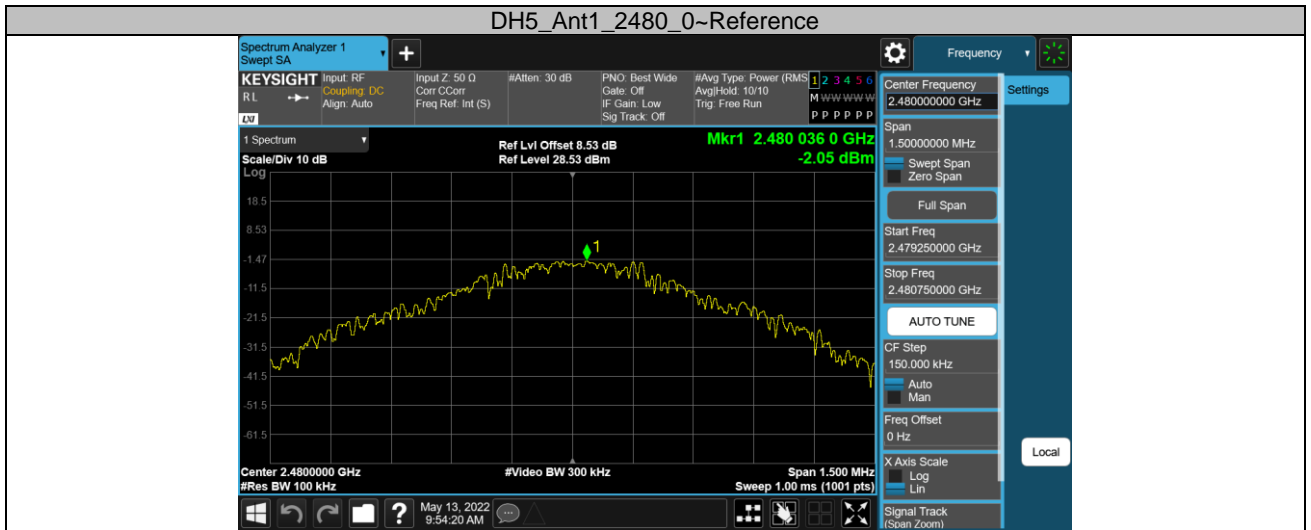

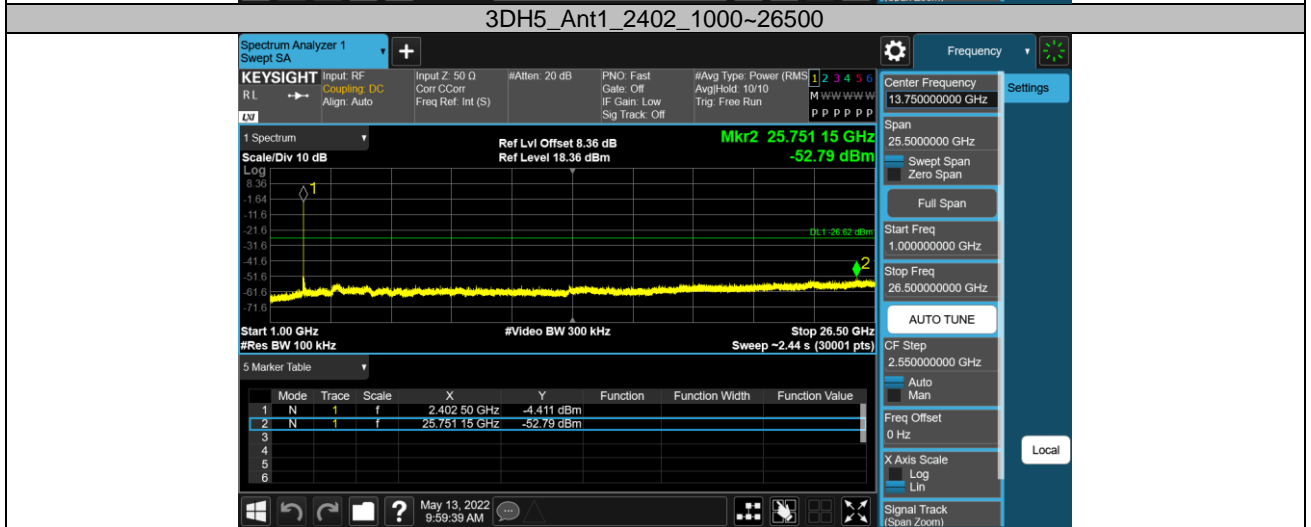
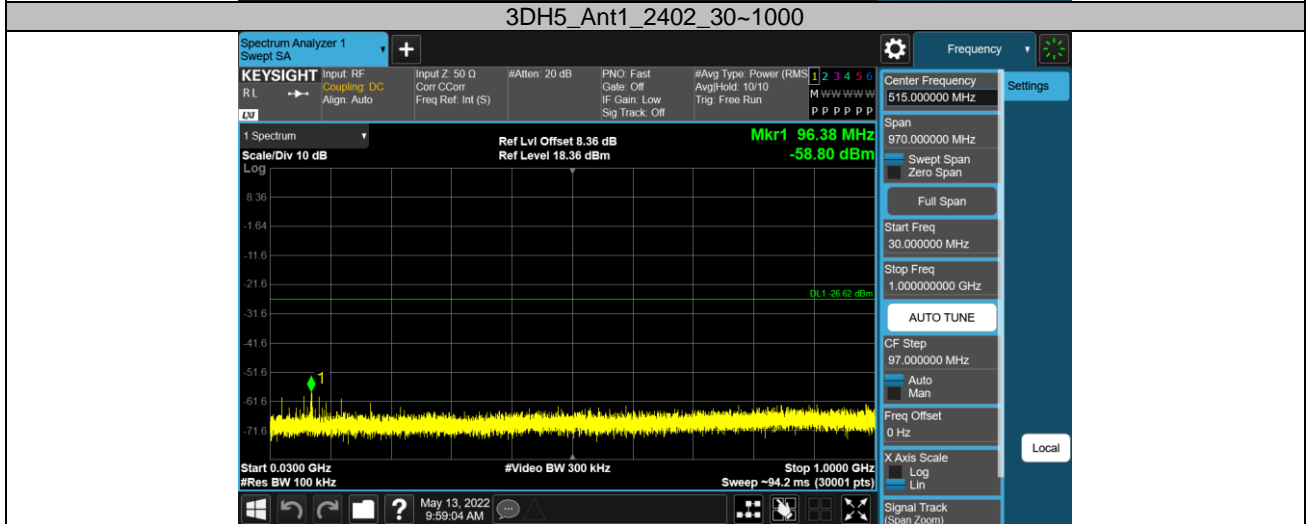
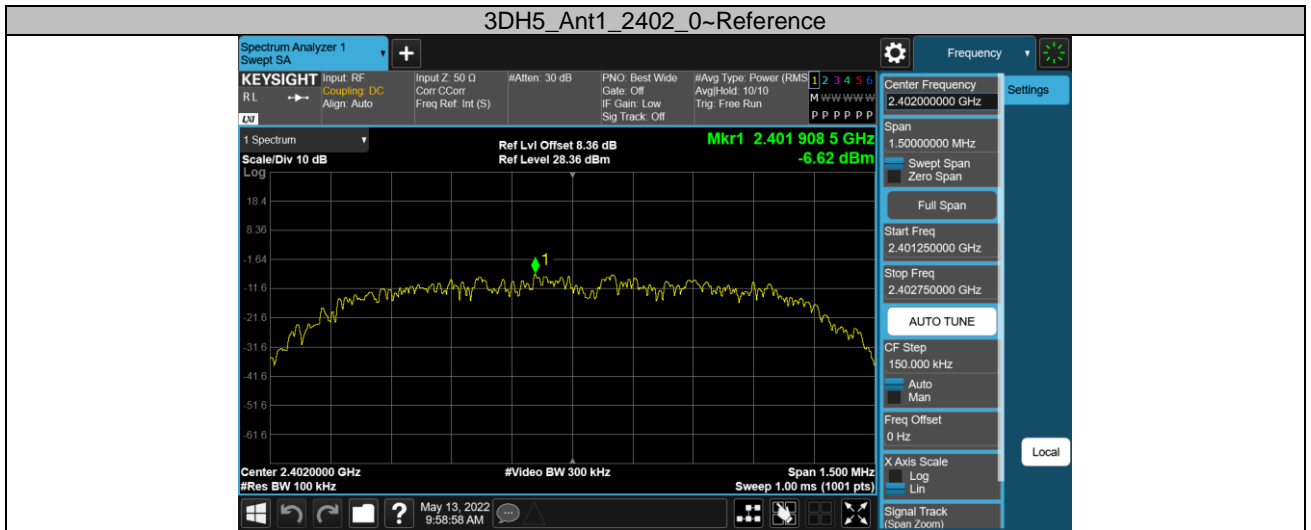


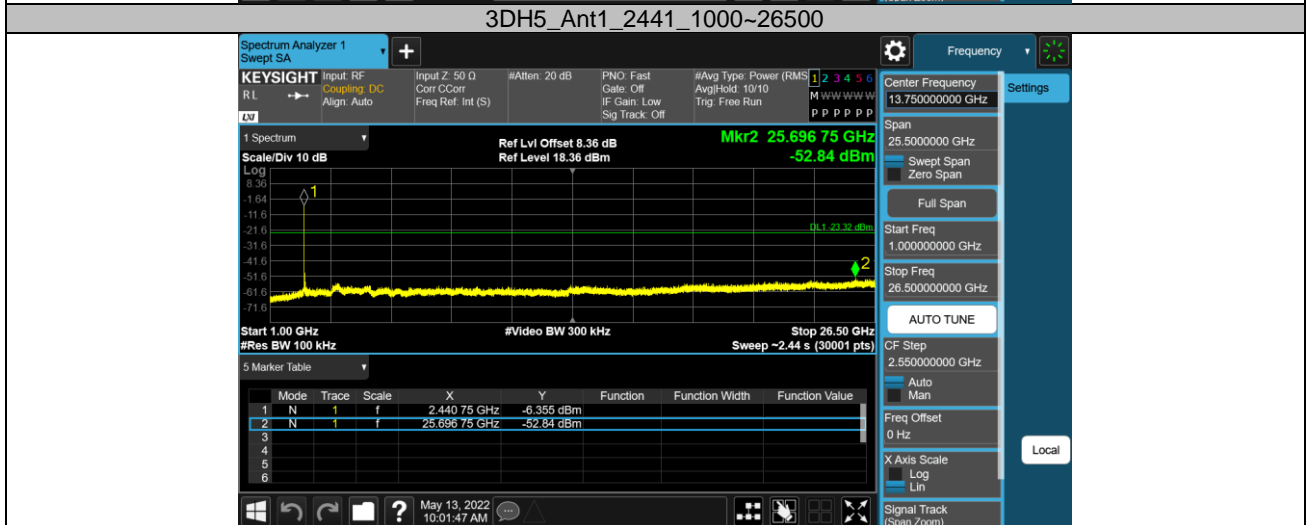
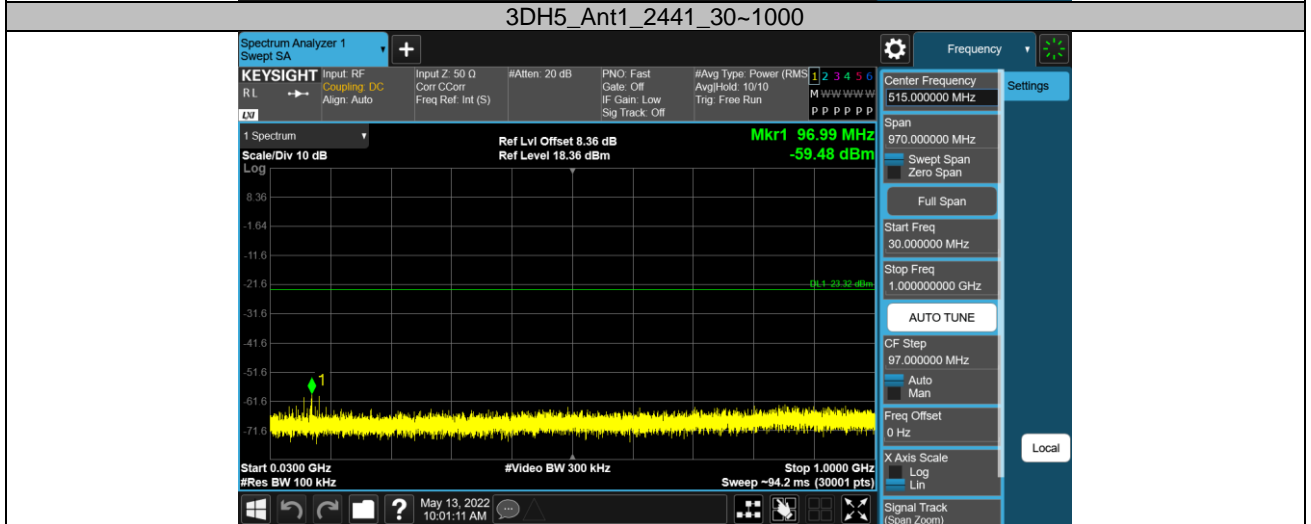
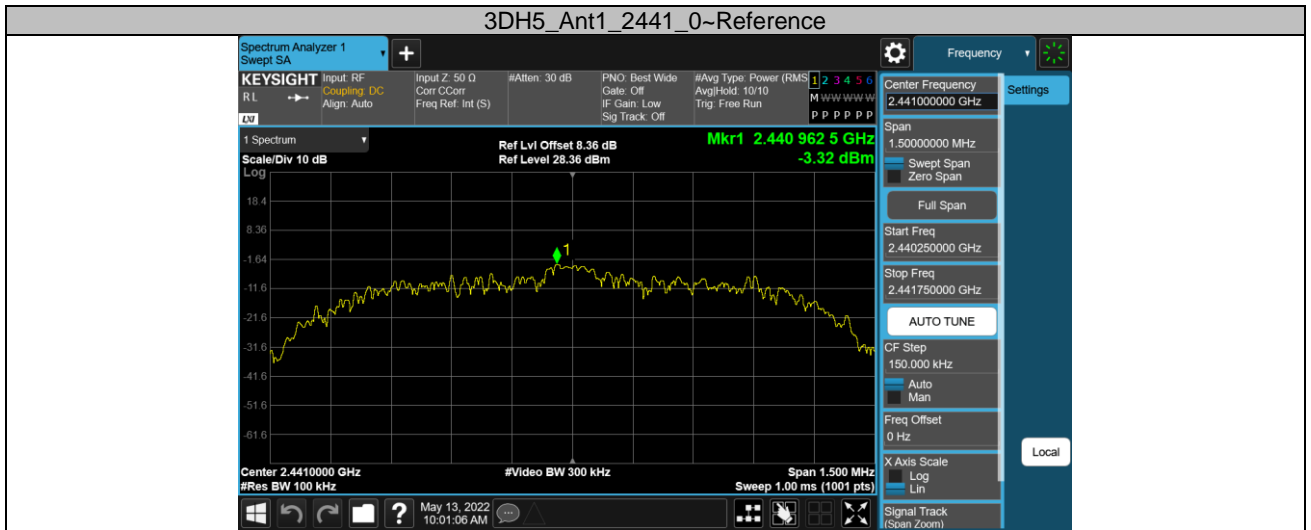


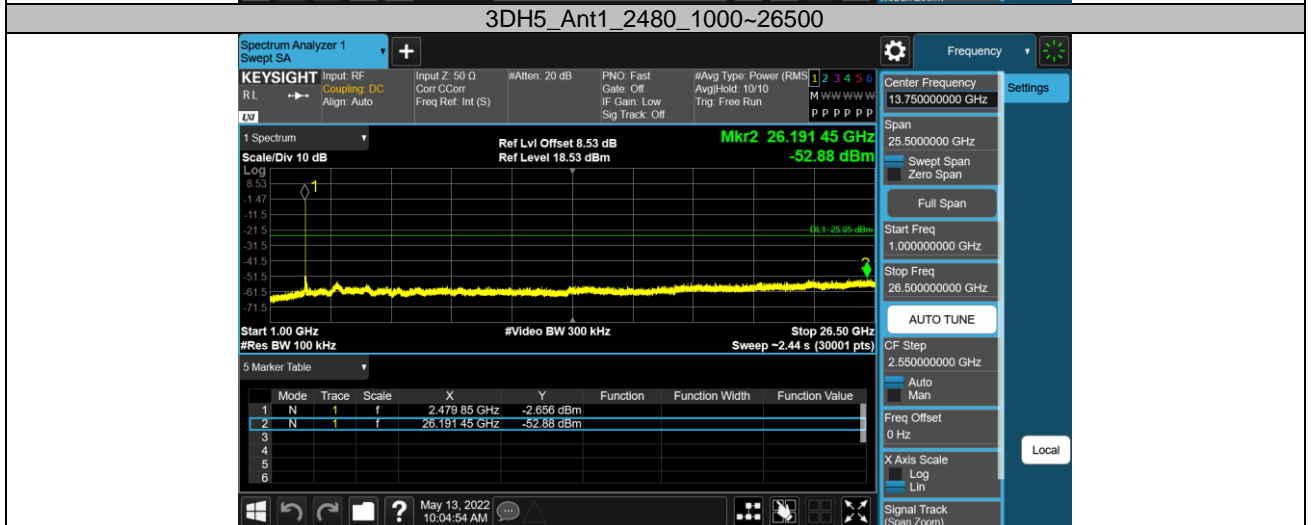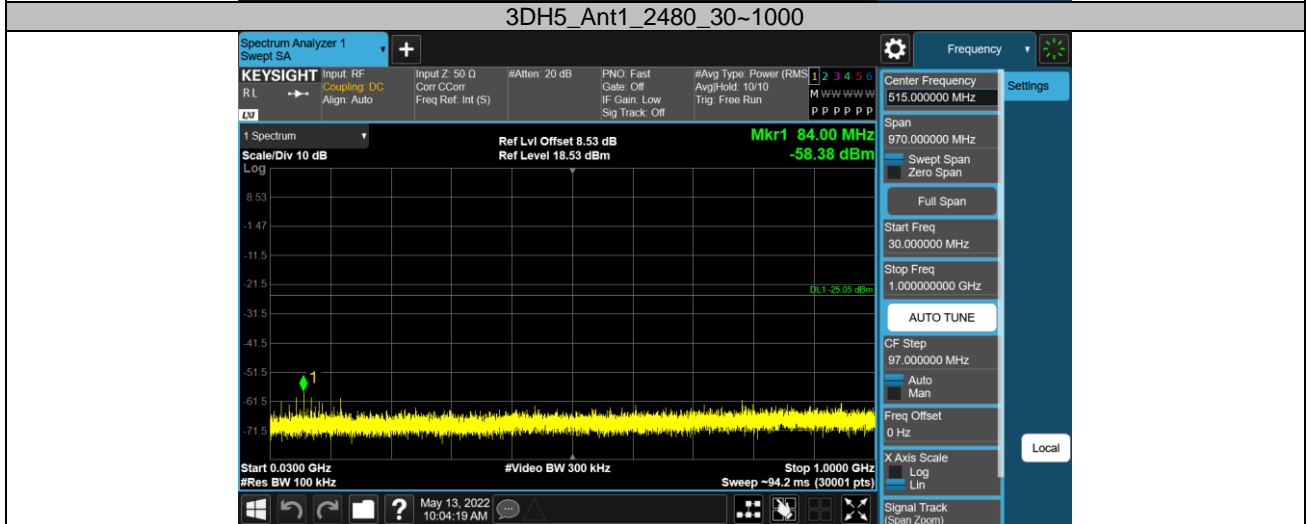
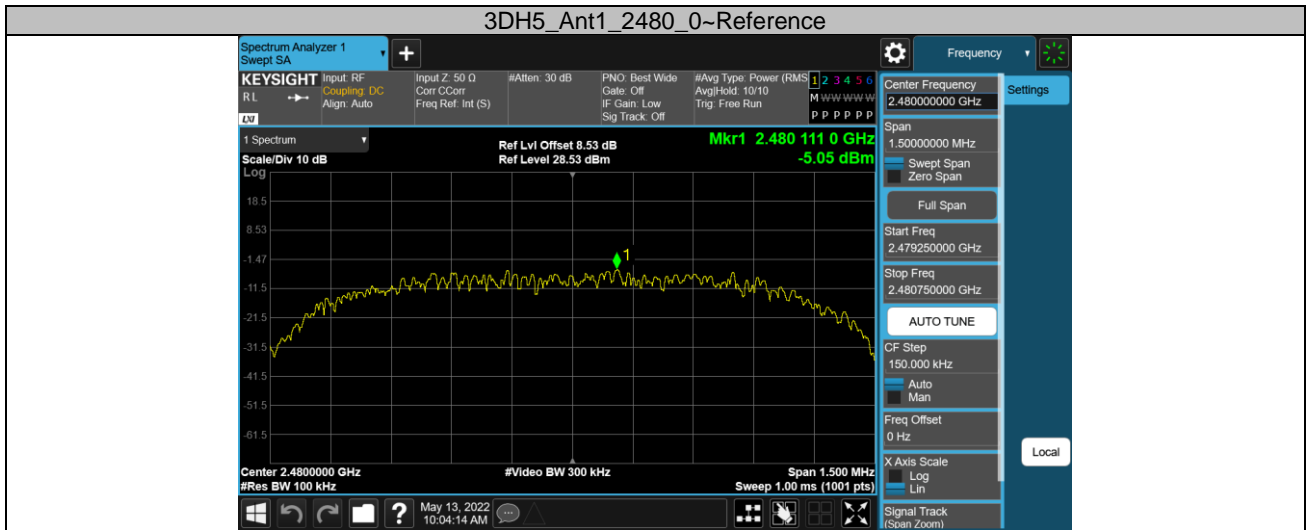


Band Edge

TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-3.80	-46.67	≤-23.8	PASS
		High	2480	-1.59	-45.82	≤-21.59	PASS
		Low	Hop_2402	-3.79	-48.09	≤-23.79	PASS
		High	Hop_2480	-2.15	-47.91	≤-22.15	PASS
3DH5	Ant1	Low	2402	-3.53	-48.79	≤-23.53	PASS
		High	2480	-1.45	-48.26	≤-21.45	PASS
		Low	Hop_2402	-3.94	-48.62	≤-23.94	PASS
		High	Hop_2480	-4.31	-48.65	≤-24.31	PASS

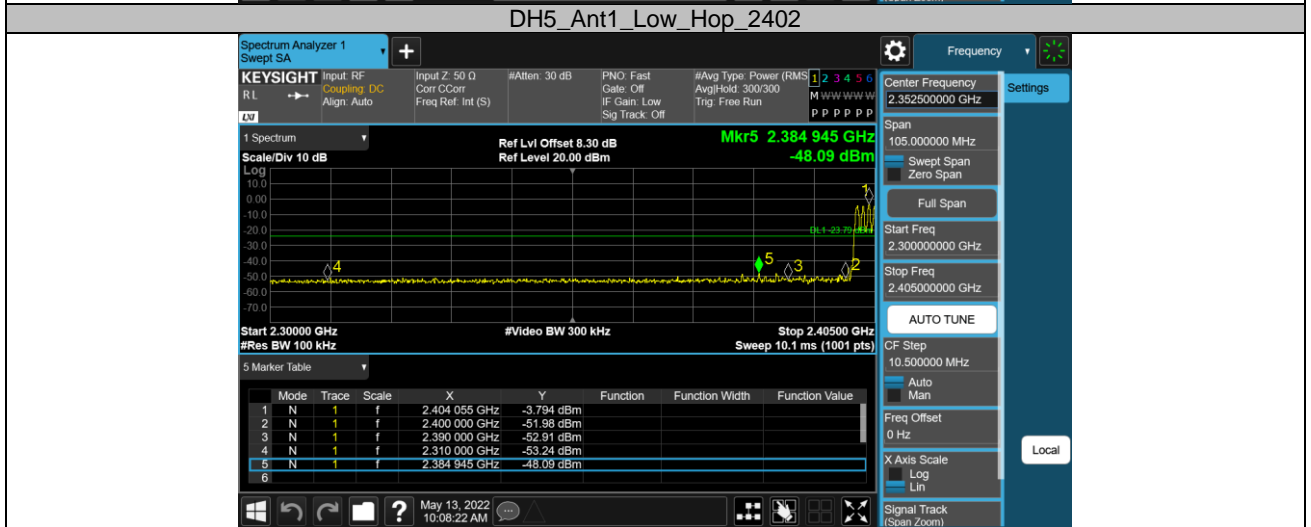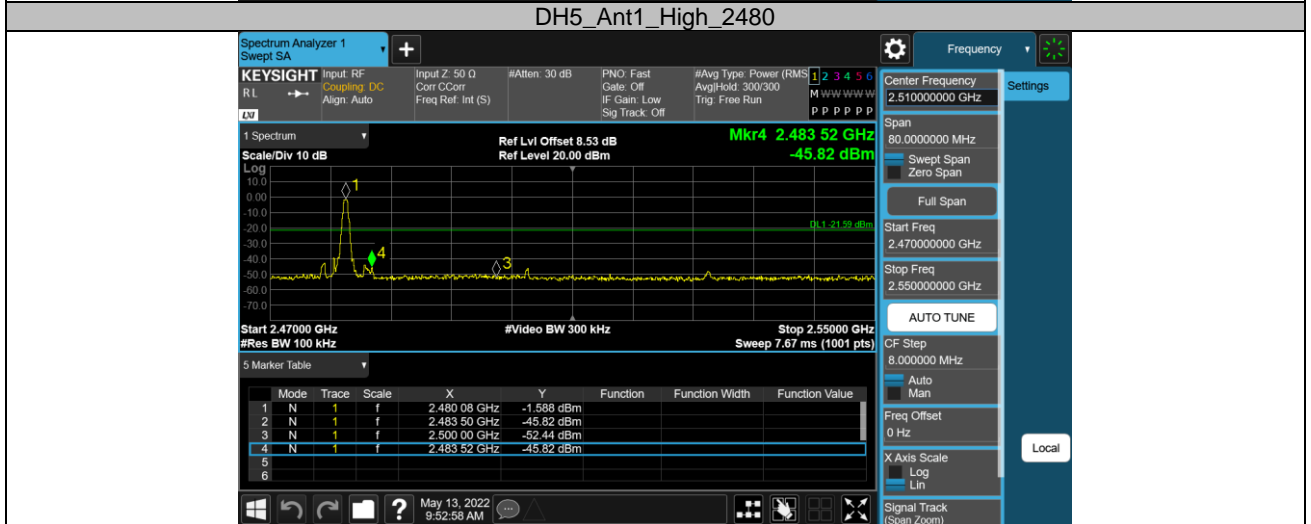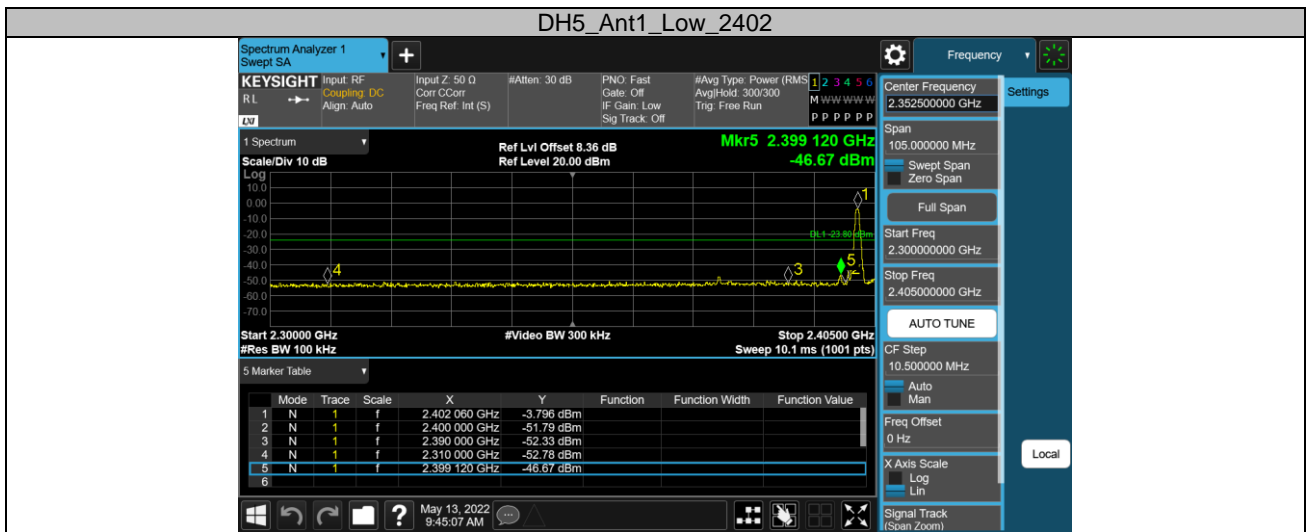

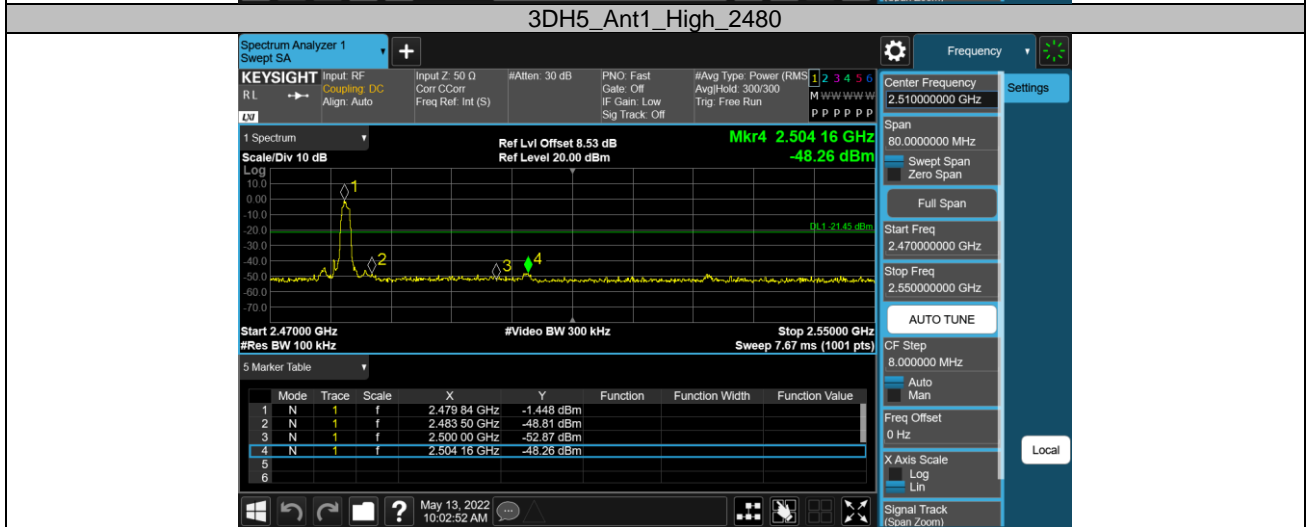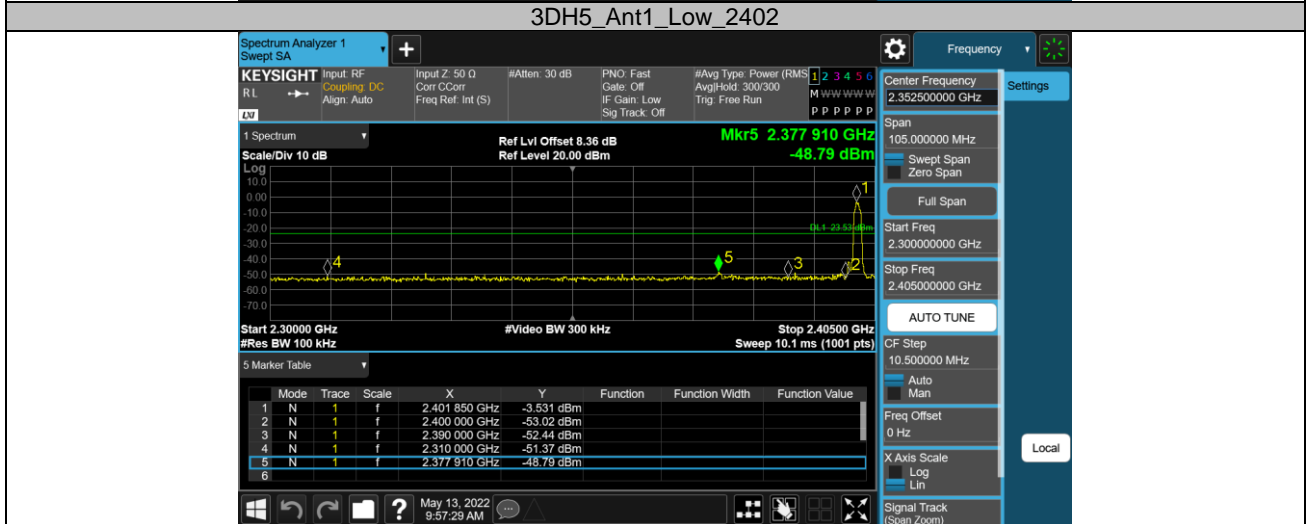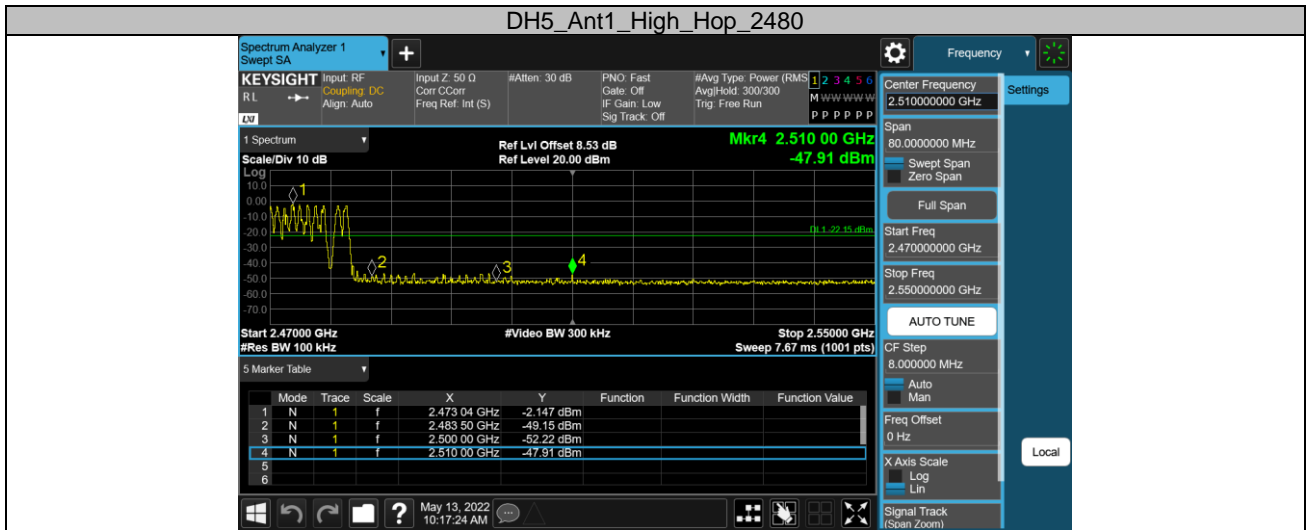

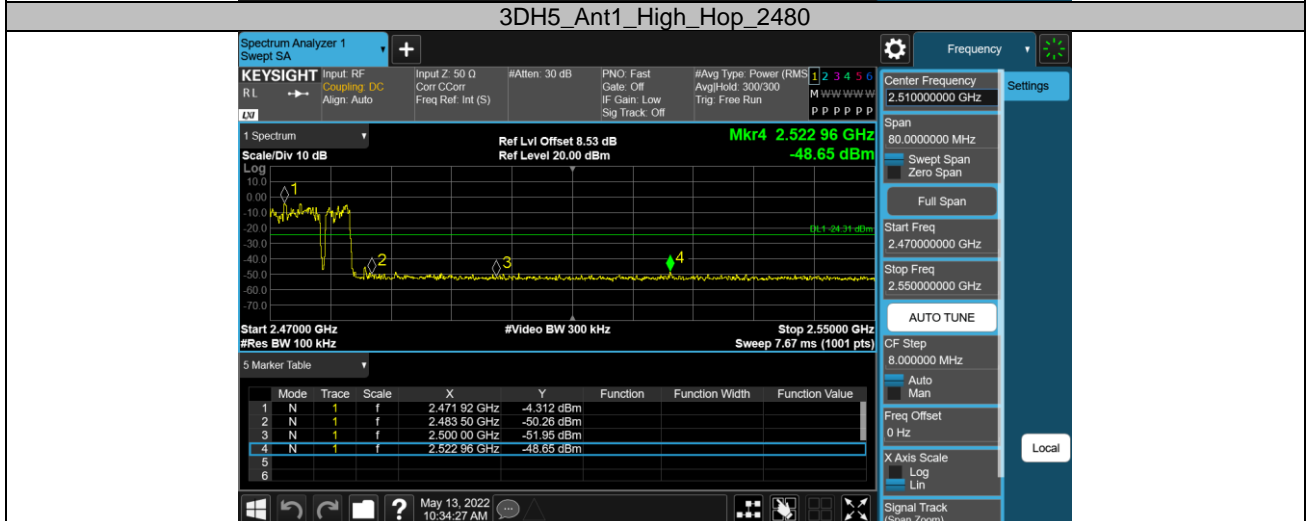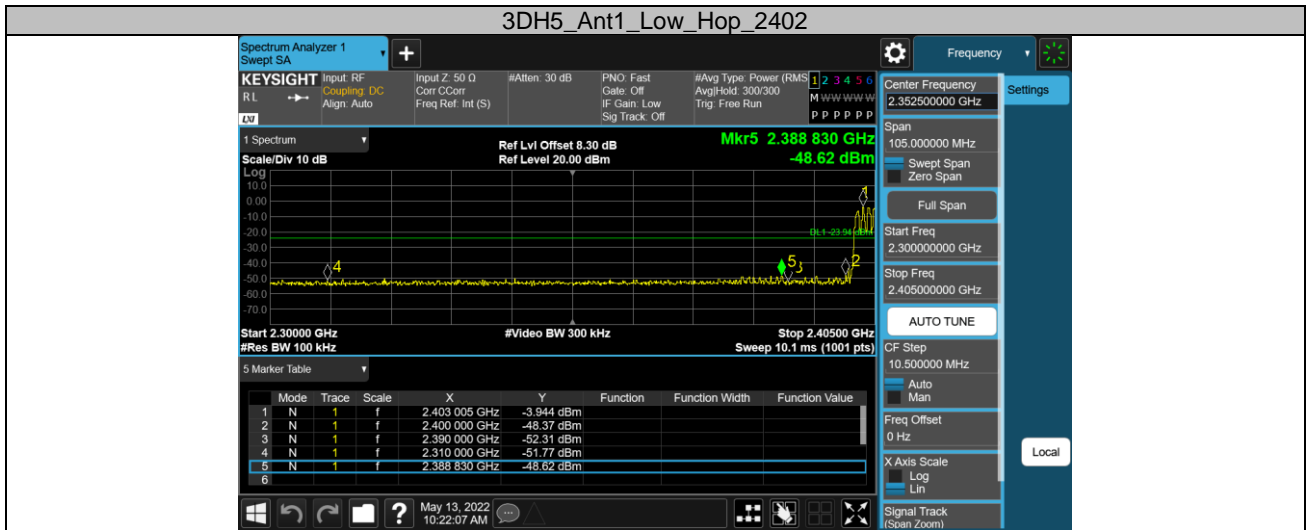


Appendix B.7: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case was presented in this report.

30MHz - 1GHz

EUT Information

EUT Name:	VAPPEBY PT
Model:	E2133
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168371336/A003254344-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

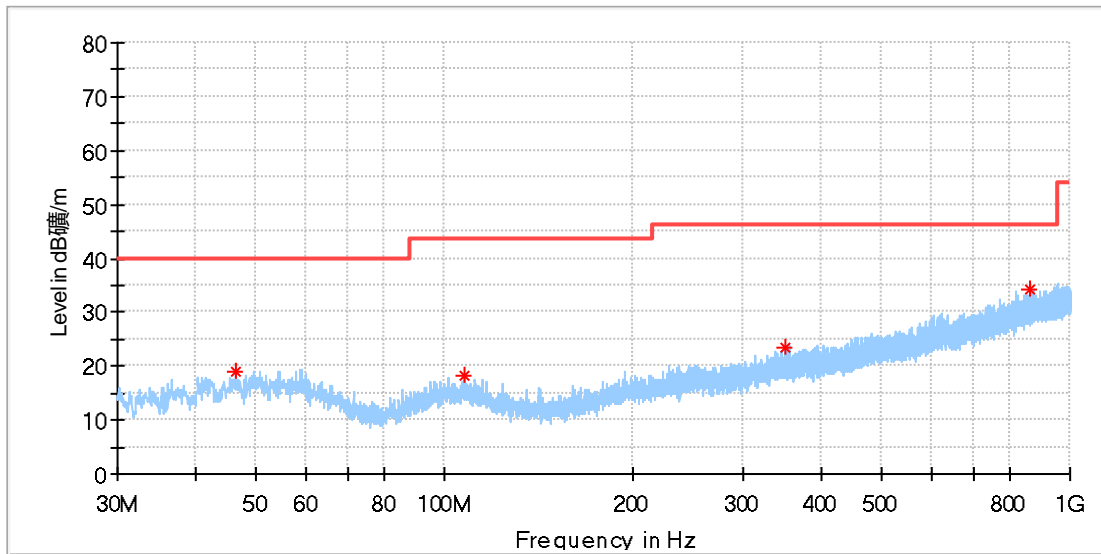

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.393000	19.03	40.00	20.97	100.0	H	324.0	-18.6
107.600000	18.07	43.50	25.43	100.0	H	133.0	-18.9
349.906000	23.60	46.00	22.40	100.0	H	54.0	-14.8
861.775000	34.33	46.00	11.67	100.0	H	347.0	-5.3

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

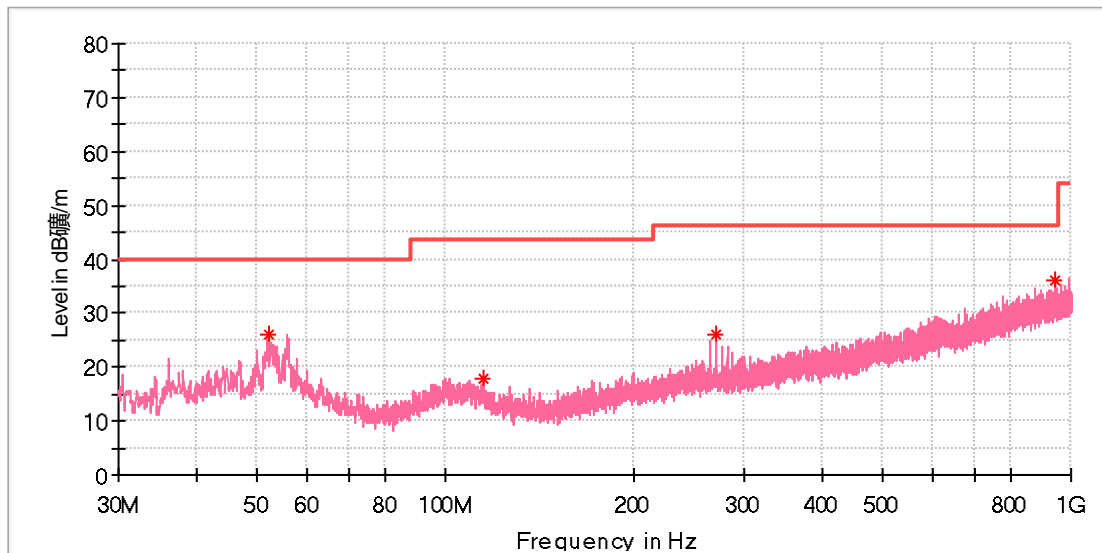

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.019000	25.99	40.00	14.01	100.0	V	0.0	-18.4
114.972000	17.70	43.50	25.80	100.0	V	161.0	-19.7
269.978000	25.96	46.00	20.04	100.0	V	133.0	-17.0
943.303500	36.04	46.00	9.96	100.0	V	11.0	-4.5

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

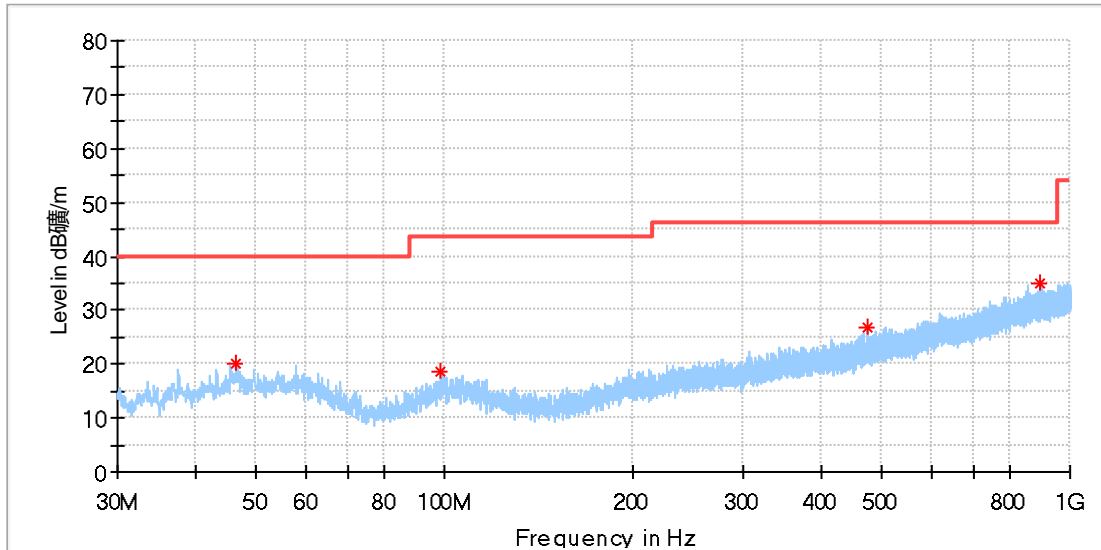

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.538500	20.03	40.00	19.97	100.0	H	23.0	-18.6
98.821500	18.66	43.50	24.84	100.0	H	343.0	-19.2
472.902000	26.69	46.00	19.31	100.0	H	207.0	-12.3
893.688000	35.00	46.00	11.00	100.0	H	245.0	-5.0

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

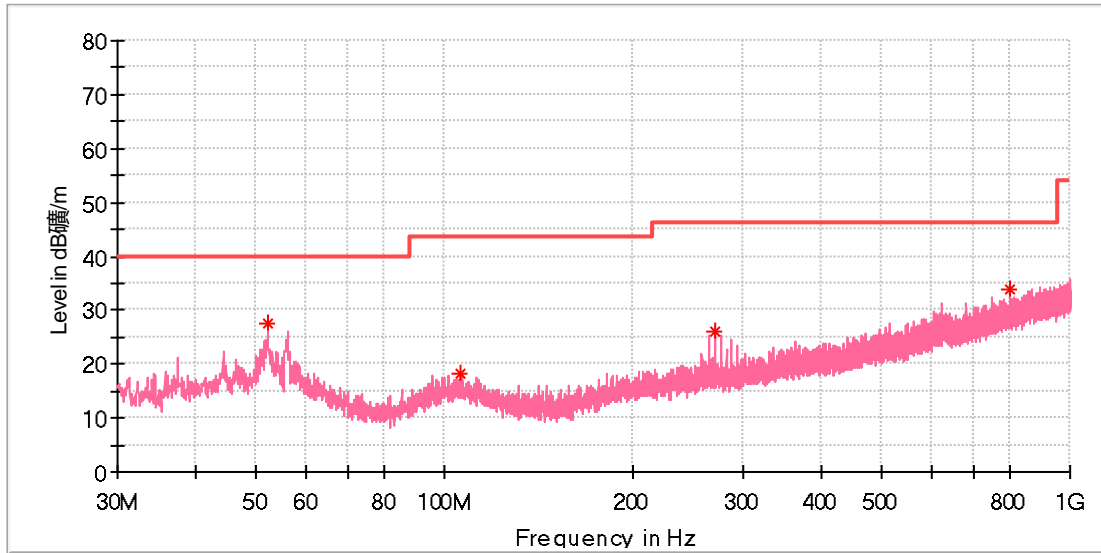

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
52.116000	27.40	40.00	12.60	100.0	V	113.0	-18.4
106.387500	18.37	43.50	25.13	100.0	V	280.0	-18.8
269.978000	25.91	46.00	20.09	100.0	V	204.0	-17.0
803.866000	33.71	46.00	12.29	100.0	V	350.0	-6.3

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

EUT Name:	VAPPEBY PT
Model:	E2133
Test Mode:	BR_DH5_Low channel
Order No/Sample No:	168371336/A003254344-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

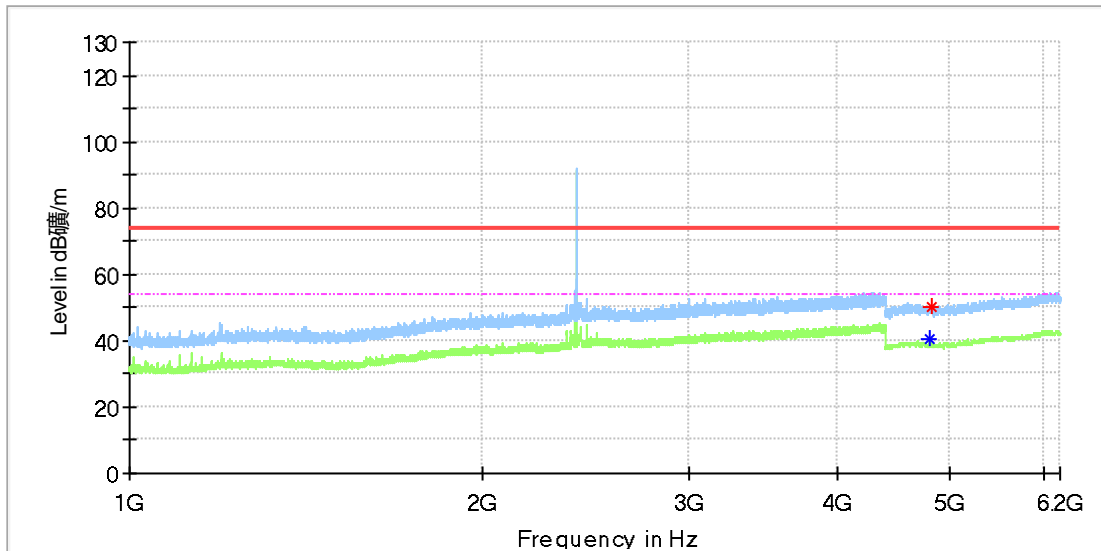

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4801.000000	---	40.48	54.00	13.52	100.0	H	169.0	11.8
4813.000000	50.13	---	74.00	23.87	100.0	H	22.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

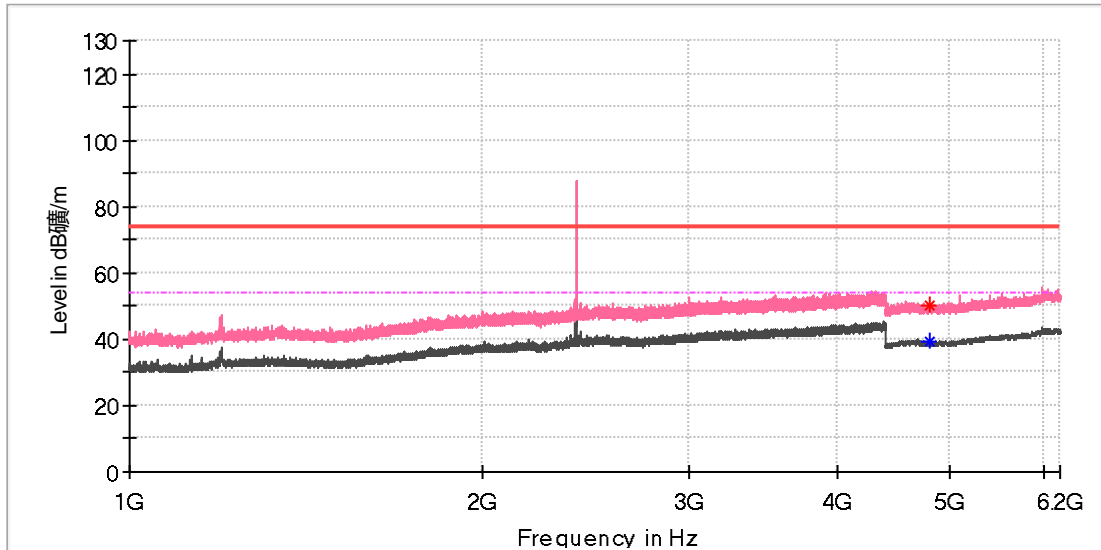

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4800.500000	---	39.57	54.00	14.43	100.0	V	295.0	11.8
4808.000000	50.41	---	74.00	23.59	100.0	V	122.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

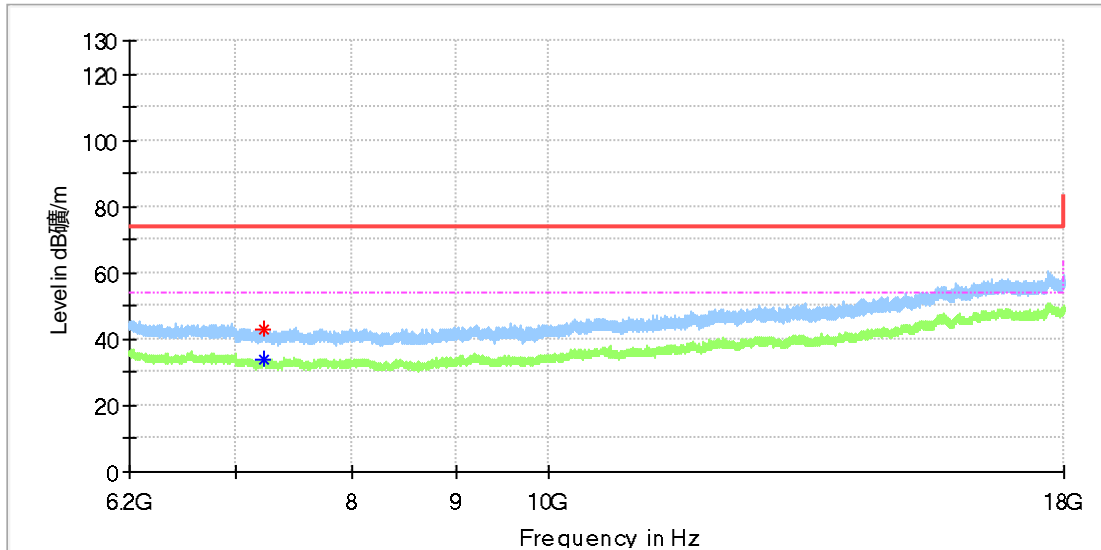

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7219.225000	42.74	---	74.00	31.26	100.0	H	218.0	8.7
7225.616667	---	33.74	54.00	20.26	100.0	H	0.0	8.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

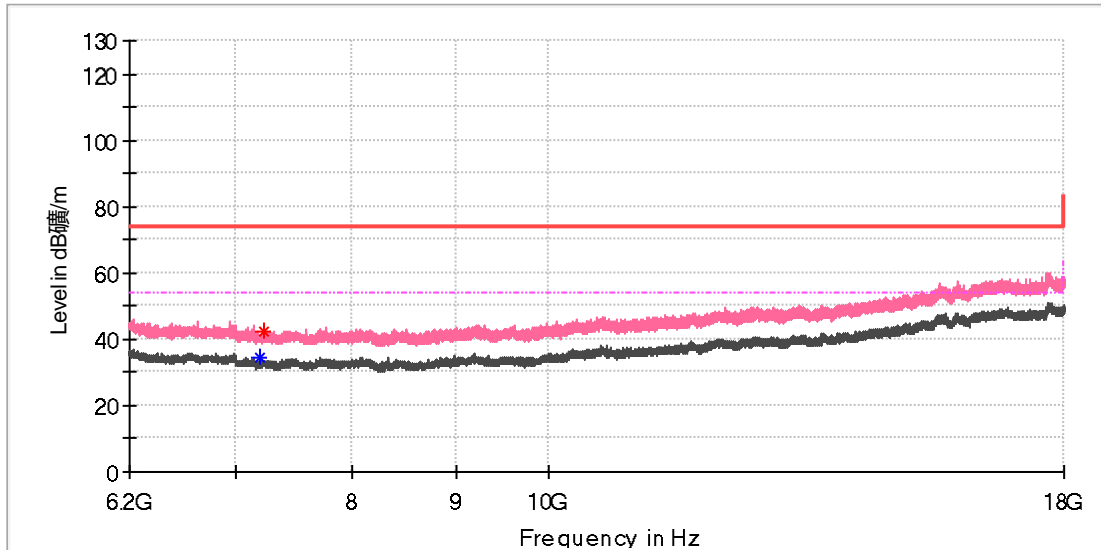

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7198.575000	---	34.45	54.00	19.55	100.0	V	0.0	8.8
7234.466667	42.45	---	74.00	31.55	100.0	V	235.0	8.6

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	VAPPEBY PT
Model:	E2133
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168371336/A003254344-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

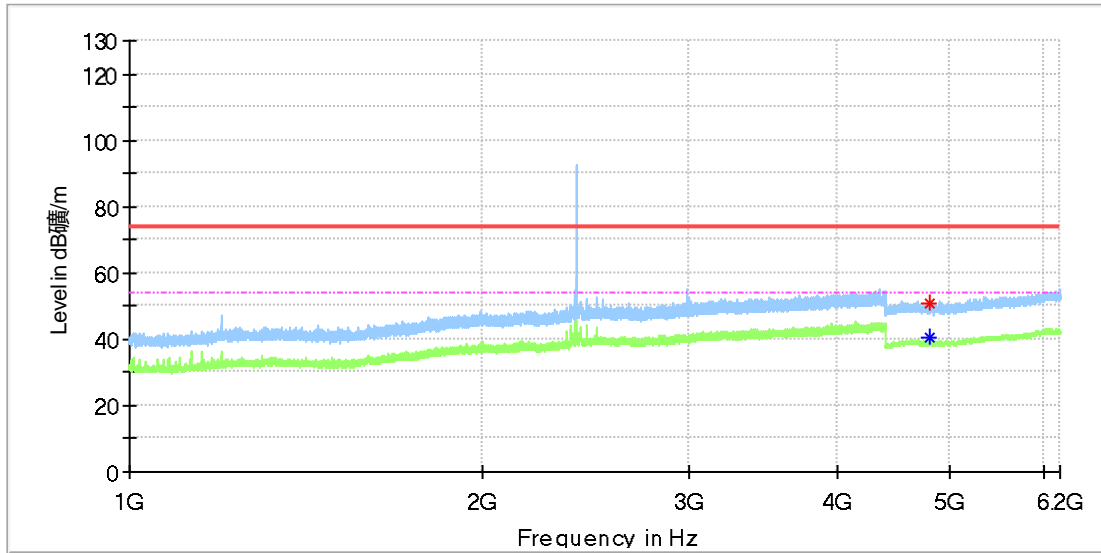

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4800.000000	50.96	---	74.00	23.04	100.0	H	56.0	11.8
4801.000000	---	40.44	54.00	13.56	100.0	H	49.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_Mid channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

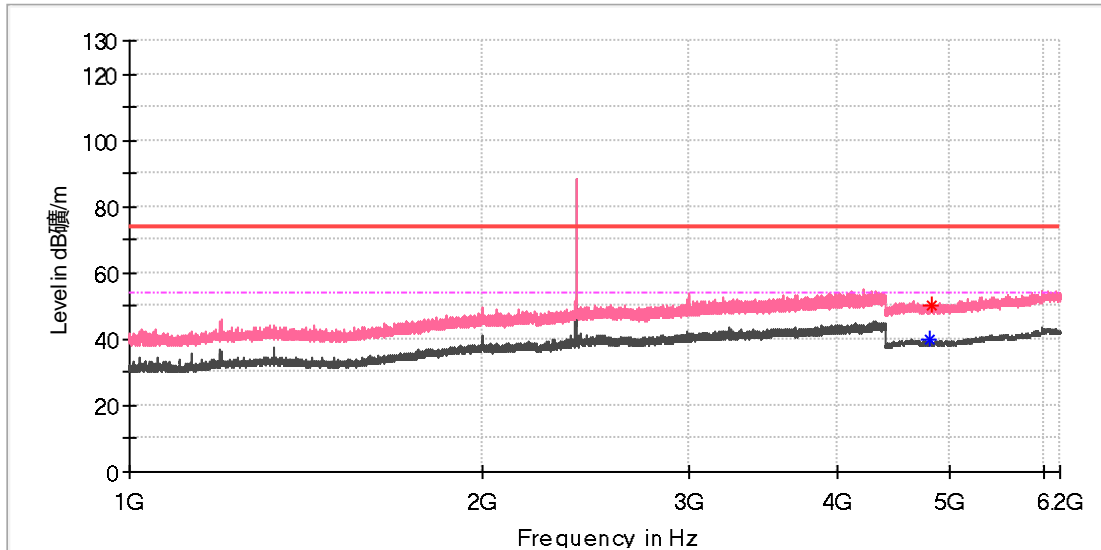

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4801.000000	---	39.79	54.00	14.21	100.0	V	250.0	11.8
4816.500000	50.42	---	74.00	23.58	100.0	V	94.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	VAPPEBY PT
Model:	E2133
Test Mode:	BR_DH5_Mid channel
Order No/Sample No:	168371336/A003254344-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

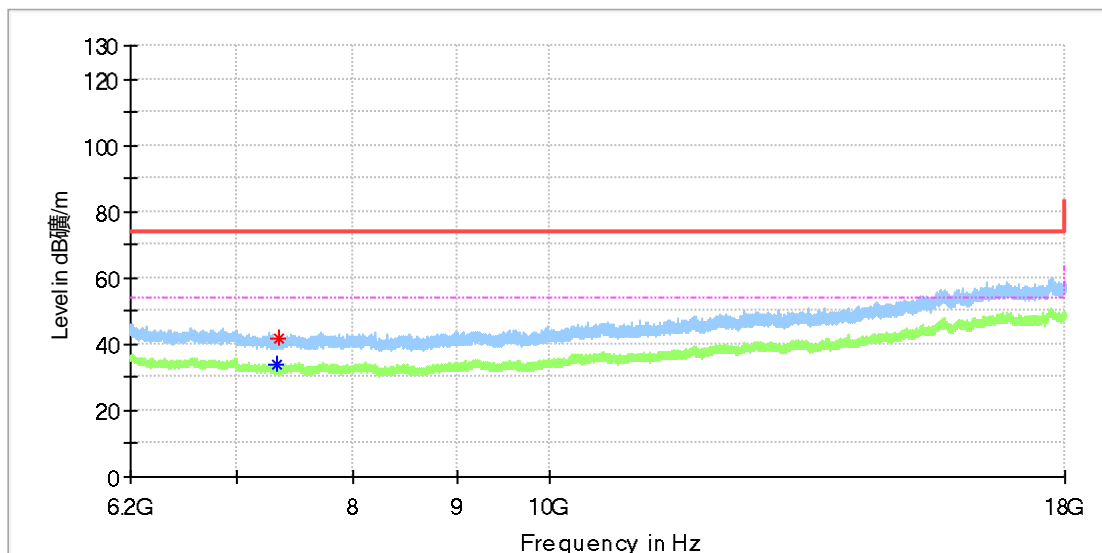

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7329.358333	---	33.74	54.00	20.26	100.0	H	272.0	8.1
7337.716667	41.70	---	74.00	32.30	100.0	H	168.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_Mid channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

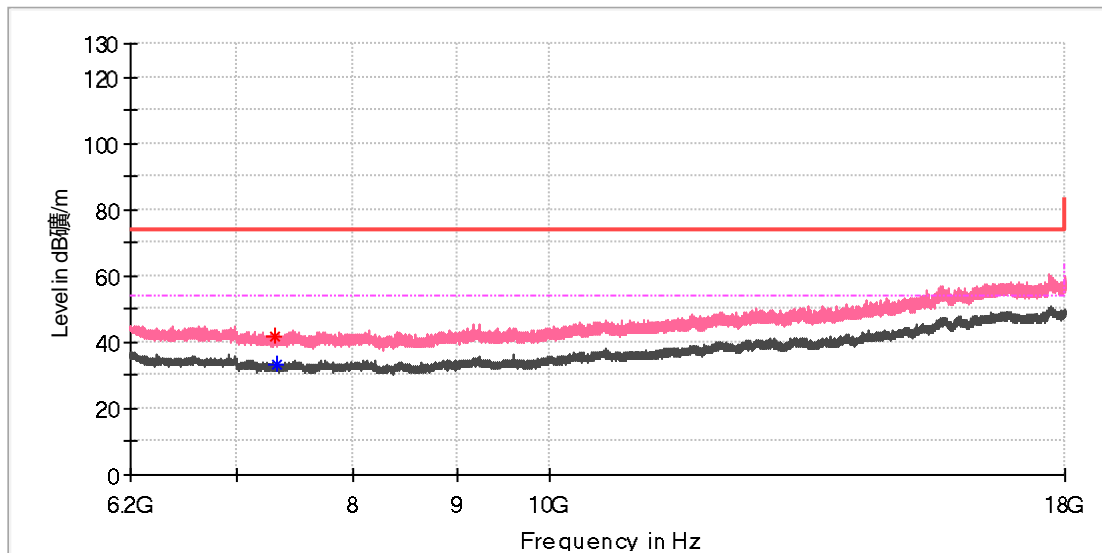

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7316.083333	41.71	---	74.00	32.29	100.0	V	97.0	8.2
7326.900000	---	33.16	54.00	20.84	100.0	V	291.0	8.1

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

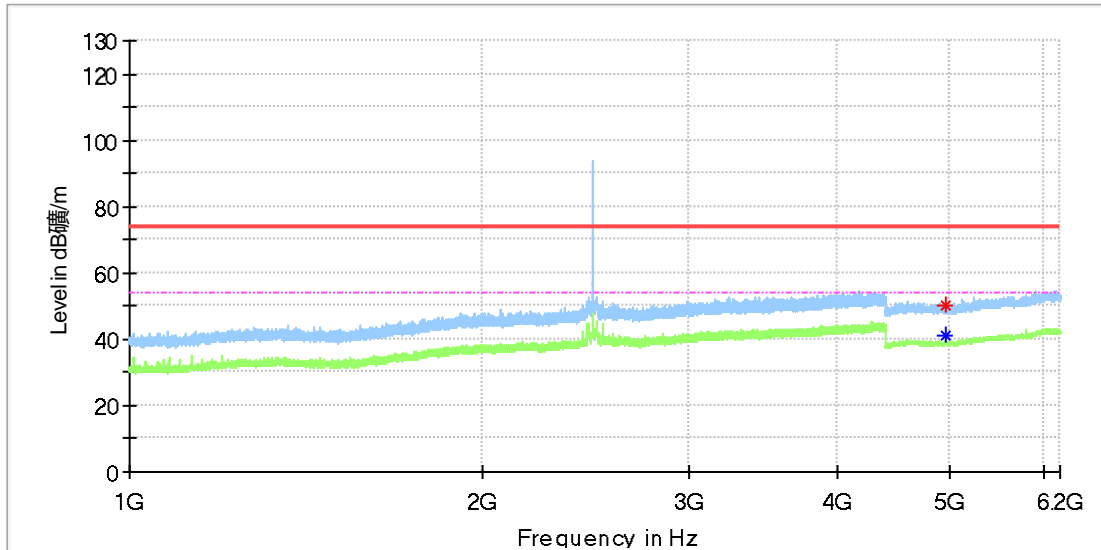

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4948.000000	50.25	---	74.00	23.75	100.0	H	161.0	11.8
4957.000000	---	40.89	54.00	13.11	100.0	H	30.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

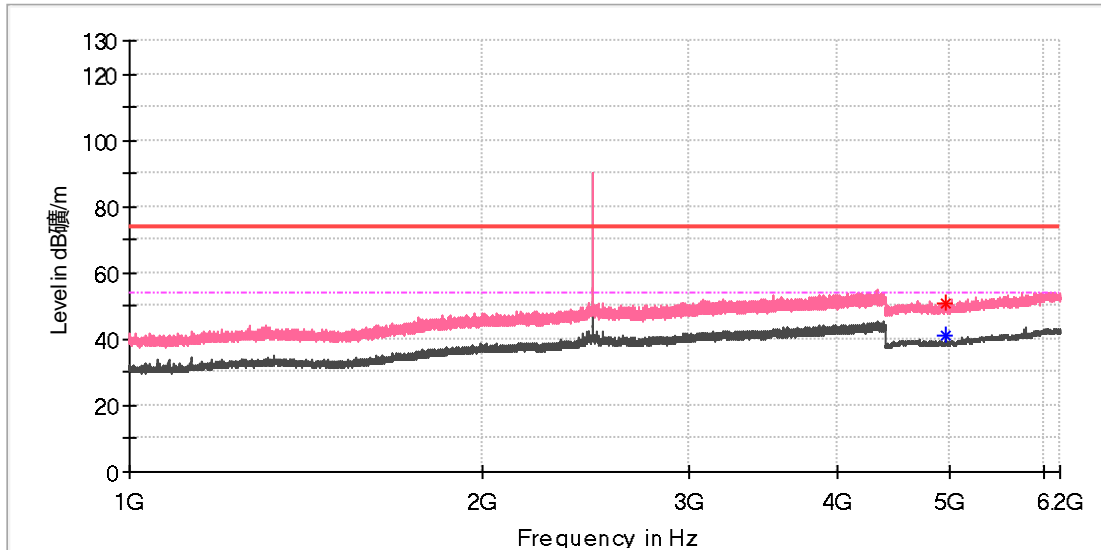

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4948.000000	50.53	---	74.00	23.47	100.0	V	101.0	11.8
4957.000000	---	41.24	54.00	12.76	100.0	V	259.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	VAPPEBY PT
Model:	E2133
Test Mode:	BR_DH5_High channel
Order No/Sample No:	168371336/A003254344-001
Test Voltage:	Battery
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

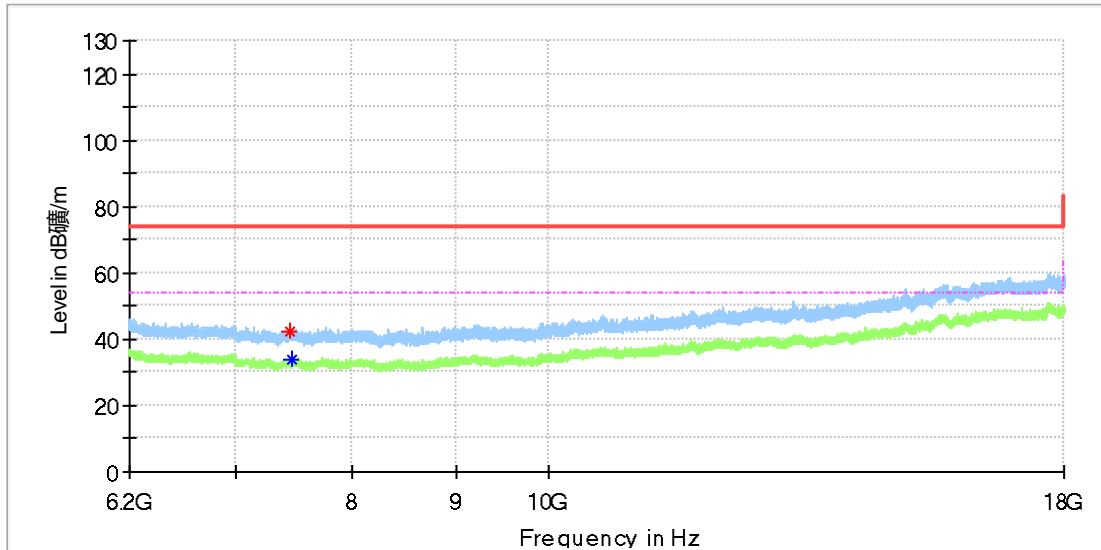

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7445.391667	42.24	---	74.00	31.76	100.0	H	27.0	8.5
7460.141667	---	33.68	54.00	20.32	100.0	H	164.0	8.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: Battery
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

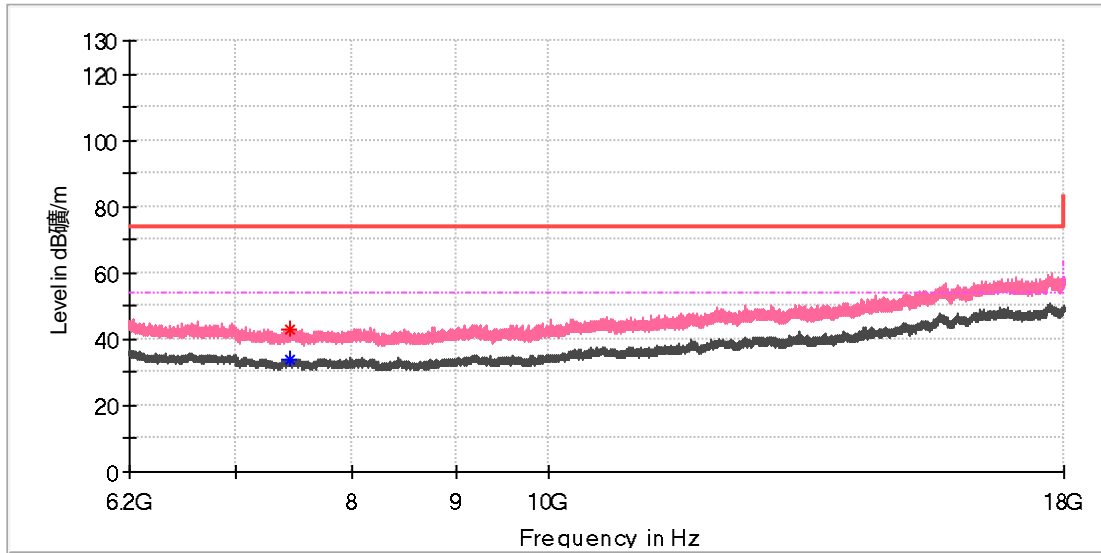

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.000000	---	33.81	54.00	20.19	100.0	V	194.0	8.4
7445.883333	42.82	---	74.00	31.18	100.0	V	325.0	8.5


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.8: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage: DC 5V From USB
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

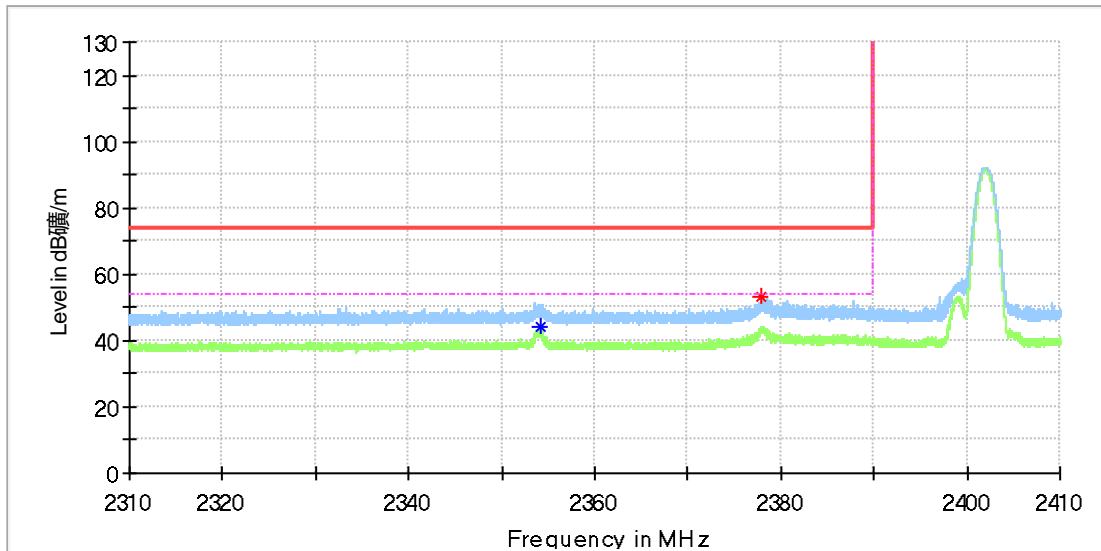

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2354.090000	---	44.09	54.00	9.91	100.0	H	4.0	6.9
2377.925000	53.40	---	74.00	20.60	100.0	H	22.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage:: DC 5V From USB
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

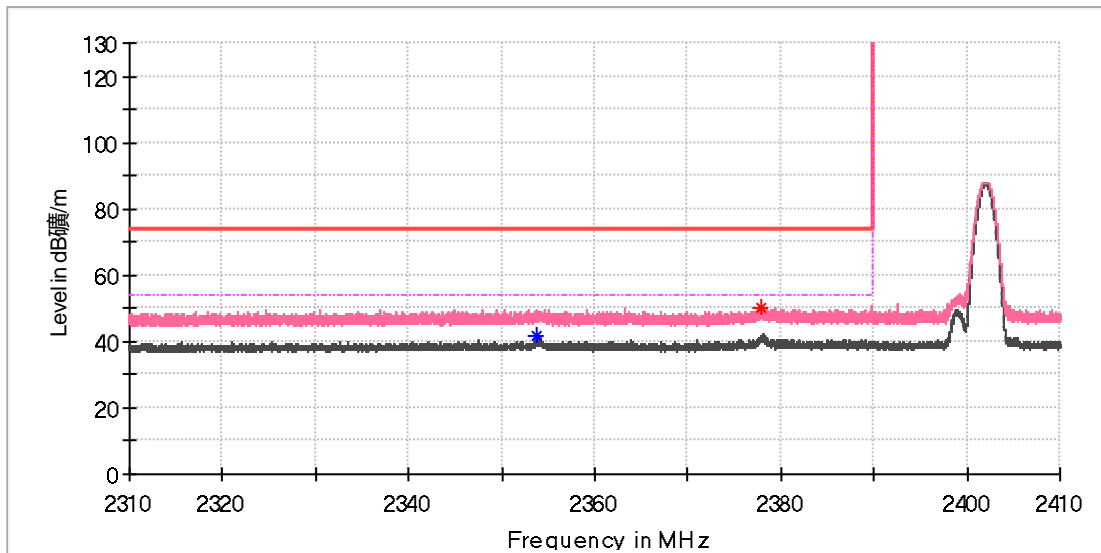

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2353.805000	---	41.70	54.00	12.30	100.0	V	359.0	6.9
2377.805000	50.23	---	74.00	23.77	100.0	V	359.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage:: DC 5V From USB
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

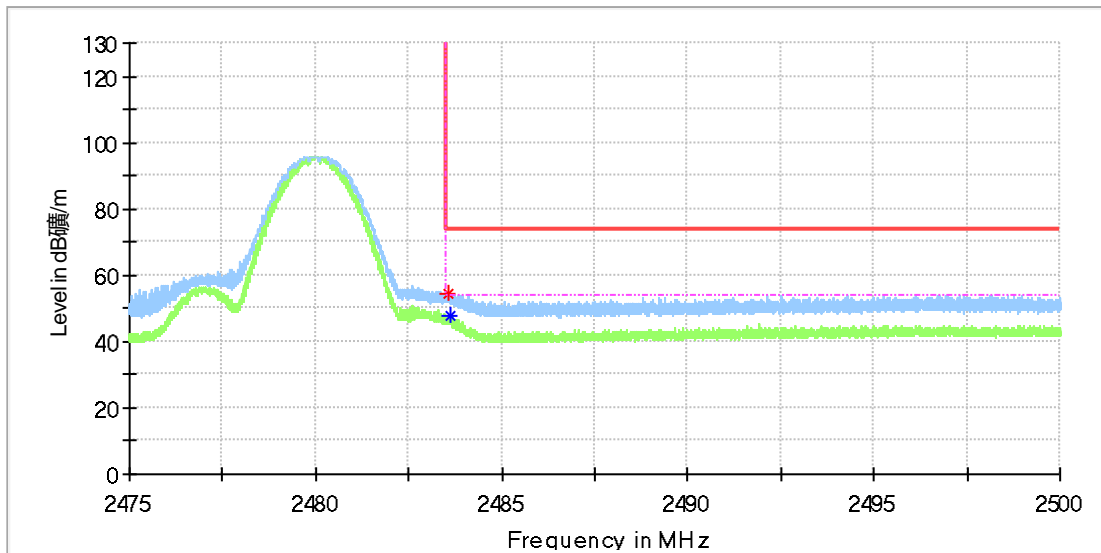

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.540000	54.59	---	74.00	19.41	100.0	H	322.0	7.4
2483.595000	---	47.67	54.00	6.33	100.0	H	322.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: VAPPEBY PT
 Model: E2133
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168371336/A003254344-001
 Test Voltage:: DC 5V From USB
 Remark: Temp 23 Humi:58%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

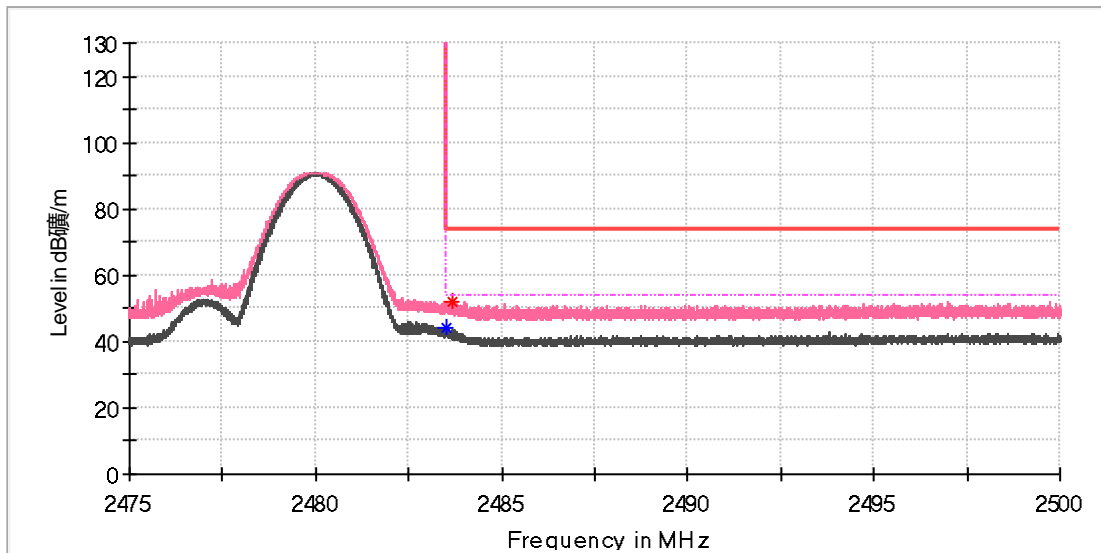

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.533750	---	44.30	54.00	9.70	100.0	V	168.0	7.4
2483.663750	51.99	---	74.00	22.01	100.0	V	155.0	7.4


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Appendix B.9: Test Results of Conducted Emission

EUT Information

EUT Name:	VAPPEBY PT
Order No:	168371336(P00681907)
Model:	E2133
Test Mode:	Bluetooth
Test Voltage:	AC 120V/60Hz
Test By:	Jianhua Lu
Review By:	Gary Chen
Tem./Hum./Pressure:	24.2°C/53%/101kPa
Remark:	SR1

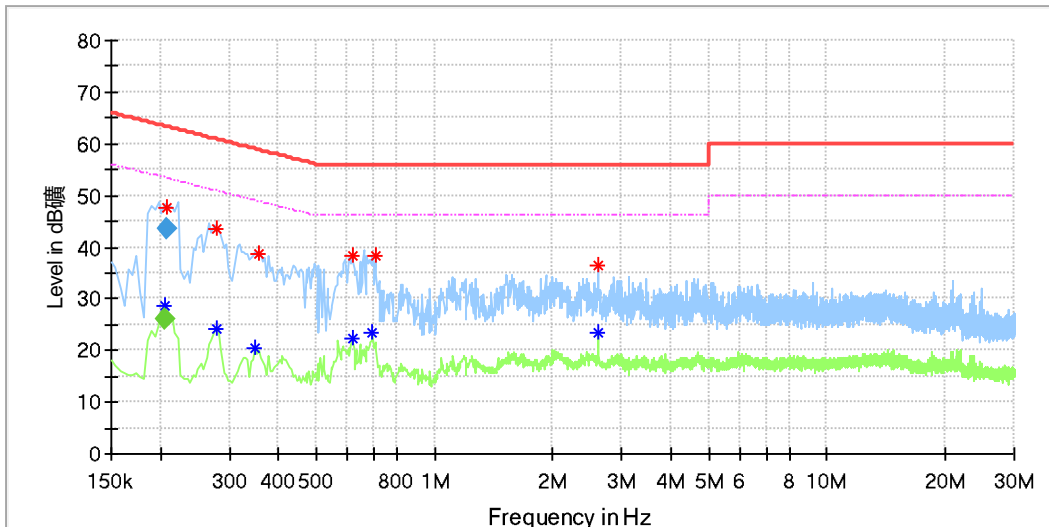

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Line	Corr. (dB)
0.204500	---	28.51	53.37	24.85	L1	9.6
0.208500	47.66	---	63.05	15.39	L1	9.6
0.278000	---	24.22	50.88	26.66	L1	9.6
0.278000	43.64	---	60.88	17.24	L1	9.6
0.350000	---	20.51	48.96	28.45	L1	9.8
0.358000	38.60	---	58.78	20.17	L1	9.7
0.616000	---	22.29	46.00	23.71	L1	9.7
0.616000	38.33	---	56.00	17.67	L1	9.7
0.696000	---	23.39	46.00	22.61	L1	9.7
0.708000	38.45	---	56.00	17.55	L1	9.7
2.620000	---	23.34	46.00	22.66	L1	9.9
2.620000	36.59	---	56.00	19.41	L1	9.9

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.204500	---	25.94	53.43	27.48	1000.0	9.000	L1	9.6
0.208500	43.45	---	63.27	19.82	1000.0	9.000	L1	9.6

EUT Information

EUT Name: VAPPEBY PT
 Order No: 168371336(P00681907)
 Model: E2133
 Test Mode: Bluetooth
 Test Voltage: AC 120V/60Hz
 Test By: Jianhua Lu
 Review By: Gary Chen
 Tem./Hum./Pressure: 24.2°C/53%/101kPa
 Remark: SR1

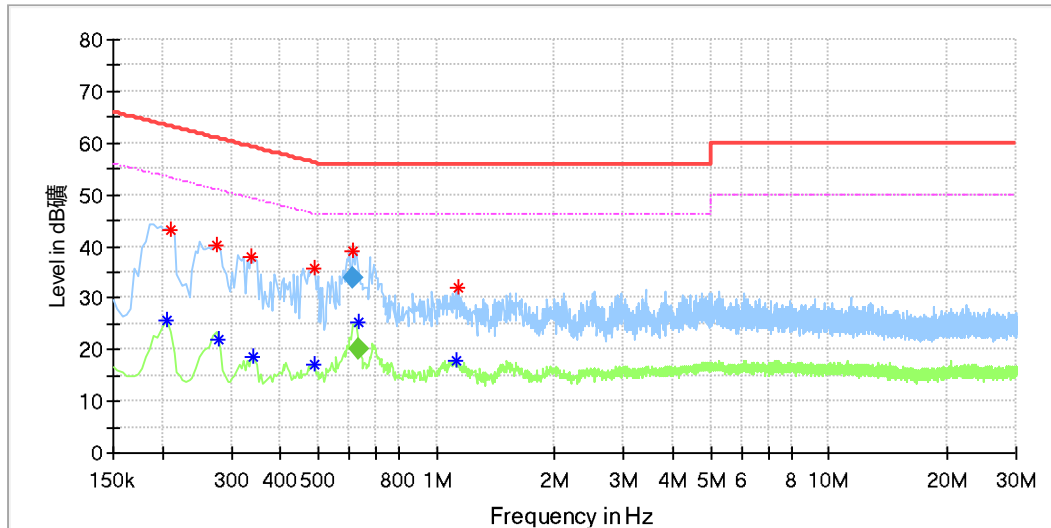

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.206000	---	25.77	53.37	27.60	N	9.6
0.210000	43.14	---	63.21	20.06	N	9.6
0.274000	40.27	---	61.00	20.72	N	9.6
0.278000	---	22.08	50.88	28.79	N	9.6
0.338000	37.81	---	59.25	21.44	N	9.7
0.342000	---	18.64	49.16	30.51	N	9.7
0.486000	---	17.27	46.24	28.96	N	9.7
0.490000	35.64	---	56.17	20.52	N	9.7
0.613500	39.17	---	56.00	16.83	N	9.7
0.634500	---	25.41	46.00	20.59	N	9.7
1.124000	---	17.77	46.00	28.23	N	9.7
1.132000	31.90	---	56.00	24.10	N	9.7

Final_Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.613500	34.02	---	56.00	21.98	1000.0	9.000	N	9.7
0.634500	---	20.23	46.00	25.77	1000.0	9.000	N	9.7