

# EMC TEST REPORT

## No. 2109489STO-103

### Electromagnetic disturbances

#### EQUIPMENT UNDER TEST

Equipment: Decoration lamp with LED  
Type/Model: J2120 Stråla  
Manufacturer: IKEA of Sweden AB  
Tested by request of: IKEA of Sweden AB

#### SUMMARY

Referring to the emission limits, and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards:

FCC 47 CFR Part 15: Radio frequency devices, Subpart B: Unintentional radiators. Class B equipment.

ICES-005 Issue 5: Lighting Equipment, Class B. (2018)

For details, see clause 2 – 4.

Date of issue: December 15, 2021

Tested by:   
Ann-Christine Norrström

Approved by:   
Anders Lindström

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Revision History**

Test report no.	Release no.	Date of issue	Description
2109489STO-103	1	December 15, 2021	

## Terms, definition and abbreviations

The following terms, definitions and abbreviations may be used throughout the report.

Term/definition/abbreviation	Meaning
<b>AAN</b>	Asymmetrical Artificial Network
<b>AC</b>	Alternating Current
<b>AE</b>	Associated Equipment
<b>AMN</b>	Artificial Mains Network
<b>ANSI</b>	American National Standards Institute
<b>AV</b>	Average
<b>BW</b>	Bandwidth
<b>CAV</b>	CISPR Average
<b>CFR</b>	Code of Federal Regulations
<b>CISPR</b>	Comité international spécial des perbutations radioélectriques
<b>CM</b>	Common Mode
<b>CMAD</b>	Common Mode Absorption Device
<b>DC</b>	Direct Current
<b>DM</b>	Differential Mode
<b>EM</b>	Electromagnetic
<b>EMC</b>	Electromagnetic Compatibility
<b>EUT</b>	Equipment Under Test
<b>F</b>	Fail
<b>FAR</b>	Fully Anechoic Room
<b>FCC</b>	Federal Communications Commission
$F_x$	Highest fundamental frequency generated or used within the EUT, or highest frequency at which it operates
<b>ICES</b>	Interference-Causing Equipment Standard
<b>H</b>	Horizontal
$I_{ref}$	Reference Current
<b>ISN</b>	Impedance Stabilizing Network
<b>MU</b>	Measurement Uncertainty
<b>N/A</b>	Not Applicable
<b>P</b>	Pass
<b>PE</b>	Protective Earth
<b>PK</b>	Peak
<b>Pol.</b>	Polarisation
<b>QP / QPK</b>	Quasi-Peak
<b>RBW</b>	Resolution Bandwidth
<b>RF</b>	Radio Frequency
<b>RGP</b>	Reference Ground Plane
<b>RH</b>	Relative Humidity
<b>RMS</b>	Root Mean Square
<b>Rx</b>	Receiver / Receiving
<b>SAC</b>	Semi-Anechoic Chamber
<b>Tx</b>	Transmitter / Transmitting
<b>V</b>	Vertical
<b>VBW</b>	Video Bandwidth

**CONTENTS**

	<b>Page</b>
1. Client Information .....	5
2. Equipment under test (EUT).....	5
2.1 Identification of the EUT .....	5
2.2 Test set up and EUT photos .....	6
2.3 Additional information about the EUT .....	7
2.4 Associated/auxiliary equipment .....	7
2.5 Decision rule .....	7
3. Test Specifications .....	8
3.1 Additions, deviations and exclusions from standards and accreditation .....	8
3.2 Test site .....	8
3.3 Mode of operation during the test .....	9
4. Test Summary .....	10
5. Conducted continuous disturbances .....	11
5.1 Test results, AC Power input port, Class B, Mode 1 .....	12
5.2 Test results, AC Power input port, Class B, Mode 2.....	13
5.3 Test equipment .....	13
6. Radiated rf Emission in the frequency-range 30 MHz – 1 GHz .....	14
6.1 Test results, 30 – 1000 MHz, FCC, Class B, Mode1 .....	16
6.2 Test results, 30 – 1000 MHz, FCC, Class B, Mode2 .....	17
6.3 Test equipment .....	18

**1. CLIENT INFORMATION**

The EUT has been tested by request of

<b>Company</b>	IKEA of Sweden AB
<b>Name of contact</b>	Jianqiu Chen
<b>Client observer</b>	-

**2. EQUIPMENT UNDER TEST (EUT)**
**2.1 Identification of the EUT**

<b>Equipment:</b>	Decoration lamp with LED														
<b>Type/Model:</b>	J2120 Stråla														
<b>Brand name:</b>	IKEA														
<b>S/N:</b>	-														
<b>Manufacturer:</b>	IKEA of Sweden AB Box 702 SE-343 81 Älmhult Sweden														
<b>Highest clock frequency, <math>F_x</math>:</b>	< 108 MHz														
<b>Software version:</b>	-														
<b>Hardware version:</b>	-														
<b>Mounting position: (during normal use)</b>	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor-standing <input type="checkbox"/> Wall/ceiling <input type="checkbox"/> Hand-held <input type="checkbox"/> Other:														
<b>Supplementary information:</b>															
<b>Input ratings</b>	<b>Voltage [V]</b>	<b>Freq. [Hz]</b>	<b>Current [A]</b>	<b>Power [W]</b>	<b>Coupling</b>										
<input checked="" type="checkbox"/> AC*	220-240	50-60	0.05	4.2	<table border="0"> <tr> <td><b>L1</b></td> <td><b>L2</b></td> <td><b>L3</b></td> <td><b>N</b></td> <td><b>PE</b></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> </table>	<b>L1</b>	<b>L2</b>	<b>L3</b>	<b>N</b>	<b>PE</b>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<b>L1</b>	<b>L2</b>	<b>L3</b>	<b>N</b>	<b>PE</b>											
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>											
<input checked="" type="checkbox"/> DC	4			0.45	<table border="0"> <tr> <td><b>V+</b></td> <td><b>V-</b></td> <td></td> <td><b>PE</b></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input checked="" type="checkbox"/></td> <td></td> <td><input type="checkbox"/></td> </tr> </table>	<b>V+</b>	<b>V-</b>		<b>PE</b>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>		
<b>V+</b>	<b>V-</b>		<b>PE</b>												
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input type="checkbox"/>												
<input type="checkbox"/> Battery					<table border="0"> <tr> <td><b>V+</b></td> <td><b>V-</b></td> <td></td> <td><b>PE</b></td> </tr> <tr> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td></td> <td><input type="checkbox"/></td> </tr> </table>	<b>V+</b>	<b>V-</b>		<b>PE</b>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		
<b>V+</b>	<b>V-</b>		<b>PE</b>												
<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>												
<input type="checkbox"/> Other:															
<b>Supplementary information:</b>	* LED-driver														



???????  
Type No. J2120

Stråla

Made in

Lamp

Conforms to:  
UL Std 588  
Certified to:  
CSA Std C22.2 No. 37  
CAN ICES-005 (B) / NMB-005 (B)  
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: FHO-J2120

4V DC, 0.45W

Sup. No.00000



LED-driver

Photo/copy of marking/rating plate(s)

2.2 Test set up and EUT photos

Test set up and EUT photos are enclosed in Annex 1 to this test report.

### 2.3 Additional information about the EUT

The EUT was tested in table-top configuration.

The EUT consists of the following units:

Unit	Type designation	Description
Lamp	J2120 Stråla	-

The EUT has the following ports:

Port type	Port name	Length [m]	Shielded
<b>AC I/O</b>			
<input checked="" type="checkbox"/> AC power input	*AC-mains plug	-	<input type="checkbox"/>
<input type="checkbox"/> AC power output			<input type="checkbox"/>
<b>DC I/O</b>			
<input checked="" type="checkbox"/> DC power input	DC cord	2.10	<input type="checkbox"/>
<input type="checkbox"/> DC power output			<input type="checkbox"/>
<b>Signal/control I/O</b>			
<input type="checkbox"/> Signal/control			<input type="checkbox"/>
<input type="checkbox"/> Telecom/network			<input type="checkbox"/>
<b>Supplementary information:</b>			
* Port of LED-driver			

The EUT ports were connected according to the following:

Port name	Cable type	Connected to
AC	Plug-in	LED driver
DC	Two-core	Lamp

### 2.4 Associated/auxiliary equipment

#### Auxiliary

Equipment needed for correct operation of the EUT and is part of the system under test.

Equipment	Manufacturer	Type/Model	S/N
LED-driver	IKEA	KMW-040-030-NA-3	-

### 2.5 Decision rule

The statements of conformity are reported as:

Passed – When the measured values are within the specified limits.

Failed – When one or more measures values are outside the specified limits.

### 3. TEST SPECIFICATIONS

#### 3.1 Additions, deviations and exclusions from standards and accreditation

The following editions of basic standards were applied instead of the standards referenced in FCC 47 CFR Part 15 and ICES-005:

Referenced	Applied
ANSI C63.4-2014	ANSI C63.4-2014
CISPR 15:2015	CISPR 15:2018

#### 3.2 Test site

Measurements were performed at:

Intertek Semko AB.  
 Torshamnsgatan 43,  
 P.O. Box 1103  
 SE-164 22 Kista

Intertek Semko AB is an FCC listed test site with site registration number 90913  
 Intertek Semko AB is an FCC accredited conformity assessment body with designation number SE0002

Intertek Semko AB is an Industry Canada listed test facility with IC assigned code 2042G

Measurement chambers

Measurement Chamber	Type of chamber	IC Site filing #
<input checked="" type="checkbox"/> STORA HALLEN	Semi-anechoic 10 m and 3 m	2042G-2
<input type="checkbox"/> BJÖRKHALLEN	Semi-anechoic 3 m	2042G-1
<input type="checkbox"/> 5 m CHAMBER	Semi-anechoic 5 m	2042G-3



### 3.3 Mode of operation during the test

Mode no.	Supply	Description
1	120 V AC/4 V DC	Light on
2	120 V AC/4 V DC	Stand by

Test	Mode of operation
Conducted continuous emission	1,2
Radiated emission of EM fields	1,2

#### 4. TEST SUMMARY

The test has been carried out at the Intertek Semko AB premises in Kista, Sweden.

The results in this report apply only to sample tested.

Result: P – F – N/A

EMISSION TESTS					
Chapter	Standard(s)	Description	Port type(s)	Note(s)	Verdict
5	ANSI C63.4	Conducted continuous emission	AC input	-	P
6	ANSI C63.4	Radiated emission of EM fields	Enclosure	-	P
<b>Supplementary information:</b>					


**5. CONDUCTED CONTINUOUS DISTURBANCES**  
in the frequency-range 0.15 – 30 MHz

Date of test	Temp. [°C]	Humidity [%RH]	Tested by
December 10, 2021	21	27	Ann-Christine Norrström

<b>Test setup and procedure:</b>	EUT was placed 0.8 m from the AMN /ISN. Overview sweeps were performed for each lead of the cable(s). AE requiring mains power to operate was/were connected to AMN /ISN terminated with 50 Ω, when applicable.		
<b>EUT position:</b>	<input checked="" type="checkbox"/> Table-top (EUT 0.4 m from the RGP) <input type="checkbox"/> Floor-standing (EUT 12 mm from the RGP) <input type="checkbox"/> Other:		
Tested port type(s):	Coupling device	Measurement uncertainty	
		Frequency range	Value
<input checked="" type="checkbox"/> AC power	<input checked="" type="checkbox"/> AMN	0.15 – 30 MHz	± 3.3 dB
<b>Supplementary information:</b> Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011. The measurement uncertainty is given with a confidence of 95 %.			

Port	Frequency [MHz]	Voltage limits [dBμV] (2)	
		QP	AV
<b>Limits FCC Part 15 subpart B and ICES-005</b>			
<input type="checkbox"/> AC power input Class A	0.15 – 0.50	79	66
	0.50 – 30.0	73	60
<input checked="" type="checkbox"/> AC power input Class B	0.15 – 0.50	66 – 56 (1)	56 – 46 (1)
	0.50 – 5.00	56	46
	5.00 – 30.0	60	50
<b>Supplementary information:</b> (1) The limits decrease linearly with the logarithm of the frequency. (2) At transitional frequencies the lower limit applies.			

5.1 Test results, AC Power input port, Class B, Mode 1

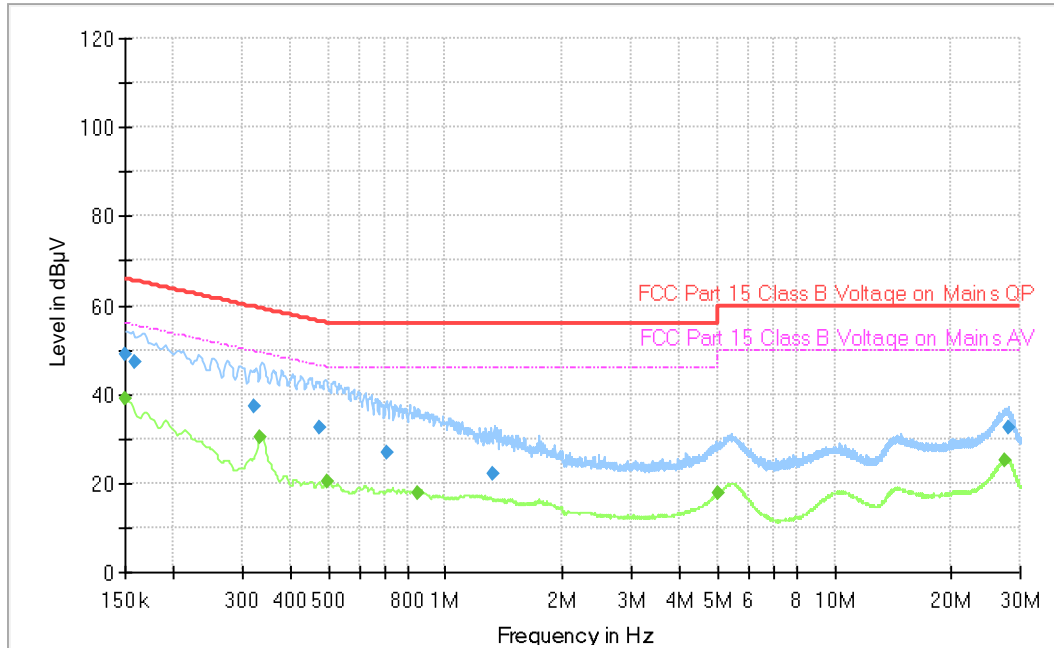

Diagram, Peak and AV overview sweep

Measurement results, Quasi-peak, Mode 1


Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Line	Margin (dB)
0.150	49,0	66.0	N	17.0
0.159	47.1	65.5	N	18.4

Measurement results, Average. Mode 1

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Line	Margin
0.150	38.8	56.0	N	38.2
0.334	30.3	49.3	L1	19.0

All other measured disturbances have a margin of more than 20 dB to the limits.  
 Result [dBµV] = Analyser reading [dBµV] + cable loss [dB] + LISN insertion loss [dB]

5.2 Test results, AC Power input port, Class B, Mode 2

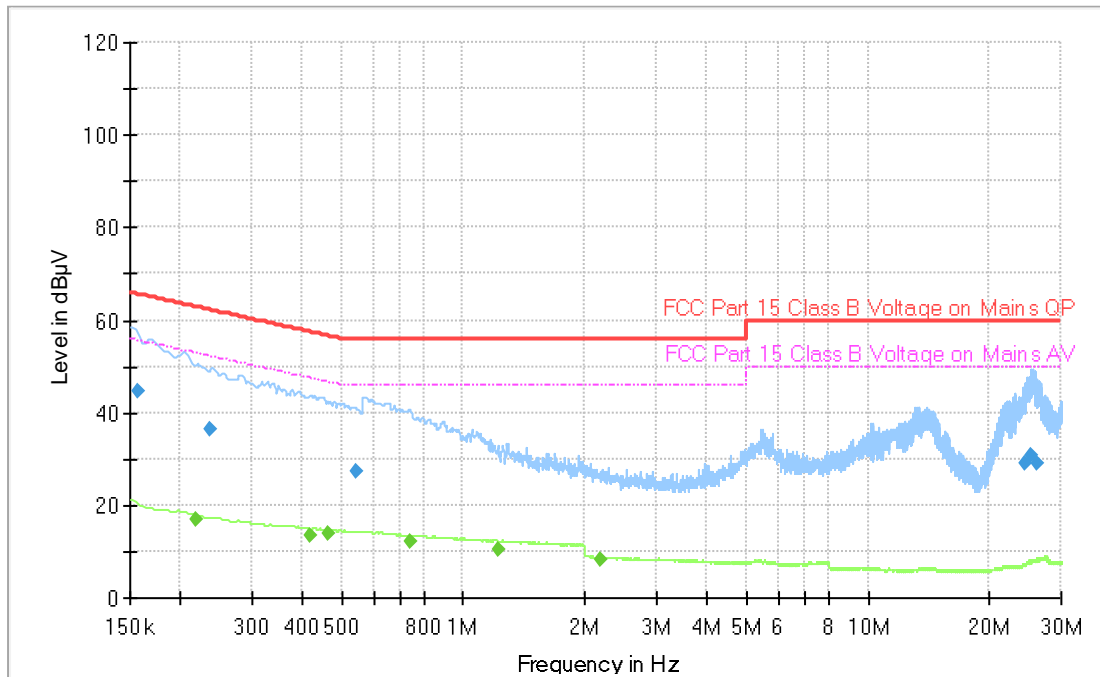

Diagram, Peak and AV overview sweep

Measurement results, Quasi-peak, Mode 2

All other measured disturbances have a margin of more than 20 dB to the limits.

Measurement results, Average. Mode 2

All other measured disturbances have a margin of more than 20 dB to the limits.

All other measured disturbances have a margin of more than 20 dB to the limits.  
 Result [dBµV] = Analyser reading [dBµV] + cable loss [dB] + LISN insertion loss [dB]

5.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Measurement software	Rohde & Schwarz	EMC32 - V.10.50.40	--	--	--
Test receiver	Rohde & Schwarz	ESU 8	12866	07-2021	1 year
AMN / LISN	Rohde & Schwarz	ESH3-Z5	2728	07-2021	1 year
Pulse Limiter	ROHDE & SCHWARZ	ESH3-Z2	4623	07-2021	1 year
Cable	SUHNER	G03232 D-01	9701	06-2021	1 year
Cable	HUBER+SUHNER	RG 223/U	9815	06-2021	1 year

6. RADIATED RF EMISSION IN THE FREQUENCY-RANGE 30 MHz – 1 GHz


Date of test	Temp. [°C]	Humidity [%RH]	Tested by
November 29, 2021	22	15	Ann-Christine Norrström

<b>Test setup and procedure:</b>	The EUT was placed on a non-conductive support on the RGP. Overview sweeps were performed with the measurement receiver in max hold mode and the peak detector activated in the frequency range 30 – 1000 MHz. Above 1 GHz, both the peak and average detectors were activated, when applicable. During height scan above 1 GHz the EUT was kept in antennas cone of radiation.		
<b>EUT position:</b>	<input checked="" type="checkbox"/> Table-top (EUT 0.8 m from the RGP) <input type="checkbox"/> Floor-standing (EUT 12 mm from the RGP) <input type="checkbox"/> Other:		
<b>Highest measured frequency:</b>	<input checked="" type="checkbox"/> $F_X \leq 108$ MHz: 1 GHz <input type="checkbox"/> $108 \text{ MHz} < F_X \leq 500$ MHz: 2 GHz <input type="checkbox"/> $500 \text{ MHz} < F_X \leq 1$ GHz: 5 GHz <input type="checkbox"/> $F_X > 1$ GHz: $5 \times F_X$ up to a max. of 40 GHz <input type="checkbox"/> $F_X$ is unknown: 40 GHz		
<b>Frequency range:</b>	<b>Measuring distance</b>	<b>Measurement uncertainty</b>	
<input type="checkbox"/> 30 to 1000 MHz	3 m	± 5.1 dB	
<input checked="" type="checkbox"/> 30 to 1000 MHz	10 m	± 5.0 dB	
<input type="checkbox"/> 1.0 to 18 GHz	3 m	± 4.5 dB	
<input type="checkbox"/> 18 to 26 GHz	3 m	± 4.8 dB	
<input type="checkbox"/> 26 to 40 GHz	3 m	± 5.7 dB	
<b>Supplementary information:</b> Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011. The measurement uncertainty is given with a confidence of 95 %.			

Test	Freq. [MHz]	Meas. angle [°]	Antenna			RBW [kHz]			VBW [kHz]
			Type	Height	Pol.	QP	PK	AV	PK
Preview	30 – 1000	0 – 359	Bilog	1 – 4 m	V and H	-	120	-	1000
Final						120	-	-	
Preview	1000 – 40000	0 – 359	Horn	1 – 4 m		-	1000	1000	3000
Final						-	1000	1000	-

Measurement distance [m]	Frequency [MHz]	Limits [dB $\mu$ V/m]		
		QP	PK	AV
<b>Limits, FCC, Class A</b>				
<input type="checkbox"/> 3 / <input type="checkbox"/> 10	30 – 88	49.5 / 39.1	-	-
	88 – 216	54.0 / 43.5	-	-
	216 – 960	56.9 / 46.4	-	-
	960 – 1000	60.0 / 49.5	-	-
<input type="checkbox"/> 3	Above 1000	-	80.0	60.0
<b>Limits, FCC, Class B</b>				
<input type="checkbox"/> 3 / <input checked="" type="checkbox"/> 10	30 – 88	40.0 / 29.5	-	-
	88 – 216	43.5 / 33.1	-	-
	216 – 960	46.0 / 35.6	-	-
	960 – 1000	54.0 / 43.5	-	-
<input type="checkbox"/> 3	Above 1000	-	74.0	54.0
<b>Limits, ICES-005 Class A</b>				
<input type="checkbox"/> 3 / <input type="checkbox"/> 10	30 – 88	49.5 / 39.1	-	-
	88 – 216	54.0 / 43.5	-	-
	230 – 1000	56.9 / 46.4	-	-
<b>Limits, ICES-005, Class B</b>				
<input type="checkbox"/> 3 / <input checked="" type="checkbox"/> 10	30 – 88	40.0 / 29.5	-	-
	88 – 216	43.5 / 33.1	-	-
	230 – 1000	46.0 / 35.6	-	-

6.1 Test results, 30 – 1000 MHz, FCC, Class B, Mode1

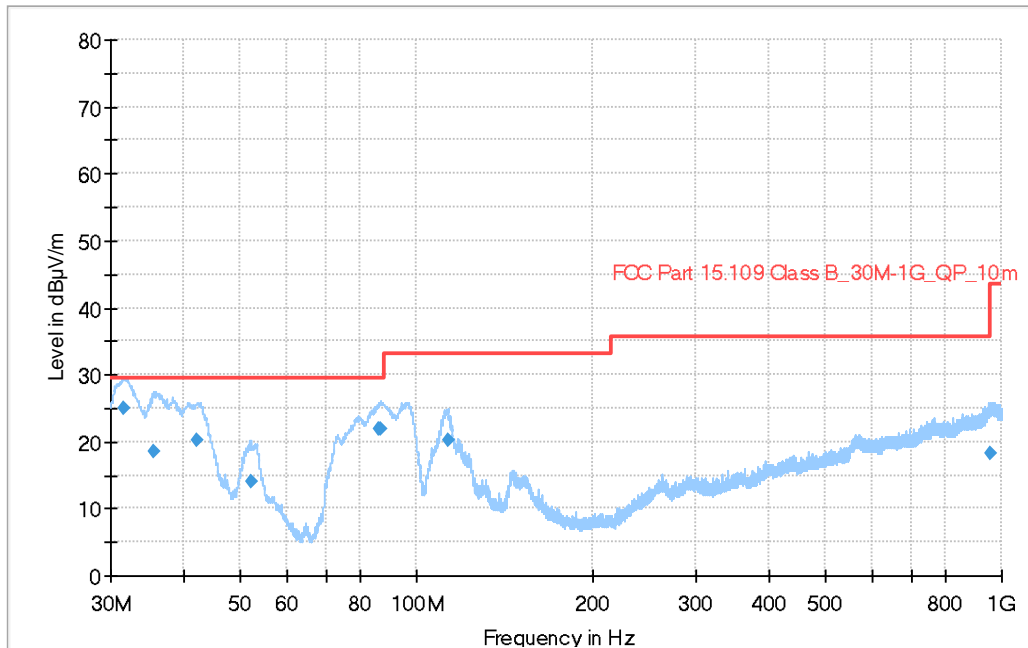

Diagram, Peak overview sweep

Measurement results, Quasi-peak, Mode 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Pol	Height (cm)	Azimuth h	Margin (dB)
31.590	25.1	29.5	V	100.0	197.0	4.4*
35.670	18.5	29.5	V	159.0	224.0	11.0
42.270	20.3	29.5	V	106.0	183.0	9.2
52.140	14.0	29.5	V	261.0	210.0	15.5
86.460	21.9	29.5	V	161.0	-21.0	7.6
86.760	22.0	29.5	V	150.0	-17.0	7.5
112.890	20.2	33.1	V	105.0	7.0	12.8
956.190	18.2	35.6	H	131.0	190.0	17.4


The EUT also fulfil the limit for ICES-005, see limit in table page 15.

\*The measured result is below the limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence, However, the result indicates that compliance is more probable than non-compliance with the specification limit,

$$\text{Result [dBµV/m]} = \text{Analyser reading [dBµV]} + \text{Antenna factor [1/m]} - \text{Amplifier gain [dB]} + \text{Cable loss [dB]}$$



6.2 Test results, 30 – 1000 MHz, FCC, Class B, Mode2

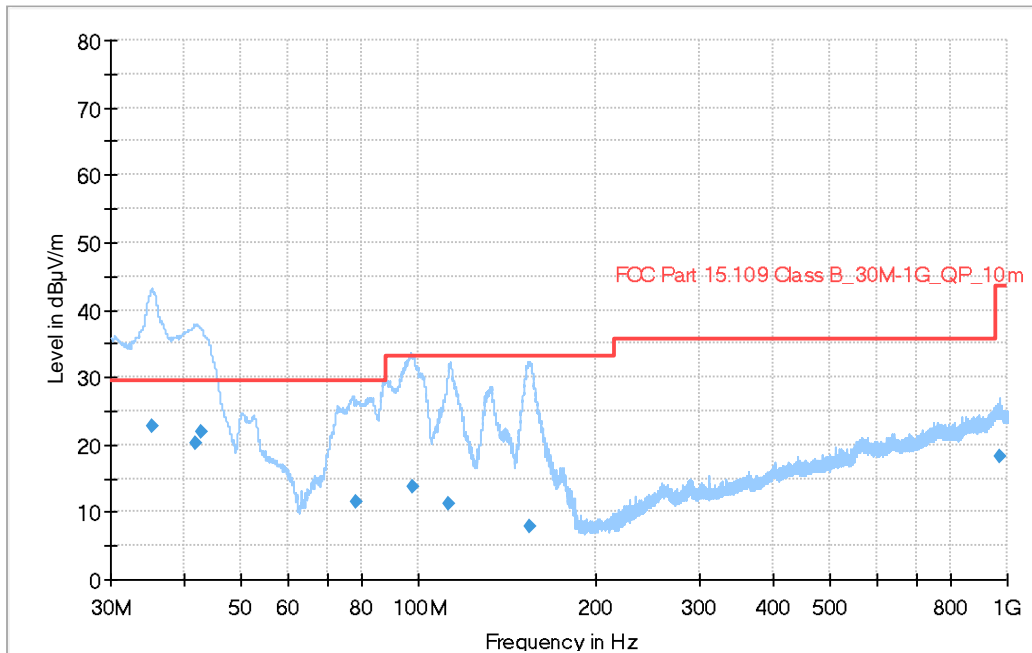

Diagram, Peak and Average overview sweep

Measurement results, Peak

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Pol	Height (cm)	Azimuth (h)	Margin (dB)
35.340	22.7	29.5	V	145.0	282.0	6.8
41.700	20.1	29.5	V	122.0	103.0	9.4
42.720	21.9	29.5	V	100.0	137.0	7.6
78.090	11.6	29.5	V	124.0	19.0	17.9
97.440	13.8	33.1	V	143.0	-11.0	19.3
112.860	11.3	33.1	V	118.0	140.0	21.79
154.170	8.0	33.1	V	225.0	58.0	25.1
969.810	18.4	43.5	H	194.0	84.0	25.1

The EUT also fulfil the limit for ICES-005, see limit in table page 15.

$$\text{Result [dB}\mu\text{V/m]} = \text{Analyser reading [dB}\mu\text{V]} + \text{Antenna factor [1/m]} - \text{Amplifier gain [dB]} + \text{Cable loss [dB]}$$

**6.3 Test equipment**

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Antenna bilog	TESEQ	CBL 6111D	34200	03-2020	3 Years
Preamplifier	SEMKO	AM1331	7992	09-2021	1 Year
Coaxial cable	ROSENBERGER	LA5-S003-10000 (UFB293C)	39163	02-2021	1 Year
Coaxial cable	ROSENBERGER	LA5-S003-8500	39148	05-2021	1 Year
Coaxial cable	Huber+Suhner	SUCOFLEX 106	39122	05-2021	1 Year
Measurement receiver	Rohde & Schwarz	ESW 44	33890	07-2021	1 Year
Temp and moisture	Vaisala	HMI 41	31215	07-2021	1 Year