

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	<b>CN22ISUS 001</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	<b>244406045</b>	<b>Seite 1 von 25</b> <i>Page 1 of 25</i>
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	<b>1774198</b>	<b>Auftragsdatum:</b> <i>Order date.:</i>	<b>2022-01-29</b>	
<b>Auftraggeber:</b> <i>Client:</i>	<b>IKEA of Sweden AB</b> Box 702, SE-343 81 Älmhult, Sweden			
<b>Prüfgegenstand:</b> <i>Test item:</i>	<b>Portable General Purpose Luminaire</b>			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	<b>K2201 TÄGVIRKE</b>			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	<b>TÜV Rheinland EMC service</b>			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	<b>FCC 47 CFR Part 15, Subpart B:2020 Class B</b> <b>ICES-005:2018</b>			
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	<b>2022-03-23</b>	Refer to the EUT photos file		
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	<b>A003231893-012</b>			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	<b>Refer to test report</b>			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	<b>Refer to clause 1.1</b>			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	<b>TÜV Rheinland (Shanghai) Co., Ltd.</b>			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	<b>Pass</b>			
<b>geprüft von: / tested by:</b> Jessie Xu		<b>genehmigt von: / authorized by:</b> Jiayi Zhou		
<b>Datum: / Date:</b> 2022-05-07 <i>Jessie Xu</i>		<b>Datum: / Date:</b> 2022-05-07 <i>Jiayi Zhou</i>		
<b>Stellung: / Position:</b> Project manager		<b>Stellung: / Position:</b> Senior manager		
<b>Sonstiges / Other:</b>	FCC ID: FHO-K2201 Test Firm Registration Number: 958801			
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>		<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged</i>		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

V05

**Prüfbericht - Nr.:** CN22ISUS 001  
Test Report No.:

Seite 2 von 25  
Page 2 of 25

## TEST SUMMARY

5.1.1 CONDUCTED EMISSION

*Result:*

*Passed*

5.2.1 RADIATED EMISSION

*Result:*

*Passed*

# Contents

<b>1</b>	<b>TEST SITES</b> .....	<b>4</b>
1.1	TEST FACILITIES.....	4
<b>2</b>	<b>GENERAL PRODUCT INFORMATION</b> .....	<b>5</b>
2.1	PRODUCT FUNCTION AND INTENDED USE.....	5
2.2	RATINGS AND SYSTEM DETAILS.....	5
2.3	INDEPENDENT OPERATION MODES.....	5
2.4	DESCRIPTION OF INTERCONNECTING CABLES.....	5
2.5	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	5
2.6	HIGHEST FREQUENCY GENERATED OR USED IN THE DEVICE OR ON WHICH THE DEVICE OPERATES OR TUNES.....	5
2.7	SUBMITTED DOCUMENTS.....	5
<b>3</b>	<b>TEST SET-UP AND OPERATION MODES</b> .....	<b>6</b>
3.1	PRINCIPLE OF CONFIGURATION SELECTION.....	6
3.2	EQUIPMENT AND CABLE ARRANGEMENT.....	6
3.3	TEST SOFTWARE.....	7
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	7
<b>4</b>	<b>CONFORMITY DECISION RULE</b> .....	<b>8</b>
<b>5</b>	<b>TEST RESULTS EMISSION</b> .....	<b>9</b>
5.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz.....	9
5.1.1	Conducted emission.....	9
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	15
5.2.1	Radiated emission.....	15
<b>6</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP</b> .....	<b>23</b>
<b>7</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS</b> .....	<b>24</b>
<b>8</b>	<b>LIST OF FIGURES</b> .....	<b>25</b>

**Prüfbericht - Nr.: CN22ISUS 001**  
Test Report No.:

**Seite 4 von 25**  
Page 4 of 25

# 1 Test Sites

## 1.1 Test Facilities

**Laboratory: TÜV Rheinland (Shanghai) Co., Ltd.**

**Address: No.177, 178, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China**

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

Refer to Clause 7 for test and measurement instruments.

## 2 General Product Information

### 2.1 Product Function and Intended Use

The EUT (equipment under test) is the ordinary portable general purpose luminaire for lighting and similar use. For the further information, refer to the user's manual.

### 2.2 Ratings and System Details

Rated input	:	DC 5 V, Max 3.3 W (Charging) 4 × DC 1.2 V, 1.1 W (with battery only)
Protection class	:	III

### 2.3 Independent Operation Modes

The basic operation modes are: "ON" and "OFF" with dimming function.

### 2.4 Description of interconnecting cables

N/A

### 2.5 Noise Generating and Noise Suppressing Parts

Refer to the circuit diagram for further information.

### 2.6 Highest frequency generated or used in the device or on which the device operates or tunes

The highest frequency used in the EUT is less than 108 MHz.

### 2.7 Submitted Documents

Circuit diagram, user's manual and rating label.

### 3 Test Set-up and Operation Modes

#### 3.1 Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.

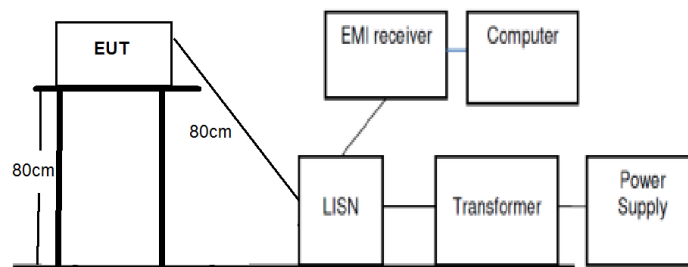
Refer to the related paragraph of this report.

The sequence of testing:

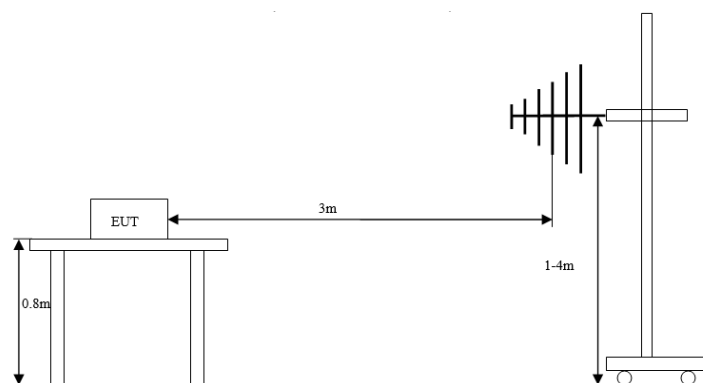
1. Radiated emission tests were performed on 2022-03-25.
2. Conducted emission tests were performed on 2022-03-28.

#### 3.2 Equipment and cable arrangement

Block diagram for both conducted emission and radiated emission tests is as follows:



(Conducted emission)



(Radiated emission)

Also refer to photographs on clause 6 for test setups for both conducted emission test and radiated emission test.

**Prüfbericht - Nr.: CN22ISUS 001**  
Test Report No.:Seite 7 von 25  
Page 7 of 25

### 3.3 Test Software

No special test software was used during the tests.

### 3.4 Special Accessories and Auxiliary Equipment

During the tests, the power supply and laptop were used.

Product	Model	Brand
Power supply	ICPSW5-17NA-1 Input:AC 100-240 V, 50/60 Hz Output: DC 5 V	IKEA of Sweden AB
Laptop	T450	Thinkpad

### 3.5 Countermeasures to achieve EMC Compliance

No other special measure is employed to achieve the requirement.

## 4 Conformity Decision Rule

For all EMI tests included in this report, as measurement uncertainties are less than the values  $U_{\text{CISPR}}$  given in CISPR 16-4-2, compliance with the limits is determined by comparing measurement results directly with corresponding limits without taking into consideration of measurement uncertainties.



## 5 Test Results EMISSION

### 5.1 Emission in the Frequency Range up to 30 MHz

#### 5.1.1 Conducted emission

<b>Result:</b>	<b>Passed</b>
Date of testing	: 2022-03-28
Test procedure	: FCC 47 CFR Part 15, Subpart B:2020, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-1
Frequency range	: 0.15 – 30 MHz
Limits	: Quasi-peak limit: 0.15 – 0.5 MHz, 66 to 56 dB $\mu$ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 56 dB $\mu$ V; 5 – 30 MHz, 60 dB $\mu$ V Average limit: 0.15 – 0.5 MHz, 56 to 46 dB $\mu$ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 46 dB $\mu$ V; 5 – 30 MHz, 50 dB $\mu$ V
Bandwidth of EMI receiver for final measurement	: 9 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Shielded room
Input voltage	: AC 120 V, 60 Hz
Operational mode	: Mode 1: Charging by power supply and lighting on Mode 2: Charging by laptop and lighting on
Ambient condition	: Temperature: 21.8 °C; Relative humidity: 36.2 %
Expanded measurement uncertainty ( $k=2$ )	: 3.39 dB

The measurement setup was made according to ANSI C63.4-2014 in a shielded room.

The measurement equipment like test receivers, quasi-peak detector and artificial mains network (AMN) are in compliance with CISPR 16-1 series standards.

The tested object was set-up on a wooden support. The EUT was set 0.8 m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3 m and 0.4 m.

The disturbance voltage test was performed on the neutral line and phase line of the power supply of the EUT respectively.

The following figures and tables were those measured by an automatic measuring system. Both quasi-peak and average measurements were performed. In the following spectral diagram, “◆”

**Prüfbericht - Nr.: CN22ISUS 001**  
Test Report No.:

**Seite 10 von 25**  
Page 10 of 25

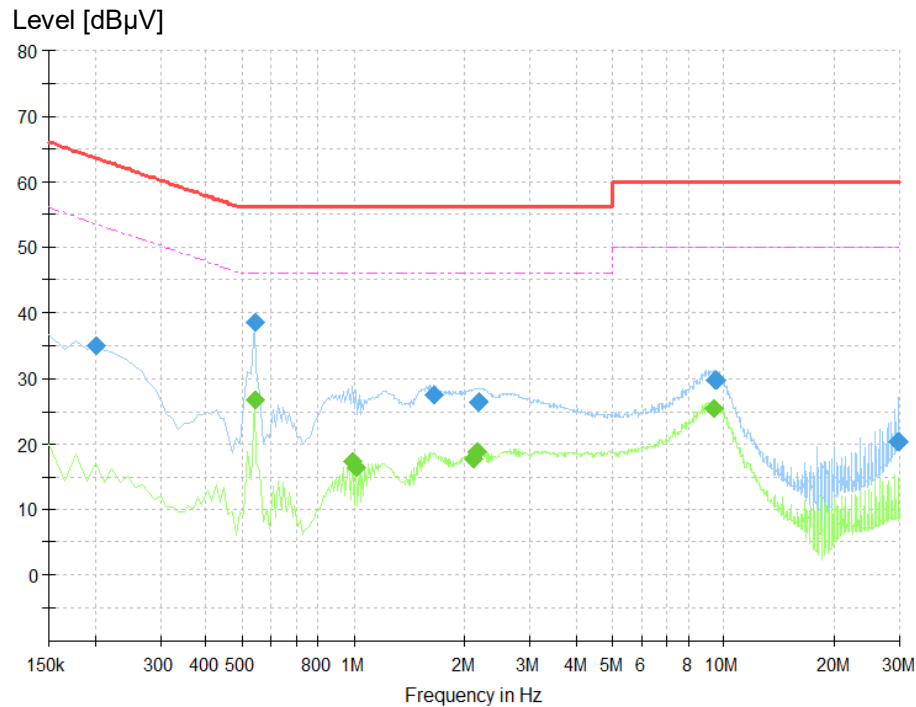
means Quasi-Peak Value and “♦” means Average Value results.

Notes on following tables of conducted emission results and conversions:

Level (dB $\mu$ V): final measurement results by using quasi-peak detector and average detector

Transd (dB): transducer factor including cable loss, insertion loss of artificial mains network and gain of pre-amplifier (if used)

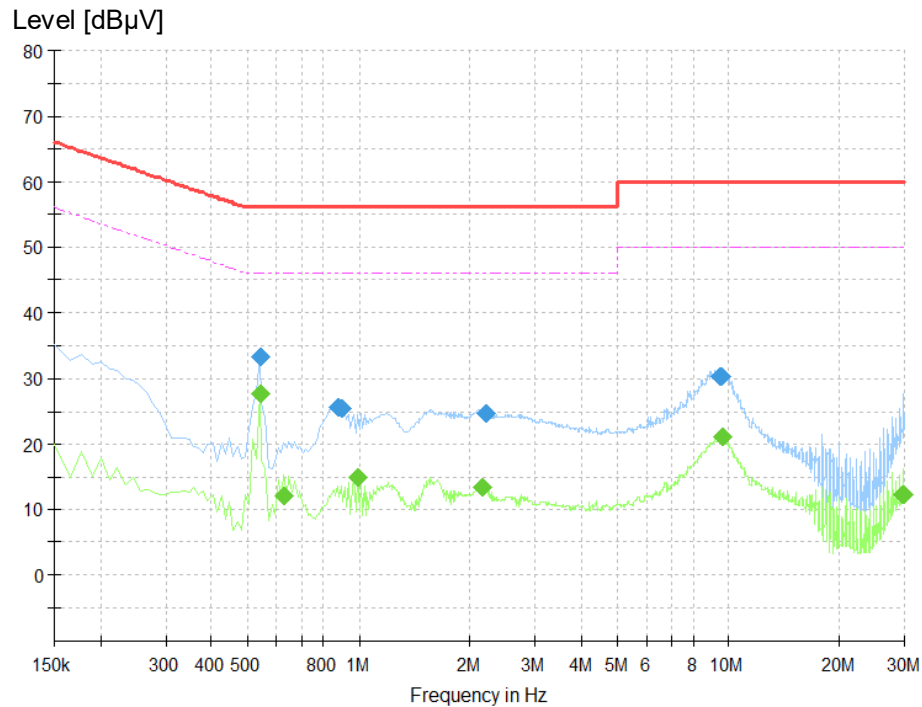
Margin: Limit (dB $\mu$ V) - Level (dB $\mu$ V)

**Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L for mode 1**

**Final Quasi-peak measurement result:**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.200625	34.90	63.59	28.69	1000.0	9.000	L1
0.538125	38.45	56.00	17.55	1000.0	9.000	L1
1.640625	27.51	56.00	28.49	1000.0	9.000	L1
2.180625	26.57	56.00	29.43	1000.0	9.000	L1
9.481875	29.83	60.00	30.17	1000.0	9.000	L1
29.810625	20.50	60.00	39.50	1000.0	9.000	L1

**Final Average measurement result:**

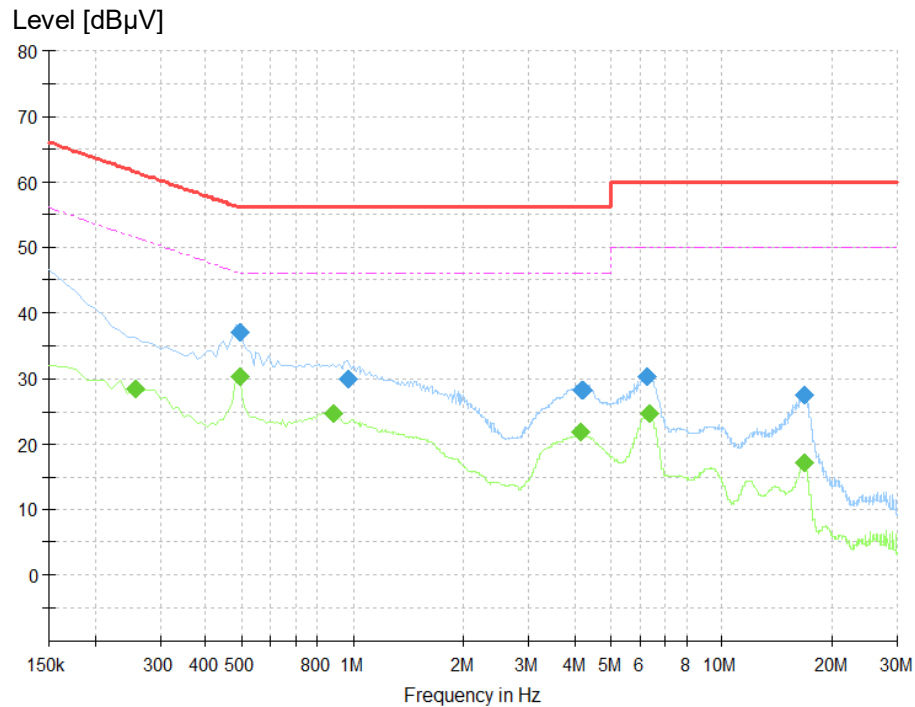
Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.538125	26.62	46.00	19.38	1000.0	9.000	L1
0.988125	17.37	46.00	28.63	1000.0	9.000	L1
1.010625	16.30	46.00	29.70	1000.0	9.000	L1
2.101875	17.59	46.00	28.41	1000.0	9.000	L1
2.169375	18.90	46.00	27.10	1000.0	9.000	L1
9.459375	25.48	50.00	24.52	1000.0	9.000	L1

**Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N for mode 1**

**Final Quasi-peak measurement result:**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.538125	33.14	56.00	22.86	1000.0	9.000	N
0.875625	25.59	56.00	30.41	1000.0	9.000	N
0.988125	25.46	56.00	30.54	1000.0	9.000	N
2.214375	24.78	56.00	31.22	1000.0	9.000	N
9.481875	30.14	60.00	29.86	1000.0	9.000	N

**Final Average measurement result:**

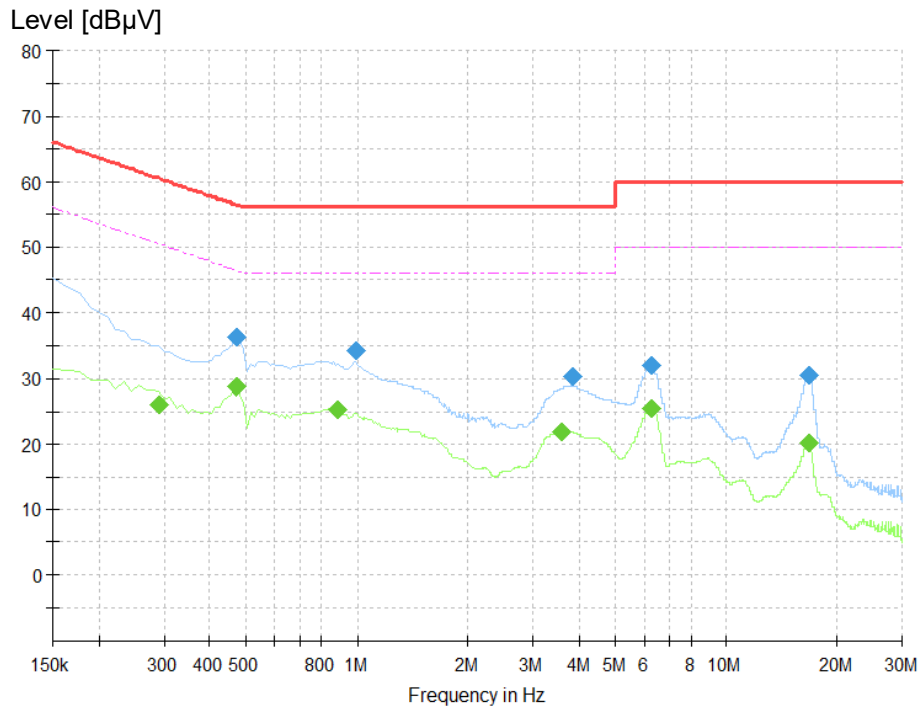
Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.538125	27.65	46.00	18.35	1000.0	9.000	N
0.628125	12.23	46.00	33.77	1000.0	9.000	N
0.988125	14.84	46.00	31.16	1000.0	9.000	N
2.169375	13.50	46.00	32.50	1000.0	9.000	N
9.616875	21.12	50.00	28.88	1000.0	9.000	N
29.765625	12.37	50.00	37.63	1000.0	9.000	N

**Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L for mode 2**

**Final Quasi-peak measurement result:**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.493125	36.94	56.12	19.18	1000.0	9.000	L1
0.965625	29.91	56.00	26.09	1000.0	9.000	L1
4.194375	28.24	56.00	27.76	1000.0	9.000	L1
6.309375	30.15	60.00	29.85	1000.0	9.000	L1
16.670625	27.55	60.00	32.45	1000.0	9.000	L1

**Final Average measurement result:**

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.256875	28.54	51.53	22.99	1000.0	9.000	L1
0.493125	30.18	46.12	15.93	1000.0	9.000	L1
0.886875	24.67	46.00	21.33	1000.0	9.000	L1
4.160625	22.01	46.00	23.99	1000.0	9.000	L1
6.320625	24.64	50.00	25.36	1000.0	9.000	L1
16.771875	17.20	50.00	32.80	1000.0	9.000	L1

**Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N for mode 2**

**Final Quasi-peak measurement result:**

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.470625	36.30	56.50	20.20	1000.0	9.000	N
0.988125	34.31	56.00	21.69	1000.0	9.000	N
3.811875	30.28	56.00	25.72	1000.0	9.000	N
6.275625	31.88	60.00	28.12	1000.0	9.000	N
16.738125	30.43	60.00	29.57	1000.0	9.000	N

**Final Average measurement result:**

Frequency (MHz)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.290625	26.04	50.51	24.46	1000.0	9.000	N
0.470625	28.68	46.50	17.82	1000.0	9.000	N
0.886875	25.10	46.00	20.90	1000.0	9.000	N
3.586875	21.88	46.00	24.12	1000.0	9.000	N
6.264375	25.45	50.00	24.55	1000.0	9.000	N
16.704375	20.06	50.00	29.94	1000.0	9.000	N

## 5.2 Emission in the Frequency Range above 30 MHz

### 5.2.1 Radiated emission

<b>Result:</b>	<b>Passed</b>
----------------	---------------

Date of testing	: 2022-03-25
Test procedure	: FCC 47 CFR Part 15, Subpart B:2020, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-2-2
Product classification	: Class B
Frequency range	: 30 – 1000 MHz (see Note 1)
Limits	: Quasi-peak limits (3 m distance): 30 – 88 MHz, 40 dB $\mu$ V/m; 88 – 216 MHz, 43.5 dB $\mu$ V/m; 216 – 1000 MHz, 46 dB $\mu$ V/m (see Note 2)
Bandwidth of EMI receiver for final measurement	: 120 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Semi-anechoic chamber
Input voltage	: AC 120 V, 60 Hz
Operational mode	: Mode 1: Charging by power supply and lighting on Mode 2: Charging by laptop and lighting on Mode 3: Lighting on by internal battery
Ambient condition	: Temperature: 20.8 °C; Relative humidity: 35.2 %
Expanded measurement uncertainty ( $k=2$ )	: 5.49 dB

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on an 80 cm wooden support above the reference ground plane. The wooden support was rotated 360° around and the height of the antenna was varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following spectral diagram, “×” means quasi-peak test results.

*Note 1: The highest frequency in the EUT is less than 108 MHz. According to FCC Part 15 subpart B §15.33 (b) (1), the upper frequency for radiated emission measurement is 1000 MHz.*

*Note 2: The class B limits of ICES-005:2018 is stricter than those FCC 47 CFR Part 15, Subpart B:2020 for 3 m test distance. Therefore, the former limits are used in following figures and tables.*

**Prüfbericht - Nr.: CN22ISUS 001**  
Test Report No.:

**Seite 16 von 25**  
Page 16 of 25

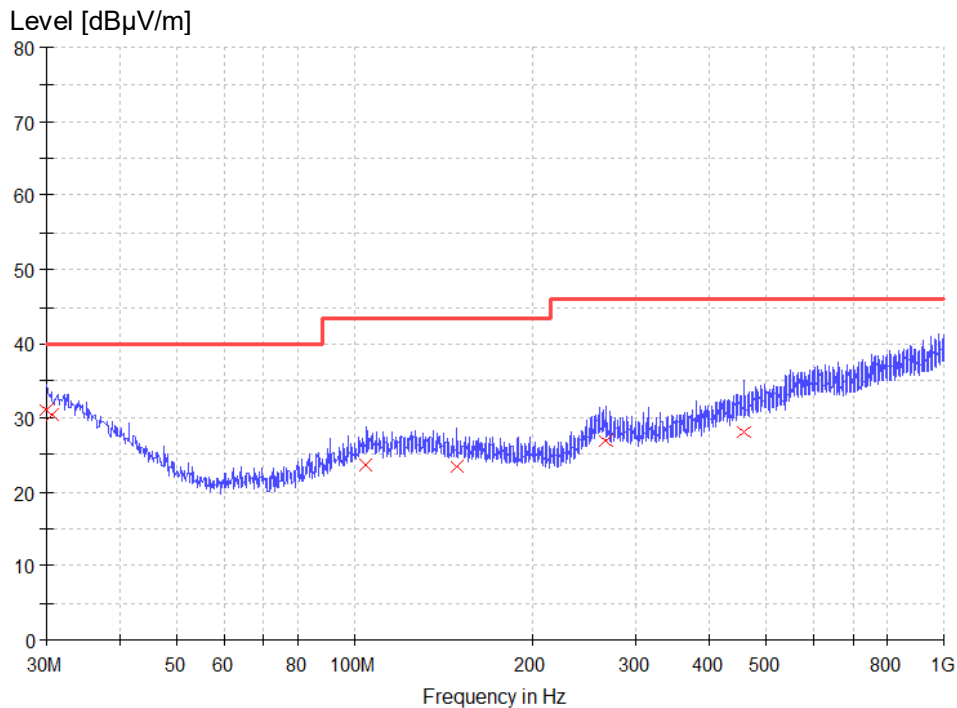
Notes on following tables of radiated emission results and conversions:

QuasiPeak (dB $\mu$ V/m): final measurement results by using quasi-peak detector

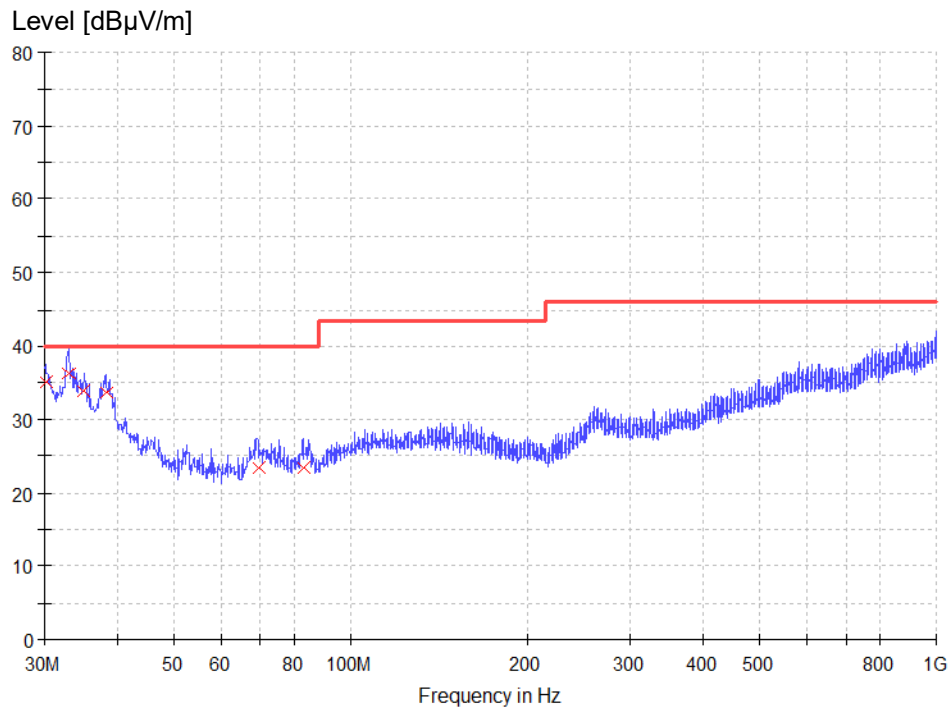
Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)

Margin: Limit (dB $\mu$ V/m) - QuasiPeak (dB $\mu$ V/m)



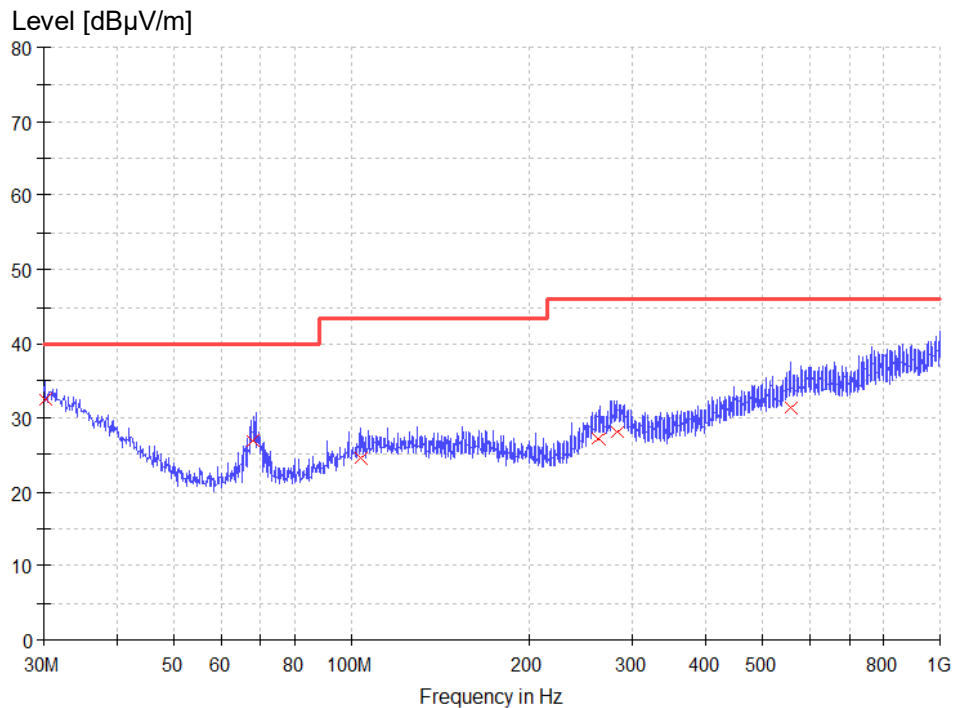
**Figure 5: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization for mode 1**

**Final quasi-peak measurement results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.000000	31.2	1000.0	120.000	150.0	H	180.0	25.4	8.8	40.0
30.606250	30.3	1000.0	120.000	200.0	H	145.0	25.1	9.7	40.0
104.447500	23.6	1000.0	120.000	200.0	H	32.0	18.2	19.9	43.5
148.825000	23.3	1000.0	120.000	300.0	H	-58.0	17.3	20.2	43.5
266.073750	26.8	1000.0	120.000	300.0	H	-124.0	20.5	19.2	46.0
458.497500	28.2	1000.0	120.000	250.0	H	-180.0	24.3	17.8	46.0

**Figure 6: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization for mode 1**


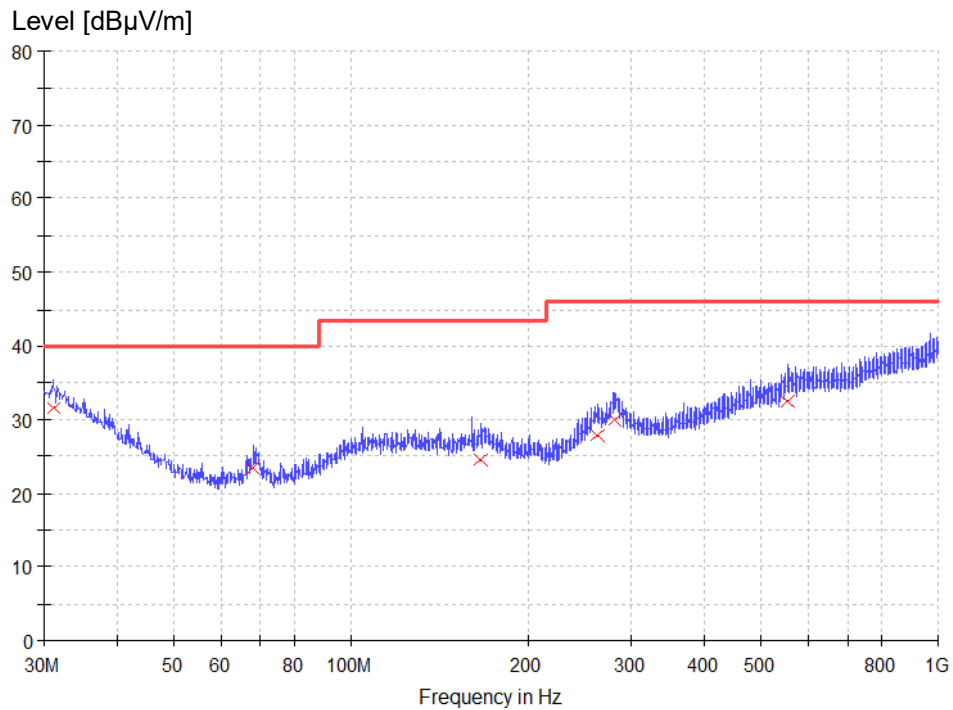
Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.121250	35.1	1000.0	120.000	150.0	V	-180.0	25.3	4.9	40.0
32.910000	36.3	1000.0	120.000	200.0	V	-95.0	23.9	3.7	40.0
35.092500	33.9	1000.0	120.000	100.0	V	-30.0	22.7	6.1	40.0
38.245000	33.8	1000.0	120.000	100.0	V	49.0	21.0	6.2	40.0
69.406250	23.5	1000.0	120.000	150.0	V	112.0	13.1	16.5	40.0
83.107500	23.4	1000.0	120.000	200.0	V	180.0	14.0	16.6	40.0

**Figure 7: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization for mode 2**


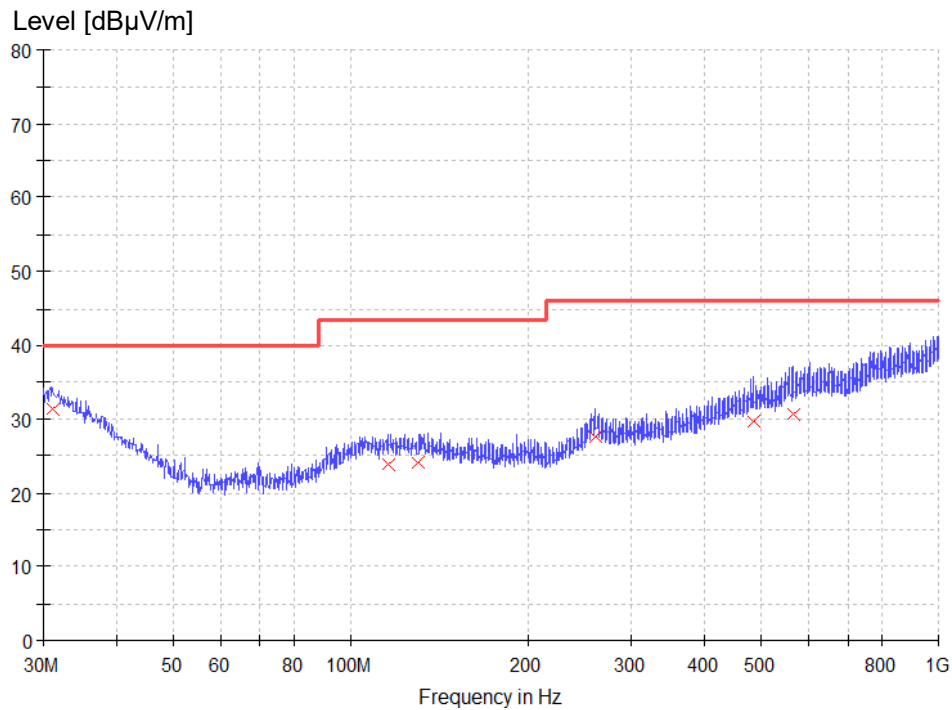
Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.121250	32.5	1000.0	120.000	300.0	H	180.0	25.3	7.5	40.0
68.315000	26.8	1000.0	120.000	250.0	H	144.0	13.0	13.2	40.0
103.962500	24.6	1000.0	120.000	250.0	H	58.0	18.2	18.9	43.5
263.648750	27.1	1000.0	120.000	300.0	H	-36.0	20.7	18.9	46.0
283.412500	28.1	1000.0	120.000	300.0	H	-113.0	19.6	17.9	46.0
558.771250	31.3	1000.0	120.000	300.0	H	-180.0	26.3	14.7	46.0

**Figure 8: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization for mode 2**


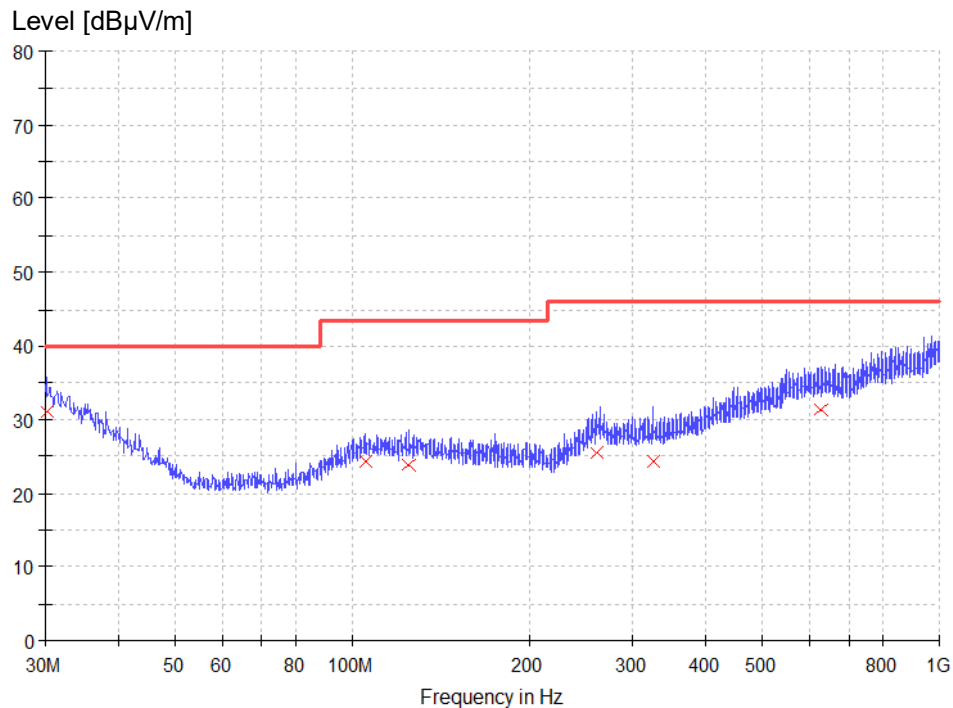
Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
31.091250	31.6	1000.0	120.000	200.0	V	180.0	24.9	8.4	40.0
68.100000	23.3	1000.0	120.000	300.0	V	-175.0	13.0	16.7	40.0
166.406250	24.5	1000.0	120.000	200.0	V	95.0	16.5	19.0	43.5
262.800000	27.8	1000.0	120.000	250.0	V	12.0	20.7	18.2	46.0
280.381250	30.0	1000.0	120.000	300.0	V	-55.0	19.6	16.0	46.0
554.527500	32.6	1000.0	120.000	300.0	V	-120.0	26.5	13.4	46.0

**Figure 9: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization for mode 3**


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
31.091250	31.3	1000.0	120.000	100.0	H	-180.0	24.9	8.7	40.0
116.087500	23.8	1000.0	120.000	150.0	H	-93.0	18.6	19.7	43.5
130.395000	24.1	1000.0	120.000	200.0	H	45.0	18.7	19.4	43.5
261.587500	27.6	1000.0	120.000	150.0	H	90.0	20.7	18.4	46.0
484.930000	29.7	1000.0	120.000	300.0	H	103.0	24.8	16.3	46.0
564.833750	30.7	1000.0	120.000	300.0	H	180.0	26.2	15.3	46.0

**Figure 10: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization for mode 3**


Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.121250	31.2	1000.0	120.000	150.0	V	-180.0	25.3	8.8	40.0
104.932500	24.3	1000.0	120.000	100.0	V	-96.0	18.3	19.2	43.5
124.575000	23.8	1000.0	120.000	200.0	V	-25.0	18.7	19.7	43.5
260.738750	25.5	1000.0	120.000	200.0	V	48.0	20.7	20.5	46.0
324.637500	24.4	1000.0	120.000	150.0	V	106.0	20.6	21.6	46.0
628.732500	31.3	1000.0	120.000	100.0	V	180.0	26.4	14.7	46.0

**Prüfbericht - Nr.: CN22ISUS 001**  
Test Report No.:

**Seite 23 von 25**  
Page 23 of 25

## **6 Photographs of the Test Set-Up**

Refer to the test setup file.

## 7 List of Test and Measurement Instruments

Equip.	Description	Model	Manufacturer	Last Date DD.MM.YYYY	Due Date DD.MM.YYYY
9023229	EMI test receiver	ESR3	Rohde&Schwarz	22.03.2021	31.08.2022
G1811403	Artificial mains network	ENV216	Rohde&Schwarz	04.11.2021	04.11.2022
G1824248	Dual display multimeter	F45	Fluke	18.09.2020	18.09.2022
G1811378	3m modified semi-anechoic chamber	SAC3	Frankonia	27.06.2019	27.06.2022
G1811402	EMI test receiver	ESCI	Rohde&Schwarz	01.09.2021	01.09.2022
G1811425	Bilog antenna	CBL 6112D	Teseq	10.03.2020	10.03.2023
G1824845	EMC measurement software	EMC32 (Ver 10.20.01)	Rohde&Schwarz	N/A	N/A



## 8 List of Figures

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L for mode 1.....	11
Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N for mode 1 .....	12
Figure 3: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L for mode 2.....	13
Figure 4: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N for mode 2 .....	14
Figure 5: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization for mode 1 .....	17
Figure 6: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization for mode 1 .....	18
Figure 7: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization for mode 2 .....	19
Figure 8: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization for mode 2 .....	20
Figure 9: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization for mode 3 .....	21
Figure 10: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization for mode 3 .....	22

**End of test report**