

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	<b>CN210H1L 001</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	<b>244313994</b>	<b>Seite 1 von 19</b> <i>Page 1 of 19</i>
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	<b>1774198</b>	<b>Auftragsdatum:</b> <i>Order date.:</i>	<b>2021-04-01</b>	
<b>Auftraggeber:</b> <i>Client:</i>	<b>IKEA of Sweden AB</b> BOX 702, SE-343 81 Älmhult, Sweden			
<b>Prüfgegenstand:</b> <i>Test item:</i>	<b>Cabinet Lighting</b>			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	<b>L2104 Skydrag</b>			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	<b>TÜV Rheinland EMC service</b>			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	<b>FCC 47 CFR Part 15, Subpart B:2019 Class B</b> <b>ICES-005:2018</b>			
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	<b>2021-04-01</b>	Refer to the EUT photos file		
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	<b>A003025464-015</b>			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	<b>2021-04-19~2021-04-25</b>			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	<b>Refer to clause 1.1</b>			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	<b>TÜV Rheinland (Shanghai) Co., Ltd.</b>			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	<b>Pass</b>			
<b>geprüft von: / tested by:</b> Jessie Xu		<b>genehmigt von: / authorized by:</b> Jiayi Zhou		
<b>Datum: / Date:</b> 2021-06-24 <i>Jessie Xu</i>		<b>Datum: / Date:</b> 2021-06-24 <i>Jiayi Zhou</i>		
<b>Stellung: / Position:</b> Project manager		<b>Stellung: / Position:</b> Senior manager		
<b>Sonstiges / Other:</b>	FCC ID: FHO-L2104 Test Firm Registration Number: 958801			
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>		<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged</i>		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

**Prüfbericht - Nr.:** CN210H1L 001  
*Test Report No.:*

**Seite 2 von 19**  
*Page 2 of 19*

## TEST SUMMARY

5.1.1 CONDUCTED EMISSION

*Result:*  
*Passed*

5.2.1 RADIATED EMISSION

*Result:*  
*Passed*

## Contents

<b>1</b>	<b>TEST SITES</b> .....	<b>4</b>
1.1	TEST FACILITIES.....	4
<b>2</b>	<b>GENERAL PRODUCT INFORMATION</b> .....	<b>5</b>
2.1	PRODUCT FUNCTION AND INTENDED USE.....	5
2.2	RATINGS AND SYSTEM DETAILS.....	5
2.3	INDEPENDENT OPERATION MODES.....	5
2.4	DESCRIPTION OF INTERCONNECTING CABLES.....	5
2.5	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	5
2.6	HIGHEST FREQUENCY GENERATED OR USED IN THE DEVICE OR ON WHICH THE DEVICE OPERATES OR TUNES.....	5
2.7	SUBMITTED DOCUMENTS.....	5
<b>3</b>	<b>TEST SET-UP AND OPERATION MODES</b> .....	<b>6</b>
3.1	PRINCIPLE OF CONFIGURATION SELECTION.....	6
3.2	EQUIPMENT AND CABLE ARRANGEMENT.....	6
3.3	TEST SOFTWARE.....	7
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	7
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	7
<b>4</b>	<b>CONFORMITY DECISION RULE</b> .....	<b>8</b>
<b>5</b>	<b>TEST RESULTS EMISSION</b> .....	<b>9</b>
5.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz.....	9
5.1.1	Conducted emission.....	9
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz.....	13
5.2.1	Radiated emission.....	13
<b>6</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP</b> .....	<b>17</b>
<b>7</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS</b> .....	<b>18</b>
<b>8</b>	<b>LIST OF FIGURES</b> .....	<b>19</b>

**Prüfbericht - Nr.:** CN210H1L 001  
*Test Report No.:*

**Seite 4 von 19**  
*Page 4 of 19*

## 1 Test Sites

### 1.1 Test Facilities

**Laboratory:** TÜV Rheinland (Shanghai) Co., Ltd.

**Address:** No.177, 178, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

Refer to Clause 7 for test and measurement instruments.

## 2 General Product Information

### 2.1 Product Function and Intended Use

The EUTs (equipment under test) is the ordinary cabinet lighting for lighting and similar use. For the further information, refer to the user's manual.

### 2.2 Ratings and System Details

System input : DC 24 V  
Rated power : 5.7 W  
Protection class : III

### 2.3 Independent Operation Modes

The basic operation modes are: "ON" and "OFF".

### 2.4 Description of interconnecting cables

No.	Interface and name	Shielded or not	Specified length (mm)
1	Power supply line	Unshielded	3500

### 2.5 Noise Generating and Noise Suppressing Parts

Refer to the circuit diagram for further information.

### 2.6 Highest frequency generated or used in the device or on which the device operates or tunes

The highest frequency used in the EUT is less than 108 MHz.

### 2.7 Submitted Documents

Circuit diagram, user's manual and rating label.

### 3 Test Set-up and Operation Modes

#### 3.1 Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.


Refer to the related paragraph of this report.

The sequence of testing:


1. Radiated emission tests were performed on 2021-04-19.
2. Conducted emission tests were performed on 2021-04-25.

#### 3.2 Equipment and cable arrangement

Block diagram for both conducted emission and radiated emission tests is as follows:

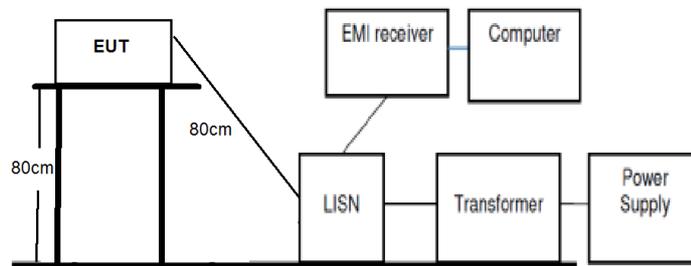

(Conducted emission)

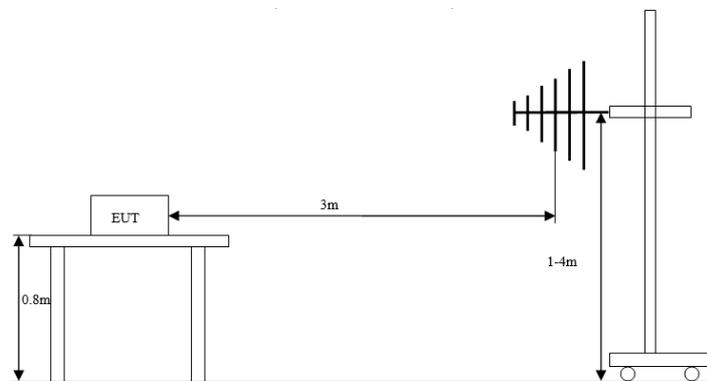

(Radiated emission)

Also refer to photographs on clause 6 for test setups for both conducted emission test and radiated emission test.

**Prüfbericht - Nr.: CN210H1L 001**  
Test Report No.:

Seite 7 von 19  
Page 7 of 19

### **3.3 Test Software**

No special test software was used during the tests.

### **3.4 Special Accessories and Auxiliary Equipment**

During the tests, the LED power supply (Model: ICPSLC24-30NA-IL-1, Manufacturer: IKEA of Sweden AB) was used as the auxiliary equipment.

### **3.5 Countermeasures to achieve EMC Compliance**

No other special measure is employed to achieve the requirement.

**Prüfbericht - Nr.:** CN210H1L 001  
*Test Report No.:*

**Seite 8 von 19**  
*Page 8 of 19*

## 4 Conformity Decision Rule

For all EMI tests included in this report, as measurement uncertainties are less than the values  $U_{\text{CISPR}}$  given in CISPR 16-4-2, compliance with the limits is determined by comparing measurement results directly with corresponding limits without taking into consideration of measurement uncertainties.

## 5 Test Results EMISSION

### 5.1 Emission in the Frequency Range up to 30 MHz

#### 5.1.1 Conducted emission

Result:	Passed
Date of testing	: 2021-05-26
Test procedure	: FCC 47 CFR Part 15, Subpart B:2019, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-1 series standards
Frequency range	: 0.15 – 30 MHz
Limits	: Quasi-peak limit: 0.15 – 0.5 MHz, 66 to 56 dB $\mu$ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 56 dB $\mu$ V; 5 – 30 MHz, 60 dB $\mu$ V Average limit: 0.15 – 0.5 MHz, 56 to 46 dB $\mu$ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 46 dB $\mu$ V; 5 – 30 MHz, 50 dB $\mu$ V
Bandwidth of EMI receiver for final measurement	: 9 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Shielded room
Input voltage	: AC 120 V, 60 Hz for LED power supply
Operational mode	: Power on
Ambient condition	: Temperature: 19.0 °C; Relative humidity: 46.6 %
Expanded measurement uncertainty ( $k=2$ )	: 3.39 dB

The measurement setup was made according to ANSI C63.4-2014 in a shielded room.

The measurement equipment like test receivers, quasi-peak detector and artificial mains network (AMN) are in compliance with CISPR 16-1 series standards.

The tested object was set-up on a wooden support. The EUT was set 0.8 m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3 m and 0.4 m.

The disturbance voltage test was performed on the neutral line and phase line of the power supply of the EUT respectively.

The following figures and tables were those measured by an automatic measuring system. Both quasi-peak and average measurements were performed. In the following spectral diagram, Blue “◆” means Quasi-Peak Value and green “◆” means Average Value results.

**Prüfbericht - Nr.: CN210H1L 001**

Test Report No.:

Seite 10 von 19

Page 10 of 19


Notes on following tables of conducted emission results and conversions:

Level (dB $\mu$ V): final measurement results by using quasi-peak detector and average detector

Transd (dB): transducer factor including cable loss, insertion loss of artificial mains network and gain of pre-amplifier (if used)

Margin: Limit (dB $\mu$ V) - Level (dB $\mu$ V)

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L

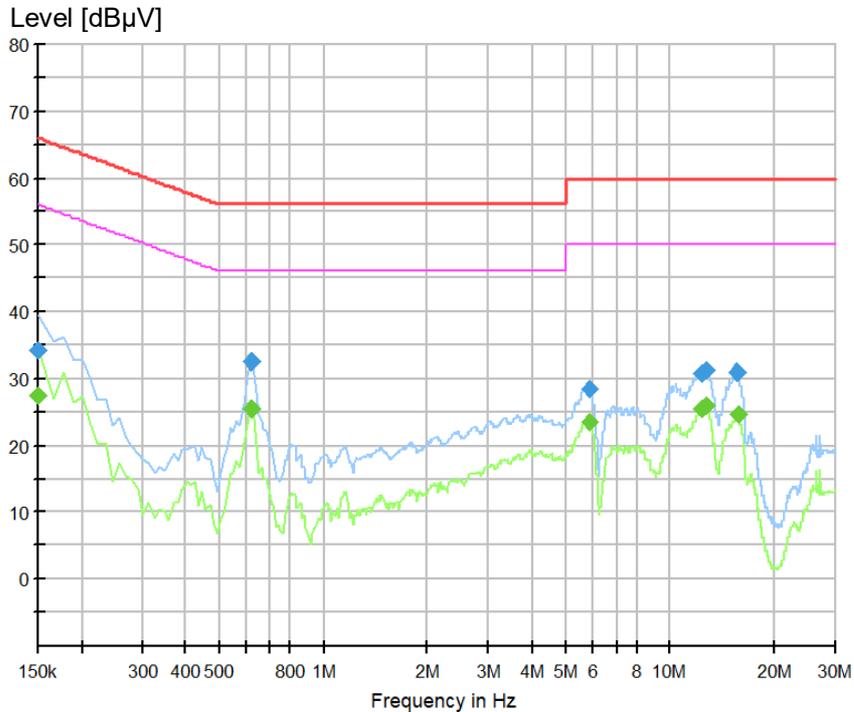


Final Quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	34.33	66.00	31.67	1000.0	9.000	L1
0.616875	32.55	56.00	23.45	1000.0	9.000	L1
5.870625	28.55	60.00	31.45	1000.0	9.000	L1
12.350625	30.80	60.00	29.20	1000.0	9.000	L1
12.710625	31.20	60.00	28.80	1000.0	9.000	L1
15.590625	30.89	60.00	29.11	1000.0	9.000	L1

Final Average measurement result:

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	27.38	56.00	28.62	1000.0	9.000	L1
0.616875	25.50	46.00	20.50	1000.0	9.000	L1
5.893125	23.54	50.00	26.46	1000.0	9.000	L1
12.373125	25.47	50.00	24.53	1000.0	9.000	L1
12.688125	25.93	50.00	24.07	1000.0	9.000	L1
15.860625	24.77	50.00	25.23	1000.0	9.000	L1

Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N

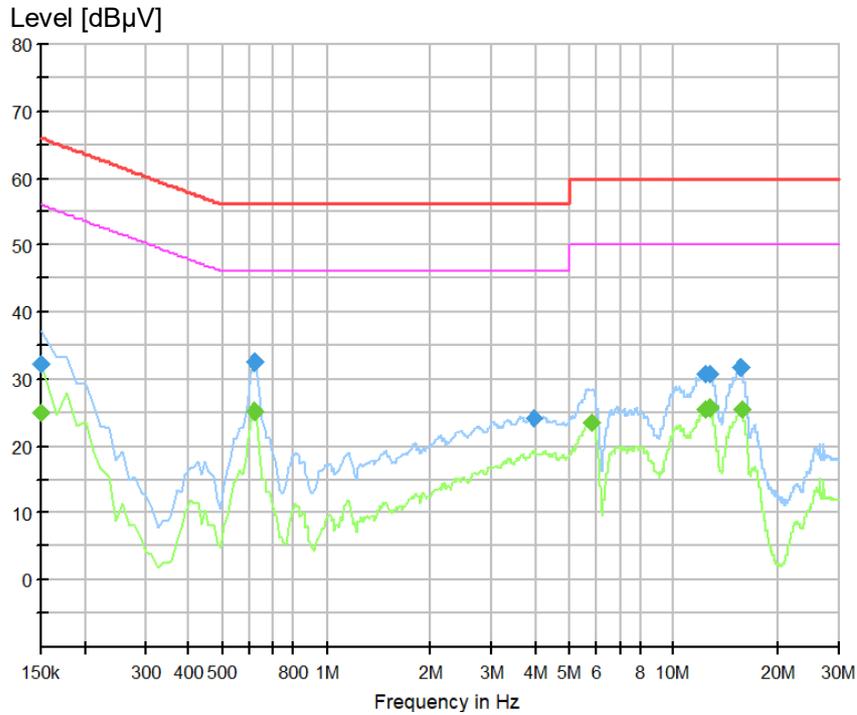

Final Quasi-peak measurement result:

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	32.15	66.00	33.85	1000.0	9.000	N
0.616875	32.60	56.00	23.40	1000.0	9.000	N
3.958125	24.21	56.00	31.79	1000.0	9.000	N
12.373125	30.67	60.00	29.33	1000.0	9.000	N
12.710625	30.84	60.00	29.16	1000.0	9.000	N
15.601875	31.73	60.00	28.27	1000.0	9.000	N

Final Average measurement result:

Frequency (MHz)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	24.98	56.00	31.02	1000.0	9.000	N
0.616875	25.22	46.00	20.78	1000.0	9.000	N
5.836875	23.44	50.00	26.56	1000.0	9.000	N
12.384375	25.36	50.00	24.64	1000.0	9.000	N
12.699375	25.58	50.00	24.42	1000.0	9.000	N
15.849375	25.53	50.00	24.47	1000.0	9.000	N

## 5.2 Emission in the Frequency Range above 30 MHz

### 5.2.1 Radiated emission

<b>Result:</b>	<b>Passed</b>
----------------	---------------

Date of testing	: 2021-05-19
Test procedure	: FCC 47 CFR Part 15, Subpart B:2019, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-1 series standards
Product classification	: Class B
Frequency range	: 30 – 1000 MHz (see Note 1)
Limits	: Quasi-peak limits (3 m distance): 30 – 88 MHz, 40 dB $\mu$ V/m; 88 – 216 MHz, 43.5 dB $\mu$ V/m; 216 – 1000 MHz, 46 dB $\mu$ V/m (see Note 2)
Bandwidth of EMI receiver for final measurement	: 120 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Semi-anechoic chamber
Input voltage	: AC 120 V, 60 Hz for LED power supply
Operational mode	: Power on
Ambient condition	: Temperature: 19.1 °C; Relative humidity: 43.0 %
Expanded measurement uncertainty ( $k=2$ )	: 5.49 dB

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on a 80 cm wooden support above the reference ground plane. The wooden support was rotated 360° around and the height of the antenna was varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following spectral diagram, “×” means quasi-peak test results.

*Note 1: The highest frequency in the EUT is less than 108 MHz. According to FCC Part 15 subpart B §15.33 (b) (1), the upper frequency for radiated emission measurement is 1000 MHz.*

*Note 2: The class B limits of ICES-005:2018 is stricter than those FCC 47 CFR Part 15, Subpart B:2019 for 3 m test distance. Therefore, the former limits are used in following figures and tables.*

**Prüfbericht - Nr.: CN210H1L 001**

Test Report No.:

Seite 14 von 19

Page 14 of 19


Notes on following tables of radiated emission results and conversions:

QuasiPeak (dB $\mu$ V/m): final measurement results by using quasi-peak detector

Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)

Margin: Limit (dB $\mu$ V/m) - QuasiPeak (dB $\mu$ V/m)


**Figure 3: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization**

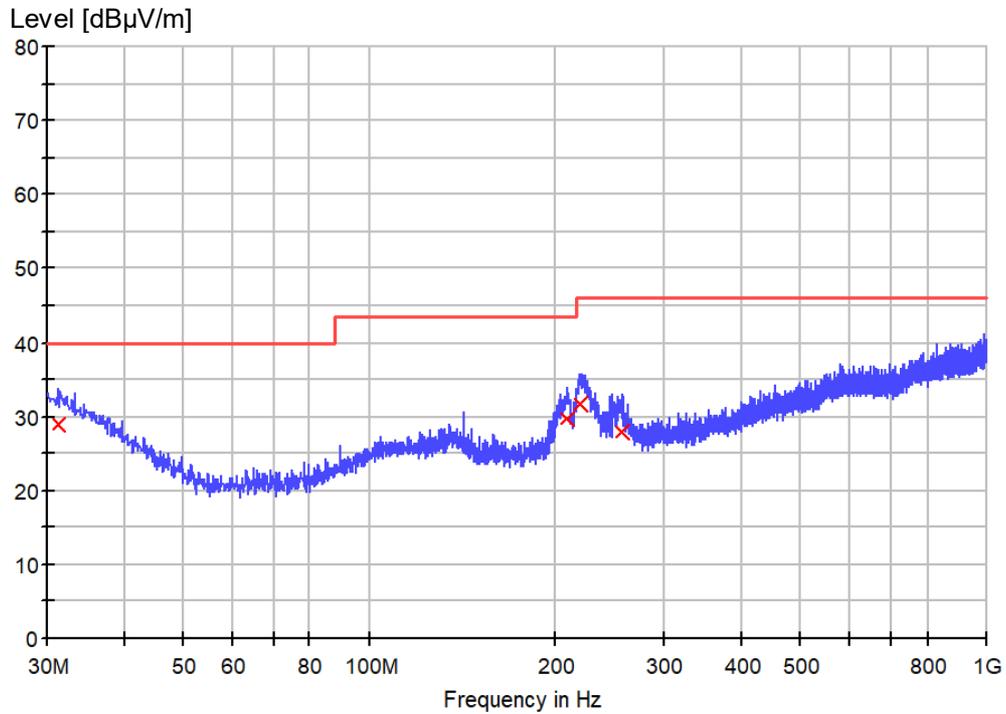

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
31.212500	28.8	1000.0	120.000	100.0	H	180.0	24.8	11.2	40.0
208.722500	29.6	1000.0	120.000	100.0	H	180.0	16.1	13.9	43.5
220.241250	31.8	1000.0	120.000	100.0	H	180.0	16.0	14.2	46.0
256.495000	27.9	1000.0	120.000	100.0	H	180.0	20.2	18.1	46.0

Figure 4: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization

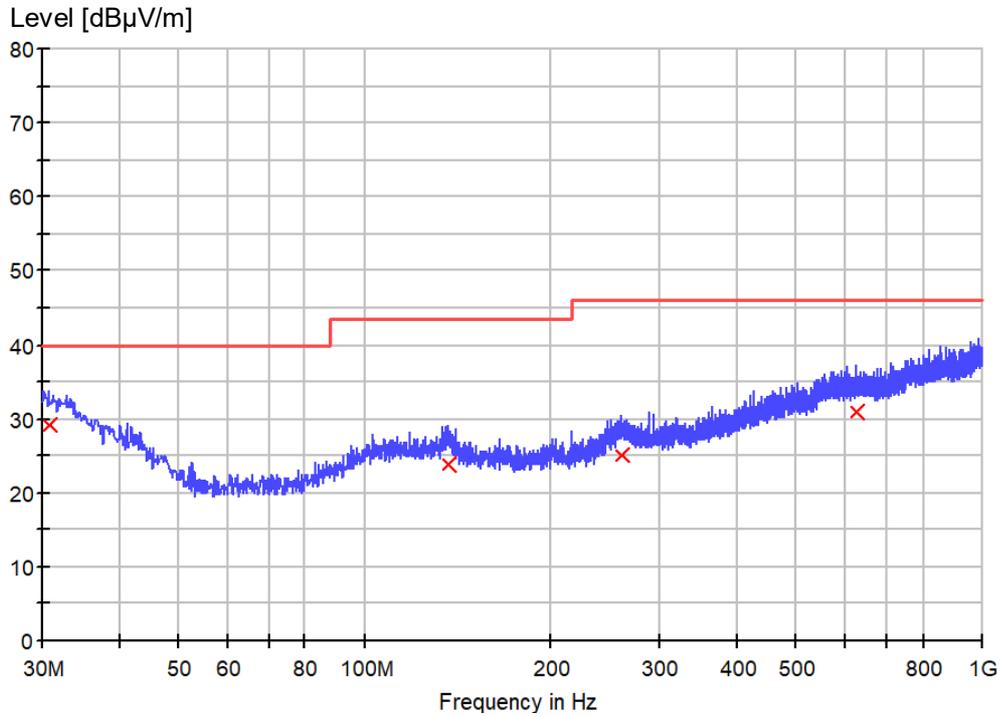

Final quasi-peak measurement results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
30.848750	29.2	1000.0	120.000	100.0	V	0.0	25.0	10.8	40.0
136.700000	23.9	1000.0	120.000	100.0	V	0.0	18.3	19.6	43.5
260.617500	25.1	1000.0	120.000	100.0	V	0.0	20.7	20.9	46.0
628.490000	30.9	1000.0	120.000	100.0	V	0.0	26.4	15.1	46.0

**Prüfbericht - Nr.: CN210H1L 001**  
Test Report No.:

**Seite 17 von 19**  
Page 17 of 19

## **6 Photographs of the Test Set-Up**

Refer to the test setup file.

**Prüfbericht - Nr.: CN210H1L 001**  
Test Report No.:

**Seite 18 von 19**  
Page 18 of 19

## 7 List of Test and Measurement Instruments

Equip.	Description	Model	Manufacturer	Last Date DD.MM.YYYY	Due Date DD.MM.YYYY
9023229	EMI test receiver	ESR3	Rohde&Schwarz	22.03.2021	22.03.2022
G1811403	Artificial mains network	ENV216	Rohde&Schwarz	23.11.2020	23.11.2021
G1824248	Dual display multimeter	F45	Fluke	18.09.2020	18.09.2022
G1811378	3m modified semi-anechoic chamber	SAC3	Frankonia	27.06.2019	27.06.2022
G1811402	EMI test receiver	ESCI	Rohde&Schwarz	18.09.2020	18.09.2021
G1811425	Bilog antenna	CBL 6112D	Teseq	10.03.2020	10.03.2023
G1824845	EMC measurement software	EMC32 (Ver 10.20.01)	Rohde&Schwarz	N/A	N/A

## 8 List of Figures

Figure 1: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, L .....	11
Figure 2: Spectral Diagrams, Conducted Emission, 150 kHz – 30 MHz, N.....	12
Figure 3: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Horizontal polarization.....	15
Figure 4: Spectral Diagrams, Radiated Emission, 30 MHz – 1000 MHz, Vertical polarization.....	16

**End of test report**