

IKEA of Sweden AB

TEST REPORT

SCOPE OF WORK:

FCC Part 15 subpart B – EMC report

Model:

LED1919G8, LED1919G8K5

REPORT NUMBER

190400508SHA-001

ISSUE DATE

October 9, 2019

DOCUMENT CONTROL NUMBER

TTRFFCCPART15b_V1

© 2018 Intertek



Applicant : **IKEA of Sweden AB**
Box 702 SE-343 81 Älmhult SWEDEN

Manufacturer : **Jinzhai Yankon Lufei Lighting Co., Ltd.**
Building D7, Jinwutong Pioneer Park, Meishanhu Road, Jinzhai
County Modern Industrial Park, Lu'an City, Anhui Province, China

Manufacturing site : **Jinzhai Yankon Lufei Lighting Co., Ltd.**
Building D7, Jinwutong Pioneer Park, Meishanhu Road, Jinzhai
County Modern Industrial Park, Lu'an City, Anhui Province, China

Summary

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2018): Radio Frequency Devices (Subpart B)

ANSI C63.4 (2014): American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

PREPARED BY:

REVIEWED BY:

Charles Zhang
Project Engineer

Star Guo
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Contents

| | |
|---|-----------|
| REVISION HISTORY..... | 4 |
| MEASUREMENT RESULT SUMMARY | 5 |
| 1 GENERAL INFORMATION | 6 |
| 1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) | 6 |
| 1.2 DESCRIPTION OF TEST FACILITY | 7 |
| 2 TEST SPECIFICATIONS..... | 8 |
| 2.1 STANDARDS OR SPECIFICATION | 8 |
| 2.2 MODE OF OPERATION DURING THE TEST..... | 8 |
| 2.3 TEST SOFTWARE LIST | 8 |
| 2.4 TEST PERIPHERALS LIST | 8 |
| 2.5 RECORD OF CLIMATIC CONDITIONS | 8 |
| 2.6 INSTRUMENT LIST | 9 |
| 2.7 MEASUREMENT UNCERTAINTY | 10 |
| 3 CONDUCTED EMISSION | 11 |
| 3.1 LIMITS..... | 11 |
| 3.1.1 <i>Limits for conducted emission of class A device.....</i> | <i>11</i> |
| 3.1.2 <i>Limits for conducted emission of class B device.....</i> | <i>11</i> |
| 3.2 TEST SETUP | 12 |
| 3.3 TEST SETUP AND TEST PROCEDURE | 13 |
| 3.4 TEST PROTOCOL..... | 14 |
| 4 RADIATED EMISSION | 16 |
| 4.1 RADIATED EMISSION LIMITS | 16 |
| 4.1.1 <i>Limits for radiated emission of class A device.....</i> | <i>16</i> |
| 4.1.2 <i>Limits for radiated emission of class B device.....</i> | <i>16</i> |
| 4.2 BLOCK DIAGRAM AND TEST SET UP | 17 |
| 4.3 TEST SETUP AND TEST PROCEDURE | 18 |
| 4.4 TEST PROTOCOL..... | 19 |

Revision History

| Report No. | Version | Description | Issued Date |
|------------------|---------|-------------------------|-----------------|
| 190400508SHA-001 | Rev. 01 | Initial issue of report | October 9, 2019 |
| | | | |
| | | | |

Measurement result summary

| TEST ITEM | FCC REFERENCE | TEST RESULT | NOTE |
|--------------------|---------------|-------------|------|
| Conducted emission | 15.107 | Pass | |
| Radiation emission | 15.109 | Pass | |

Notes: 1: NA =Not Applicable

2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product Name : Self-ballasted LED lamps

Type/Model : LED1919G8, LED1919G8K5

Description of EUT : The product covered by this report is self-ballasted LED lamp, which be provided with an E26 lamp cap for connection to a 120V, 60Hz source of supply through suitable lampholders. Dry location use only. NOT Suitable for used with a dimmer. It can be used in totally enclosed luminaires. All models are same except the color temperature. LED1919G8 was tested as representative.

Rating : AC120V, 60Hz, 7.6W, 75mA, with E26 lamp cap

Brand name : IKEA

Category of EUT : Class B

EUT type : ☒ Table top
☐ Floor standing

Sample received date : 2019/04/03

Sample identification No. : 0190403-10-001

Date of test : 2019/04/03

1.2 Description of Test Facility

Name : Intertek Testing Services Shanghai
Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R.
China
Telephone : 86 21 61278200
Telefax : 86 21 54262353

The test facility is : CNAS Accreditation Lab
recognized, certified, Registration No. CNAS L0139
or accredited by these FCC Accredited Lab
organizations Designation Number: CN1175
IC Registration Lab
CAB identifier.: CN0051
VCCI Registration Lab
Registration No.: R-14243, G-10845, C-14723, T-12252
A2LA Accreditation Lab
Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2017): Radio Frequency Device: Subpart B

ANSI C63.4 (2014): Interim Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz.

2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.

2.3 Test software list

| Test Items | Software | Manufacturer | Version |
|--------------------|----------|--------------|---------|
| Conducted emission | ESxS-K1 | R&S | V2.1.0 |
| Radiated emission | ES-K1 | R&S | V1.71 |

2.4 Test peripherals list

| Item No. | Name | Band and Model | Description |
|----------|------|----------------|-------------|
| | | | |
| | | | |

2.5 Record of climatic conditions

| Test Item | Temperature (°C) | Relative Humidity (%) | Pressure (Kpa) |
|--------------------|------------------|-----------------------|----------------|
| Conducted emission | 24 | 42 | NA |
| Radiated Emission | 24 | 42 | NA |

Notes: NA =Not Applicable

2.6 Instrument list

| Conducted Emission / Disturbance Power / Tri-loop Test / CDN method | | | | | |
|---|-----------------------|-------------------|-----------|--------------|------------|
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESCS 30 | EC 2107 | 2020-07-14 |
| <input checked="" type="checkbox"/> | A.M.N. | R&S | ESH2-Z5 | EC 3119 | 2019-11-29 |
| <input checked="" type="checkbox"/> | Shielded room | Zhongyu | - | EC 2838 | 2020-01-13 |
| Radiated Emission | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESIB 26 | EC 3045 | 2019-09-12 |
| <input checked="" type="checkbox"/> | Bilog Antenna | TESEQ | CBL 6112D | EC 4206 | 2019-12-10 |
| <input checked="" type="checkbox"/> | Semi-anechoic chamber | Albatross project | - | EC 3048 | 2019-07-31 |
| Additional instrument | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Therom-Hygrograph | ZJ1-2A | S.M.I.F. | EC 3783 | 2020-03-10 |
| <input checked="" type="checkbox"/> | Therom-Hygrograph | ZJ1-2A | S.M.I.F. | EC 3325 | 2020-04-07 |

2.7 Measurement Uncertainty

| Measurement | Frequency | Expanded Uncertainty (k=2) (\pm) |
|-----------------------------------|----------------|---|
| Conducted emission at mains ports | 9kHz ~ 150kHz | 3.71 dB |
| | 150kHz ~ 30MHz | 3.31 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 5.04 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz | 4.97 dB |
| | 6GHz ~ 18GHz | 5.29 dB |

3 Conducted emission

Test result: **PASS**

3.1 Limits


3.1.1 Limits for conducted emission of class A device


| Frequency range (MHz) | Limits dB(μV) | |
|---|---------------|---------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 79 | 66 |
| 0.5 ~ 30 | 73 | 60 |
| Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out. | | |

3.1.2 Limits for conducted emission of class B device


| Frequency range (MHz) | Limits dB(μV) | |
|---|---------------|-----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 ~ 56 * | 56 ~ 46 * |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |
| Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz 2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out. | | |

3.2 Test setup

 For table top equipment

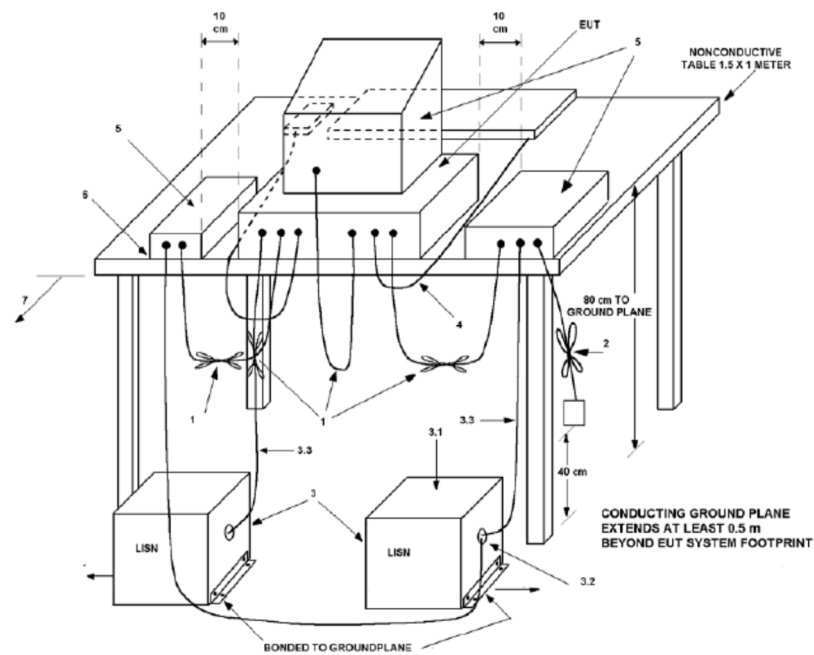

☐ For floor standing equipment

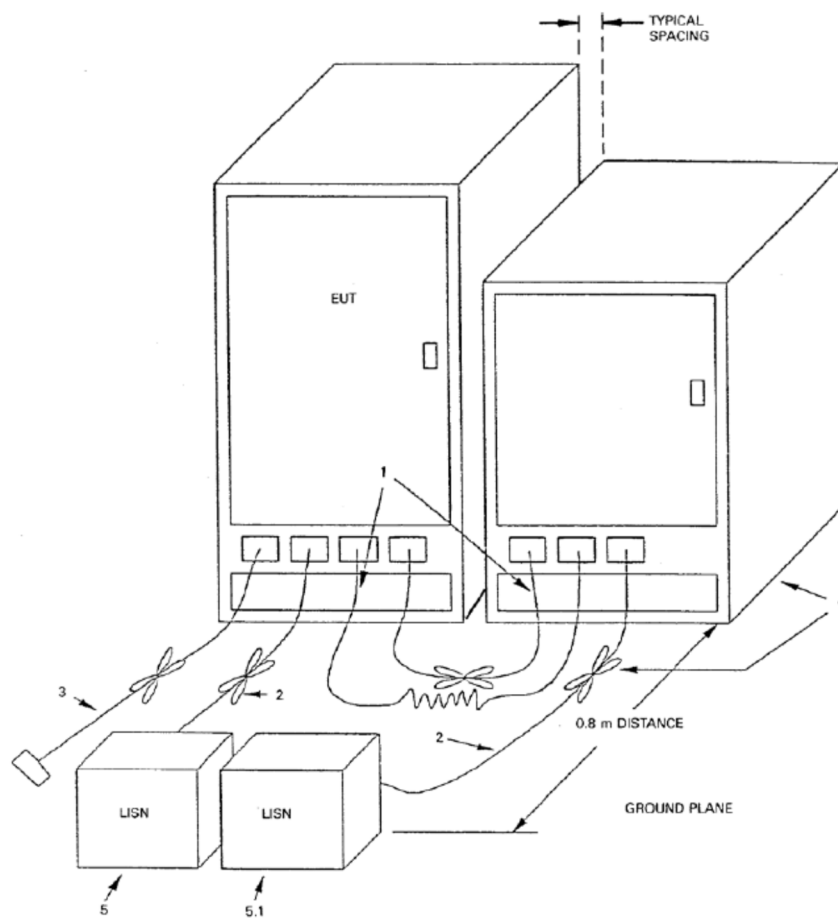

3.3 Test Setup and Test Procedure

Measurement was performed in shielded room, and instruments used were following clause 4 and clause 5 of ANSI 63.4.


Detailed test procedure was following clause 7.3 of ANSI 63.4.

EUT arrangement and operation conditions were according to clause 6 and clause 7 of ANSI 63.4.

Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

3.4 Test Protocol


L line

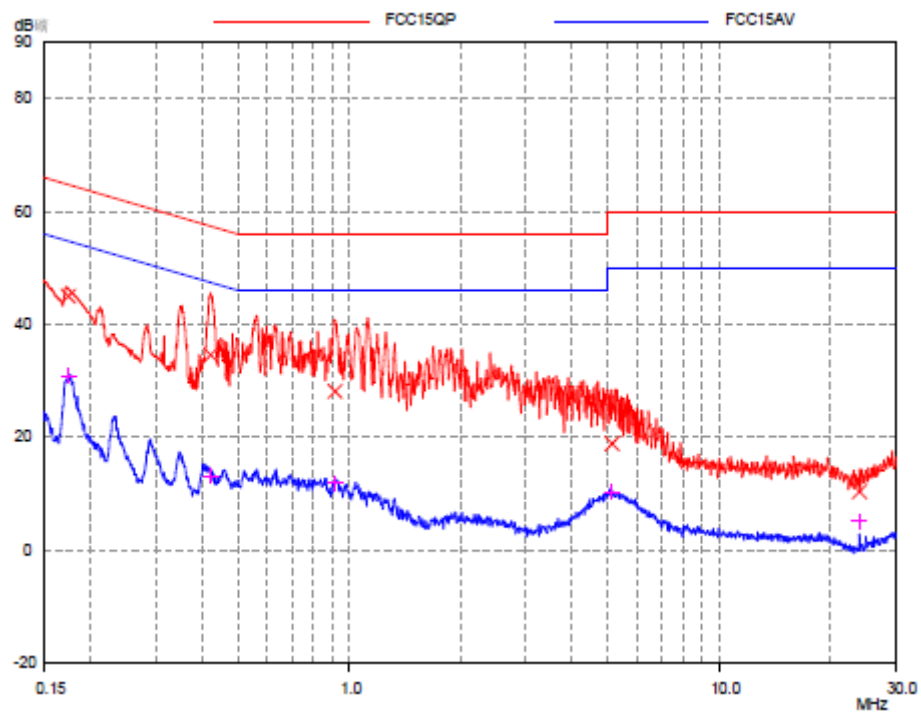

| Frequency MHz | QP Level dB μ V | QP Limit dB μ V | QP Delta dB |
|------------------|------------------------|------------------------|----------------|
| 0.17 | 45.01 | 64.77 | 19.76 |
| 0.42 | 34.55 | 57.41 | 22.86 |
| 0.91 | 28.11 | 56.00 | 27.89 |
| 5.13 | 18.80 | 60.00 | 41.20 |
| 23.96 | 10.29 | 60.00 | 49.71 |

| Frequency MHz | AV Level dB μ V | AV Limit dB μ V | AV Delta dB |
|------------------|------------------------|------------------------|----------------|
| 0.17 | 30.81 | 54.77 | 23.96 |
| 0.42 | 13.07 | 47.41 | 34.34 |
| 0.91 | 11.85 | 46.00 | 34.15 |
| 5.13 | 10.14 | 50.00 | 39.86 |
| 23.96 | 5.03 | 50.00 | 44.97 |

N line

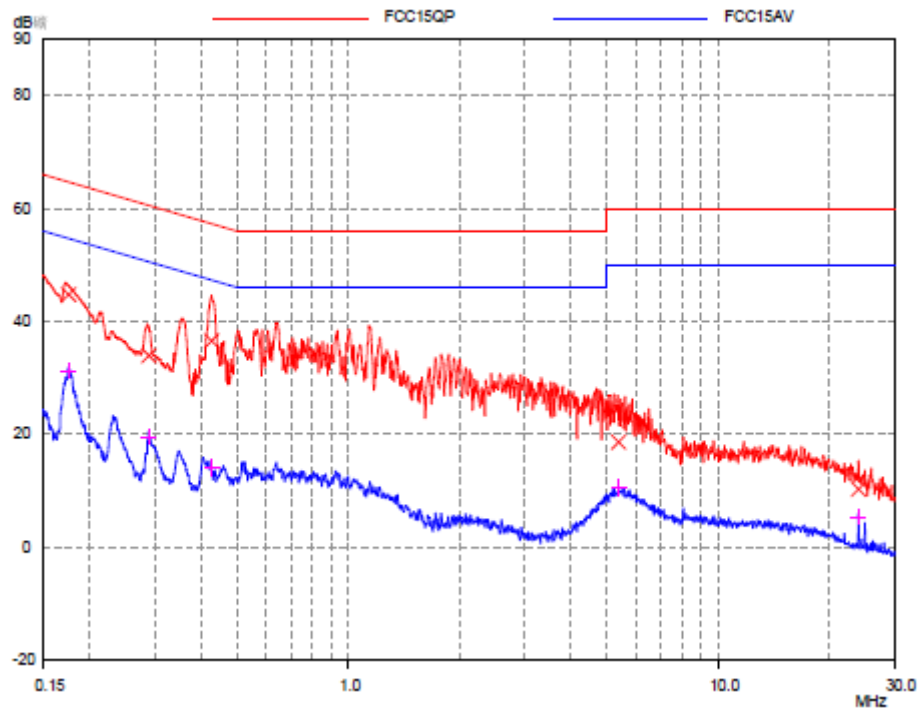

| Frequency MHz | QP Level dBμV | QP Limit dBμV | QP Delta dB |
|------------------|------------------|------------------|----------------|
| 0.17 | 44.75 | 64.71 | 19.96 |
| 0.28 | 33.93 | 60.56 | 26.63 |
| 0.42 | 36.53 | 57.31 | 20.78 |
| 5.38 | 18.57 | 60.00 | 41.43 |
| 23.96 | 10.25 | 60.00 | 49.75 |

| Frequency MHz | AV Level dBμV | AV Limit dBμV | AV Delta dB |
|------------------|------------------|------------------|----------------|
| 0.17 | 31.13 | 54.71 | 23.58 |
| 0.28 | 19.46 | 50.56 | 31.10 |
| 0.42 | 14.02 | 47.31 | 33.29 |
| 5.38 | 10.50 | 50.00 | 39.50 |
| 23.96 | 5.29 | 50.00 | 44.71 |

- Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,
 Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.
 Then Correct Factor = 10.00 + 2.00 = 12.00dB;
 Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;
 Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

4 Radiated emission

Test result: **PASS**

4.1 Radiated emission limits

4.1.1 Limits for radiated emission of class A device


| Frequency (MHz) | Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 10m |
|---|--|
| 30 ~ 88 | 39 |
| 88 ~ 216 | 43.5 |
| 216 ~ 960 | 46.4 |
| Above 960 | 49.5 |
| Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades. | |

4.1.2 Limits for radiated emission of class B device


| Frequency (MHz) | Permitted limit in dB μ V/m (Quasi-peak) of Measurement Distance 3m |
|---|---|
| 30 ~ 88 | 40.0 |
| 88 ~ 216 | 43.5 |
| 216 ~ 960 | 46.0 |
| Above 960 | 54.0 |
| Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades. | |

4.2 Block diagram and test set up

☒ For table top equipment

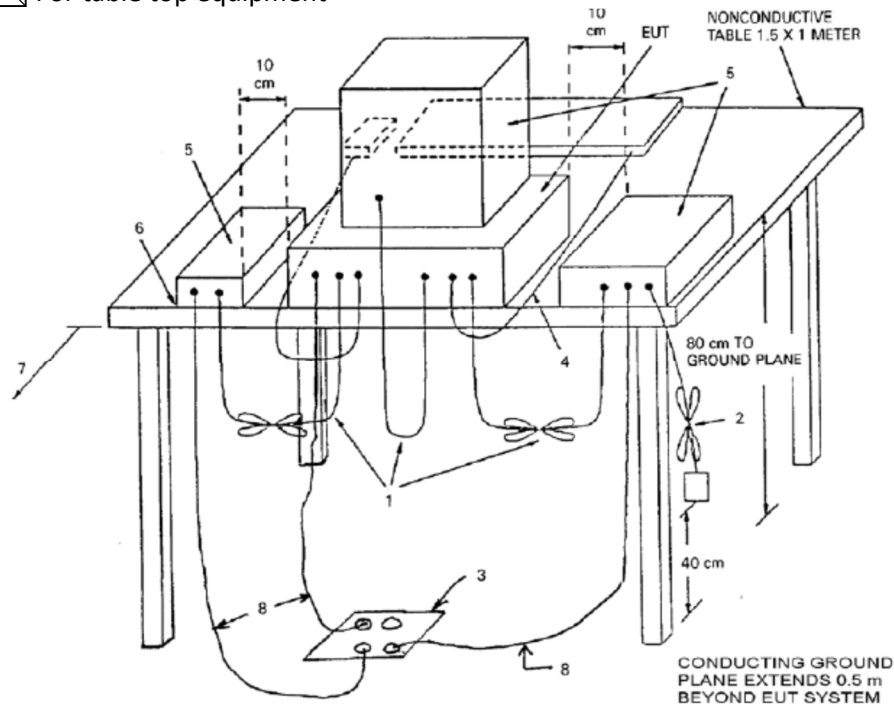

☐ For floor standing equipment

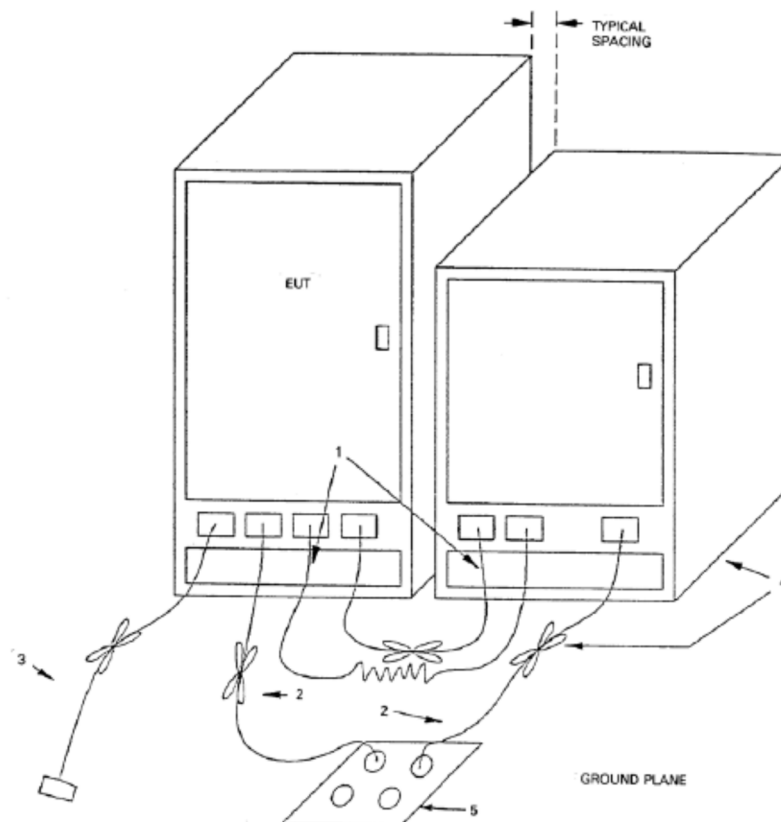

4.3 Test Setup and Test Procedure

The measurement was performed in a semi-anechoic chamber.

The distance from EUT to receiving antenna is 3 meter.

Measurement was performed according to clause 4 and clause 5 of ANSI 63.4.

Test procedure was according to clause 8.3 of ANSI 63.4.

EUT arrangement and operate condition were according to clause 6 and clause 8 of ANSI 63.4.


The bandwidth setting on R&S Test Receiver was 120 kHz.

The required measurement frequency range was checked.


4.4 Test Protocol

Test Curve:

Horizontal

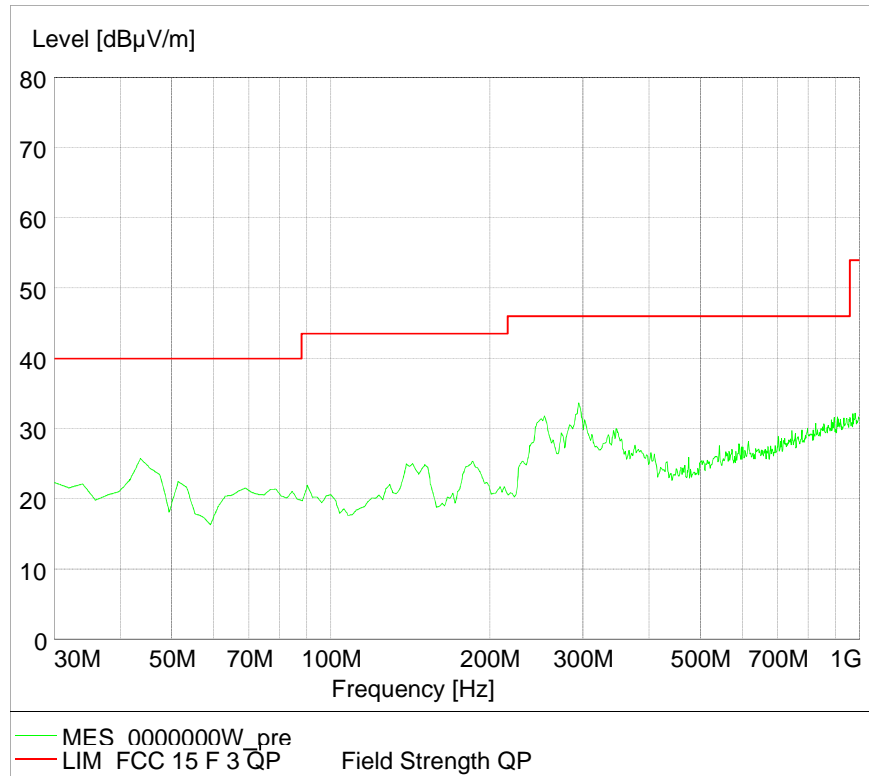

Vertical

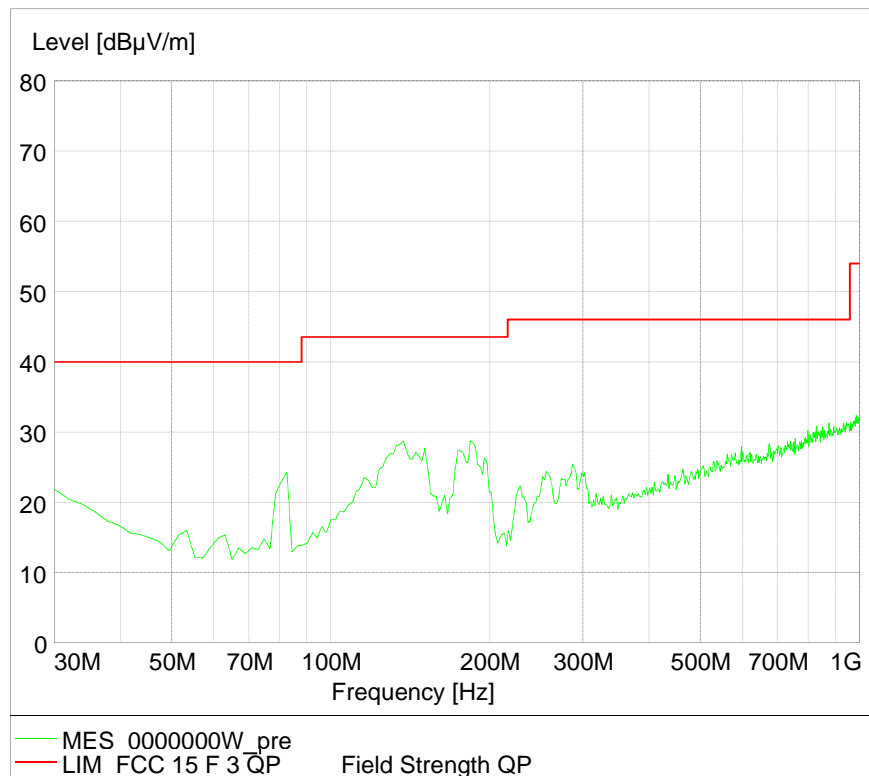

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV +
0.20dB/m = 10.20dBuV/m; Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

*****END of the report*****