

# IKEA of Sweden AB

# TEST REPORT

## SCOPE OF WORK:

FCC Part 15 subpart B – EMC report

### Model:

LED1935C3

### REPORT NUMBER

200101481SHA-001

### ISSUE DATE

April 10, 2020

### DOCUMENT CONTROL NUMBER

TTRFFCCPART15b\_V1

© 2018 Intertek



**Applicant** : **IKEA of Sweden AB**  
**Box 702, SE-343 81 Älmhult, SWEDEN**

**Manufacturer** : **Same as applicant**

**Manufacturing site** : **LEEDARSON LIGHTING CO.,LTD.**  
**Xingtai Industrial Park, Economic Development Zone**  
**of Changtai County, Zhangzhou City, Fujian**  
**Province, China**  
**Haysonic IoT Technology CO., Ltd.**  
**Xingtai Industrial Park, Economic Development Zone of Changtai**  
**County, Zhangzhou City, Fujian Province, China**

#### Summary

The equipment complies with the requirements according to the following standard(s) or Specification:

**47CFR Part 15 (2019):** Radio Frequency Devices (Subpart B)

**ANSI C63.4 (2014):** American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

**PREPARED BY:**

**REVIEWED BY:**

Star Guo  
Project Engineer

Andy Chen  
Reviewer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## Contents

<b>REVISION HISTORY</b>	<b>4</b>
<b>MEASUREMENT RESULT SUMMARY</b>	<b>5</b>
<b>1 GENERAL INFORMATION</b>	<b>6</b>
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST FACILITY	7
<b>2 TEST SPECIFICATIONS</b>	<b>8</b>
2.1 STANDARDS OR SPECIFICATION	8
2.2 MODE OF OPERATION DURING THE TEST	8
2.3 TEST SOFTWARE LIST	8
2.4 TEST PERIPHERALS LIST	8
2.5 RECORD OF CLIMATIC CONDITIONS	8
2.6 INSTRUMENT LIST	9
2.7 MEASUREMENT UNCERTAINTY	10
<b>3 CONDUCTED EMISSION</b>	<b>11</b>
3.1 LIMITS	11
3.1.1 <i>Limits for conducted emission of class A device</i>	11
3.1.2 <i>Limits for conducted emission of class B device</i>	11
3.2 TEST SETUP	12
3.3 TEST SETUP AND TEST PROCEDURE	13
3.4 TEST PROTOCOL	14
<b>4 RADIATED EMISSION</b>	<b>16</b>
4.1 RADIATED EMISSION LIMITS	16
4.1.1 <i>Limits for radiated emission of class A device</i>	16
4.1.2 <i>Limits for radiated emission of class B device</i>	16
4.2 BLOCK DIAGRAM AND TEST SET UP	17
4.3 TEST SETUP AND TEST PROCEDURE	18
4.4 TEST PROTOCOL	19

### Revision History

Report No.	Version	Description	Issued Date
200101481SHA-001	Rev. 01	Initial issue of report	April 10, 2020

## Measurement result summary

TEST ITEM	FCC REFERENCE	TEST RESULT	NOTE
Conducted emission	15.107	Pass	
Radiation emission	15.109	Pass	

Notes: 1: NA =Not Applicable

2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product Name : Self-ballasted LED lamps  
Type/Model : LED1935C3  
Description of EUT : We tested it, and listed the worst data.  
Rating : 120V~, 60Hz, 2.7W, 35mA, with E12 lamp cap  
Brand name : IKEA  
Category of EUT : Class B  
EUT type : ☒ Table top  
                  ☐ Floor standing  
Sample received date : January 19, 2020  
Sample identification No. : 020119-63  
Date of test : January 19, 2020

## 1.2 Description of Test Facility

Name : Intertek Testing Services Shanghai  
Address : Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R.  
China  
Telephone : 86 21 61278200  
Telefax : 86 21 54262353

The test facility is : CNAS Accreditation Lab  
recognized, certified, Registration No. CNAS L0139  
or accredited by these FCC Accredited Lab  
organizations Designation Number: CN1175  
IC Registration Lab  
CAB identifier.: CN0051  
VCCI Registration Lab  
Registration No.: R-14243, G-10845, C-14723, T-12252  
A2LA Accreditation Lab  
Certificate Number: 3309.02

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

**47CFR Part 15 (2019):** Radio Frequency Device: Subpart B

**ANSI C63.4 (2014):** Interim Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz.

### 2.2 Mode of operation during the test

Within this test report, EUT was tested under all available operation modes and tested under its rating voltage and frequency. Other voltage and frequency is specified if used.

### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

### 2.4 Test peripherals list

Item No.	Name	Band and Model	Description

### 2.5 Record of climatic conditions

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)
Conducted emission	24	42	101
Radiated Emission	24	42	101

Notes: NA =Not Applicable



## 2.6 Instrument list

Conducted Emission / Disturbance Power / Tri-loop Test / CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2020-07-15
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2020-11-29
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2021-01-13
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2020-09-12
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2020-06-10
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2020-07-31
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3326	2021-03-28
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2021-02-28
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2020-07-01

## 2.7 Measurement Uncertainty

Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Conducted emission at mains ports	9kHz ~ 150kHz	3.71 dB
	150kHz ~ 30MHz	3.31 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.04 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	4.97 dB
	6GHz ~ 18GHz	5.29 dB

### 3 Conducted emission

Test result: **PASS**

#### 3.1 Limits


##### 3.1.1 Limits for conducted emission of class A device


Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60
Note: If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

##### 3.1.2 Limits for conducted emission of class B device


Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 ~ 56 *	56 ~ 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50
Note: 1. * Means the limit decreasing linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz 2. If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.		

### 3.2 Test setup

 For table top equipment

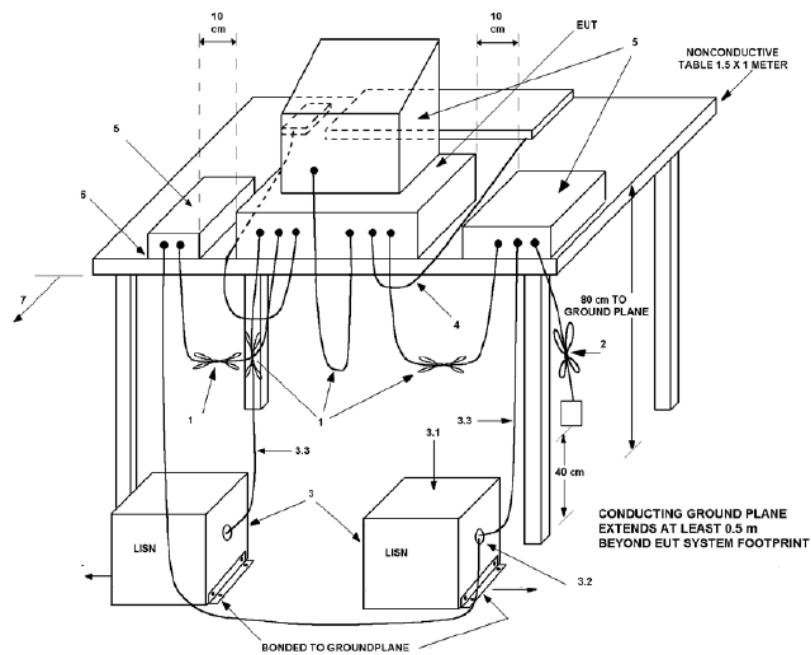

☐ For floor standing equipment

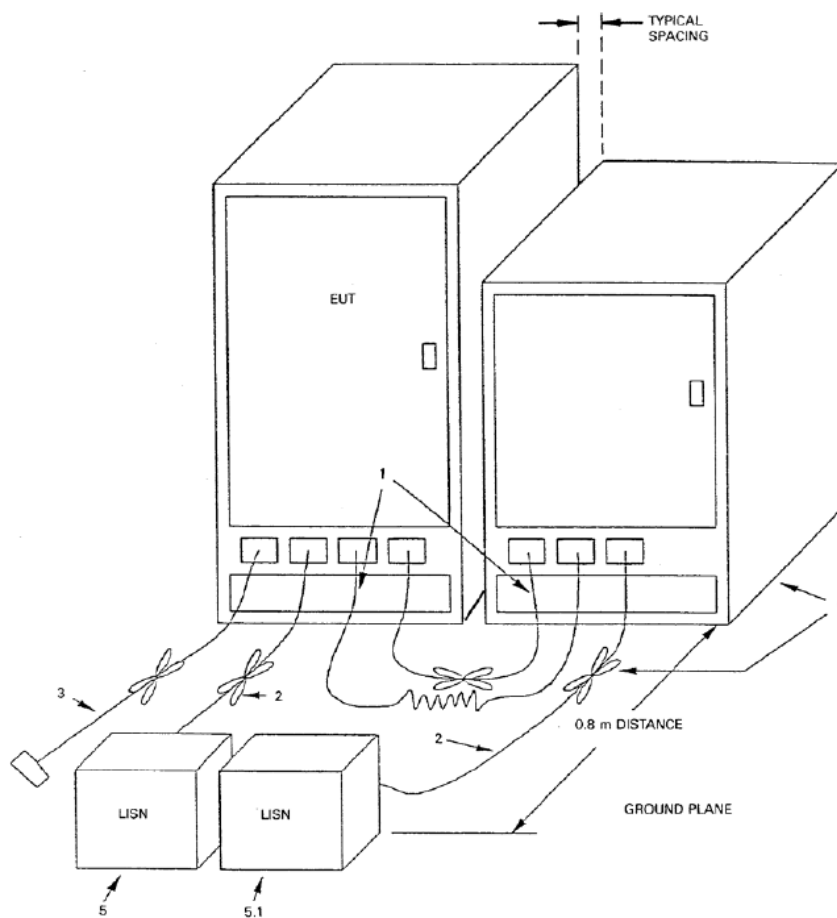

### **3.3 Test Setup and Test Procedure**

Measurement was performed in shielded room, and instruments used were following clause 4 and clause 5 of ANSI 63.4.


Detailed test procedure was following clause 7.3 of ANSI 63.4.

EUT arrangement and operation conditions were according to clause 6 and clause 7 of ANSI 63.4.

Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

### 3.4 Test Protocol

L line:

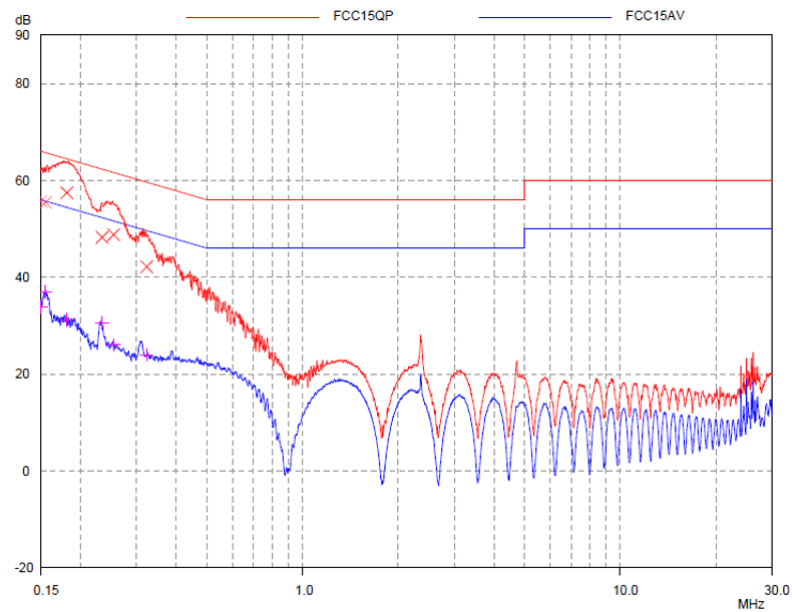


Final Measurement Results

Frequency MHz	QP Level dB	QP Limit dB	QP Delta dB
0.15	55.69	66.00	10.31
0.15486	55.47	65.74	10.27
0.18095	57.45	64.44	6.99
0.23363	48.25	62.32	14.07
0.25406	48.79	61.62	12.83
0.32282	42.19	59.63	17.44

Frequency MHz	AV Level dB	AV Limit dB	AV Delta dB
0.15	33.81	56.00	22.19
0.15486	37.02	55.74	18.72
0.18095	31.19	54.44	23.25
0.23363	30.61	52.32	21.71
0.25406	26.06	51.62	25.56
0.32282	23.97	49.63	25.66

N line:

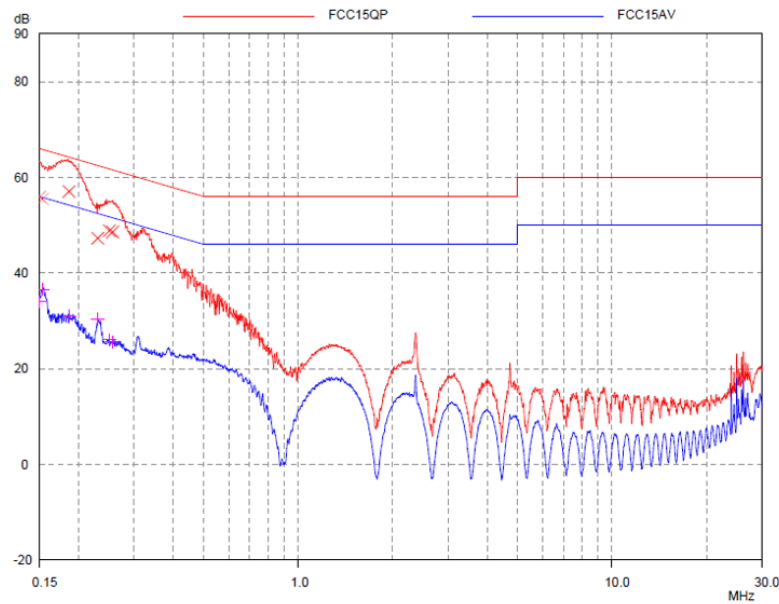

**Final Measurement Results**

Frequency MHz	QP Level dB	QP Limit dB	QP Delta dB
0.15	55.91	66.00	10.09
0.15363	55.49	65.80	10.31
0.18608	57.05	64.21	7.16
0.22993	47.29	62.45	15.16
0.25002	48.87	61.76	12.89
0.25608	48.59	61.56	12.97

Frequency MHz	AV Level dB	AV Limit dB	AV Delta dB
0.15	34.04	56.00	21.96
0.15363	36.63	55.80	19.17
0.18608	31.00	54.21	23.21
0.22993	30.34	52.45	22.11
0.25002	26.06	51.76	25.70
0.25608	25.60	51.56	25.96

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming LISN Factor = 10.00dB, Cable Loss = 2.00dB,  
Original Receiver Reading = 10.00dBuV, Limit = 66.00dBuV.  
Then Correct Factor = 10.00 + 2.00 = 12.00dB;  
Corrected Reading = 10dBuV + 12.00dB = 22.00dBuV;  
Margin = 66.00dBuV – 22.00dBuV = 44.00dB.

## 4 Radiated emission

Test result: **PASS**

### 4.1 Radiated emission limits

#### 4.1.1 Limits for radiated emission of class A device

Frequency (MHz)	Permitted limit in dB $\mu$ V/m (Quasi-peak) of Measurement Distance 10m
30 ~ 88	39
88 ~ 216	43.5
216 ~ 960	46.4
Above 960	49.5
Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.	


#### 4.1.2 Limits for radiated emission of class B device

Frequency (MHz)	Permitted limit in dB $\mu$ V/m (Quasi-peak) of Measurement Distance 3m
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
Above 960	54.0
Note: for the measurement distance other than 3m and 10m, the limit is varied according to 20dB/10 decades.	




## 4.2 Block diagram and test set up

☐ For table top equipment

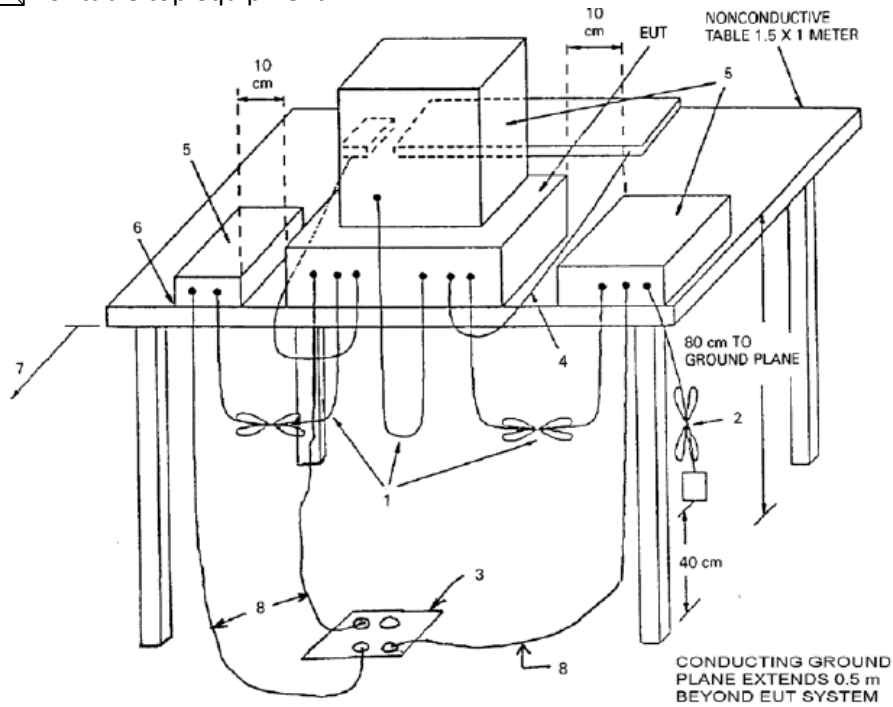

☐ For floor standing equipment

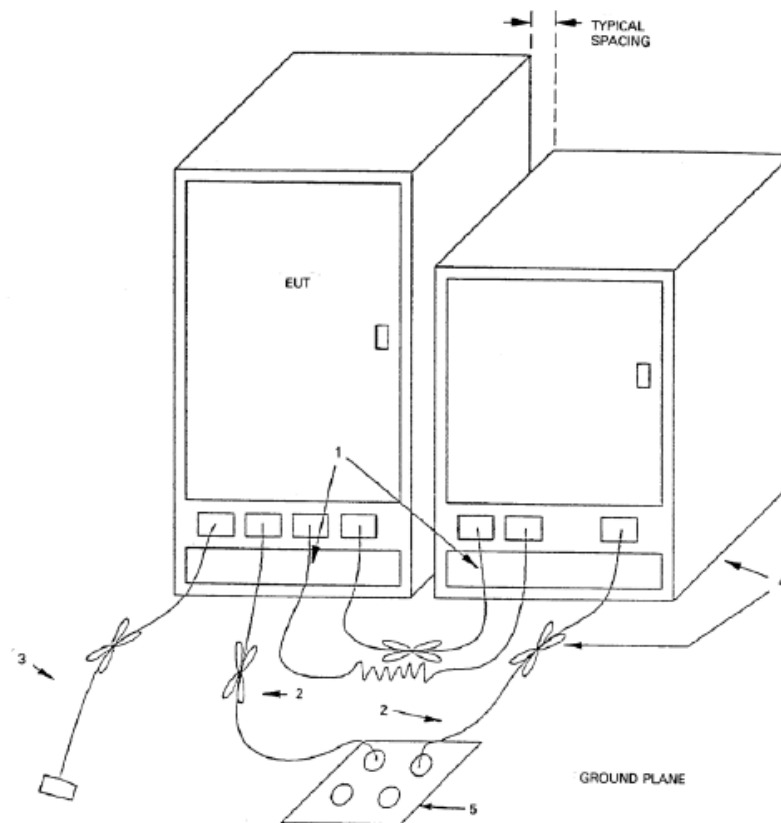

### **4.3 Test Setup and Test Procedure**

The measurement was performed in a semi-anechoic chamber.

The distance from EUT to receiving antenna is 3 meter.

Measurement was performed according to clause 4 and clause 5 of ANSI 63.4.

Test procedure was according to clause 8.3 of ANSI 63.4.


EUT arrangement and operate condition were according to clause 6 and clause 8 of ANSI 63.4.

The bandwidth setting on R&S Test Receiver was 120 kHz.


The required measurement frequency range was checked.

## 4.4 Test Protocol

### Test Curve:

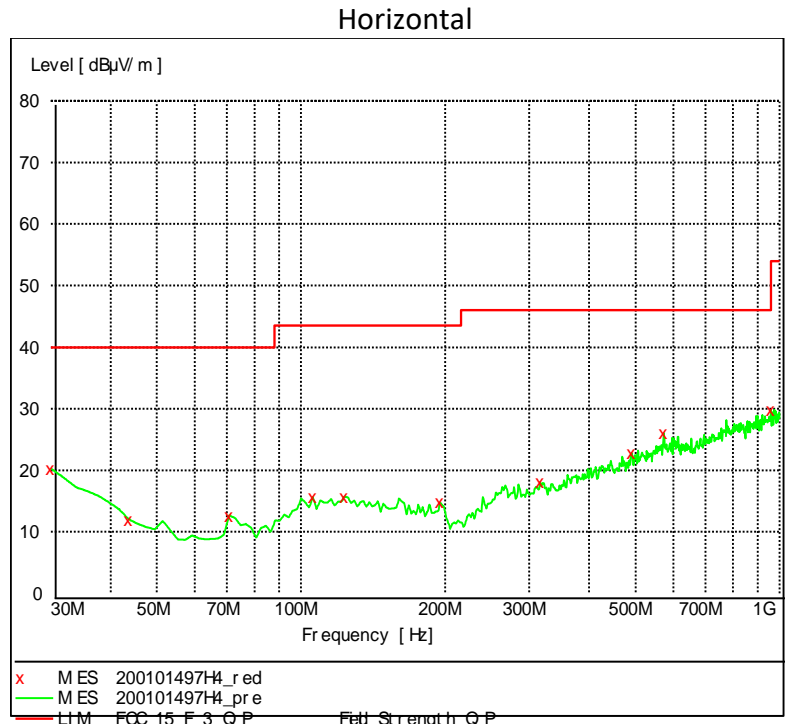

Frequency MHz	Level dBUV/m	Transd dB	Limit dBUV/m	Margin dB
30.000000	20.30	18.8	40.0	19.7
43.607214	12.00	11.7	40.0	28.0
70.821643	12.60	7.4	40.0	27.4
105.811623	15.60	12.5	43.5	27.9
123.306613	15.70	13.2	43.5	27.8
195.230461	14.80	11.0	43.5	28.7
315.751503	18.10	15.4	46.0	27.9
490.701403	22.80	19.5	46.0	23.2
572.344689	26.00	20.6	46.0	20.0
959.178357	29.80	24.3	46.0	16.2

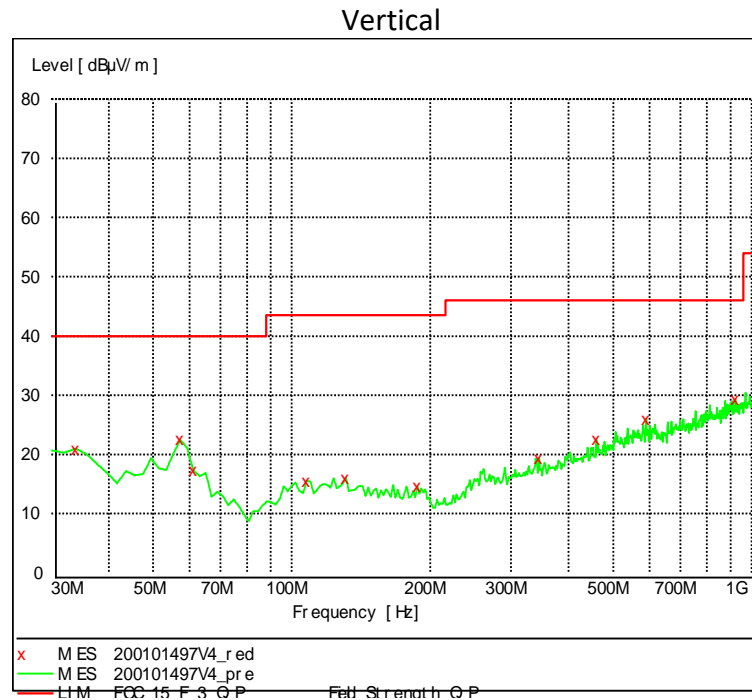

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB
33.887776	21.00	16.5	40.0	19.0
57.214429	22.50	7.5	40.0	17.5
61.102204	17.30	7.1	40.0	22.7
107.755511	15.50	12.6	43.5	28.0
131.082164	16.00	12.9	43.5	27.5
187.454910	14.70	10.8	43.5	28.8
344.909820	19.30	16.3	46.0	26.7
459.599198	22.60	18.9	46.0	23.4
589.839679	26.00	20.8	46.0	20.0
922.244489	29.30	23.9	46.0	16.7

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, limit = 40.00dBuV/m.

Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV +

0.20dB/m = 10.20dBuV/m; Margin = 40.00dBuV/m - 10.20dBuV/m = 29.80dB.

**Test data:**

**1G - 18G:**

Polarization	Frequency (MHz)	Emission level (dBuV/m)	Limits (dBuV/m)	Margin (dBuV/m)
Horizontal	1529.05	41.6	74.0	32.4
	2344.68	42.6	74.0	31.4
	8697.39	42.8	74.0	31.2
	10086.17	44.0	74.0	30.0
	11056.11	42.8	74.0	31.2
	11629.25	53.9	74.0	20.1
	13040.08	45.4	74.0	28.6
	14847.69	45.3	74.0	28.7
	16192.38	47.6	74.0	26.4
Vertical	17404.80	53.3	74.0	20.7
	1138.27	43.3	74.0	30.7
	2108.21	43.9	74.0	30.1
	3769.53	43.7	74.0	30.3
	5629.25	49.5	74.0	24.5
	8841.68	46.6	74.0	27.4
	10891.78	46.2	74.0	27.8
	16236.47	47.2	74.0	26.8
	17404.80	56.3	74.0	17.7

Note: \* means the emission level is 20dB or more lower than the relevant limit.

**\*\*\*END of the report\*\*\***