

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	<b>50328586 001</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	<b>244192889</b>	<b>Seite 1 von 18</b> <i>Page 1 of 18</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	<b>60051577</b>	<b>Auftragsdatum:</b> <i>Order date.:</i>	<b>11.12.2019</b>		
<b>Auftraggeber:</b> <i>Client:</i>	<b>IKEA of Sweden AB</b> BOX 702 SE-343 81 Älmhult Sweden				
<b>Prüfgegenstand:</b> <i>Test item:</i>	<b>Semi-integrated LED lamp</b>				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	<b>LED1939G2</b>				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	<b>EMC test</b>				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	<b>FCC 47 CFR Part 15, Subpart B:2018 Class B</b> <b>ICES-005:2018</b> <b>ANSI C63.4:2014</b>				
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	<b>22.12.2019</b>	Refer to the EUT photos file			
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	<b>A001038415-001</b>				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	<b>Refer to test report</b>				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	<b>EMC laboratory</b>				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	<b>TÜV Rheinland (Shanghai) Co., Ltd.</b>				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	<b>Pass</b>				
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>			
<i>Jessie Xu</i>		<i>Hexiong Liu</i>			
08.01.2020	Jessie Xu/Senior project engineer	08.01.2020	Hexiong Liu/Department manager		
<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>					
FCC ID: FHO-LED1939G2					
Test Firm Registration Number: 958801					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested					
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

## TEST SUMMARY

### 4.1.1 CONDUCTED EMISSION

*Result:*

*Passed*

### 4.2.1 RADIATED EMISSION

*Result:*

*Passed*

# Contents

<b>1</b>	<b>TEST SITES</b> .....	<b>4</b>
1.1	TEST FACILITIES .....	4
<b>2</b>	<b>GENERAL PRODUCT INFORMATION</b> .....	<b>5</b>
2.1	PRODUCT FUNCTION AND INTENDED USE .....	5
2.2	RATINGS AND SYSTEM DETAILS .....	5
2.3	INDEPENDENT OPERATION MODES .....	5
2.4	DESCRIPTION OF INTERCONNECTING CABLES .....	5
2.5	NOISE GENERATING AND NOISE SUPPRESSING PARTS .....	5
2.6	HIGHEST FREQUENCY GENERATED OR USED IN THE DEVICE OR ON WHICH THE DEVICE OPERATES OR TUNES	5
2.7	SUBMITTED DOCUMENTS .....	5
<b>3</b>	<b>TEST SET-UP AND OPERATION MODES</b> .....	<b>6</b>
3.1	PRINCIPLE OF CONFIGURATION SELECTION .....	6
3.2	EQUIPMENT AND CABLE ARRANGEMENT .....	6
3.3	TEST SOFTWARE .....	7
3.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....	7
3.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE .....	7
<b>4</b>	<b>TEST RESULTS EMISSION</b> .....	<b>8</b>
4.1	EMISSION IN THE FREQUENCY RANGE UP TO 30 MHz .....	8
4.1.1	<i>Conducted emission</i> .....	8
4.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30 MHz .....	12
4.2.1	<i>Radiated emission</i> .....	12
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP</b> .....	<b>16</b>
<b>6</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS</b> .....	<b>17</b>
<b>7</b>	<b>LIST OF FIGURES</b> .....	<b>18</b>

# 1 Test Sites

## 1.1 Test Facilities

**Laboratory: TÜV Rheinland (Shanghai) Co., Ltd.**

**Address: No.177, 178, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China**

The used test equipment is in accordance with CISPR 16-1 series standards for measurement of radio interference.

Refer to Clause 6 for test and measurement instruments.

## 2 General Product Information

### 2.1 Product Function and Intended Use

The EUT (equipment under test) is an ordinary LED lamp for lighting and similar use. For the further information, refer to the user's manual.

### 2.2 Ratings and System Details

Product	:	Semi-integrated LED lamp	LED power supply
Model	:	LED1939G2	ICPSW24-7-2
Rated input	:	DC 24 V	AC 100-240 V, 50/60 Hz
Rated wattage	:	2 W	Max. 7 W
Rated current	:	99 mA	0.1 A

The semi-integrated LED lamp LED1939G2 can be integrated into table lamp (model: TYP B1609, manufacturer: IKEA of Sweden AB) and powered by above LED power supply (manufacturer: IKEA of Sweden AB). Therefore, the EMC tests were performed on the semi-integrated LED lamp LED1939G2 with the table lamps and LED power supply.

### 2.3 Independent Operation Modes

The basic operation mode is "On" or "Off".

### 2.4 Description of interconnecting cables

None.

### 2.5 Noise Generating and Noise Suppressing Parts

Refer to the circuit diagram for further information.

### 2.6 Highest frequency generated or used in the device or on which the device operates or tunes

The highest frequency used in the EUT is less than 108 MHz.

### 2.7 Submitted Documents

PCB layout, circuit diagram and label.

### 3 Test Set-up and Operation Modes

#### 3.1 Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible emission level. The test conditions were adapted accordingly in reference to the instructions for use.

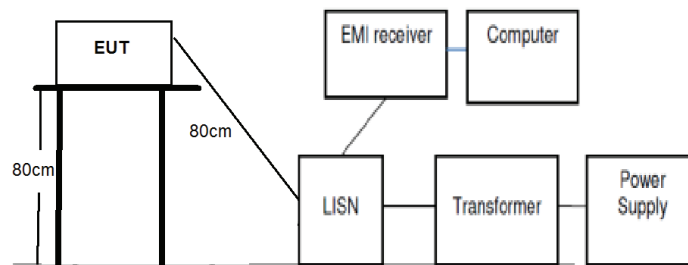
Refer to the related paragraph of this report.

The sequence of testing:

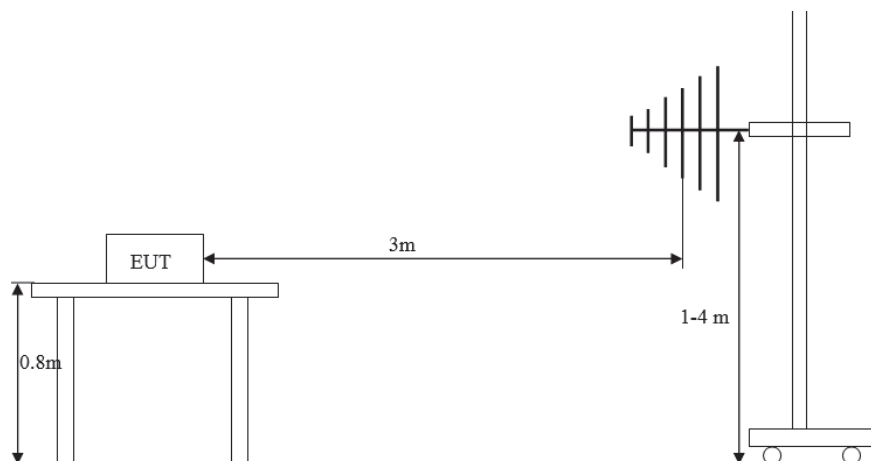
1. Radiated emission tests were performed on 31.12.2019;
2. Conducted emission tests were performed on 06.01.2020.

#### 3.2 Equipment and cable arrangement

Block diagram for both conducted emission and radiated emission tests is as follows:



(Conducted emission)



(Radiated emission)

Also refer to photographs on section 6 for test setups for both conducted emission test and radiated emission test.

### **3.3 Test Software**

No special test software was used during the tests.

### **3.4 Special Accessories and Auxiliary Equipment**

During the tests, the table lamp (model: TYP B1609, manufacturer: IKEA of Sweden AB) was used as the auxiliary equipment.

### **3.5 Countermeasures to achieve EMC Compliance**

No special measure is employed to achieve the requirement.

## 4 Test Results EMISSION

### 4.1 Emission in the Frequency Range up to 30 MHz

#### 4.1.1 Conducted emission

Result:	Passed
Date of testing	: 06.01.2020
Test procedure	: FCC 47 CFR Part 15, Subpart B:2018, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-1 series standards
Frequency range	: 0.15 – 30 MHz
Limits	: Quasi-peak limit: 0.15 - 0.5 MHz, 66 to 56 dB $\mu$ V (decrease with the logarithm of frequency); 0.5 - 5 MHz, 56 dB $\mu$ V; 5 - 30 MHz, 60 dB $\mu$ V Average limit: 0.15 - 0.5 MHz, 56 to 46 dB $\mu$ V (decrease with the logarithm of frequency); 0.5 – 5 MHz, 46 dB $\mu$ V; 5 – 30 MHz, 50 dB $\mu$ V
Bandwidth of EMI receiver for final measurement	: 9 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Shielded room
Input voltage	: AC 120 V, 60 Hz for LED power supply
Operational mode	: Power on
Ambient condition	: Temperature: 25 °C; Relative humidity: 50 %
Expanded measurement uncertainty ( $k=2$ )	: 3.39 dB (150 kHz – 30 MHz)

The measurement setup was made according to ANSI C63.4-2014 in a shielded room.

The measurement equipment like test receivers, quasi-peak detector and artificial mains network (AMN) are in compliance with CISPR 16-1 series standards.

The tested object was set-up on a wooden support. The EUT was set 0.8 m away from the AMN. The cord longer than necessary to be connected to the AMN was folded forth and back parallel so as to form a bundle with a length between 0.3 m and 0.4 m.

The disturbance voltage test was performed on the neutral line and phase line of the power supply of the EUT respectively.

The following figures and tables were those measured by an automatic measuring system. Both quasi-peak and average measurements were performed. In the following spectral diagram, “ $\blacklozenge$ ” means quasi-peak test results and “ $\blacklozenge$ ” means average test results.

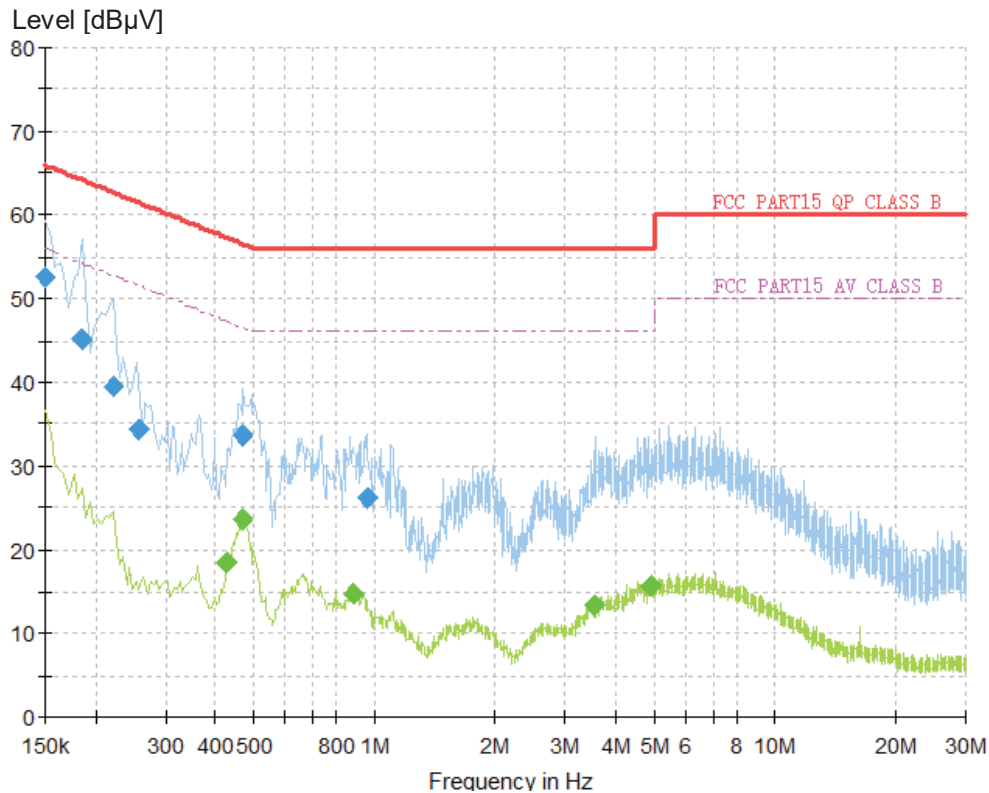
Notes on following tables of conducted emission results and conversions:



**Prüfbericht - Nr.: 50328586 001**  
*Test Report No.:***Seite 9 von 18**  
*Page 9 of 18*

Level (dB $\mu$ V): final measurement results by using quasi-peak detector and average detector  
Transd (dB): transducer factor including cable loss, insertion loss of artificial mains network  
and gain of pre-amplifier (if used)

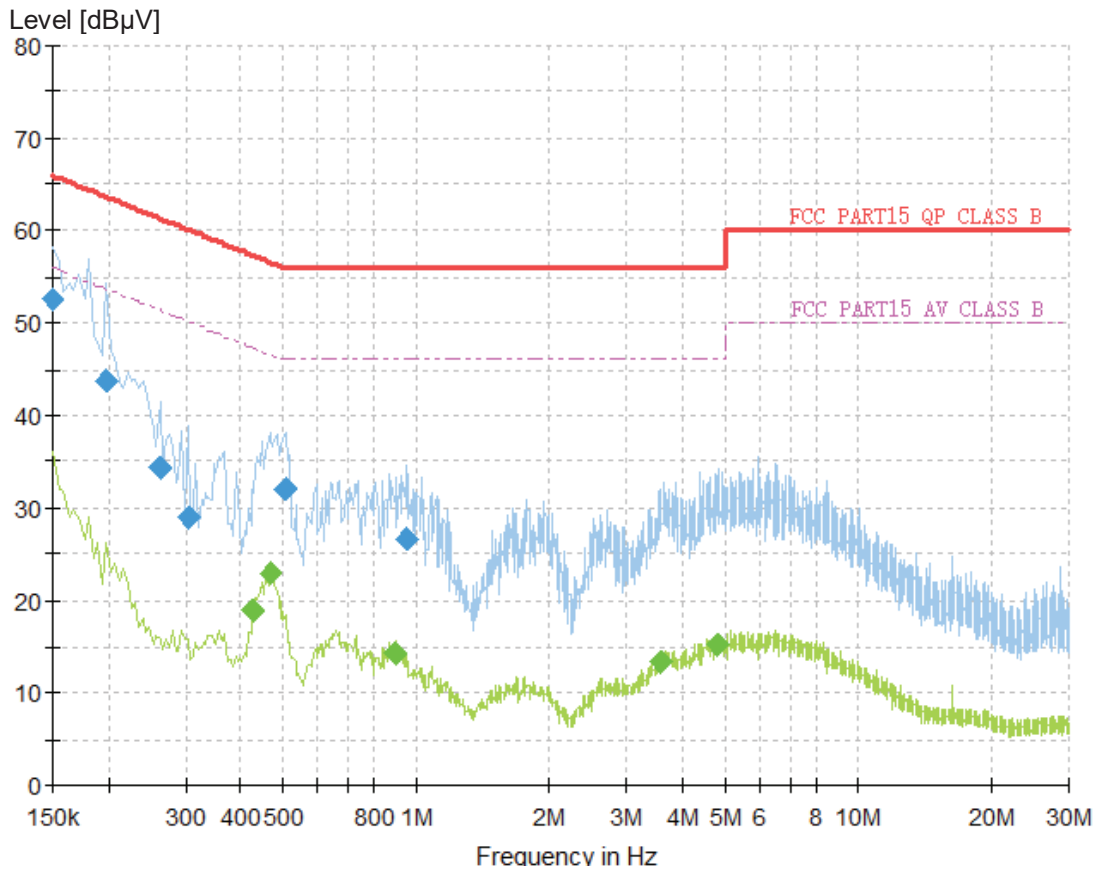
Margin: Limit (dB $\mu$ V) - Level (dB $\mu$ V)

**Figure 1: Spectral diagram and measurement results, mains terminal disturbance voltage, 150 kHz – 30 MHz, line L**

**Final quasi-peak measurement results:**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	52.70	66.00	13.30	1000.0	0.200	L1	ON	9.5
0.186000	45.23	64.21	18.98	1000.0	9.000	L1	ON	9.5
0.222000	39.62	62.74	23.12	1000.0	9.000	L1	ON	9.5
0.258000	34.41	61.50	27.09	1000.0	9.000	L1	ON	9.5
0.469500	33.71	56.52	22.82	1000.0	9.000	L1	ON	9.6
0.960000	26.27	56.00	29.73	1000.0	9.000	L1	ON	9.6

**Final average measurement results:**

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.429000	18.49	47.27	28.78	1000.0	9.000	L1	ON	9.6
0.469500	23.56	46.52	22.96	1000.0	9.000	L1	ON	9.6
0.888000	14.78	46.00	31.22	1000.0	9.000	L1	ON	9.6
3.552000	13.32	46.00	32.68	1000.0	9.000	L1	ON	9.7
4.915500	15.65	46.00	30.35	1000.0	9.000	L1	ON	9.7

**Figure 2: Spectral diagram and measurement results, mains terminal disturbance voltage, 150 kHz – 30 MHz, line N**

**Final quasi-peak measurement results:**

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	52.63	66.00	13.37	1000.0	0.200	N	ON	9.5
0.199500	43.77	63.63	19.86	1000.0	9.000	N	ON	9.5
0.262500	34.32	61.35	27.03	1000.0	9.000	N	ON	9.5
0.303000	29.07	60.16	31.09	1000.0	9.000	N	ON	9.5
0.505500	31.99	56.00	24.01	1000.0	9.000	N	ON	9.6
0.951000	26.77	56.00	29.23	1000.0	9.000	N	ON	9.6

**Final average measurement results:**

Frequency (MHz)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.429000	18.88	47.27	28.39	1000.0	9.000	N	ON	9.6
0.465000	22.97	46.60	23.63	1000.0	9.000	N	ON	9.6
0.901500	14.34	46.00	31.66	1000.0	9.000	N	ON	9.6
3.565500	13.33	46.00	32.67	1000.0	9.000	N	ON	9.6
4.780500	15.20	46.00	30.80	1000.0	9.000	N	ON	9.6

## 4.2 Emission in the Frequency Range above 30 MHz

### 4.2.1 Radiated emission

<b>Result:</b>	<b>Passed</b>
----------------	---------------

Date of testing	: 31.12.2019
Test procedure	: FCC 47 CFR Part 15, Subpart B:2018, ICES-005:2018, ANSI C63.4-2014 and CISPR 16-1 series standards
Frequency range	: 30 – 1000 MHz Note: The highest frequency in the EUT is less than 108 MHz. According to FCC Part 15 subpart B §15.33 (b) (1), the upper frequency for radiated emission measurement is 1000 MHz.
Limits	: Quasi-peak limits (3 m distance): 30 – 88 MHz, 40 dB $\mu$ V/m; 88 – 216 MHz, 43.5 dB $\mu$ V/m; 216 – 960 MHz, 46 dB $\mu$ V/m; Above 960 MHz, 54 dB $\mu$ V/m (for FCC 47 CFR Part 15, Subpart B:2018) Above 960 MHz, 46 dB $\mu$ V/m (for ICES-005:2018)
Bandwidth of EMI receiver for final measurement	: 120 kHz
Measurement time for final measurement	: 1 s
Kind of test site	: Semi-anechoic chamber
Operation modes	: Power on
Ambient condition	: Temperature: 20.9 °C; Relative humidity: 39.6 %
Expanded measurement uncertainty ( $k=2$ )	: 5.49 dB

The radiated disturbance test was carried out in a semi-anechoic chamber. The test distance from the receiving antenna to the EUT is 3 m. The normalized site attenuation of the semi-anechoic chamber is regularly calibrated to ensure the radiated disturbance test results are valid. During the test, the EUT was placed on a 0.8 m high wooden table above the reference ground plane. The wooden table was rotated 360° around and the height of the antenna was varied from 1 m to 4 m to find the maximum disturbance. The test was performed with the antenna both in its horizontal and vertical polarizations.

The following figures and tables were those measured by an automatic measurement system. A preview test was firstly performed with peak detector. The final test was performed with quasi-peak at those critical frequencies during the preview test. In the following spectral diagram, “x” means quasi-peak test results.

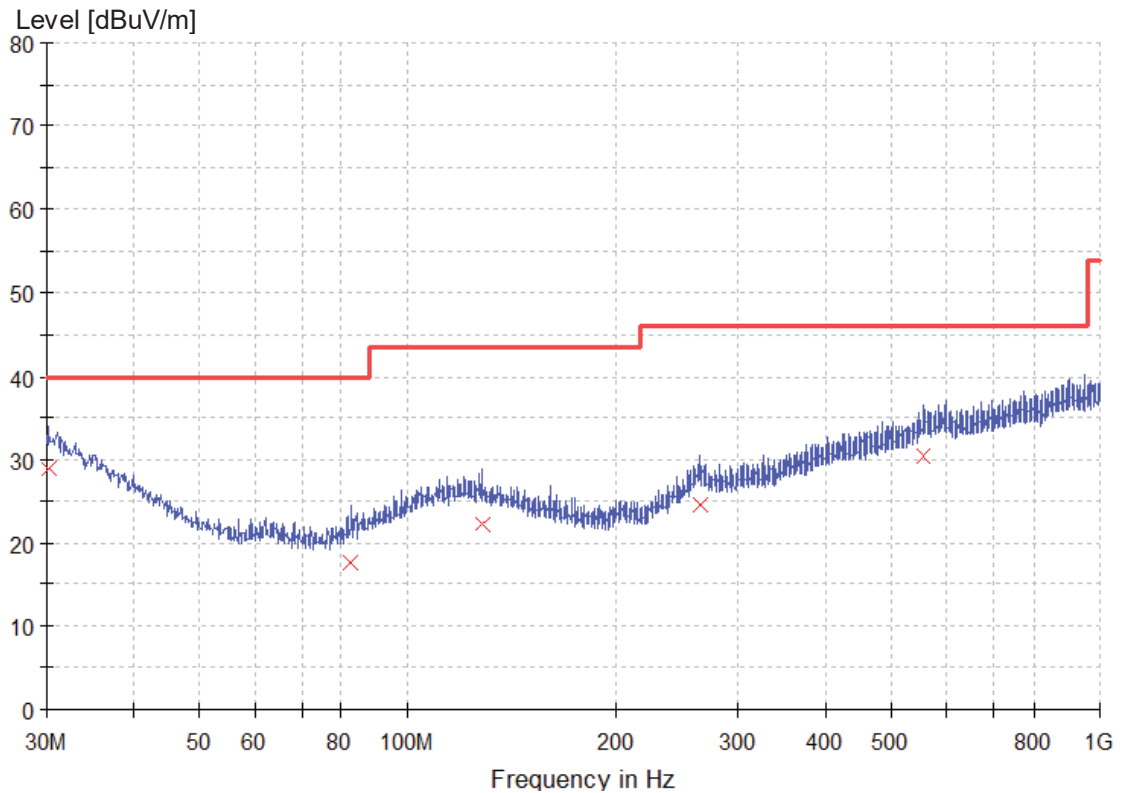
**Prüfbericht - Nr.: 50328586 001**  
Test Report No.:**Seite 13 von 18**  
Page 13 of 18

Notes on following tables of radiated emission results and conversions:

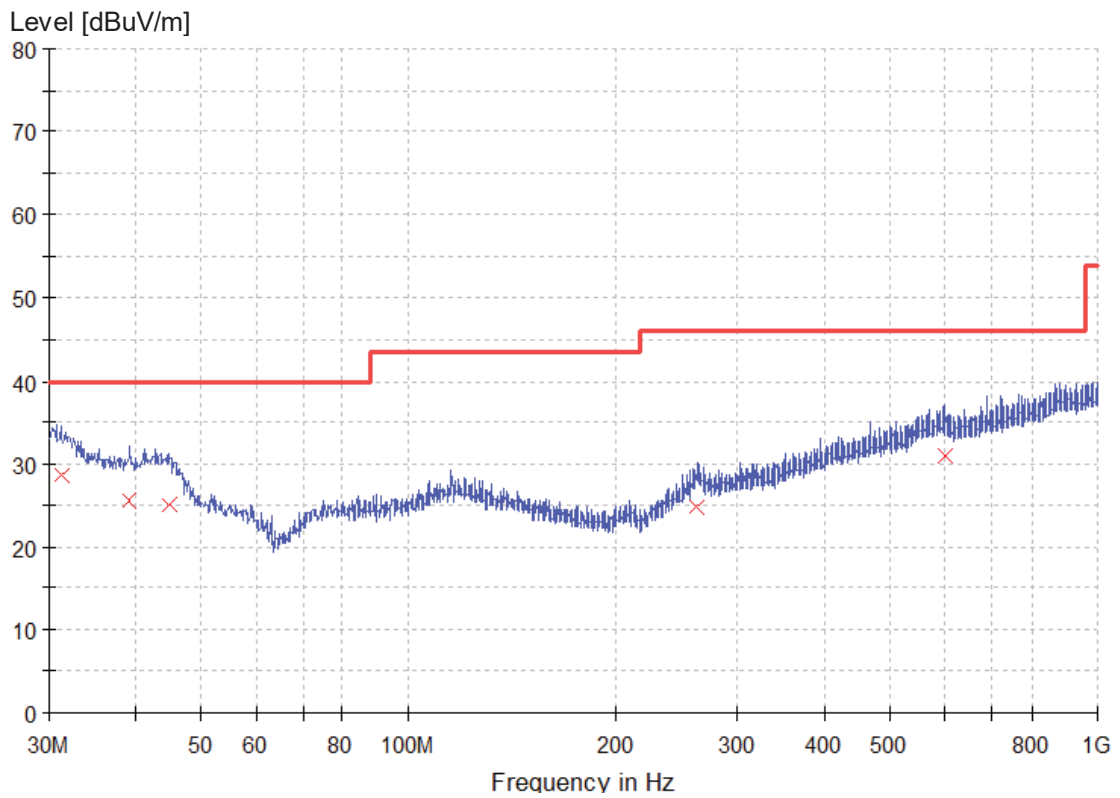
QuasiPeak (dB $\mu$ V/m): final measurement results by using quasi-peak detector

Corr. (dB): correction factor including: antenna factor, cable loss, and gain of pre-amplifier (if used)

Margin: Limit (dB $\mu$ V/m) - QuasiPeak (dB $\mu$ V/m)

**Figure 3: Spectrum diagrams and measurement results, 30-1000 MHz, Horizontal polarization**

**Final Quasi-peak measurement result:**

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
30.121250	28.8	1000.0	120.000	100.0	H	-180.0	25.3	11.2	40.0
82.865000	17.7	1000.0	120.000	100.0	H	-180.0	14.3	22.3	40.0
128.212500	22.2	1000.0	120.000	100.0	H	-180.0	18.9	21.3	43.5
264.740000	24.6	1000.0	120.000	100.0	H	-180.0	21.3	21.4	46.0
556.831250	30.4	1000.0	120.000	100.0	H	-180.0	26.6	15.6	46.0

**Figure 4: Spectrum diagrams and measurement results, 30-1000 MHz, Vertical polarization**

**Final Quasi-peak measurement result:**

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
31.212500	28.7	1000.0	120.000	150.0	V	-180.0	24.7	11.3	40.0
39.336250	25.5	1000.0	120.000	150.0	V	-180.0	20.1	14.5	40.0
44.792500	25.1	1000.0	120.000	150.0	V	-180.0	17.2	14.9	40.0
263.042500	24.7	1000.0	120.000	150.0	V	-180.0	21.5	21.3	46.0
598.783750	31.0	1000.0	120.000	150.0	V	-180.0	26.8	15.0	46.0

## **5 Photographs of the Test Set-Up**

Refer to the test setup file.



**Prüfbericht - Nr.: 50328586 001**  
Test Report No.:Seite 17 von 18  
Page 17 of 18

## 6 List of Test and Measurement Instruments

Equip.	Description	Model	Manufacturer	Last Date DD.MM.YYYY	Cal. Interval DD.MM.YYYY
1811380	EMI test receiver	ESIB26	Rohde&Schwarz	19.04.2019	1 year
1811403	Artificial mains network	ENV216	Rohde&Schwarz	17.09.2019	1 year
1824845	EMC measurement software	EMC32 (Ver 10.20.01)	Rohde&Schwarz	N/A	N/A
1811378	3m modified semi-anechoic chamber	SAC3	Frankonia	14.05.2019	3 year
1811391	EMI test receiver	ESCI	Rohde&Schwarz	01.11.2019	1 year
1811425	Bilog antenna	CBL 6112D	Teseq	14.02.2017	3 year

## 7 List of Figures

- Figure 1: Spectral diagram and measurement results, mains terminal disturbance voltage, 150 kHz – 30 MHz, line L10  
Figure 2: Spectral diagram and measurement results, mains terminal disturbance voltage, 150 kHz – 30 MHz, line N11  
Figure 3: Spectrum diagrams and measurement results, 30-1000 MHz, Horizontal polarization ..... 14  
Figure 4: Spectrum diagrams and measurement results, 30-1000 MHz, Vertical polarization ..... 15

**End of test report**