


TEST REPORT**LABORATORY MEASUREMENTS****Pursuant to 47 CFR Part 15 [10-01-20 Edition] and ANSI C63.4:2014**

Report No.:	21071638HKG-001R1
Applicant:	IKEA of Sweden AB Box 702, SE-343 81 Älmhult, SWEDEN
Equipment Under Test (EUT):	
Product Description:	LED Deco Light Brass-Colour Oval
Model:	M2107 BJÖRKSPIREA
Brand Name:	
Equipment Type:	Class B Digital Device / Unintentional Radiator
Sample Receipt Date:	July 28, 2021
Test Conducted Date:	July 28, 2021 to August 13, 2021
Issue Date:	November 22, 2021
Test Site Location:	1. For Radiated Emission Test: LG1/F, 78 Tat Chee Avenue, Kowloon, Hong Kong SAR, China. 2. For Other Test: 2nd Floor, Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong SAR, China.
Relevant Standard(s):	47 CFR Part 15 [10-01-20 Edition] and ANSI C63.4:2014
Conclusion:	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 requirement.

1. This report supersedes previous report with report number 21071638HKG-001 dated August 23, 2021.
2. Please refer LUM-S21-0041 Letter issued on November 22, 2021 for amendment/ supersede notification.

Prepared and Checked by:**Approved by:****Signed on File****Lai Siu Ming, Henry/jc**
Engineer

Yip Kai Pong, Kenneth
Manager

TEST REPORT

TABLE OF CONTENTS

1	GENERAL INFORMATION	3
1.1	Client Information.....	3
1.2	General Description	3
1.3	Details of EUT.....	3
1.4	Description of Peripherals	3
1.5	Decision Rule.....	3
2	TEST SUMMARY	4
3	TEST SPECIFICATIONS	5
3.1	Standards	5
3.2	Definition of Device Classification	5
3.3	EUT Operation Condition.....	5
4	CONDUCTED EMISSION MEASUREMENTS	6
4.1	Operating Environment	6
4.2	Test Setup and Procedure	6
4.3	Test Equipment.....	7
4.4	Conducted Emission Limits.....	7
4.5	Conducted Emission Test Data	8
5	RADIATED EMISSION MEASUREMENTS	10
5.1	Operating Environment	10
5.2	Test Setup and Procedure	10
5.3	Test Equipment.....	11
5.4	Radiated Emission Limits	11
5.5	Field Strength Calculation.....	12
5.6	Radiated Emission Test Data	13

TEST REPORT

1. GENERAL INFORMATION

1.1 Client Information

Applicant: IKEA of Sweden AB

1.2 General Description of EUT

Product Description: LED Deco Light Brass-Colour Oval
Model No.: M2107 BJÖRKSPIREA
Serial No.: Not Labelled

1.3 Details of EUT

Rated Voltage: 2.4VDC (2 x 1.2V, 750mAh "AAA" Rechargeable Batteries) and/or
USB Port of 5VDC

Cables: Not Applicable

For more detail features, please refer to user's Manual.

1.4 Description of Peripherals

Description	Remark
Notebook HP ProBook (Model: 430 G1; S/N:2CE4250H44)	Provided by Intertek
1 x Micro USB cable with length of 1.5m	Provided by Applicant

1.5 Decision Rule

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level (k=2). In case, the measured value is within guard band region, undetermined decision will be used.

TEST REPORT

2. TEST SUMMARY

Test	Standard	Class	Result
Conducted Emission	Section 15.107 of 47 CFR Part 15	Class B	Pass
Radiated Emission	Section 15.109 of 47 CFR Part 15	Class B	Pass

Remark:

The EUT has been tested/evaluated and pass the 47 CFR Part 15 without modification.

The production units are required to conform to the initial sample as received when the units are placed on the market.

Enclosed please find the FCC Labelling and Instruction Manual Requirements.

For all external photos and setup photos, please refer to the 21071638HKG-001R1 Annex document.

AMENDMENT HISTORY

Report No.	Issued Date	Content
21071638HKG-001	August 23, 2021	Original Report
21071638HKG-001R1	November 22, 2021	P.6~P.9: Added section of conduct emission test
		21071638HKG-001R1 Annex: Added setup photos of conduct emission test

TEST REPORT

3. TEST SPECIFICATIONS

3.1 Standards

Both conducted and radiated emission tests were performed according to the procedures in ANSI C63.4:2014. Test results are in compliance with the requirements of 47 CFR Part 15 [10-01-20 Edition].

The EUT setup configuration please refers to the photo of test configuration in item.

3.2 Definition of Device Classification

Unintentional radiator:

A device which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment.

Class B Digital Device:

A digital device which is marketed for use by the general public or in a residential environment.

Note:

A manufacturer may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

3.3 EUT Operation Condition

The EUT was powered by 2.4VDC (2 x 1.2V, 750mAh "AAA" Rechargeable Batteries) and/or USB Port of 5VDC and was running in accordance with the manufacturer's operation manual.

TEST REPORT


4. CONDUCTED EMISSION MEASUREMENTS (SECTION 15.107 OF 47 CFR PART 15)

4.1 Operating Environment

Temperature: 25°C ± 10°C

Test Voltage: 2.4VDC (2 x 1.2V, 750mAh "AAA" Rechargeable Batteries) and/or USB Port of 5VDC

4.2 Test Setup and Procedure

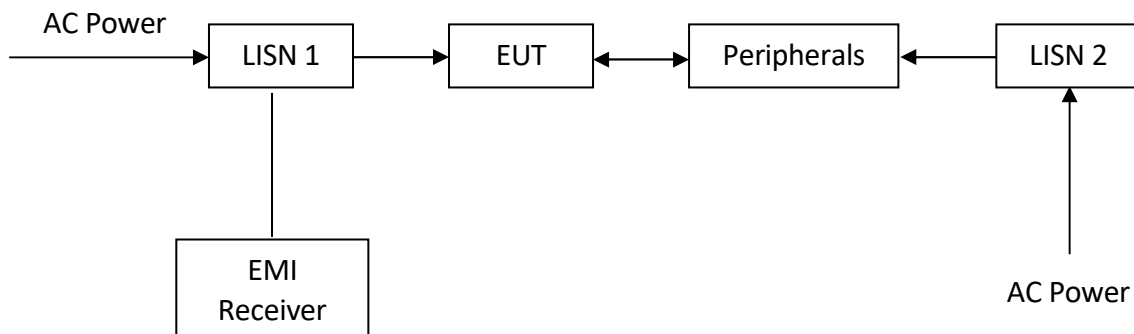

The EUT along with its peripherals were placed on a 1.0m (W) × 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

TEST REPORT

4.3 Test Equipment

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.
EW-3095	EMI Test Receiver	R&S	ESCI	101430
EW-2501	Artificial Mains Network	R&S	ENV-216	100483

4.4 Conducted Emission Limits

Frequency (MHz)	Maximum RF Line Voltage			
	Class A (dB μ V)		Class B (dB μ V)	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56	56~46
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

Note: Uncertainty: ± 3.46 dB at a Level of Confidence of 95%

TEST REPORT


4.5 Conducted Emission Test Data

Phase: Live / Neutral
Model No.: M2107 BJÖRKSPIREA
Worst Case: Light On with Micro USB Charging



RBW 9 kHz
MT 1 s

Att 10 dB AUTO PREAMP OFF

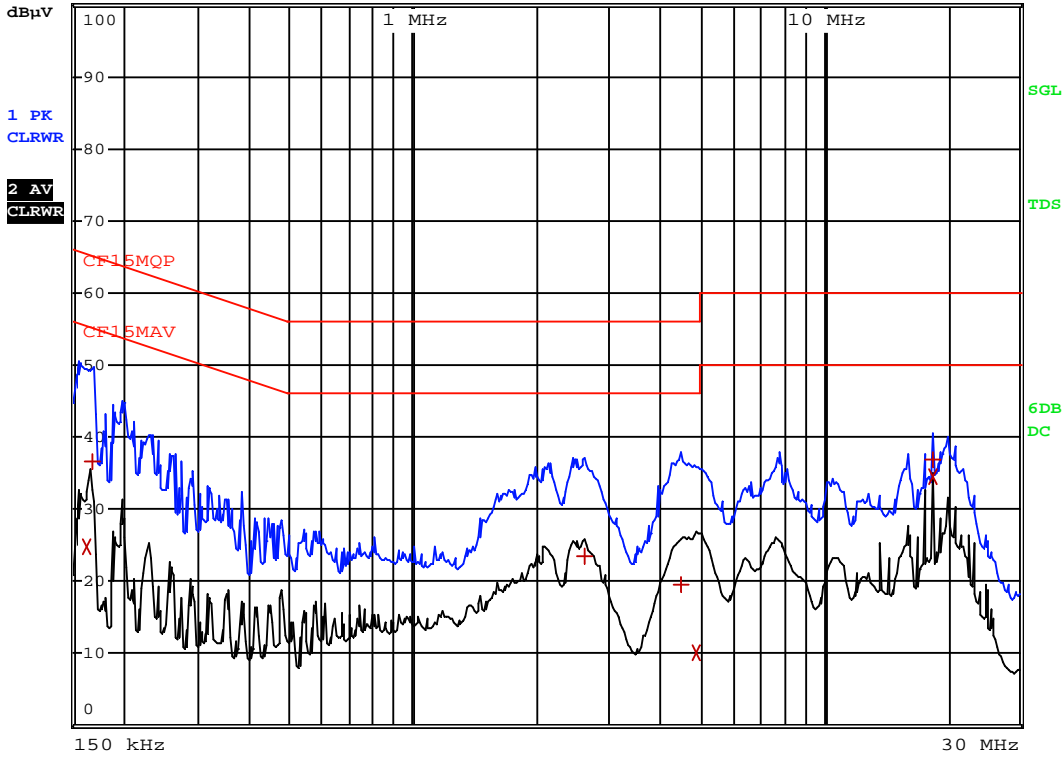

21071638HKG-001

TEST REPORT

4.5 Conducted Emission Test Data

Phase: Live / Neutral
Model No.: M2107 BJÖRKSPIREA
Worst Case: Light On with Micro USB Charging

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
	TRACE	FREQUENCY	LEVEL dBµV		DELTA LIMIT dB
2	CISPR Average	163.5 kHz	24.74	N gnd	-30.54
1	Quasi Peak	168 kHz	36.53	N gnd	-28.52
1	Quasi Peak	2.6295 MHz	23.43	N gnd	-32.56
1	Quasi Peak	4.5015 MHz	19.52	L1 gnd	-36.47
2	CISPR Average	4.9155 MHz	10.11	L1 gnd	-35.88
1	Quasi Peak	18.4875 MHz	36.91	L1 gnd	-23.08
2	CISPR Average	18.4875 MHz	34.43	L1 gnd	-15.56

TEST REPORT

5. RADIATED EMISSION MEASUREMENTS (SECTION 15.109 OF 47 CFR PART 15)


5.1 Operating Environment

Temperature: $25^{\circ}\text{C} \pm 10^{\circ}\text{C}$ Test Voltage: 2.4VDC (2 x 1.2V, 750mAh "AAA" Rechargeable Batteries) and/or USB Port of 5VDC

5.2 Test Setup and Procedure

The figure below shows the test setup, which is utilized to make these measurements.

The frequency spectrum from 30MHz to 1000MHz was investigated.

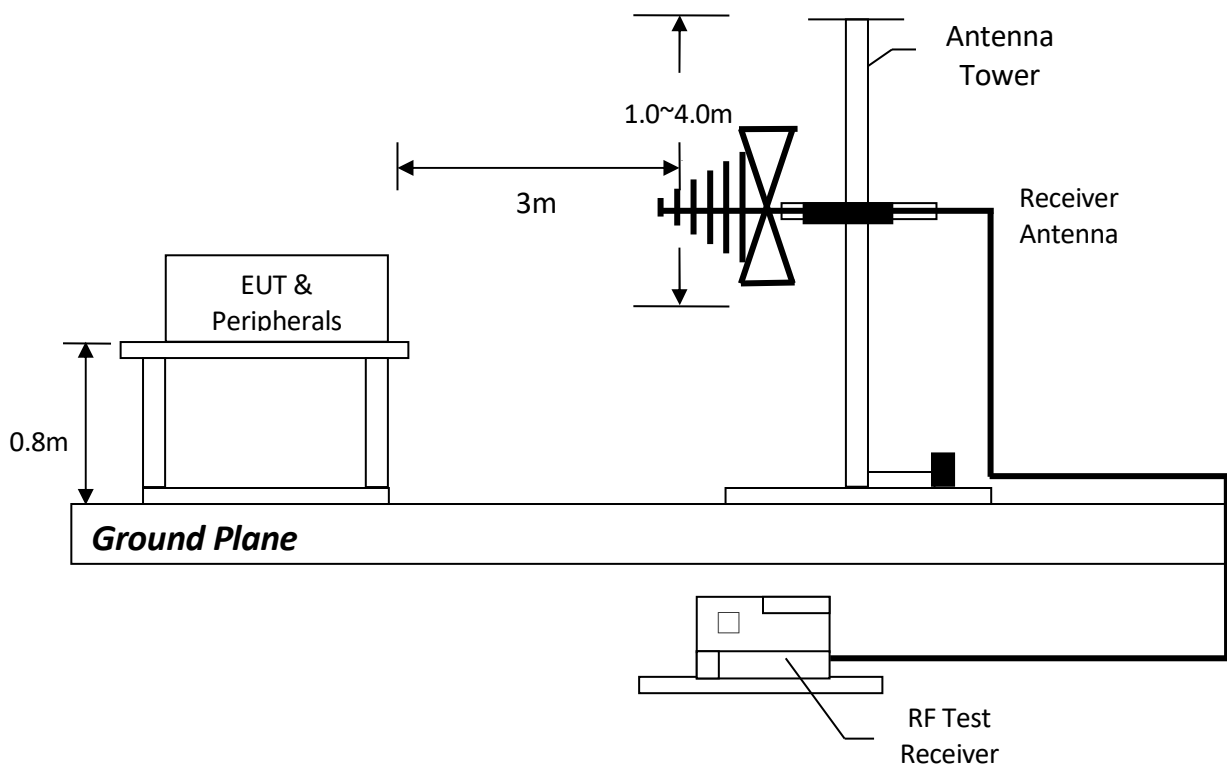

The equipment under test was placed on the top of rotation table 0.8 meter above ground plane.

The table was 360 degrees to determine the position of the highest radiation.

EUT is set 3 meters from the EMI receiving antenna, which is mounted on a variable height mast. The antenna height is varied between one meter and four meters above ground to find the maximum value of the field strength. Both horizontal polarization and vertical polarization of the antenna are set to make the measurement. The bandwidth was setting on the EMI meter 120kHz.

The levels are quasi peak value readings. The frequency spectrum from 30MHz to 1000MHz was investigated.

TEST REPORT

5.3 Test Equipment

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.
EMC701	Multi-functional Anechoic Chamber (NSA)	Albatross	Nil	B83117-C1634-T161
EMC701	Multi-functional Anechoic Chamber (SVSWR)	Albatross	Nil	B83117-C1634-T161
EMC700	Low-loss RF and Microwave Coaxial cable-12m	Huber+Suhner	SF118/11N/11N /12000MM	800018/118
EMC567	Test Receiver	R & S	ESU26	100050
EMC576	Bi-conical Antenna	R & S	HK116	100241
EMC039	Log Periodic Antenna	R & S	HL223	841516/019
EMC586	Double-Ridged Waveguide Horn	EMCO	3117	00094998
EMC660	Microwave Preamplifier	COM-POWER Corporation	PAM-118A	551091

5.4 Radiated Emission Limits

According to Section 15.109 of 47 CFR Part 15, except for Class A digital device, the field strength of radiated emission from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Class B Radiated Emission Limits:

Frequency (MHz)	Field Strength (dB μ V/m)
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

TEST REPORT

5.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + \text{Corr.}(AF \ \& \ CF)$$

Where FS = Field Strength in dB μ V/m

RA = Receiver Amplitude (including preamplifier) in dB μ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

Corr. = Cable Attenuation Factor + Antenna Factor in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + \text{Corr.}$$

Example

Assume a receiver reading of 23.0 dB μ V is obtained. The Corr. factor of 9 dB is added. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

$$RA = 23.0 \text{ dB}\mu\text{V}$$

$$\text{Corr.} = 9 \text{ dB}$$

$$FS = 23 + 9 = 32.0 \text{ dB}\mu\text{V/m}$$


$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

TEST REPORT

5.6 Radiated Emission Test Data

Pursuant to Section 15.109 of 47 CFR Part 15: Emissions Requirement

Polarity: Horizontal / Vertical
Model No.: M2107 BJÖRKSPIREA
Worst Case: Light On with Micro USB Charging

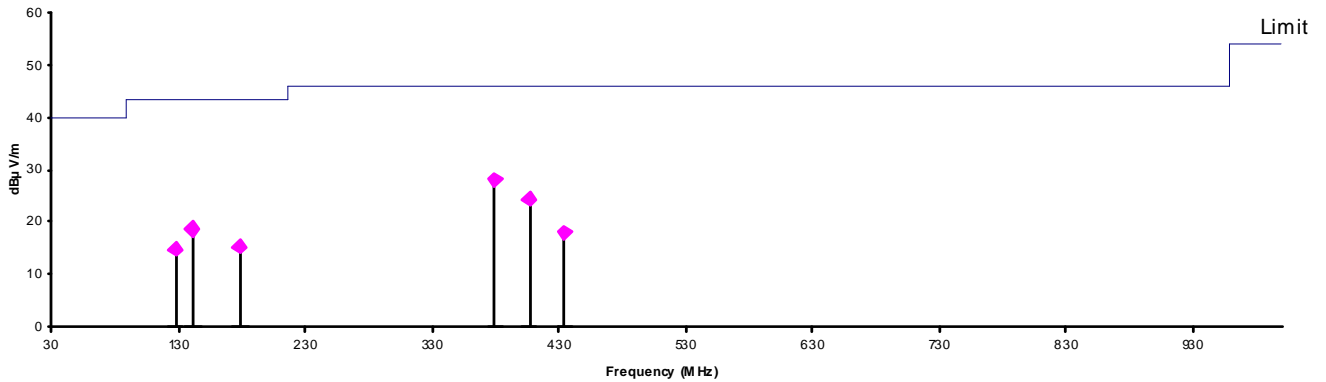

Polarization	Frequency (MHz)	Corr. Factor (dB)	Net at 3m (dBµV/m)	Limit at 3m (dBµV/m)	Margin (dB)
H	127.546	11.9	14.8	43.5	-28.7
H	141.282	12.5	18.7	43.5	-24.8
H	178.648	14.1	15.2	43.5	-28.3
H	379.680	16.3	28.2	46.0	-17.8
H	406.800	17.1	24.3	46.0	-21.7
H	433.840	17.8	18.0	46.0	-28.0

- Notes:
1. Quasi-Peak Detector Data
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30 MHz to 1000 MHz.
 4. Only emissions significantly above equipment noise floor are reported.
 5. Uncertainty: ± 6.1dB at a Level of Confidence of 95%.
 6. The correction factor included cable loss + antenna factor.

Points to note for Supplier's Declaration of Conformity

47 CFR FCC Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations

47 CFR FCC Part 2.909 Responsible party.

- (a) In the case of equipment that requires the issuance of a grant of certification, the party to whom that grant of certification is issued is responsible for the compliance of the equipment with the applicable standards. If the radio frequency equipment is modified by any party other than the grantee and that party is not working under the authorization of the grantee pursuant to Part 2.929(b), the party performing the modification is responsible for compliance of the product with the applicable administrative and technical provisions in this chapter.
- (b) For equipment subject to Supplier's Declaration of Conformity the party responsible for the compliance of the equipment with the applicable standards, who must be located in the United States (see Part 2.1077), is set forth as follows:
 - (1) The manufacturer or, if the equipment is assembled from individual component parts and the resulting system is subject to authorization under Supplier's Declaration of Conformity, the assembler.
 - (2) If the equipment by itself, or, a system is assembled from individual parts and the resulting system is subject to Supplier's Declaration of Conformity and that equipment or system is imported, the importer.
 - (3) Retailers or original equipment manufacturers may enter into an agreement with the responsible party designated in paragraph (b)(1) or (b)(2) of this section to assume the responsibilities to ensure compliance of equipment and become the new responsible party.
 - (4) If the radio frequency equipment is modified by any party not working under the authority of the responsible party, the party performing the modifications, if located within the U.S., or the importer, if the equipment is imported subsequent to the modifications, becomes the new responsible party.

47 CFR FCC Part 2.1074 Identification.

- (a) Devices subject only to Supplier's Declaration of Conformity shall be uniquely identified by the party responsible for marketing or importing the equipment within the United States. However, the identification shall not be of a format which could be confused with the FCC Identifier required on certified equipment. The responsible party shall maintain adequate identification records to facilitate positive identification for each device.
- (b) Devices subject to authorization under Supplier's Declaration of Conformity may be labeled with the following logo on a voluntary basis as a visual indication that the product complies with the applicable FCC requirements. The use of the logo on the device does not alleviate the requirement to provide the compliance information required by Part 2.1077.



FCC LABELLING AND INSTRUCTION MANUAL REQUIREMENTS

Devices subject to FCC Part 15, Subpart B (not certification) must be labelled with the following statement. The label can be affixed at any space external to the product except the battery door or detachable parts.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

In addition, for a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.**
- Increase the separation between the equipment and receiver.**
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- Consult the dealer or an experienced radio/ TV technician for help.**

If shielded cables or other specialized accessories are necessary for the unit to achieve compliance, a statement similar to the following should be added:

Shielded cables must be used with this unit to ensure compliance with the Class B FCC limits.

FCC LABELLING AND INSTRUCTION MANUAL REQUIREMENTS

Devices subject to FCC Part 15, Subpart B shall be labelled with an **unique identifier**. e.g. model number, serial number, etc. However, the identification shall not be of a format which could be confused with the FCC Identifier required on certified, notified or type accepted equipment. The importer or manufacturer shall maintain adequate identification records to facilitate positive identification for each verified device.

Receivers associated with the operation of a licensed radio service subject to FCC Part 15, Subpart B (not certification) must be labelled with the following statement. The label can be affixed at any space external to the product except the battery door or detachable parts.

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

In addition, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.