

FCC Test Firm Designation Number: FR0014
ISED Wireless Device Testing Laboratory CAB Number: FR0004

Matériel testé :
Equipment under test:

MFPM / DWILEN 2.14
(Trademark / Marketing name or product reference)

Demandeur de certification : **MICHELIN NORTH AMERICA (US)** **MICHELIN NORTH AMERICA (CANADA)**
Applicant for certification: **INC.** **INC.**
One Parkway South 2863 Granton Road
Greenville 29615 - South Carolina New Glasgow NS B2H 5C6 Canada

Fabricant : **MFP Michelin (MFPM)** **Client / Customer :**
Manufacturer: M. Clément Petit AEMC LAB
ZI Ladoux 19 rue François Blumet
63118 CEBAZAT – France 38360 SASSENAGE - France

Numéro d'affaire : 13122
Work number :

Référence de la proposition : 082019-23698-1
Proposal number:

Date de l'essai : 19 septembre au 4 octobre 2019
Date of test: September 19th to October 4th, 2019

Objectif des essais : EMC qualification according to following standards:
Test purpose: - CFR 47, FCC Part 15, Subpart C (Chapter 15.247 - Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz)
- ISED RSS-247, Issue 2 (Digital Transmission Systems Operating in the Bands 2400–2483.5 MHz)
Measurement standards : ANSI C63.10 (2013)

Lieu du test: SMEE, Rue de Taille
Test location: 38500 VOIRON - France

Test réalisé par : Laurent CHAPUS
Test realized by:

Conclusion : L'équipement satisfait aux prescriptions et essais des normes citées en référence.
Conclusion: The appliance complies with requirements and tests of above mentioned standards.

Ed.	Date	Modifications Pages /	Written by : Visa	Approved by: Visa
1	August 28 th , 2020	Initial Edition	Laurent CHAPUS Technical Manager	Regis ANCEL General Manager

La copie de ce document n'est permise que sous sa forme intégrale. Ce document est le résultat d'essais effectués sur un échantillon. Il ne préjuge pas de la conformité de l'ensemble des produits fabriqués à l'objet essayé.
This document shall not be reproduced, except in full. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the item tested.



Accréditation
N° 1-6356
Portée disponible sur :
Scope available on :
www.cofrac.fr

COORDONNEES

SMEE
Rue de Taille – ZI Des Blanchisseries
38500 VOIRON - France

TEL : 04 76 65 76 50
FAX : 04 76 66 18 30

SAS au capital de 50 000 € / RC Grenoble B534 796 453 / SIRET 534 796 453 00015 / code APE 7490B / n° TVA : FR 59 534 796 453

Contents

1. NORMATIVES REFERENCES	3
2. TEST SYNTHESIS.....	4
3. EQUIPMENT UNDER TEST (EUT).....	5
4. TEST CONDITIONS.....	5
5. MODIFICATIONS OF THE EUT.....	5
6. SPECIAL ACCESSORY.....	6
7. MEASUREMENT UNCERTAINTY	6
8. FIELD STRENGTH CALCULATION.....	6
9. CONDUCTED EMISSION MEASUREMENT (150KHZ-30MHZ).....	7
10. DTS BANDWIDTH.....	10
11. MAXIMUM PEAK OUTPUT POWER.....	13
12. MAXIMUM POWER SPECTRAL DENSITY LEVEL IN THE FUNDAMENTAL EMISSION.....	16
13. UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	20
14. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS.....	24
15. OCCUPIED BANDWIDTH (99%).....	36

1. Normatives References

FCC qualification according to:		
Standards	Applied	Title
ANSI C63.10 (2013)	X	American National Standard for Testing Unlicensed Wireless Devices
CFR47, Part 15	X	Telecommunication – Federal Communication Commission – Radio frequency devices, Sections 15.207 / 15.209 / 15.247

ISED qualification according to:		
Standards	Applied	Title
RSS-Gen (Issue 5/2019)	X	General Requirements and Information for the Certification of Radio Apparatus
RSS-247 (Issue2/2017)	X	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Note: Following guidance are used

- DTS Measurement Guidance 558074 D01 v05r02
- Determining ERP and EIRP Guidance 412172 D01 v01r01

Deviation from standard: None

2. Test synthesis

TEST	Paragraph number FCC Part 15 / ISED ICES & RSS	Spec. FCC Part 15 / ISED ICES & RSS	RESULTS (comments)
Conducted emissions test	15.207 (a) RSS-Gen § 8.8	Table 15.107 (a) / 15.207 (A) Table 4 / RSS-Gen	PASS
6dB Bandwidth	15.247 (a) (2) RSS-247 § 5.2 (a)	At least 500kHz	PASS
Maximum Peak Output Power	15.247 (b) (3) & (4) RSS-247 § 5.4 (d)	1W max / 30dBm (Conducted) 4W max / 36dBm (EIRP)	PASS
Maximum Power Spectral Density	15.247 (e) RSS-247 § 5.2 (b)	8dBm in a 3kHz band segment	PASS
Unwanted emissions into Non Restricted Frequency Bands	15.247 (d) / RSS-247 § 5.5	-20dBc in any 100kHz outside frequency band.	PASS
Unwanted emissions into Restricted Frequency Bands	15.209 (a) / 15.247 (d) / 15.205 (a) RSS-GEN §8.9, § 8.10 / RSS-247 § 5.5	<u>Measure at 300m</u> 9-490kHz: 2400µV/m/F(kHz) 6.370µA/m/F (kHz) <u>Measure at 30m</u> 0.490-1.705: 24000µV/m/F(kHz) 63.70µA/m/F (kHz) 1.705-30MHz: 30µV/m 0.08µA/m <u>Measure at 3m</u> 30MHz-88MHz : 40 dBµV/m 88MHz-216MHz : 43.5 dBµV/m 216MHz-960MHz : 46.0 dBµV/m Above 960MHz : 54.0 dBµV/m	PASS
Occupied Bandwidth	RSS-GEN § 6.7	BW at 99%	PASS

- General conclusion:**

Measures and tests performed on the sample of the product *DWILEN 2.14*, in configuration and description presented in this test report, show compliance with standards FCC CFR 47, PART 15, Subpart C and ISED RSS-Gen & RSS-247.

3. Equipment Under Test (EUT)

Nom /
Identification

MFPM / DWILEN 2.14
(Trademark / Marketing name or product reference)

Sn: F MIN / F MID / F
MAX

FCC ID:
IC:
Model / HVIN:

FCC ID: FI5-DW201
IC: 5056A-DW201
DWILEN 2.14

Alimentation /
Power supply

12V DC from vehicle battery

Auxiliaires /
Auxiliaries

AC/DC power adapter used for test: KWMOBILE
Model: 33123.01
Input: 100-240V 50/60Hz
Output : 12V/1.5A

Entrées-Sorties /
Input / Output

	Câbles pour essai / Cables for test	Blindé / Shielded	Prévu pour >3m / Intended for >3m
OBD connector for 12V power input (No data)	2 wires, 1m	No	No

Version programme /
Firmware version

NC

Mode de fonctionnement /
Running mode

The tested samples are able to:
- Transmit a carrier frequency on low, middle and high channels (Bluetooth Low Energy)

Programme de test /
Test program /

None

Fréquence max interne EST /
Max internal EUT frequency

26MHz (Except intentional RF)

Information sur l'équipement /
Equipment information

Declaration of the applicant:
- Frequency band: 2400 to 2483.5 MHz (Tx & Rx, Wideband Data Transmission systems)
- BLE Power Setting: Power is set at 4dBm
- Modulation: Bluetooth Low Energy (1Mbps)
- Antenna type: Integral (PCB trace, peak gain 0dBi)
- Powered by 12V DC from external power supply (Vehicle battery)
- Equipment intended for use as a mobile device in vehicle
- Equipment designed for continuous operation

Dimensions de l'EST /
Dimensions of EUT

52x31x26mm

4. Test conditions

Power supply voltage:
Equipment under test:
Auxiliaries:

12V DC
230V/50Hz (Radiated emission)
110V/60Hz (Conducted emission)

5. Modifications of the EUT

None

6. Special accessory

None

7. Measurement Uncertainty

Test Description	Expanded uncertainty
Conducted emissions test (150k-30MHz, AC mains)	± 3.5dB
Radiated emission test (9kHz-30MHz, electric field)	± 4.0dB
Radiated emission test (30-300MHz, OATS)	± 5.6dB
Radiated emission test (300-1000MHz, OATS)	± 5.3dB
Radiated emission test (1-40GHz, OATS / FAC)	± 5.6dB
Conducted RF output power at antenna port	± 1.6dB
Radiated RF output power (Peak, Power density)	± 5.6dB
DTS Bandwidth, 99% OBW	±4%
Temperature	± 1°C
Time and duty cycle calculation	±1%
AC and DC voltage	±1%

Note: Expanded uncertainty at 95% confidence (k=2)

8. Field Strength Calculation

The field strength (level) is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follow:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength (Level)

RA = Receiver Amplitude (Meter Reading)

AF = Antenna Factor

CF = Cable Factor

AG = Amplifier Gain

Margin value = Emission level – Limit value

Example:

RA: 14.0dBμV / AF: 16.5 dBm⁻¹ / CF: 3.5dB / AG: 15dB

→ Total factor: 5dBm⁻¹


→ Field level: 19.0dBμV/m (-21.0dB for margin if limit is 40dBμV/m)

9. Conducted Emission Measurement (150kHz-30MHz)

TEST: Limits for conducted disturbance 150kHz – 30MHz				Verdict	
<p>Method: The LISN is placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment were at least 0,8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on lines were made at the output of the LISN. The EUT is 80cm above the ground reference plane and 40cm from the vertical ground plane. The AC power cable is 1m length.</p>				Pass	
Laboratory Parameters:		Required prior to the test		During the test	
Ambient Temperature		20 to 30 °C		24°C ± 2	
Relative Humidity		25 to 70 %		45% ± 5	
Fully configured sample scanned over the following frequency range		Frequency range on each side of line		Measurement Point	
		150kHz to 30MHz		AC input port (110V) Power adapter	
Limits					
Frequency (MHz)	Limit dB (µV)				
	Quasi-Peak	Result	Average	Result	
0.15 – 0.50	66 \ 56	PASS	56 \ 46	PASS	
0.50 - 5	56	PASS	46	PASS	
5 – 30	60	PASS	50	PASS	
Supplementary information:					
Test location: SMEE					
Test date: October 4 th , 2019. Tested by L. CHAPUS					
Power supply voltage: 12V from external power adapter (AC mains 110V/60Hz)					

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AC power supply	PACIFIC POWER	AMX-125	ALI-101-002	-	-
Attenuator / limiter	SMEE	ATT#2	ATT-171-010	2019/6	2020/6
Cable RF	Div	1m	CAB-101-021	2019/4	2020/4
Measuring receiver	Rohde&Schwarz	ESRP	REC-151-002	2019/9	2021/9
LISN (50Ω / 50µH) (Meas.)	AFJ	LS16C	RSI-101-001	2019/6	2021/6
EMC Software	NEXIO	BAT EMC V3.8	SOF-101-001	-	-


Test Setup for conducted emission

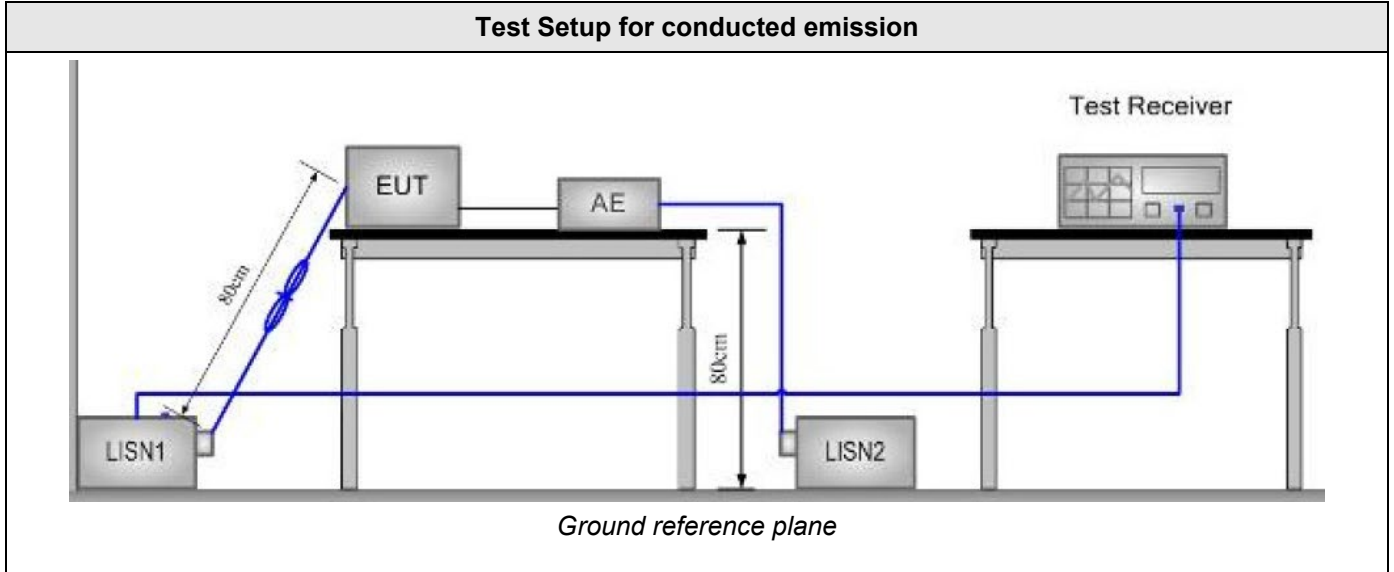

Tabulated Results for Mains Terminal Disturbance Voltage on AC port

FREQ (MHz)	Meas. PK (dBμV)	Mes. QP (dBμV)	LIMIT QP (dBμV)	Margin QP (dB)	Mes. AV (dBμV)	LIMIT AV (dBμV)	Margin AV (dB)	Line
Levels are at least 10dB below applicable limits								
Frequency band investigated:			150kHz-30MHz					
RBW:			9kHz					
Voltage:			110V/60Hz					
Limit:			FCC Part 15.207 / ISED RSS-Gen					
Final measurement detector:			Quasi-Peak and CISPR Average (AV)					
RESULT:			PASS					
Measured value calculation:			<p>The measured value (level) is calculated by adding the Cable Factor, the Transient suppressor attenuation and LISN attenuation from the receiver amplitude reading. The basic equation is as follow:</p> $\text{Meas.} = \text{RA} + \text{CF} + \text{ATT}_{\text{TRAN}} + \text{ATT}_{\text{LISN}}$ <p>Where Meas. = Level (dBμV) RA = Receiver Amplitude CF = Cable Factor ATT_{TRAN} = Transient suppressor attenuation ATT_{LISN} = LISN attenuation</p> <p>Margin value = Emission level – Limit value (A negative margin shows compliance to limit)</p>					


Graphical representation of Conducted Disturbance Measurement (Peak and Average detection) AC port, Line L1

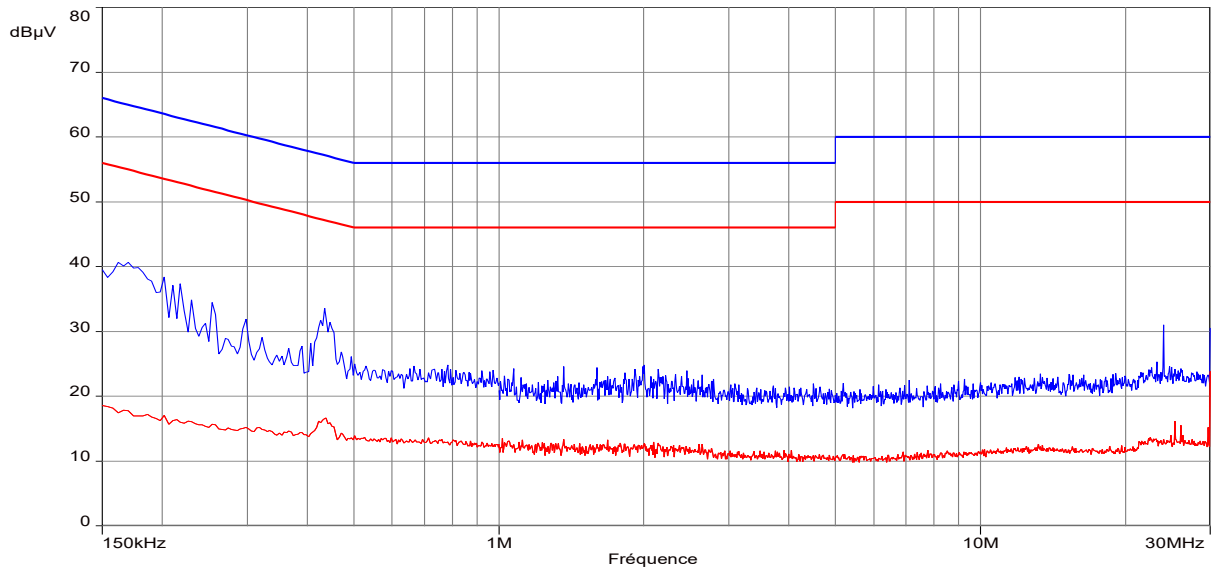

----: Peak

----: Average

Graphical representation of Conducted Disturbance Measurement (Peak and Average detection) AC port, Line Neutral

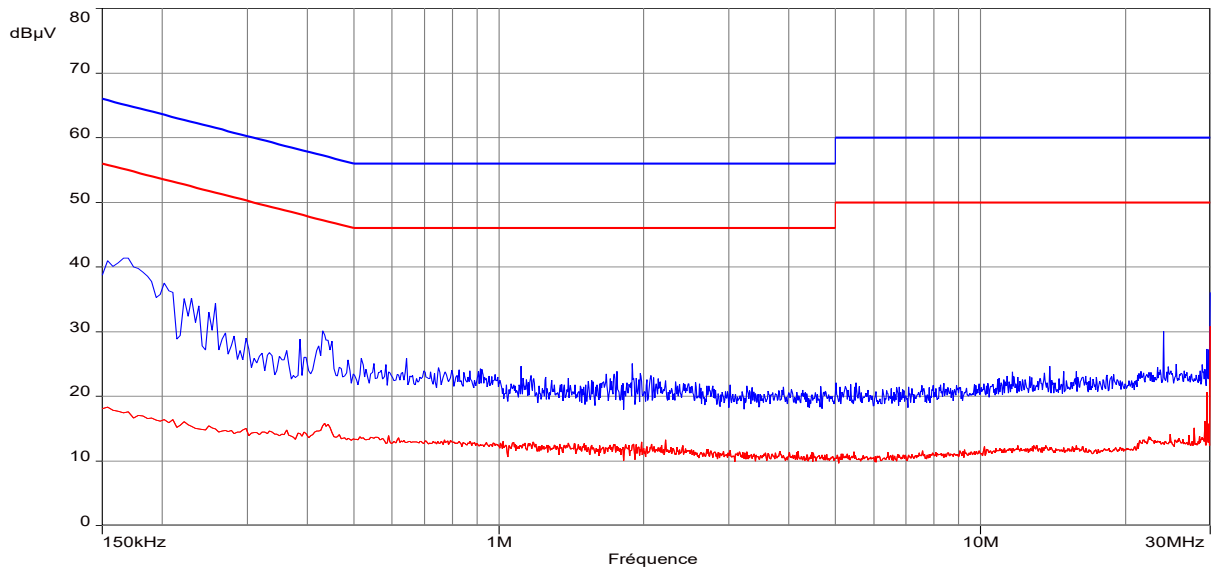


----: Peak

----: Average

10. DTS Bandwidth

TEST: DTS Bandwidth		Verdict
<p><u>Method:</u> The setup is in an anechoic chamber. The spectrum analyzer is connected to the measuring antenna. A radiated measurement is performed. The RBW is 100kHz, with VBW ≥ 3 x RBW. The SPAN is wide enough to capture all products of the modulation process. A MaxHold Peak detector is used. Automatic function of the spectrum analyser is used. The tested equipment is set to transmit operation with modulation on low, mid and high channels.</p>		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	20 to 30 °C	24°C ± 2
Relative Humidity	25 to 70 %	45% ± 5
Limits – FCC Part 15.247 (a) / RSS-247 §5.2 (a)		
Frequency (MHz)	Level for Bandwidth	Limit
2402.0	6dB below the maximum output power	At least 500kHz
2440.0		
2480.0		
Supplementary information: Test location: SMEE Test date: September 19th, 2019. Tested by L. CHAPUS		


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4
RF cable	Pasternack	PE302-120	CAB-131-024	2019/4	2020/4
Anechoic chamber	COMTEST	214263	CAG-141-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-002	-	-
Spectrum Analyzer	Rohde&Schwarz	FSV	ASP-171-004	2019/8	2021/8

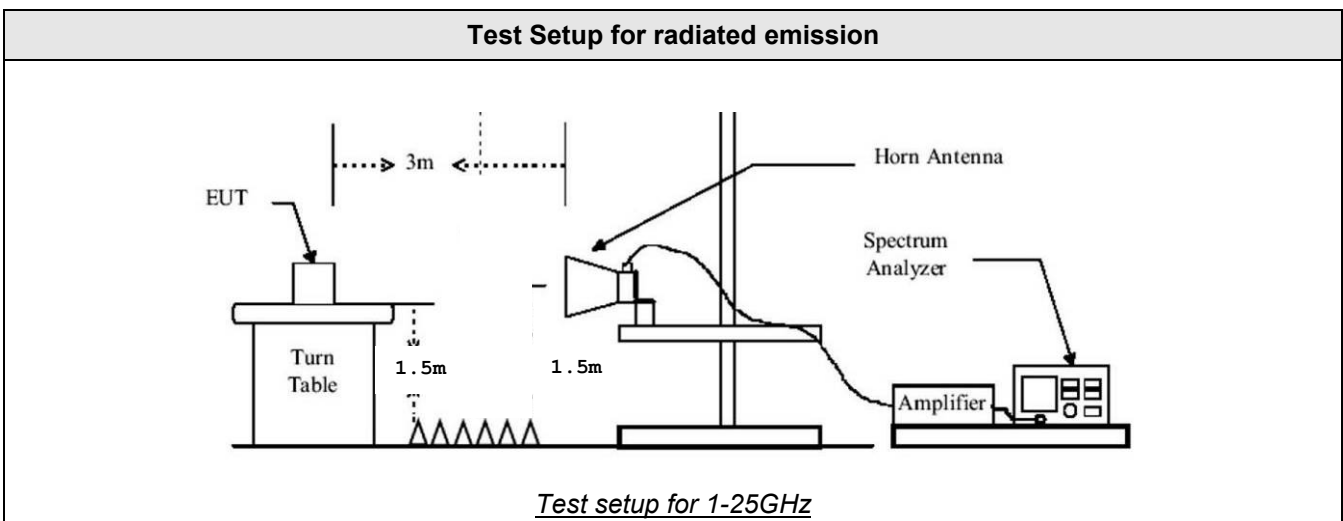


Tabulated Results for Occupied Bandwidth

Frequency (MHz)	6dB Bandwidth (kHz)	Result
2402.0	786.0	Pass
2440.0	834.0	Pass
2480.0	830.0	Pass

Graphical representation of 6dB Bandwidth

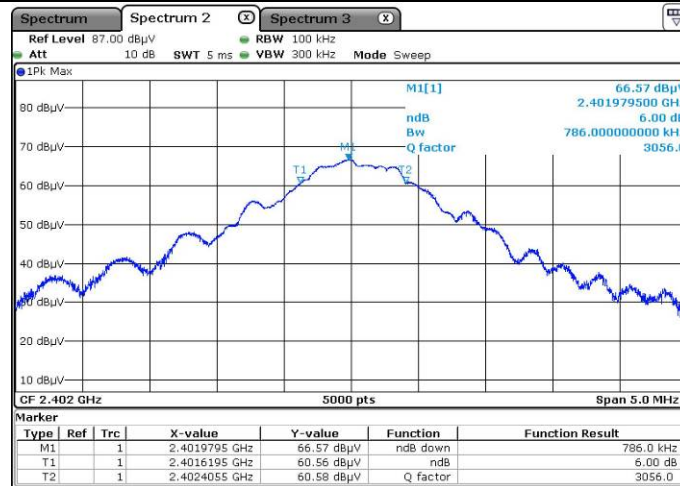


Low channel

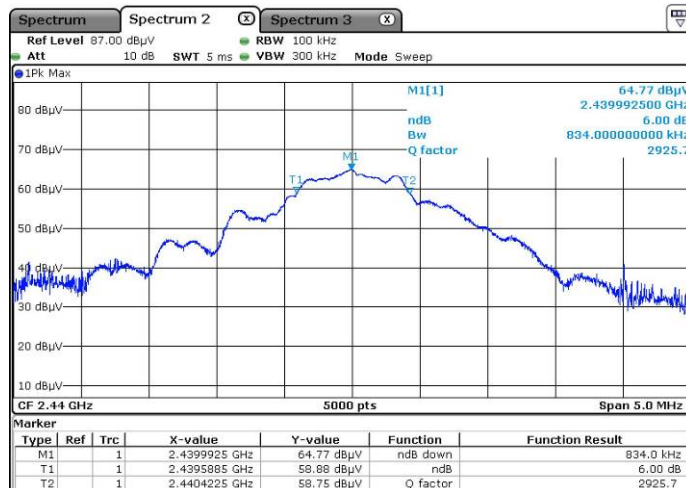

Mid channel

Graphical representation of 6dB Bandwidth

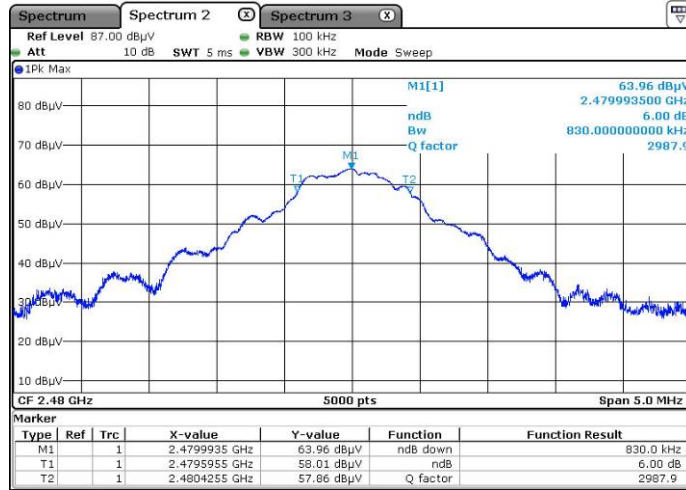

High channel


Frequency band investigated:	2400MHz to 2483.5MHz
RBW :	100kHz
Measurement detector :	Peak

11. Maximum Peak Output power

TEST: Maximum peak conducted output power		Verdict
<p>Method: A radiated measurement is performed. The RBW is wide enough to capture the maximum amplitude level (1MHz). The SPAN is wide enough to capture all products of the modulation process. A MaxHold Peak detector is used. Radiated field strength of RF Output Power is measured at 3m in a Full Anechoic Chamber (FAC) that complies with ANSI C63.10. Maximum field strength (Peak) is performed by rotating the EUT 360°. All frequencies were investigated in both horizontal and vertical antenna polarity. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with a 60° rotation on each axis. (Clause 6.6.5 of ANSI C63.10). The tested equipment is set to transmit operation with modulation on low, mid and high channels.</p>		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	20 to 30 °C	24°C ± 2
Relative Humidity	25 to 70 %	45% ± 5
Limits – FCC Part 15.247 (b) / RSS-247 §5.4 (d)		
Frequency (MHz)	Limits (dBµV/m)	
	Level / Detector	Results
2400 to 2483.5	36 dBm / Pk / 3m (Radiated)	Pass
2400 to 2483.5	30 dBm / Pk (Conducted)	Pass
Supplementary information: Test location: SMEE Test date: September 19th, 2019. Tested by L. CHAPUS		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4
RF cable	Pasternack	PE302-120	CAB-131-024	2019/4	2020/4
Anechoic chamber	COMTEST	214263	CAG-141-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-002	-	-
Spectrum Analyzer	Rohde&Schwarz	FSV	ASP-171-004	2019/8	2021/8

Test Setup for radiated emission

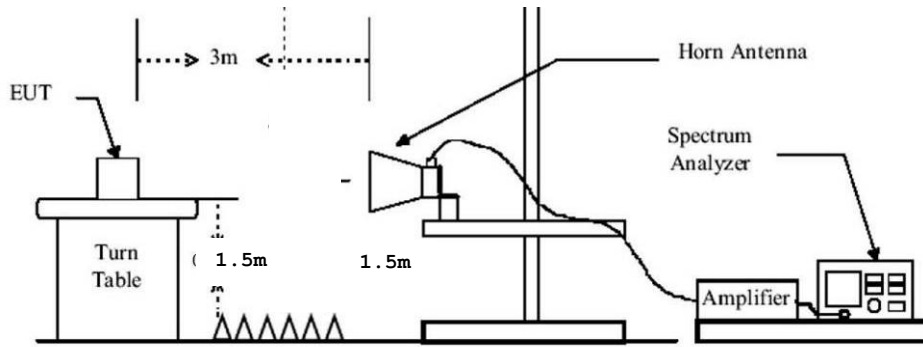

Test setup for 1-25GHz

Tabulated Results for Maximum peak output power (Radiated measurement)

FREQ (MHz)	Field Strength 3m (dB μ V/m)	Calculated EIRP (dBm)	Limit (dBm)	Result
2402	98.9	3.7	36.0	Pass
2441	97.7	2.5	36.0	Pass
2480	97.8	2.6	36.0	Pass
RBW:	1MHz			
Measurement distance:	3m			
Limit:	FCC Part 15.247 / RSS-247			
Final measurement detector:	Peak			
RESULT:	PASS			
Note:	EIRP is calculated using the following equation: $EIRP = E + 20 \log(D) - 104.8 - GR$ Where EIRP = Equivalent Isotropic Radiated Power in dBm E = Electric field strength in dB μ V/m D = Measuring distance in meter GR = Ground reflection in dB (0dB above 1GHz)			


Tabulated Results for Maximum peak output power (Conducted)			
FREQ (MHz)	Conducted power (dBm)	Limit (dBm)	Result
2402	3.7	30.0	Pass
2440	2.5	30.0	Pass
2480	2.6	30.0	Pass
RBW:	1MHz		
Limit:	FCC Part 15.247 / IC RSS-247		
Final measurement detector:	Peak		
RESULT:	PASS		
Note:	(1): Maximum conducted Peak output power is calculated as follow: $P_c = EIRP - G$ Where P_c = Conducted power dBm $EIRP$ = Equivalent Isotropic Radiated Power in dBm G = Antenna gain in dBi (0dBi, as declared by the manufacturer)		

12. Maximum Power Spectral Density Level in the fundamental emission

TEST: Maximum Peak Power Spectral Density		Verdict
<p>Method: A radiated measurement is performed. The SPAN is wide enough to capture all products of the modulation process. Radiated field strength of RF Output Power is measured at 3m in a Full Anechoic Chamber (FAC) that complies with ANSI C63.10. Maximum field strength is performed by rotating the EUT 360°. All frequencies were investigated in both horizontal and vertical antenna polarity. Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with a 60° rotation on each axis. (Clause 6.6.5 of ANSI C63.10). The tested equipment is set to transmit operation with modulation on low, mid and high channels.</p>		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	20 to 30 °C	24°C ± 2
Relative Humidity	25 to 70 %	45% ± 5
Limits – FCC Part 15.247 (e) / RSS-247 §5.2 (b)		
Frequency (MHz)	Level (Detector)	Limit
2402 / 2440 / 2480	8 dBm/3kHz (Pk)	Pass
Supplementary information: Test location: SMEE Test date: September 19th, 2019. Tested by L. CHAPUS		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4
RF cable	Pasternack	PE302-120	CAB-131-024	2019/4	2020/4
Anechoic chamber	COMTEST	214263	CAG-141-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-002	-	-
Spectrum Analyzer	Rohde&Schwarz	FSV	ASP-171-004	2019/8	2021/8

Test Setup for radiated emission

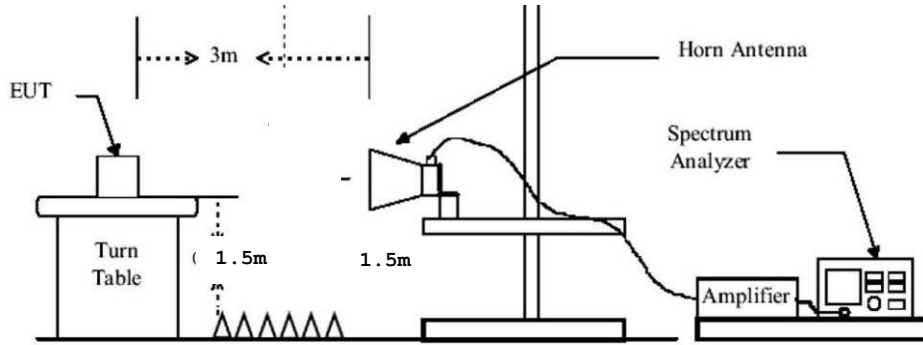


Test setup for 1-25GHz

Tabulated Results for Maximum Spectral Density (Radiated measurement)


FREQ	Field Strength 3m	Calculated Radiated PSD (EIRP)	Limit	Result
(MHz)	(dB μ V/m)	(dBm)	(dBm)	
2402	86.5	-8.7	-	-
2440	84.1	-11.1	-	-
2480	84.4	-10.8	-	-
RBW:	3kHz			
Measurement distance:	3m			
Limit:	FCC Part 15.247 / RSS-247			
Final measurement detector:	Peak			
Note:	EIRP/PSD is calculated using the following equation: $EIRP = E + 20 \times \log(D) - 104.8 - GR$ Where EIRP = Equivalent Isotropic Radiated Power in dBm E = Electric field strength in dB μ V/m D = Measuring distance in meter GR = Ground reflection in dB (0dB above 1GHz)			

Tabulated Results for Maximum Conducted Power Spectral Density			
Frequency (MHz)	PSD (dBm/3kHz)	Limit	Result
2402.0	-8.7	8dBm/3kHz	Pass
2441.0	-11.1	8dBm/3kHz	Pass
2480.0	-10.8	8dBm/3kHz	Pass
RBW:	3kHz		
Limit:	FCC Part 15.247 / RSS-247		
Final measurement detector:	Peak		
RESULT:	PASS		
Note:	Maximum conducted power spectral density is calculated as follow: $P_{SD} = P_{SD-EIRP} - G$ Where P_{SD} = Conducted power spectral density $P_{SD-EIRP}$ = Equivalent Isotropic Radiated PSD in dBm G = Antenna gain in dBi (0dBi, as declared by the manufacturer)		


Graphical representation for Maximum Power Spectral Density

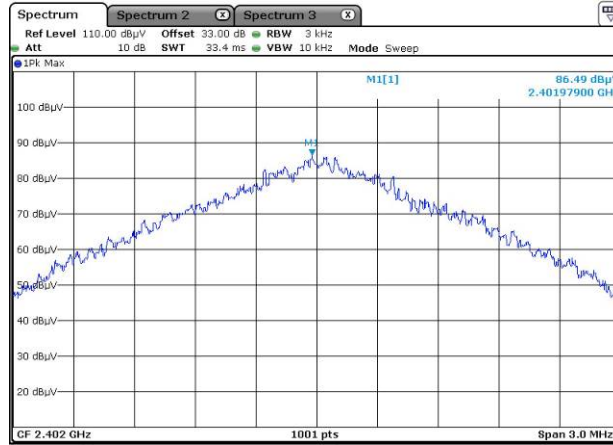

Low channel

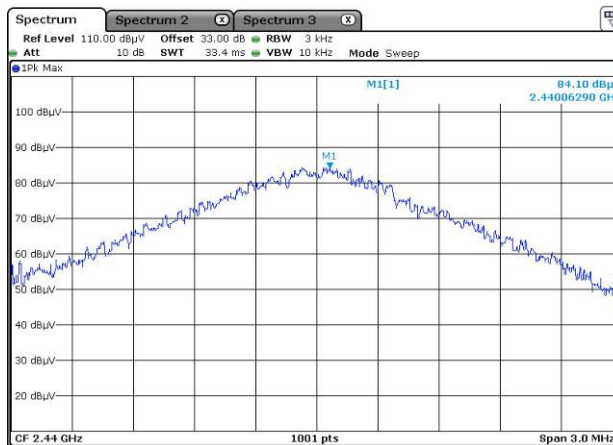

Mid channel

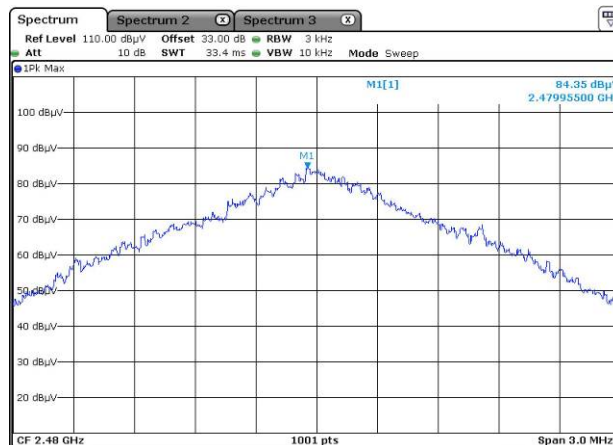

High channel

RBW:	3kHz
Limit:	FCC Part 15.247 / RSS-247
RESULT:	PASS


13. Unwanted emissions in Non-Restricted Frequency bands

TEST: Unwanted emissions in Non-Restricted Frequency Bands			Verdict
<p>Method: Measurements were performed on a 3-meter Open Area Test Site (OATS) for frequency below 1GHz. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (Peak) were then performed by rotating the EUT on 360° and adjusting the receive antenna height from 1 to 4 m</p> <p>For frequency above 1GHz, final measurements were made at 3m in a Full Anechoic Chamber (FAC) that complies with ANSI C63.10. Measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna in horizontal and vertical polarities.</p> <p>Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with 60° rotation on each axis. (Clause 6.6.5 of ANSI C63.10).</p> <p>A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured radiated field of the EUT is performed (or corrected) at 3-meters of distance. Antenna is 1.25-meters high. The pre-characterization graphs are obtained in PEAK detection with 360° continuous rotation of the device under test.</p>			Pass
Laboratory Parameters:	Required prior to the test	During the test	
Ambient Temperature	20 to 30 °C	24°C ± 2	
Relative Humidity	25 to 70 %	45% ± 5	
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point	
	30MHz – 25GHz	3 m measurement distance	
Limits – FCC Part 15.247 (d) / RSS-247 § 5.5			
Frequency (MHz)	Limits (dBµV/m)		
	Detector / Analyser RBW	Limit	Results
30 to 25000	Pk / 100kHz	20dB below the maximum Peak level	Pass
Supplementary information: Test location: SMEE Test date: September 19th, 2019. Tested by L. CHAPUS			


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconnic antenna	COM-POWER	AB- 900	ANT-101-003	2019/6	2021/6
Loop antenna	EMCO	6502	ANT-101-009	2019/8	2021/8
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
Horn antenna	ETS-LINDGREN	3116	ANT-161-014	2017/12	2022/12
Log-periodic antenna	EMCO	3146	ANT-191-019	2019/6	2021/6
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2019/8	2021/8
RF cable	Div	OATS/25m	CAB-101-017	2019/4	2020/4
RF cable	Pasternack RF	PE302-120	CAB-131-024	2019/4	2020/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-026	2019/4	2020/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-029	2019/4	2020/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
RF cable	HUBER+SUHNER	SF102 (K/2m)	CAB-171-034	2019/4	2020/4
RF cable	HUBER+SUHNER	SF102 (K/3m)	CAB-171-034	2019/4	2020/4
Pre-amplifier	Pasternack RF	PE1524	PRE-101-002	2019/6	2020/6
Pre-amplifier	SMEE	18-40GHz	PRE-171-004	2017/12	2019/12
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
OATS	Div	10m	SIT-101-001	2017/7	2020/7
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001	-	-
EMC Software	NEXIO	BAT EMC V3.9	SOF-101-001	-	-

Test Setup for radiated emission

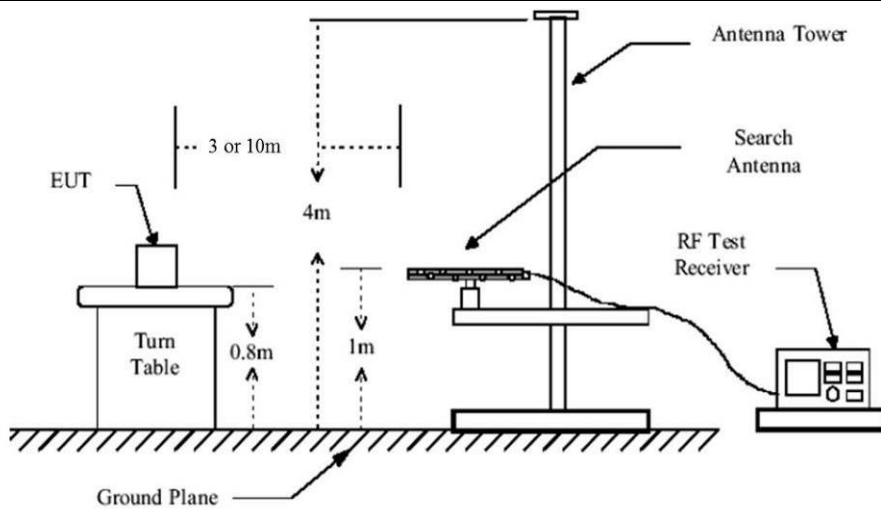

Test setup for 30-1000MHz

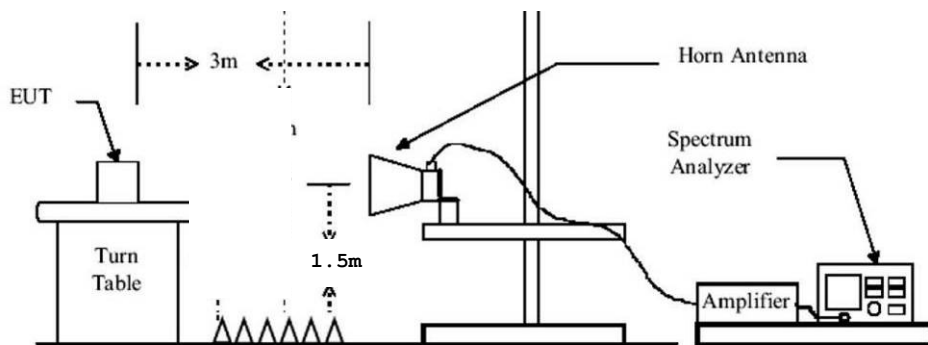


Test setup for 1-25GHz

Tabulated Results for Peak Output Power Reference level	
FREQ (MHz)	Field Strength 3m (dB μ V/m)
2402.0	98.5 (1)
2440.0	96.9 (1)
2480.0	97.0 (1)
RBW:	100kHz
Measurement distance:	3m
Limit:	Ref. level only – For 15.247 (d) / RSS-247 § 5.5
Final measurement detector:	Peak
Note:	(1): Only for identification of limit in non-restricted band Limit is 76.9 dBμV/m Peak for out-of-band frequencies in Non-Restricted bands (with a 100kHz RBW on the spectrum analyser)

Tabulated Results for Unwanted emissions in Non-Restricted bands				
FREQ (MHz)	Field Strength 3m (dB μ V/m)	Limit (dB μ V/m)	Margin (dB μ V/m)	Result (dB μ V/m)
2305.55	65.8	76.9	-11.1	Pass
2400.00	66.1	76.9	-10.8	Pass
2553.00	57.6	76.9	-19.3	Pass
2562.10	59.3	76.9	-17.6	Pass
RBW:	100kHz			
Measurement distance:	3m			
Limit:	FCC 15.247 / RSS-247			
Final measurement detector:	Peak			
RESULT:	PASS			
Note:	3-axis measurement performed for device under test. (Clause 6.6.5 of ANSI C63.10).			

Graphical representation of Band-edge compliance (LOW)

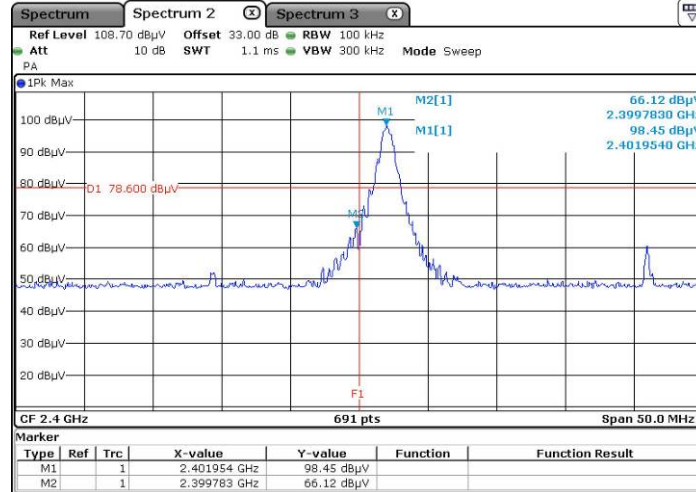

Low bandedge compliance

Radiated Peak level is 66.1dBµV/m (limit 78.6dBµV/m)

F1 = 2400MHz

RESULT: PASS


Note: radiated measurement (3m in FAC)

14. Unwanted emissions in Restricted Frequency bands


TEST: Unwanted emissions into Restricted Frequency Bands		Verdict
<p>Method: Measurements were performed on a 3-meter Open Area Test Site (OATS) for frequency below 1GHz. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (Peak) were then performed by rotating the EUT on 360° and adjusting the receive antenna height from 1 to 4 m</p> <p>For frequency above 1GHz, final measurements were made at 3m in a Full Anechoic Chamber (FAC) that complies with ANSI C63.10. Measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna in horizontal and vertical polarities.</p> <p>Three orthogonal axis measurements on EUT are performed to obtain the maximum peak field strength, with 60° rotation on each axis.(Clause 6.6.5 of ANSI C63.10).</p> <p>A pre-scan frequency identification of the EUT has been performed in full anechoic chamber. The measured radiated field of the EUT is performed (or corrected) at 3-meters of distance. Antenna is 1.25-meters high. The pre-characterization graphs are obtained in PEAK detection with 360° continuous rotation of the device under test.</p>		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	20 to 30 °C	24°C ± 2
Relative Humidity	25 to 70 %	45% ± 5
Fully configured sample scanned over the following frequency range	Frequency range on each side of line	Measurement Point
	9kHz – 30MHz	10 m measurement distance
	30MHz – 25GHz	3 m measurement distance
Limits – FCC Part 15.205, 15.209 (a), 15.247 (d) / RSS-GEN §8.9, §8.10, RSS-247 §5.5		
Frequency (MHz)	Limits (dBµV/m)	
	Level / Detector / Distance	Results
0.009 to 0.090	107.6 – 87.6 / AV / 10m 127.6 – 107.6 / PK / 10m	Pass
0.090 to 0.110	87.6 – 85.9 / QP / 10m	Pass
0.110 to 0.490	85.7 – 72.9 / AV / 10m 105.7 – 92.9 / PK / 10m	Pass
0.490 to 1.705	52.9 – 42.1 / QP / 10m	Pass
1.705 to 30	48.6 / QP / 10m	Pass
30 to 88	40.0 / QP / 3m	Pass
88 to 216	43.5 / QP / 3m	Pass
216 to 960	46.0 / QP / 3m	Pass
960-1000	54.0 / QP / 3m	Pass
Above 1GHz	54.0 / AV / 3m 74.0 / PK / 3m	Pass
Supplementary information: Test location: SMEE Test date: September 19th, 2019. Tested by L. CHAPUS		

Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconnic antenna	COM-POWER	AB- 900	ANT-101-003	2019/6	2021/6
Loop antenna	EMCO	6502	ANT-101-009	2019/8	2021/8
BiConiLog antenna	EMCO	3142B	ANT-101-010	2019/8	2021/8
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
Horn antenna	ETS-LINDGREN	3116	ANT-161-014	2017/12	2022/12
Log-periodic antenna	EMCO	3146	ANT-191-019	2019/6	2021/6
Spectrum analyzer	Rohde&Schwarz	FSV40	ASP-171-004	2019/8	2021/8
RF cable	Div	OATS/25m	CAB-101-017	2019/4	2020/4
RF cable	Pasternack RF	PE302-120	CAB-131-024	2019/4	2020/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-026	2019/4	2020/4
RF cable	HUBER+SUHNER	RG214U	CAB-141-029	2019/4	2020/4
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4
RF cable	HUBER+SUHNER	SF102 (K/2m)	CAB-171-034	2019/4	2020/4
RF cable	HUBER+SUHNER	SF102 (K/3m)	CAB-171-034	2019/4	2020/4
Pre-amplifier	Pasternack RF	PE1524	PRE-101-002	2019/6	2020/6
Pre-amplifier	SMEE	18-40GHz	PRE-171-004	2017/12	2019/12
Anechoic chamber	COMTEST	214263	CAG-141-001	2017/6	2020/6
OATS	Div	10m	SIT-101-001	2017/7	2020/7
Antenna mast	Innco- Systems	MA4000EP	MAT-101-001	-	-
Turntable	Innco- Systems	DS1200S	PLA-101-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-001	-	-
EMC Software	NEXIO	BAT EMC V3.9	SOF-101-001	-	-


Test Setup for radiated emission

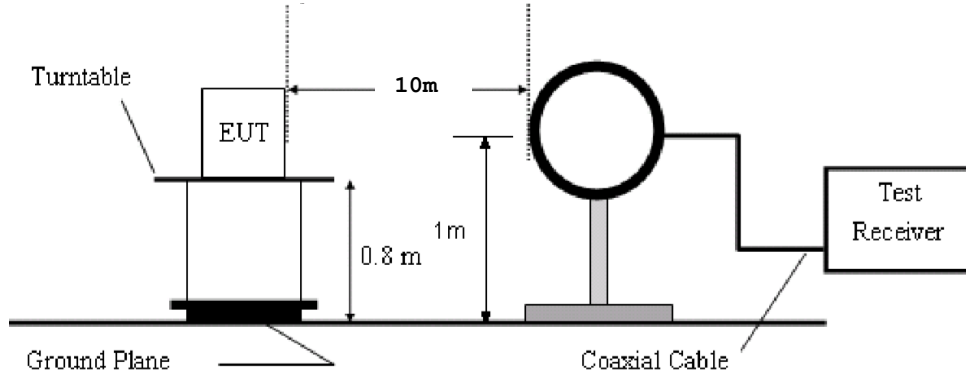

Test setup for 9k-30MHz

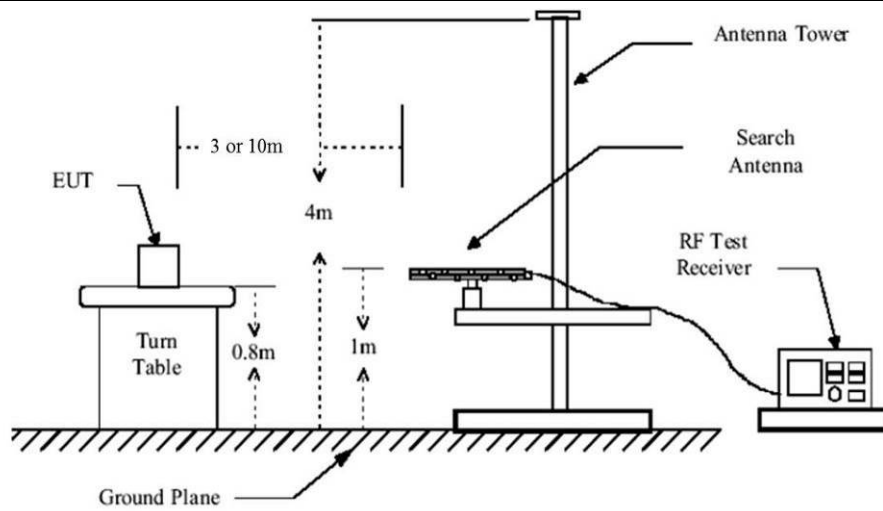

Test setup for 30-1000MHz

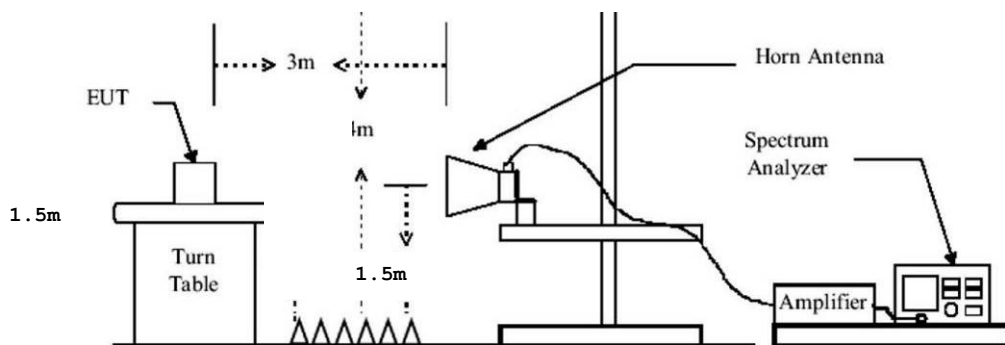


Test setup for 1-25GHz

Tabulated Results for Unwanted emissions (9kHz-30MHz)						
FREQ	RF field @ 30m	Limit @ 30m	Margin	Antenna angle	Table angle	Correc. Fact. (CF)
MHz	(QP) dB μ V/m	(QP) dB μ V/m	dB	Degree	Degree	dB
Levels are at least 10dB below limits						
Supplementary information: Frequency list measured on the Open Area Test Site has been created with pre-scan results.						
Frequency band investigated:		9kHz-30MHz				
RBW:		200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)				
Measurement distance:		10m				
Limit:		FCC Part 15.205 - 15.209 / RSS-GEN				
Final measurement detector:		Peak / Quasi-Peak / Average				
Note:		CF: Correction factor = Antenna factor + Cable loss				

Tabulated Results for Unwanted emissions (30MHz-1GHz)										
FREQ	Meter reading	Meter reading	Total factor	Field level	Field level	Pol	Antenna height	Table angle	Limit	Margin
MHz	(QP) dB μ V	(Pk) dB μ V	dB	(QP) dB μ V/m	(Pk) dB μ V/m		cm	Degré	(QP) dB μ V/m	dB
Levels are at least 10dB below limits										
Supplementary information: Frequency list measured on the Open Area Test Site has been created with pre-scan results.										
Frequency band investigated:		30MHz-1GHz								
RBW:		120kHz								
Measurement distance:		3m								
Limit:		FCC Part 15.205 - 15.209 / RSS-GEN								
Final measurement detector:		Quasi-Peak								
RESULT:		PASS								
Note:		3-axis measurement performed for device under test. (Clause 6.6.5 of ANSI C63.10).								

Tabulated Results for Unwanted emissions (1GHz-25GHz)					
FREQ (MHz)	Field Strength 3m (dB μ V/m)	Detector	Limit (dB μ V/m)	Margin (dB μ V/m)	Result
2360.68	58.5	Pk	74	-15.5	Pass
2360.68	33.2	Avg	54	-20.8	Pass
2389.42	59.6	Pk	74	-14.4	Pass
2389.42	33.3	Avg	54	-20.7	Pass
2483.50	65.8	Pk	74	-8.2	Pass
2483.50	46.6	Avg	54	-7.4	Pass
2489.84	63.9	Pk	74	-10.1	Pass
2489.84	45.8	Avg	54	-8.2	Pass
4804.00	56.2	Pk	74	-17.8	Pass
4804.00	42.0	Avg	54	-12.0	Pass
4882.00	54.5	Pk	74	-19.5	Pass
4882.00	42.0	Avg	54	-12.0	Pass
4960.00	54.6	Pk	74	-19.4	Pass
4960.00	42.0	Avg	54	-12.0	Pass
7206.00	57.7	Pk	74	-16.3	Pass
7206.00	45.0	Avg	54	-9.0	Pass
7320.00	56.2	Pk	74	-17.8	Pass
7320.00	44.5	Avg	54	-9.5	Pass
7440.00	56.1	Pk	74	-17.9	Pass
7440.00	44.5	Avg	54	-9.5	Pass
RBW:	1MHz				
Measurement distance:	3m				
Limit:	FCC Part 15.205, 15.209, 15.247 / RSS-Gen, RSS-247				
Final measurement detector:	Peak / CISPR Average				
RESULT:	PASS				
Notes:	3-axis measurement performed for device under test. (Clause 6.6.5 of ANSI C63.10).				


Graphical representation of Band-edge compliance (HIGH)

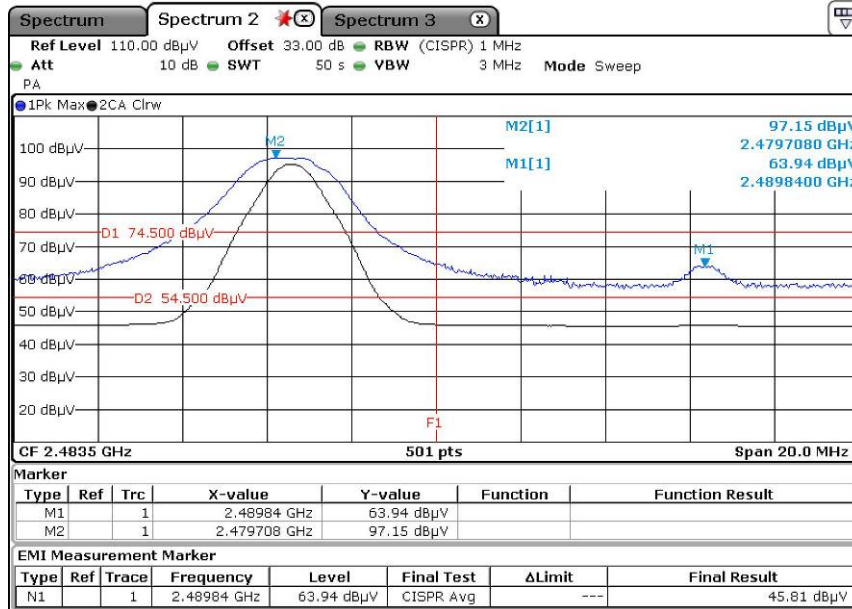

High bandedge compliance

Radiated Peak level is 63.9dBµV/m at 2489.84MHz (limit 74dBµV/m)
 Max radiated Average level is 45.8dBµV/m (limit 54dBµV/m, CISPR Average detector measurement)
RESULT: PASS
 Note: Radiated measurement (FAC/3m)



Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 9kHz-30MHz / 3m / Parallel & Perpendicular antenna position / Transmit mode)

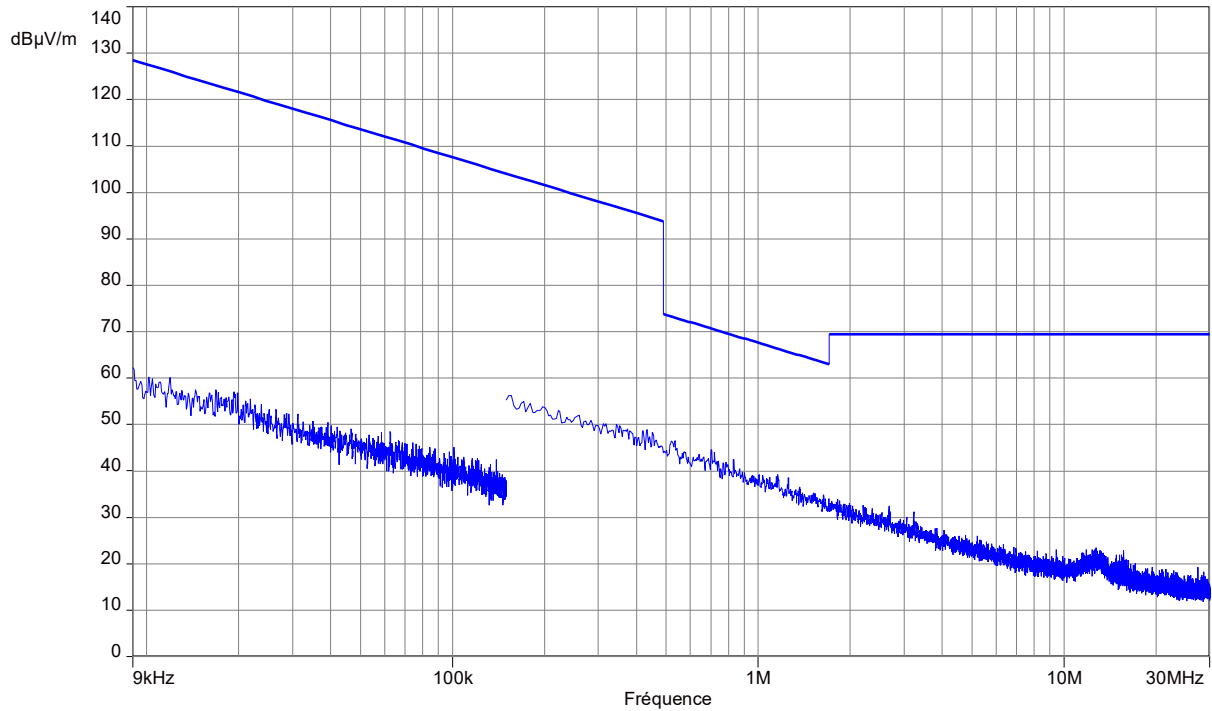

Notes: Pre-scan graph only for identification purpose.
Same result for transmit mode on all channels.

Frequency band investigated:	9kHz-30MHz
Unit :	dBµV/m
RBW :	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)
Antenna polarization :	Parallel & Perpendicular to measurement axis
Measurement detector:	Peak

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 30MHz-1GHz / 3m / Horizontal & Vertical/ Transmit mode)

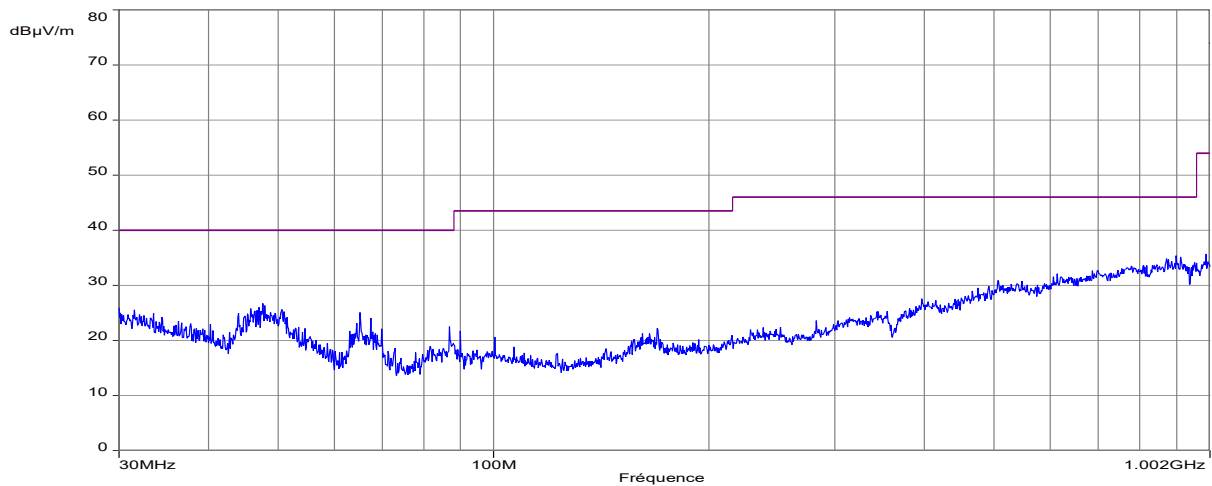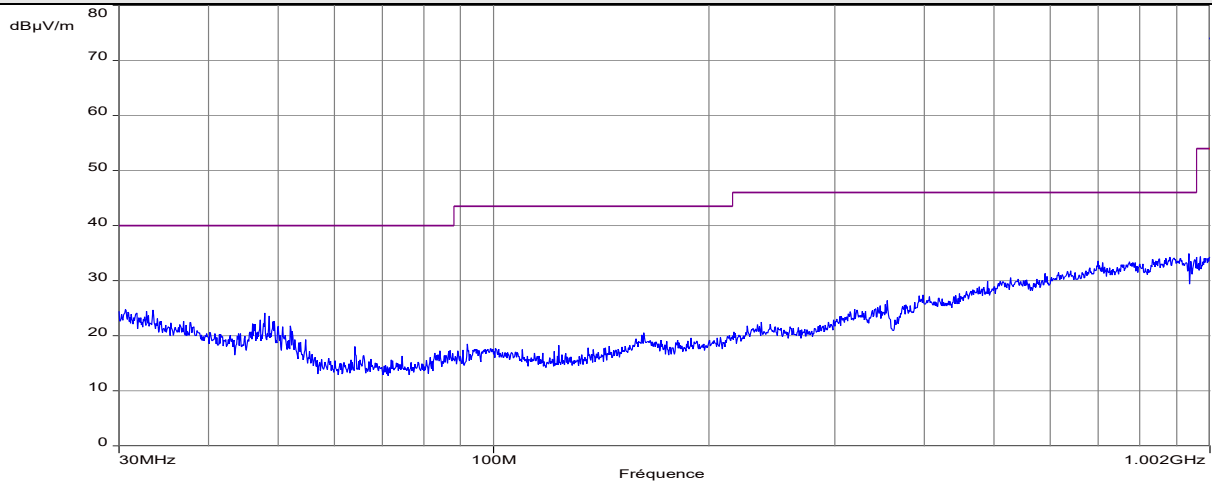



Note: Pre-scan graph only for identification purpose.
Same result for transmit mode on all channels

Frequency band investigated:	30MHz-1GHz
Unit :	dBµV/m
RBW :	100kHz
Antenna polarization :	Horizontal & Vertical
Voltage:	12V DC
Limit:	FCC 15.209 / RSS-GEN
Measurement detector:	Peak

PEAK LIST FROM PRE-SCAN

Frequency (MHz)	Peak Level (dBµV/m)	Angle (°)	Limit (dBµV/m)	Polarization	Comments
None					



Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 1GHz-18GHz / 3m / Horizontal & Vertical/ Transmit mode) – Low channel

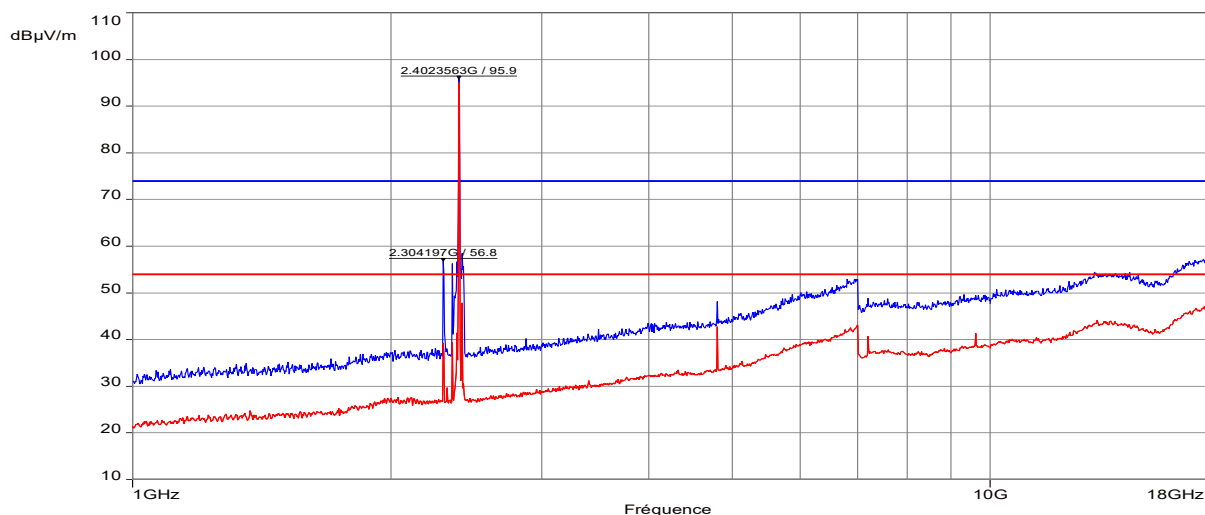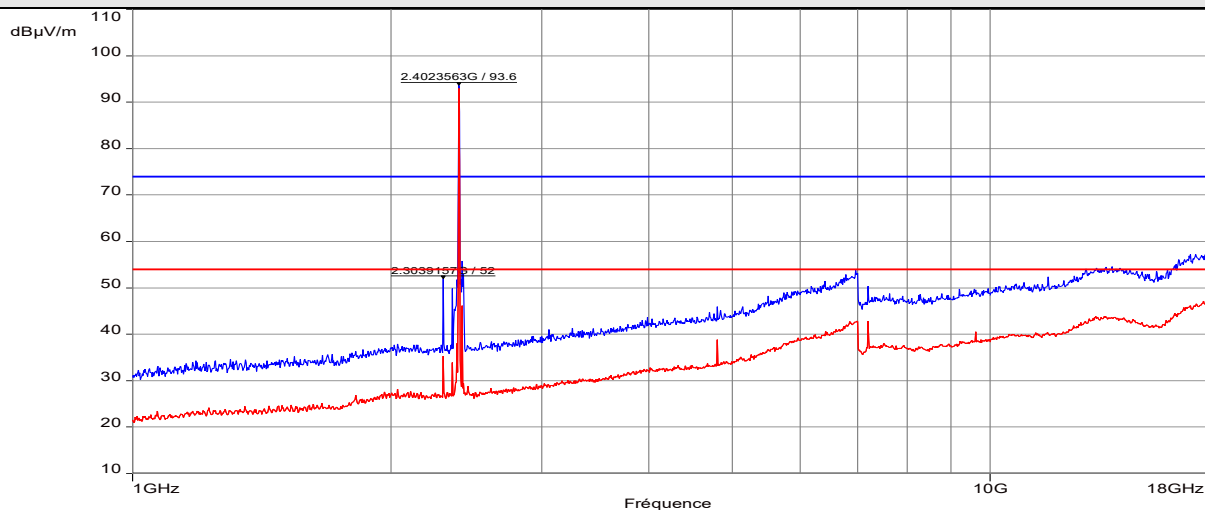

Note: Pre-scan graph only for identification purpose.

----- : Peak measure	----- : Average measure
Frequency band investigated:	1GHz-18GHz
Unit :	dBµV/m
RBW :	1MHz
Antenna polarization :	Horizontal & Vertical
Voltage:	12V
Limit:	FCC 15.247 / RSS-247
Measurement detector:	Peak / Average



Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 1GHz-18GHz / 3m / Horizontal & Vertical/ Transmit mode) – Mid channel

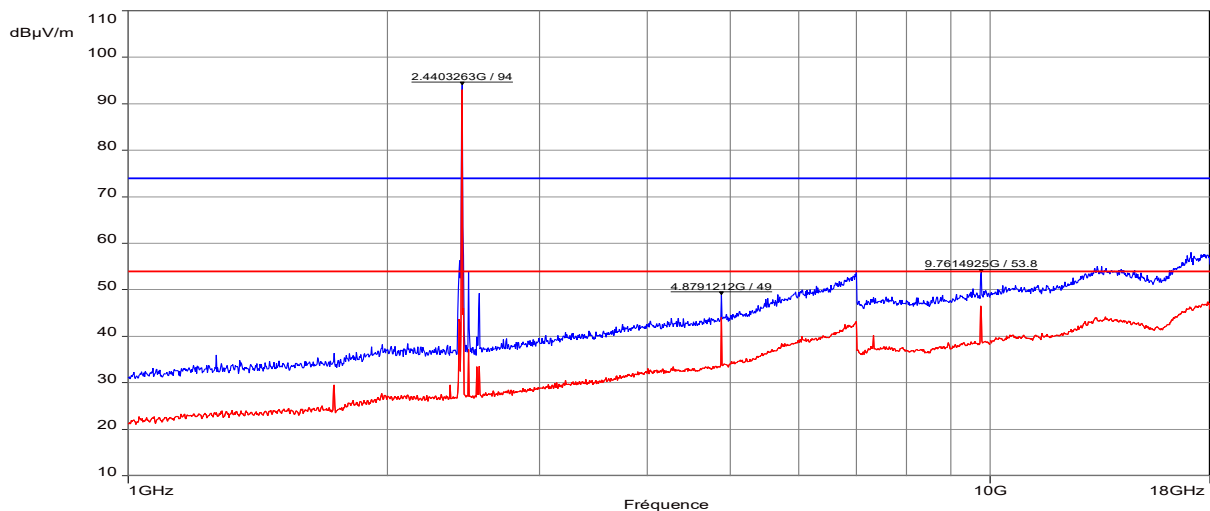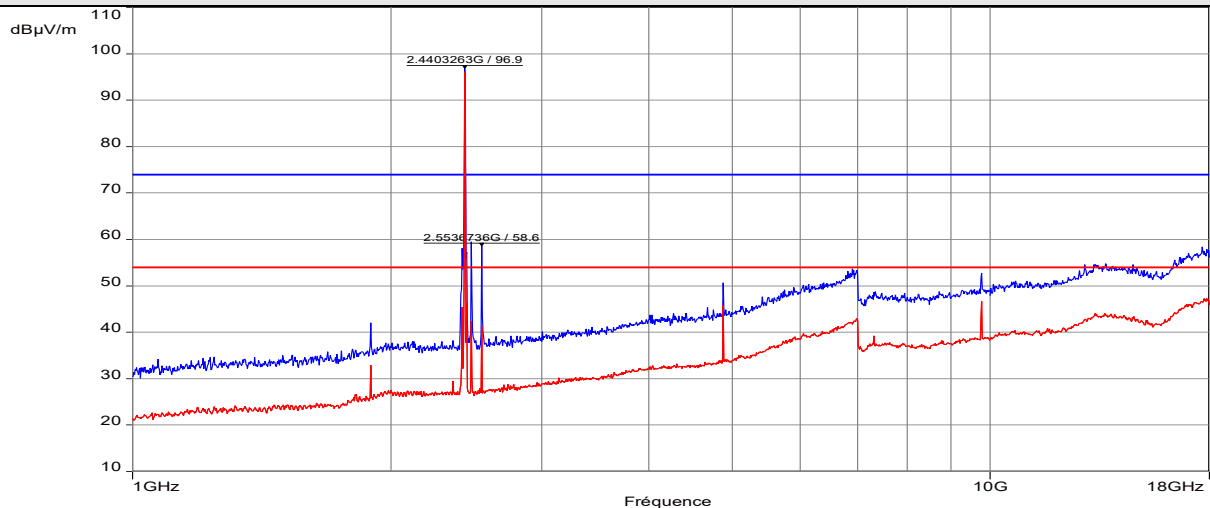

Note: Pre-scan graph only for identification purpose.

----- : Peak measure	----- : Average measure
Frequency band investigated:	1GHz-18GHz
Unit :	dBµV/m
RBW :	1MHz
Antenna polarization :	Horizontal & Vertical
Voltage:	12V
Limit:	FCC 15.247 / RSS-247
Measurement detector:	Peak / Average


Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 1GHz-18GHz / 3m / Horizontal & Vertical/ Transmit mode) – High channel

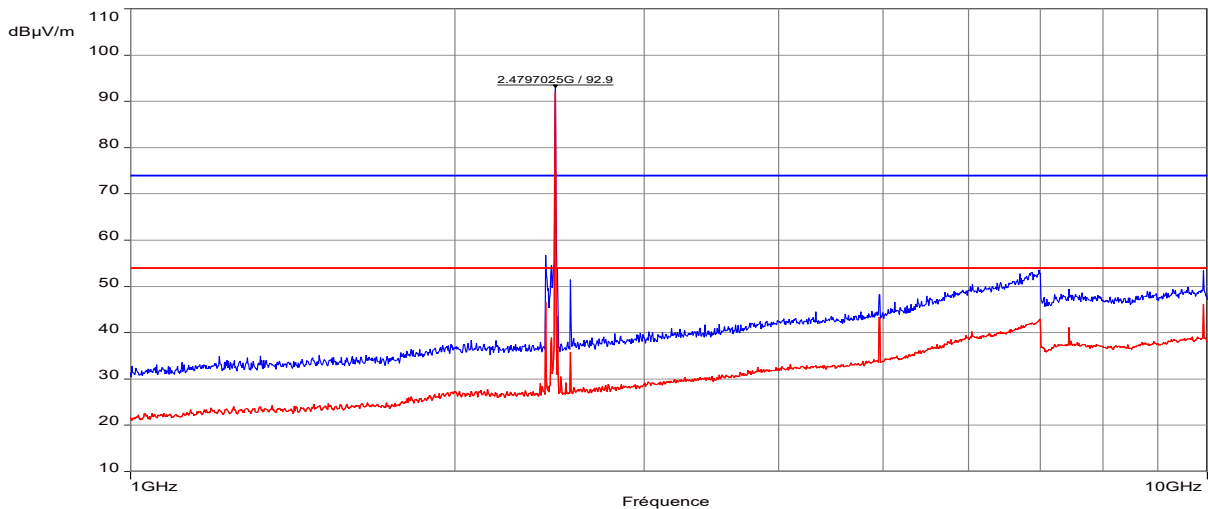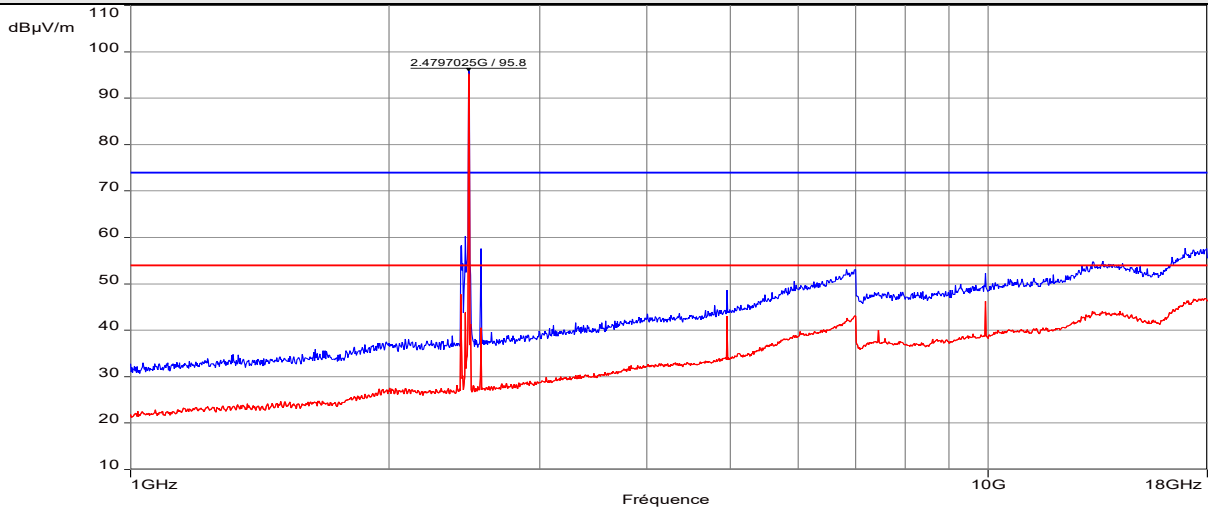

Note: Pre-scan graph only for identification purpose.

----- : Peak measure	----- : Average measure
Frequency band investigated:	1GHz-18GHz
Unit :	dBµV/m
RBW :	1MHz
Antenna polarization :	Horizontal & Vertical
Voltage:	12V
Limit:	FCC 15.247 / RSS-247
Measurement detector:	Peak / Average

Graphical representation of Radiated Disturbance Measurement (Peak detection, Anechoic chamber pre-scan, 18GHz-25GHz / 3m / Horizontal & Vertical/ Transmit mode)

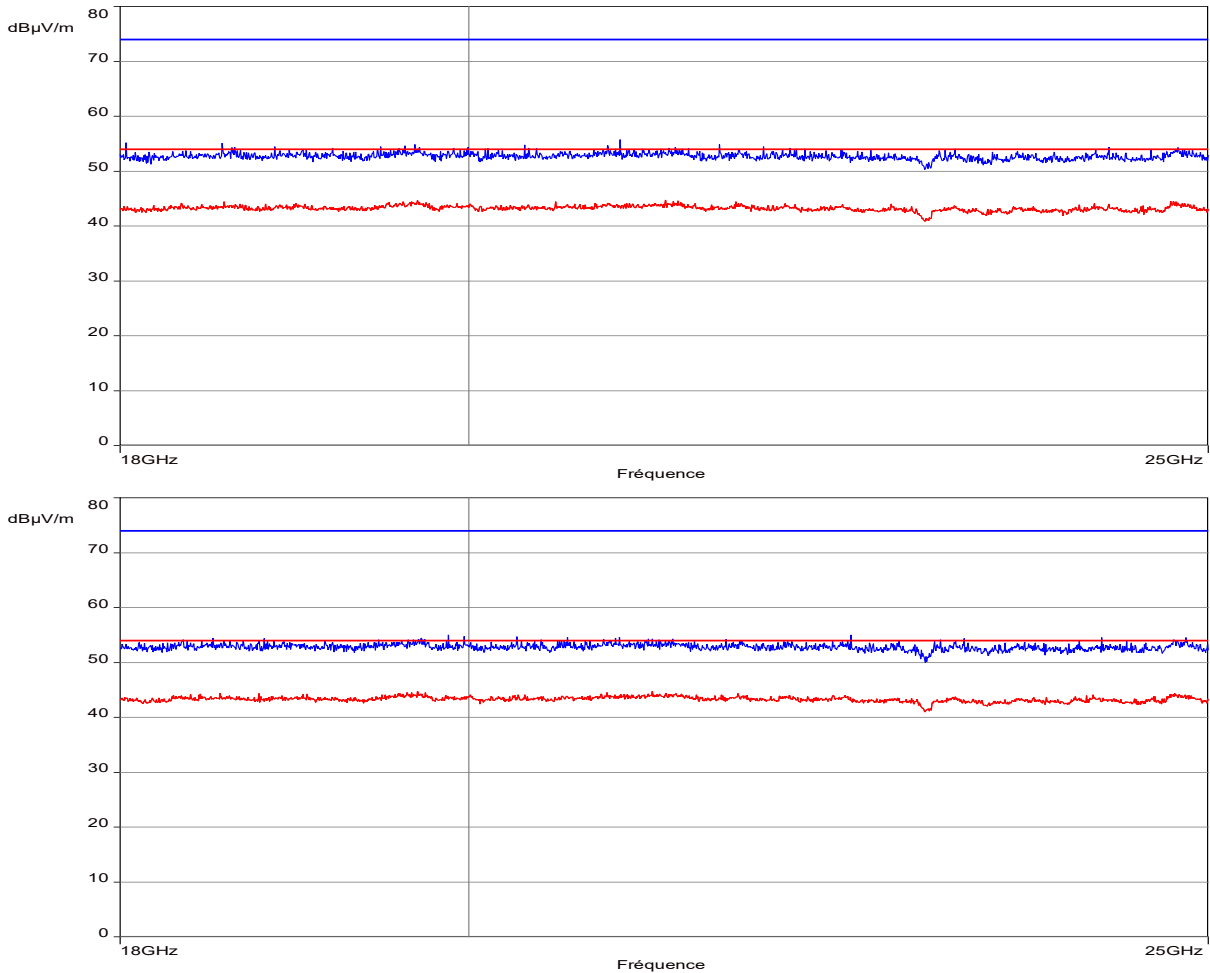

Note: Pre-scan graph only for identification purpose. Pre-scan performed at 1m and corrected to 3m distance. Same result for transmit mode on all channels.

----- : Peak measure	----- : Average measure				
Frequency band investigated:	18GHz-25GHz				
Unit :	dBµV/m				
RBW :	1MHz				
Antenna polarization :	Horizontal & Vertical				
Voltage:	12V				
Limit:	FCC 15.247 / RSS-247				
Measurement detector:	Peak / Average				
PEAK LIST FROM PRE-SCAN					
Frequency (MHz)	Peak Level (dBµV/m)	Angle (°)	Limit (dBµV/m)	Polarization	Comments
None					


15. Occupied bandwidth (99%)

TEST: Occupied bandwidth (99%) / RSS-GEN		Verdict
<p>Method: The setup is in an anechoic chamber. The spectrum analyzer is connected to the measuring antenna. A radiated measurement is performed. The RBW is set in the range of 1% to 5% of the occupied bandwidth, with VBW $\geq 3 \times$ RBW. The SPAN is wide enough to capture all products of the modulation process. A MaxHold Peak detector is used. Measure is performed with OBW 99% function of the spectrum analyser. The tested equipment is set to transmit operation with modulation on low, mid and high channels.</p>		Pass
Laboratory Parameters:	Required prior to the test	During the test
Ambient Temperature	20 to 30 °C	24°C \pm 2
Relative Humidity	25 to 70 %	45% \pm 5
Supplementary information: Test location: SMEE Test date: September 19th, 2019. Tested by L. CHAPUS		


Test Equipment Used					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Horn antenna	ETS-LINDGREN	3115	ANT-141-013	2018/10	2021/10
RF cable	HUBER+SUHNER	SF104	CAB-141-030	2019/4	2020/4
RF cable	Pasternack	PE302-120	CAB-131-024	2019/4	2020/4
Anechoic chamber	COMTEST	214263	CAG-141-001	-	-
Turntable	Innco- Systems	CT0800	PLA-141-002	-	-
Spectrum Analyzer	Rohde&Schwarz	FSV	ASP-171-004	2019/8	2021/8

Tabulated Results for Occupied Bandwidth	
Frequency (MHz)	99% Occupied Bandwidth (MHz)
2402.0	1.858
2440.0	2.013
2480.0	1.780


Graphical representation of Occupied Bandwidth

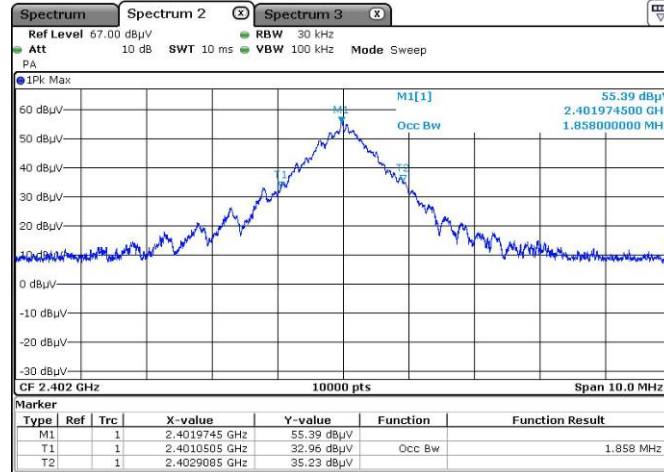

Low Channel

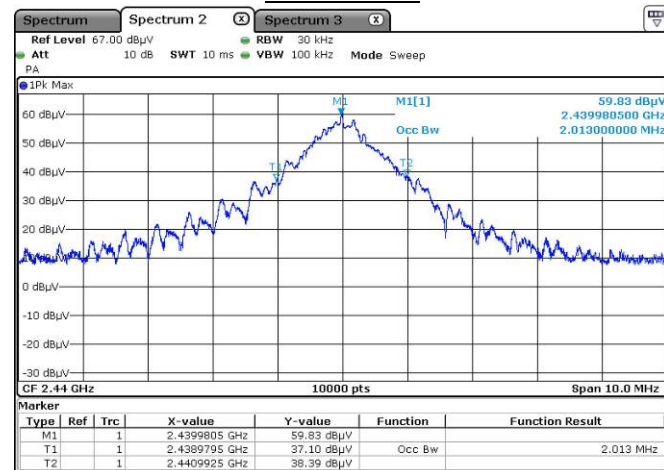

Mid Channel

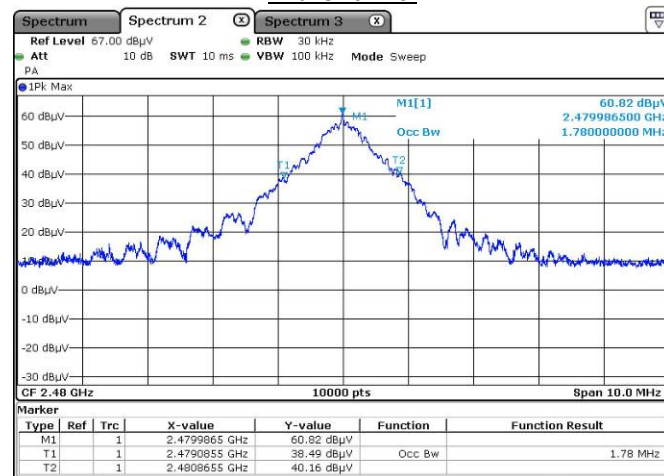

High Channel

Frequency band investigated:	2400MHz to 2483.5MHz
RBW :	30kHz
Measurement detector:	Peak