



LCIE

Bluetooth Low Energy Template: Release September 27, 2019

TEST REPORT

N°: 164420-745016-A(FILE#1034904)

Version : 02

Subject

Radio spectrum matters
tests according to standards:
47 CFR Part 15.247 & RSS-247 Issue 2 & RSS-Gen Issue 5

Issued to

MICHELIN NORTH AMERICA (US) INC.
One Parkway South
29615 Greenville South Carolina
UNITED STATES

Apparatus under test

- ↳ Product
- ↳ Trade mark
- ↳ Manufacturer
- ↳ Model under test
- ↳ Serial number
- ↳ FCC ID
- ↳ IC

MICHELIN TIRE MOUNTED SENSOR
Michelin Tire Mounted Sensor
Kickmaker
TMS-AF-01
None
FI5TMSAF01
5056A-TMSAF01

Conclusion

See Test Program chapter

Test date

November 20, 2019 to November 21, 2019

Test location

Fontenay Aux Roses

Test Site

6230B-1

Sample receipt date

November 20, 2019

Composition of document

39 pages

Document issued on

January 31, 2020

Written by :
Majid MOURZAGH
Tests operator

Approved by :
Anthony MERLIN
Technical manager



This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified or rule defined by the test method, the decision of conformity doesn't take into account the uncertainty of measures. This document doesn't anticipate any certification decision.

LCIE

Laboratoire Central des Industries Electriques
Une société de Bureau Veritas

33, Av du Général Leclerc
92266 Fontenay Aux Roses
FRANCE

Tél : +33 1 40 95 60 60
contact@lcie.fr
www.lcie.fr



PUBLICATION HISTORY

Version	Date	Author	Modification
01	November 27, 2019	Majid MOURZAGH	Creation of the document
02	January 31, 2020	Majid MOURZAGH	Correction of Operating temperature range

Each new edition of this test report replaces and cancels the previous edition. The control of the old editions of report is under responsibility of client.



SUMMARY

1.	TEST PROGRAM	4
2.	EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)	5
3.	OCCUPIED BANDWIDTH.....	9
4.	6DB EMISSION BANDWIDTH	12
5.	MAXIMUM CONDUCTED OUTPUT POWER	15
6.	POWER SPECTRAL DENSITY	18
7.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE	21
8.	UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS.....	24
9.	UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS	28
10.	UNCERTAINTIES CHART	39

1. TEST PROGRAM

References

- 47 CFR Part 15.247
- RSS 247 Issue 2
- RSS Gen Issue 5
- KDB 558074 D01 DTS Meas Guidance v05r02
- ANSI C63.10-2013

Radio requirement:

Clause (47CFR Part 15.247 & RSS-247 Issue 2 & RSS-Gen Issue 5) Test Description	Test result - Comments
Occupied Bandwidth	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
6dB Bandwidth	☒ PASS ☐ FAIL ☐ NA() ☐ NP(1)
Duty Cycle	☐ PASS ☐ FAIL ☒ NA ☐ NP(1)
Maximum Conducted Output Power	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
Power Spectral Density	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
Conducted Spurious Emission at the Band Edge	☒ PASS ☐ FAIL ☐ NA() ☐ NP(1)
Unwanted Emissions into Non-Restricted Frequency Bands	☒ PASS ☐ FAIL ☐ NA() ☐ NP(1)
AC Power Line Conducted Emission	☐ PASS ☐ FAIL ☒ NA(2) ☐ NP(1)
Unwanted Emissions into Restricted Frequency Bands	☒ PASS ☐ FAIL ☐ NA ☐ NP(1)
Receiver Radiated emissions	☐ PASS ☐ FAIL ☒ NA ☐ NP(1)
This table is a summary of test report, see conclusion of each clause of this test report for detail.	

(1): Limited program

(2): EUT not directly or indirectly connected to the AC Power Public Network

PASS: EUT complies with standard's requirement

FAIL: EUT does not comply with standard's requirement

NA: Not Applicable

NP: Test Not Performed

2. EQUIPMENT UNDER TEST: CONFIGURATION (DECLARED BY PROVIDER)

2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

Equipment under test (EUT):

Michelin Tire Mounted Sensor TMS-AF-01

Serial Number: None



Equipment Under Test

Power supply:

During all the tests, EUT is supplied by V_{nom} : 3VDC

For measurement with different voltage, it will be presented in test method.

Name	Type	Rating	Reference / Sn	Comments
Supply1	☐ AC ☐ DC ☒ Battery	3V	CR2032A	/

Voltage table used (for Power Line Conducted Emissions):

Type	Measurement performed:
	NA

Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
						none

Auxiliary equipment used during test:

Description	Manufacturer	Model	Identifier
DC POWER SUPPLY 20V	HEWLETT PACKARD	6632A	A7042061
Multimeter - CEM	FLUKE	87	A1240251

Equipment information:

Bluetooth LE Type:	☒ BLE	☐ v4.1	☐ v4.2	☐ v5.0
Frequency band:	[2400 – 2483.5] MHz			
Spectrum Modulation:	☒ DSSS (Tested like it)			
Number of Channel:	40			
Spacing channel:	2MHz			
Channel bandwidth:	☒ 1MHz		☐ 2MHz	
Antenna Type:	☒ Integral	☐ External	☐ Dedicated	
Antenna connector:	☐ Yes	☐ No	☒ Temporary for test	
Transmit chains:	1			
	Single antenna			
	Gain: -2dBi			
Beam forming gain:	No			
Receiver chains:	1			
Type of equipment:	☒ Stand-alone	☐ Plug-in	☐ Combined	
Ad-Hoc mode:	☐ Yes		☒ No	
Adaptivity mode:	☐ Yes (Load Based)	☐ Off mode	☒ No	
	Clear Channel Assessment Time:			Xµs
Duty cycle:	☐ Continuous duty	☐ Intermittent duty	☒ 100% duty	
Equipment type:	☒ Production model		☐ Pre-production model	
Operating temperature range:	Tmin:	☒ -40°C	☐ 0°C	☐ °C
	Tnom:	20°C		
	Tmax:	☐ 35°C	☐ 55°C	☒ 122°C
Type of power source:	☐ AC power supply	☐ DC power supply	☐ Battery	
Operating voltage range:	Vnom:	☐ 230V/50Hz	☐ 24Vdc	
Geo-location capability:	☐ Yes (The geographical location determined by the equipment is not accessible to the end user as defined in section 4.3.2.12.2 of ETSI EN 300 328 V2.1.1 standard)		☒ No	
Minimum performance criteria for Receiver blocking test:	☒ PER less than or equal to 10%		☐ Alternative performance criteria (4)	



CHANNEL PLAN			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
Cmin: 0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
Cmid: 19	2440	Cmax: 39	2480

DATA RATE		
Data Rate (Mbps)	Modulation Type	Worst Case Modulation
1	GFSK	☒
2	GFSK	☐

2.2. RUNNING MODE

Test mode	Description of test mode
Test mode 1	Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
Test mode 2	Permanent reception
Test	Running mode
Occupied Bandwidth	☒ Test mode 1 ☐ Alternative test mode()
6dB Bandwidth	☒ Test mode 1 ☐ Alternative test mode()
Duty Cycle	☐ Test mode 1 ☐ Alternative test mode()
Maximum Conducted Output Power	☒ Test mode 1 ☐ Alternative test mode()
Power Spectral Density	☒ Test mode 1 ☐ Alternative test mode()
Conducted Spurious Emission at the Band Edge	☒ Test mode 1 ☐ Alternative test mode()
Unwanted Emissions into Non-Restricted Frequency Bands	☒ Test mode 1 ☐ Alternative test mode()
AC Power Line Conducted Emission	☐ Test mode 1 ☐ Alternative test mode()
Unwanted Emissions into Restricted Frequency Bands	☒ Test mode 1 ☐ Alternative test mode()

Hardware information		
Software (if applicable):	V. :	FCC_v1.0.0
/		

2.3. EQUIPMENT LABELLING

None

2.4. EQUIPMENT MODIFICATION

☒ None ☐ Modification:

3. OCCUPIED BANDWIDTH

3.1. TEST CONDITIONS

Test performed by : Majid MOURZAGH
Date of test : November 21, 2019
Ambient temperature : 22 °C
Relative humidity : 38 %

3.2. TEST SETUP

- The Equipment under Test is installed:

- ☐ On a table
☒ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
☐ Radiated Method

- Test Procedure:


- ☒ RSS-Gen Issue 5 § 6.7
☐ ANSI C63.10 § 6.9.2

Measurement Procedure:

- RBW shall be in the range of 1% to 5% of the anticipated occupied bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- SPAN = Capture all products of the modulation process
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- OBW 99% function of spectrum analyzer used

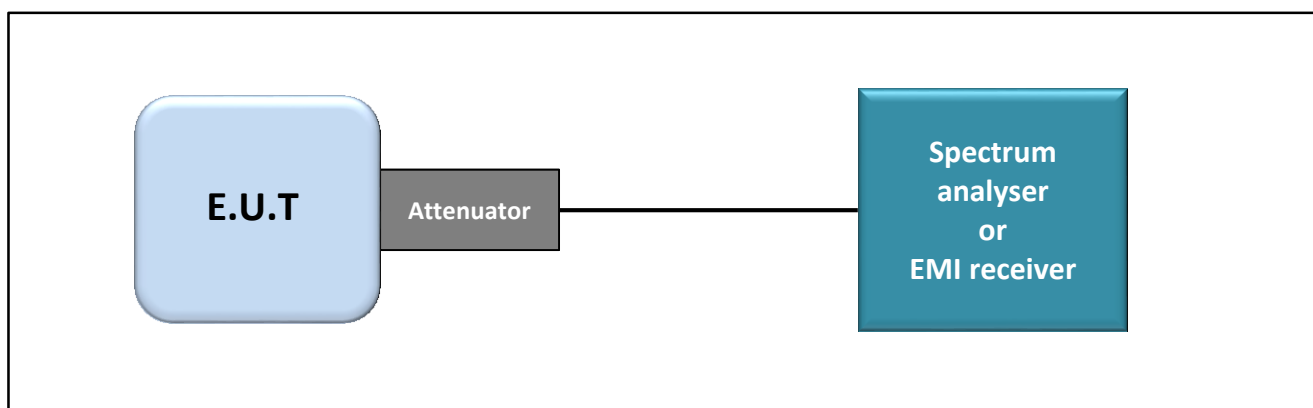

Test set up of Occupied Bandwidth

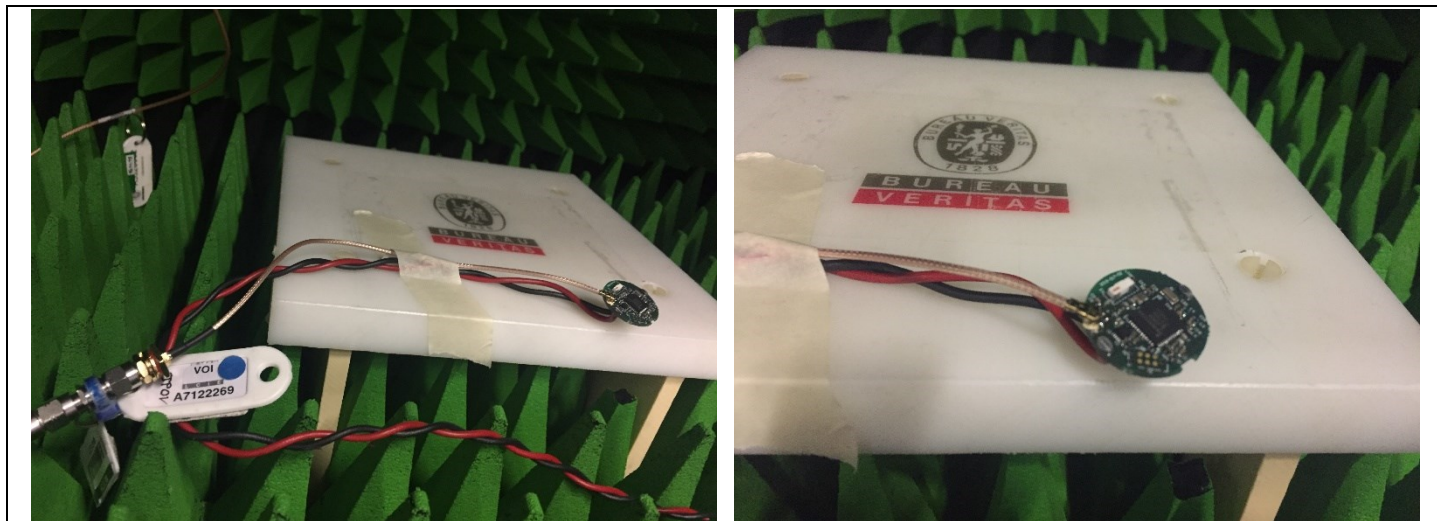

Photograph for Occupied bandwidth

3.3. **LIMIT**


None

3.4. **TEST EQUIPMENT LIST**

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122269	12/18	12/19
Cable SMA	—	18GHz	A5329373	01/19	01/20
CABLE SMA 1m	RADIAL	18GHz	A5329862	11/18	11/19
Full Anechoic Room	SIEPEL	—	D3044024		
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	05/21	05/23
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20

Note: In our quality system, the test equipment calibration due is more & less 2 months

3.5. RESULTS

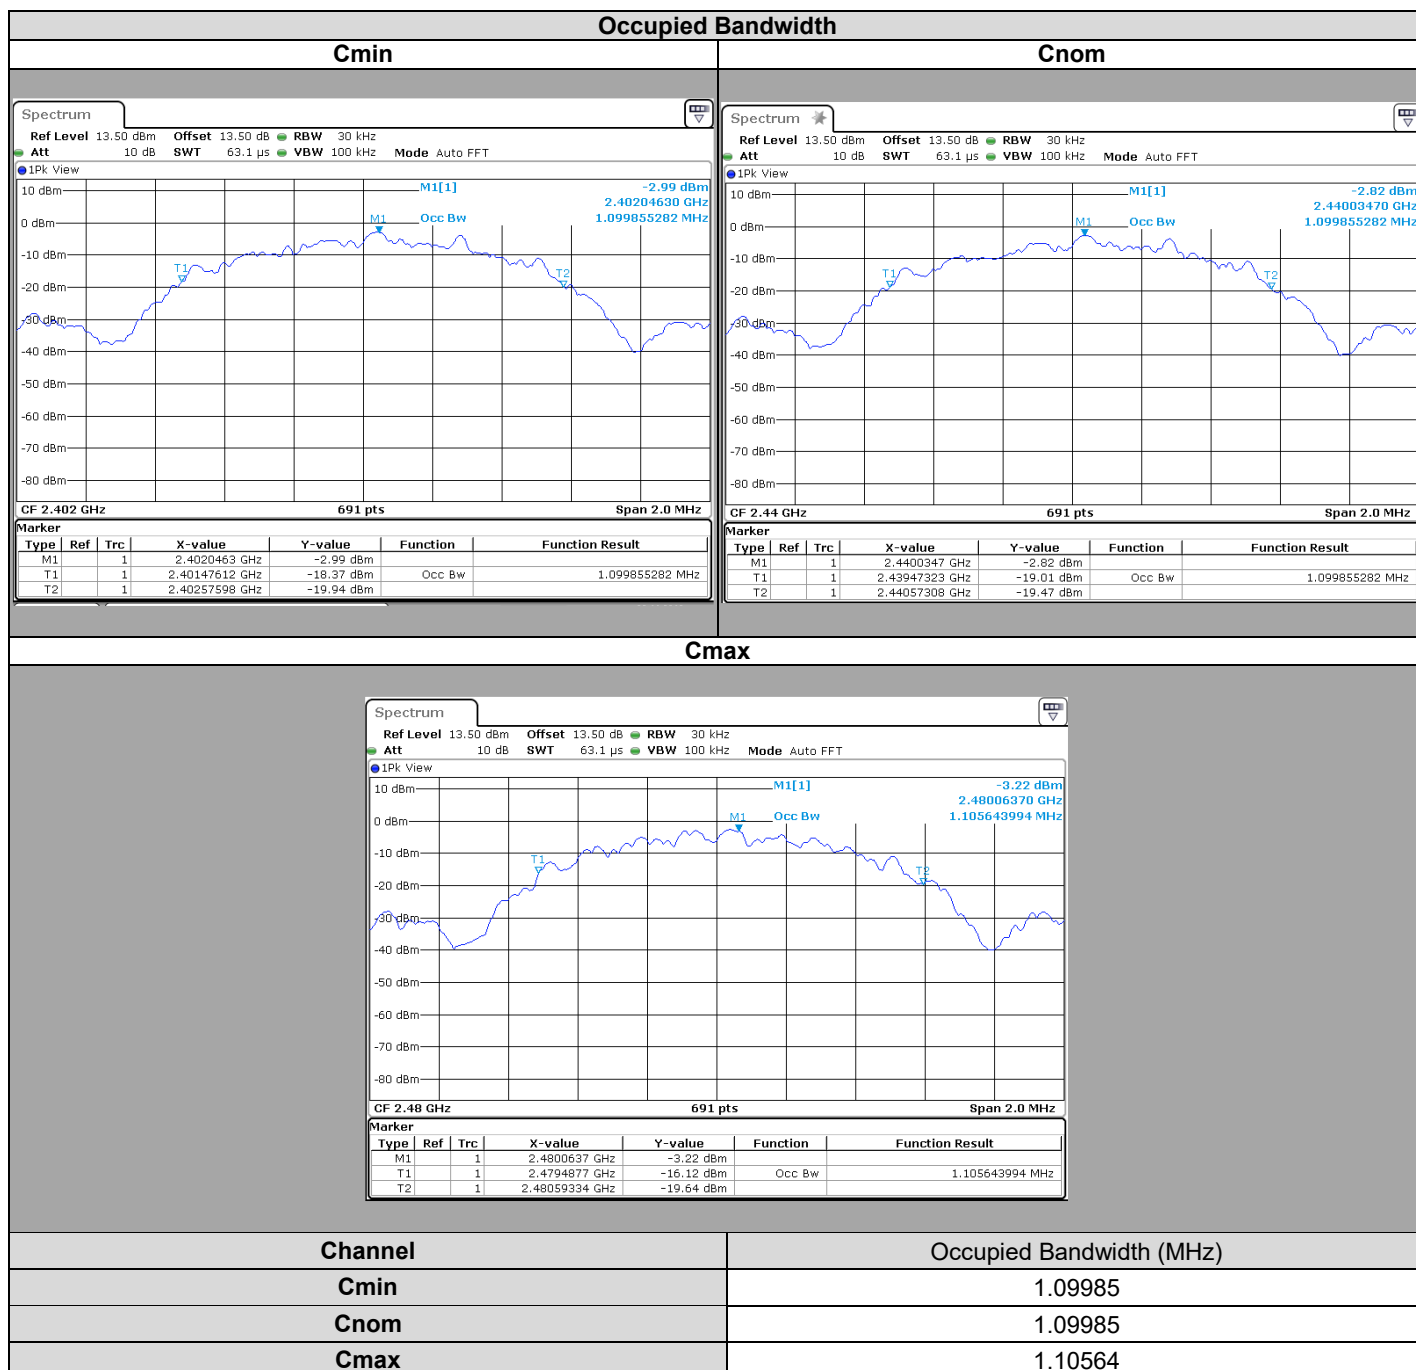

4. 6dB EMISSION BANDWIDTH

4.1. TEST CONDITIONS

Test performed by : Majid MOURZAGH
Date of test : November 21, 2019
Ambient temperature : 22 °C
Relative humidity : 38 %

4.2. TEST SETUP

- The Equipment under Test is installed:

- ☐ On a table
- ☒ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:


- ☒ KDB 558074 D01 DTS Meas Guidance v05r02 § 8.2

Measurement Procedure:

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

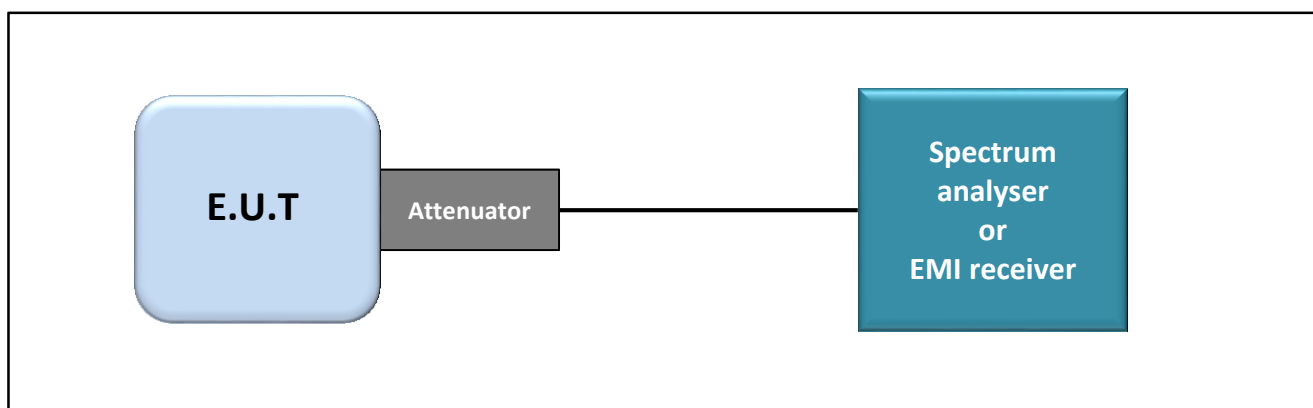

Test set up of 6dB Emission Bandwidth

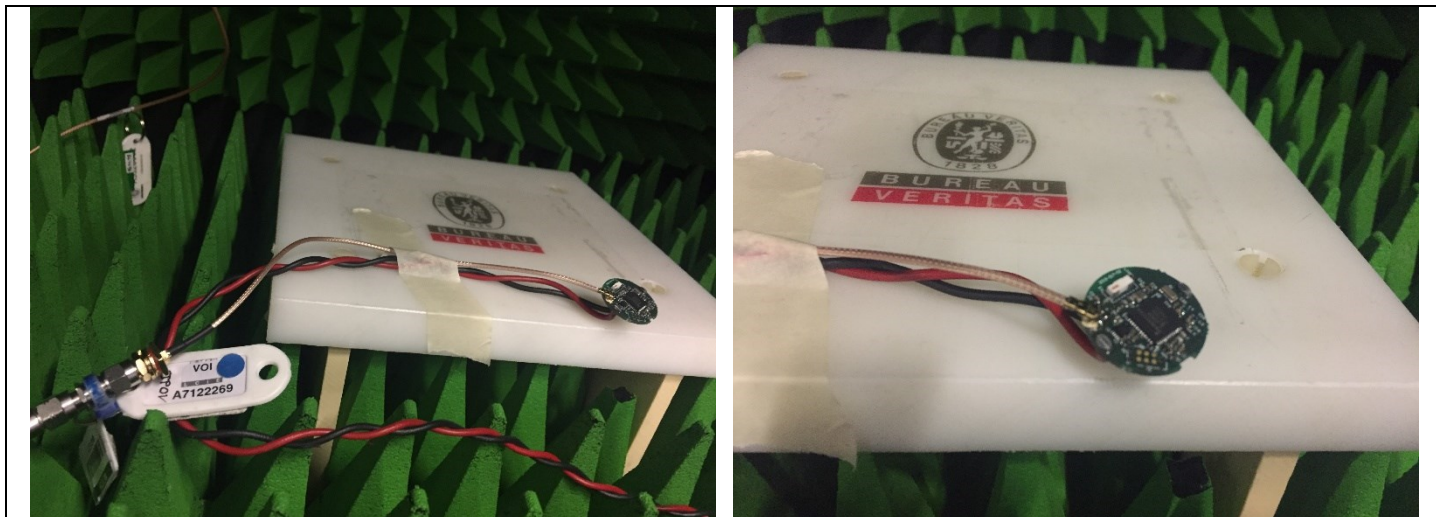

Photograph for 6dB emission bandwidth

4.3. LIMIT


The 6dB bandwidth shall be at least 500kHz

4.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122269	12/18	12/19
Cable SMA	—	18GHz	A5329373	01/19	01/20
CABLE SMA 1m	RADIAL	18GHz	A5329862	11/18	11/19
Full Anechoic Room	SIEPEL	—	D3044024		
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	05/21	05/23
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20

Note: In our quality system, the test equipment calibration due is more & less 2 months

4.5. RESULTS

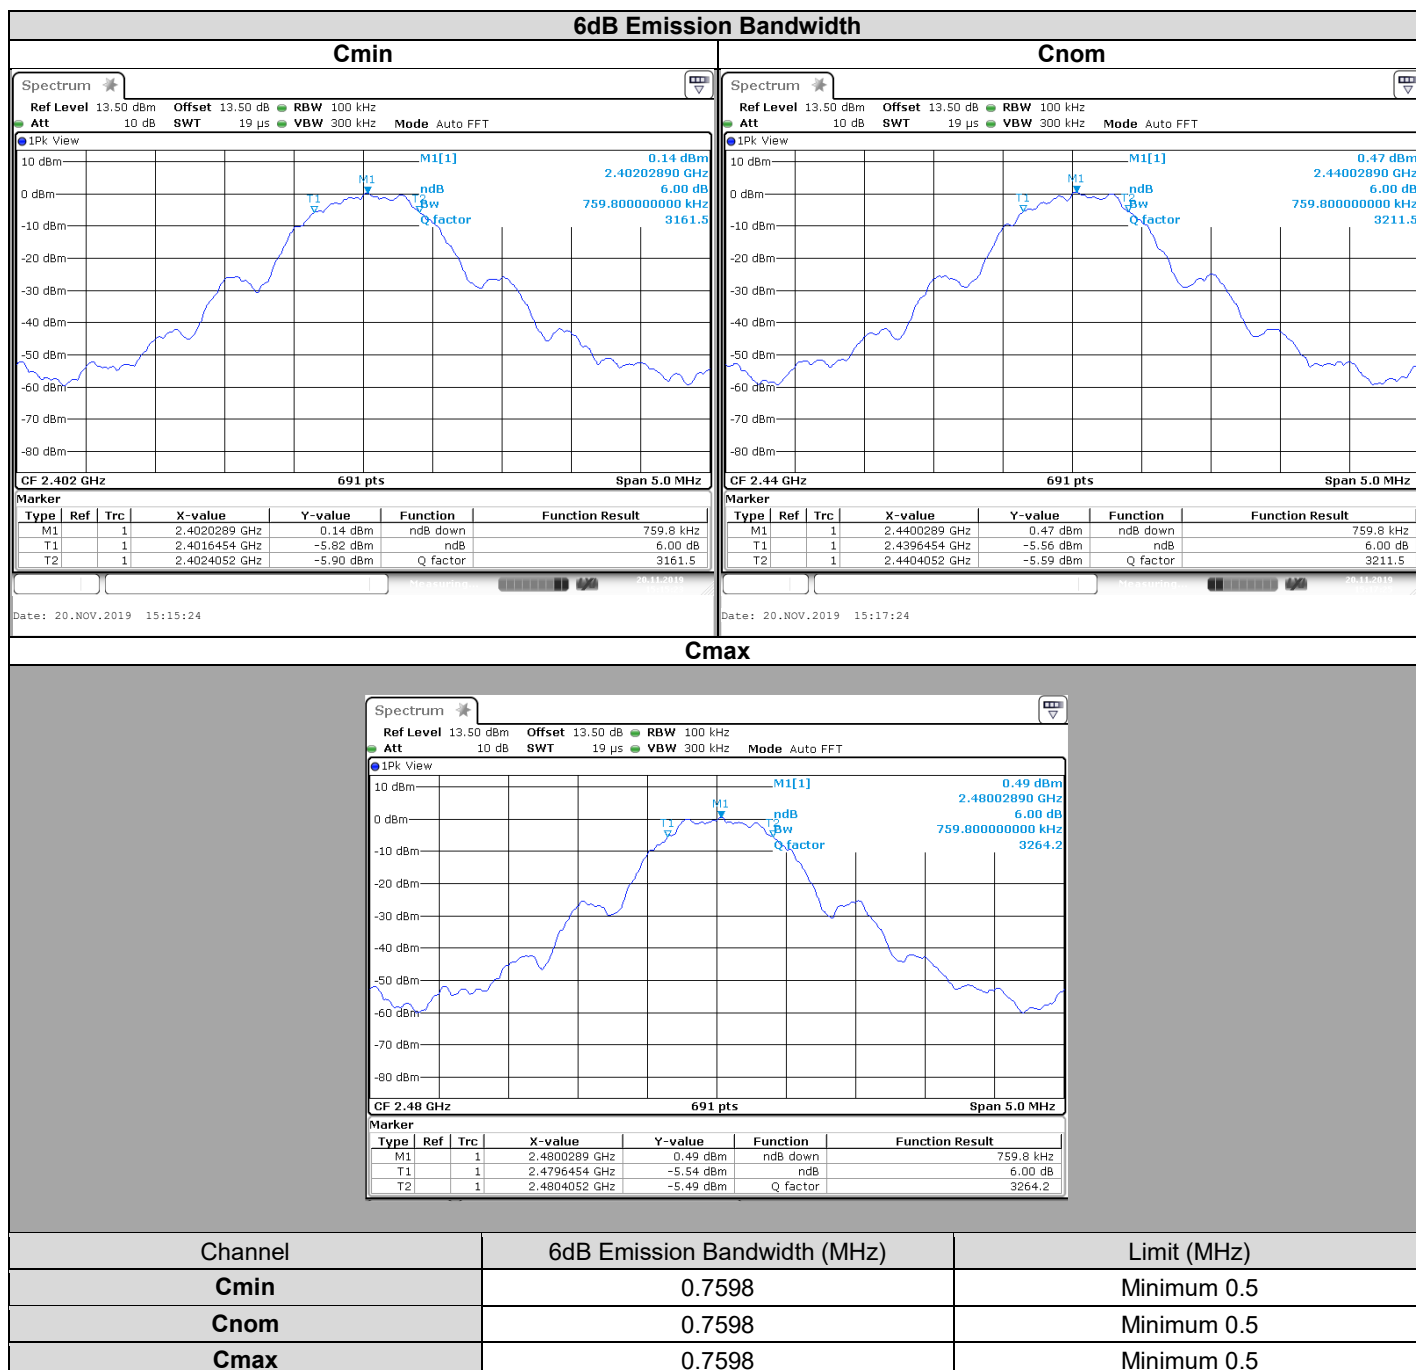

4.6. CONCLUSION

6dB Emission Bandwidth measurement performed on the sample of the product **Michelin Tire Mounted Sensor TMS-AF-01**, SN: **None**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.



5. MAXIMUM CONDUCTED OUTPUT POWER

5.1. TEST CONDITIONS

Test performed by : Majid MOURZAGH
Date of test : November 21, 2019
Ambient temperature : 22 °C
Relative humidity : 38 %

5.2. TEST SETUP

- The Equipment under Test is installed:

- ☐ On a table
- ☒ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.1


This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.


- ☐ KDB 558074 D01 DTS Meas Guidance v05r02 § 8.3.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the RBW = 1 MHz.
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 1.5 \times$ DTS bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges

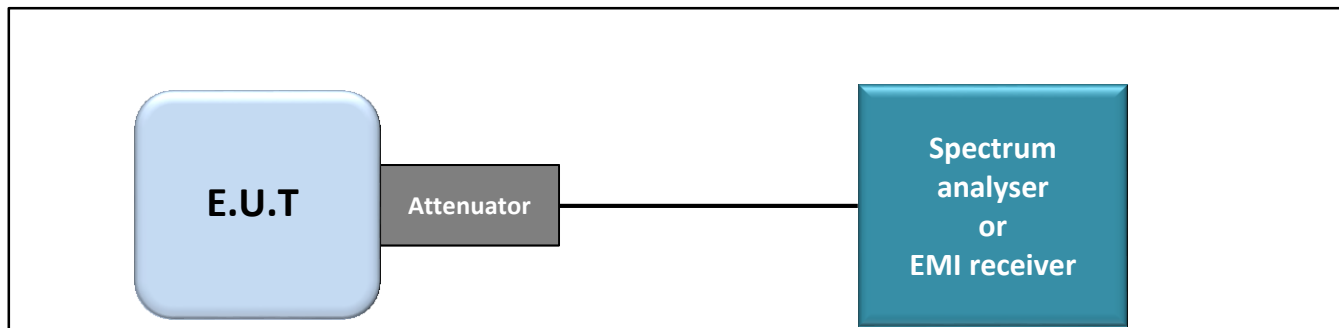

Test set up of Maximum Conducted Output Power

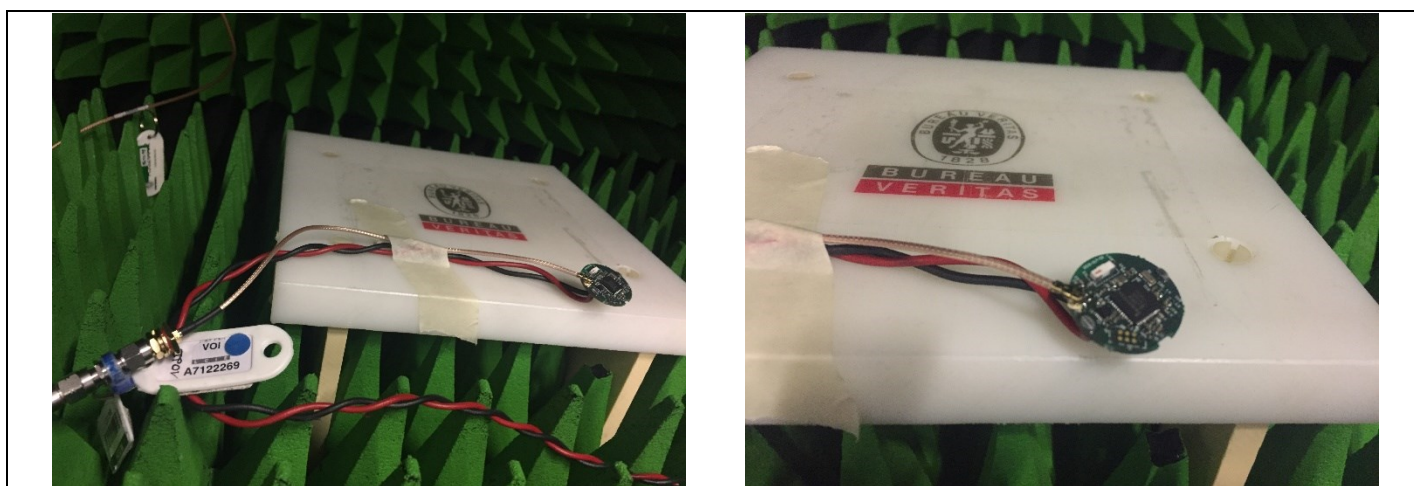

Photograph for Maximum Conducted Output Power

5.3. LIMIT


Maximum Conducted Output power:
 2400MHz-2483.5MHz: Shall not exceed 30dBm
 Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

5.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122269	12/18	12/19
Cable SMA	—	18GHz	A5329373	01/19	01/20
CABLE SMA 1m	RADIALL	18GHz	A5329862	11/18	11/19
Full Anechoic Room	SIEPEL	—	D3044024		
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	05/21	05/23
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20

Note: In our quality system, the test equipment calibration due is more & less 2 months

5.5. RESULTS

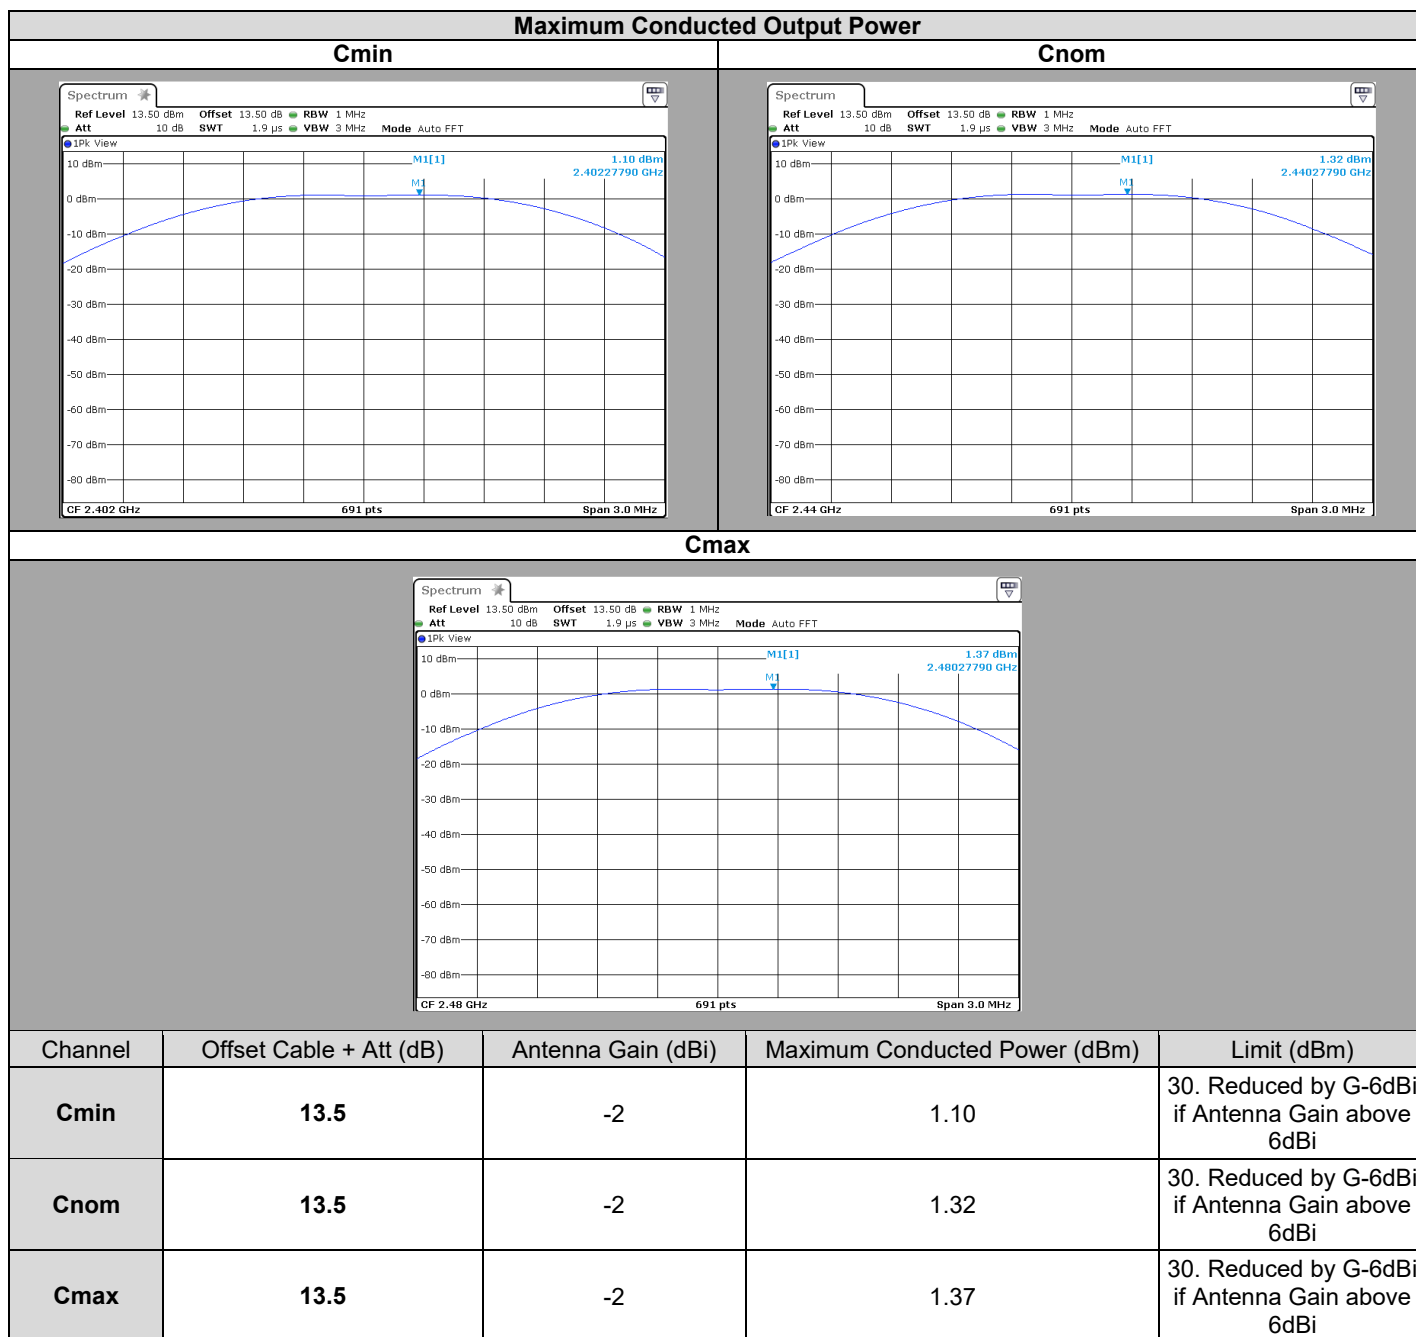

5.6. CONCLUSION

Maximum Conducted Output Power measurement performed on the sample of the product **Michelin Tire Mounted Sensor TMS-AF-01**, SN: **None**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

6. POWER SPECTRAL DENSITY

6.1. TEST CONDITIONS

Test performed by : Majid MOURZAGH
Date of test : November 21, 2019
Ambient temperature : 22 °C
Relative humidity : 38 %

6.2. TEST SETUP

- The Equipment Under Test is installed:

- ☐ On a table
- ☒ In an anechoic chamber


- Measurement is performed with a spectrum analyzer in:

- ☒ Conducted Method
- ☐ Radiated Method


- Test Procedure:

- ☒ KDB 558074 D01 DTS Meas Guidance v05r02 § 8.4 (Method PKPSD)

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: 3 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

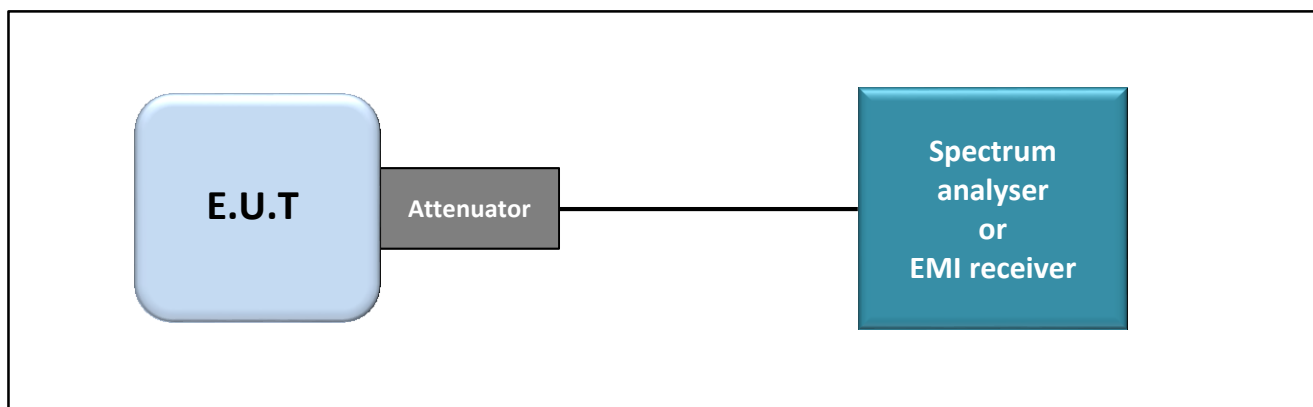

Test set up of Power Spectral Density

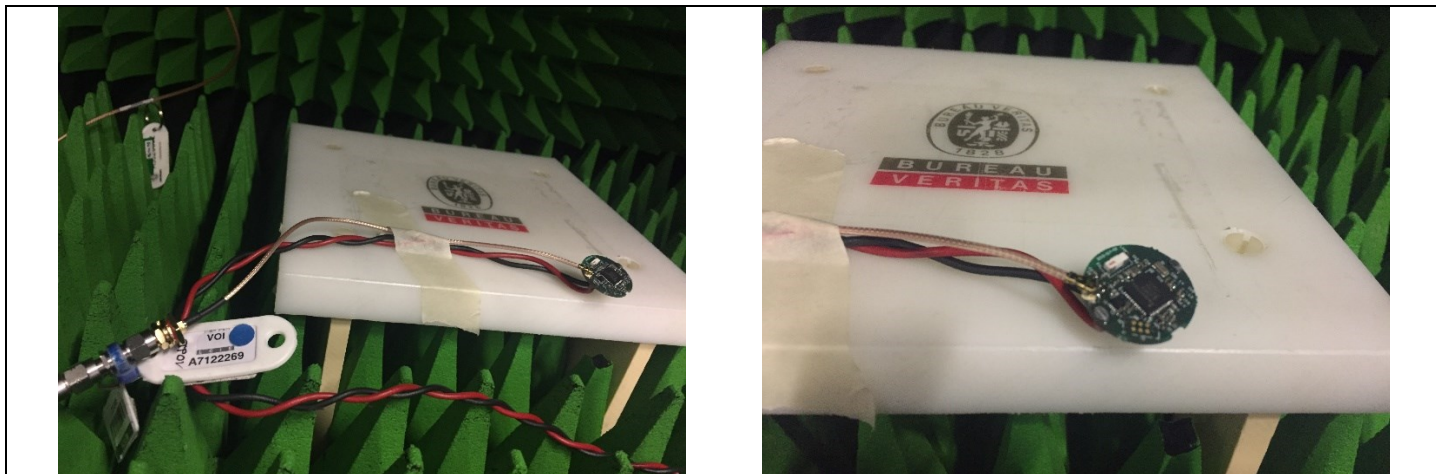

Photograph for Power Spectral Density

6.3. LIMIT

Power Spectral Density:

2400MHz-2483.5MHz: Shall not exceed 8dBm/3kHz


Limits are reduced by G-6dBi if Overall Antenna Gain above 6dBi

6.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122269	12/18	12/19
Cable SMA	—	18GHz	A5329373	01/19	01/20
CABLE SMA 1m	RADIAL	18GHz	A5329862	11/18	11/19
Full Anechoic Room	SIEPEL	—	D3044024		
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	05/21	05/23
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20

Note: In our quality system, the test equipment calibration due is more & less 2 months

6.5. RESULTS

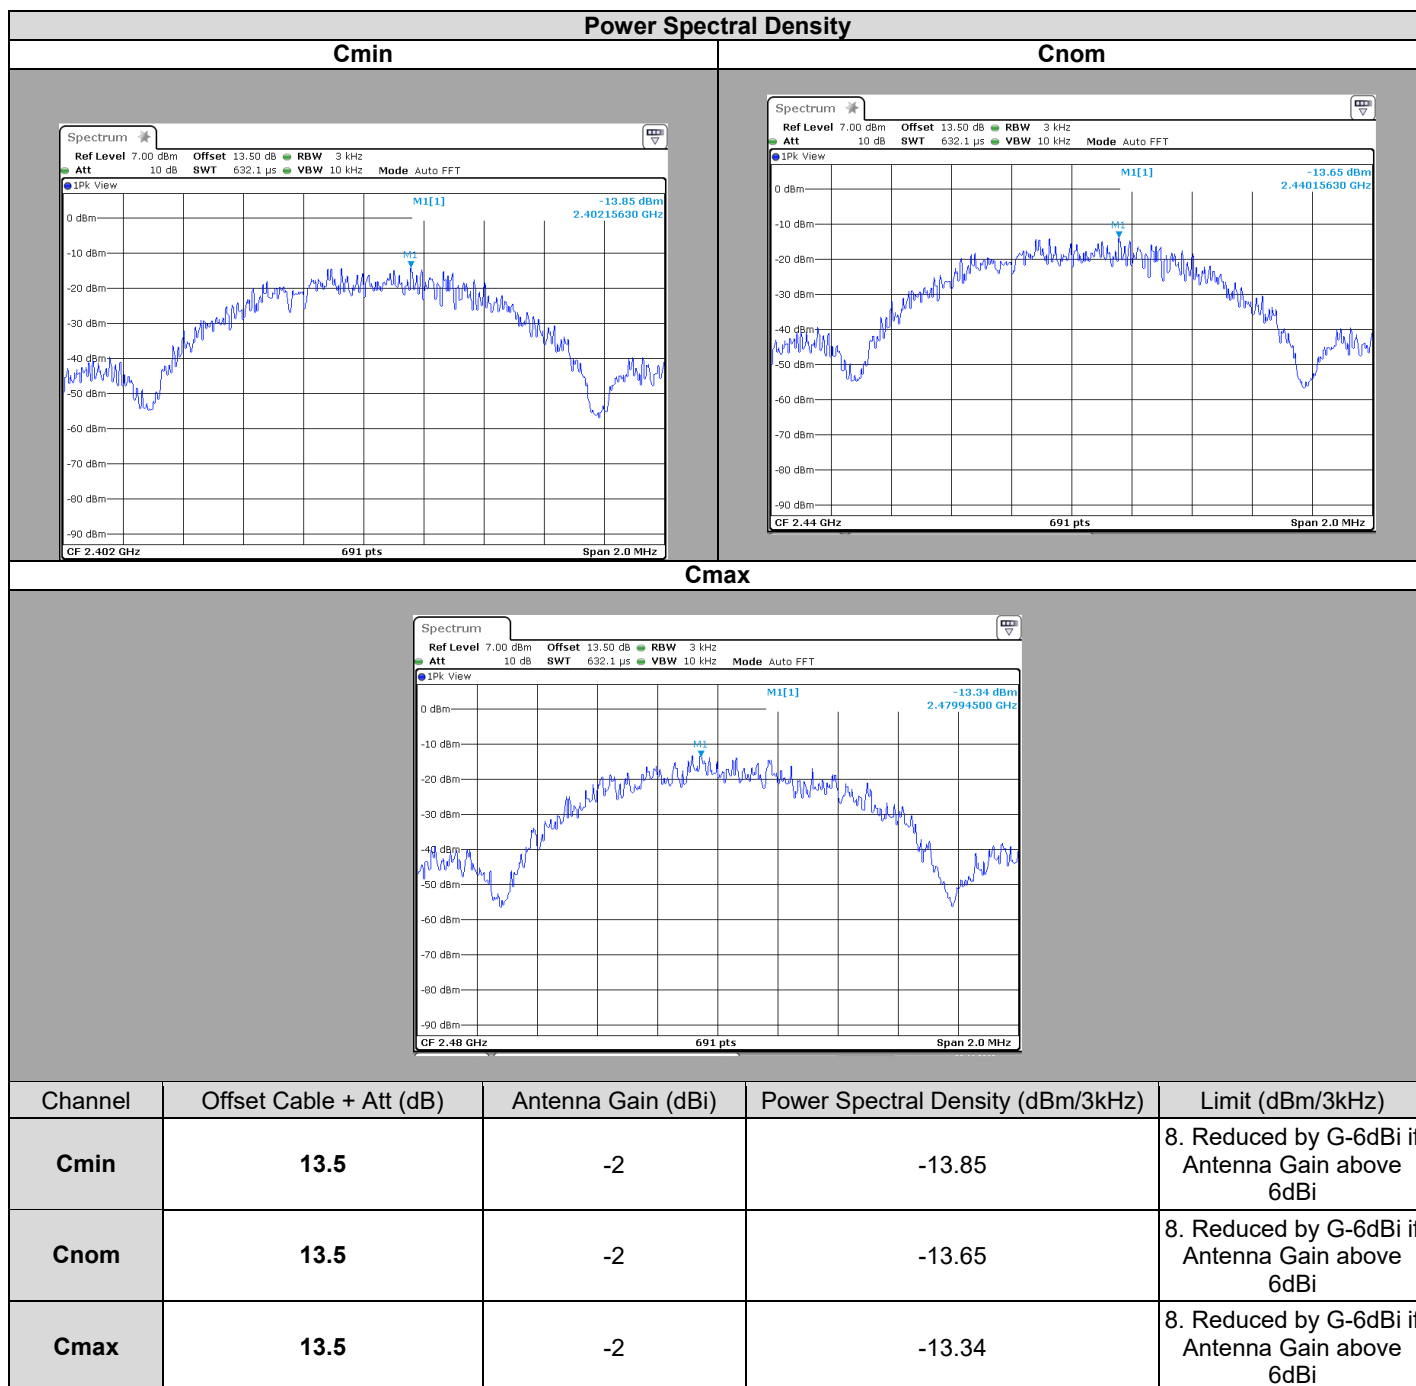

6.6. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **Michelin Tire Mounted Sensor TMS-AF-01**, SN: **None**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

7. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS AT THE BAND EDGE

7.1. TEST CONDITIONS

Test performed by : Majid MOURZAGH
Date of test : November 21, 2019
Ambient temperature : 22 °C
Relative humidity : 38 %

7.2. TEST SETUP

- The Equipment Under Test is installed:


- ☐ On a table
- ☒ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ KDB 558074 D01 DTS Meas Guidance v05r02 § 8.5

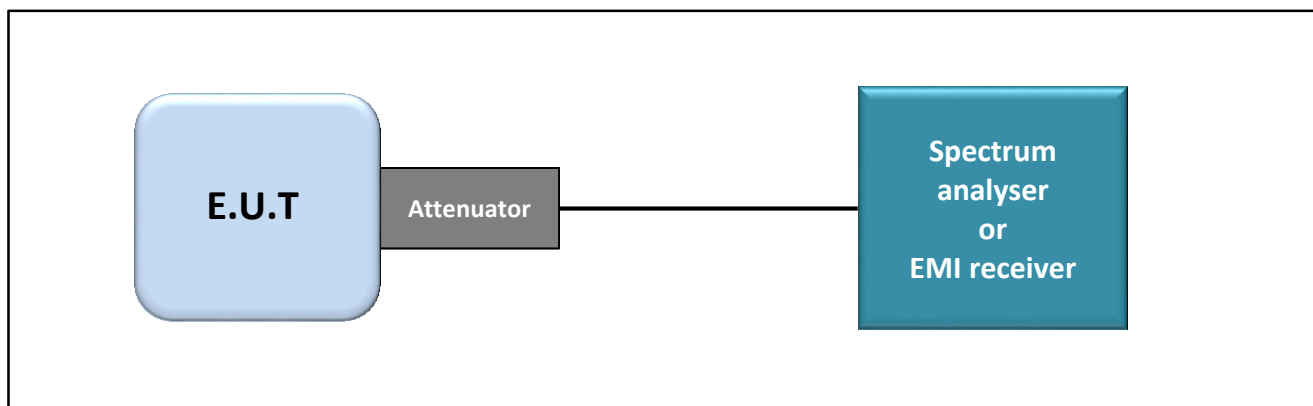

Test set up of Unwanted Emissions into Non-Restricted Frequency Bands at the Band Edge

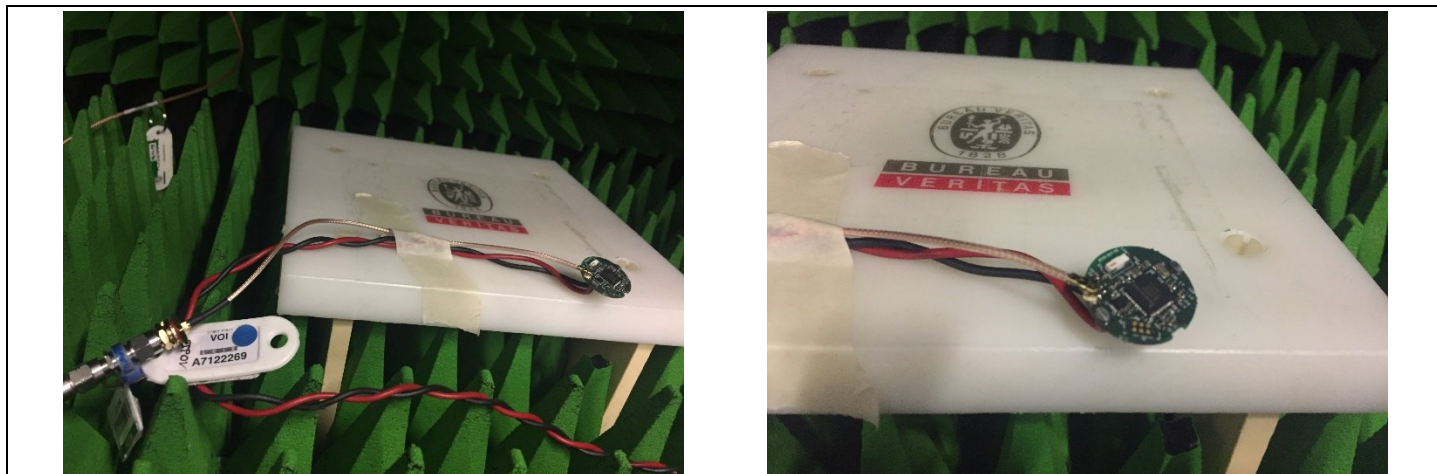

Photograph for Unwanted Emission into non-restricted frequency bands at the band edge

7.3. LIMIT


All Spurious Emissions must be at least 20dB below the Fundamental Radiator Level at the Band Edge Edge “2400MHz & 2483,5MHz”

7.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122269	12/18	12/19
Cable SMA	—	18GHz	A5329373	01/19	01/20
CABLE SMA 1m	RADIALL	18GHz	A5329862	11/18	11/19
Full Anechoic Room	SIEPEL	—	D3044024		
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	05/21	05/23
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20

Note: In our quality system, the test equipment calibration due is more & less 2 months

7.5. RESULTS

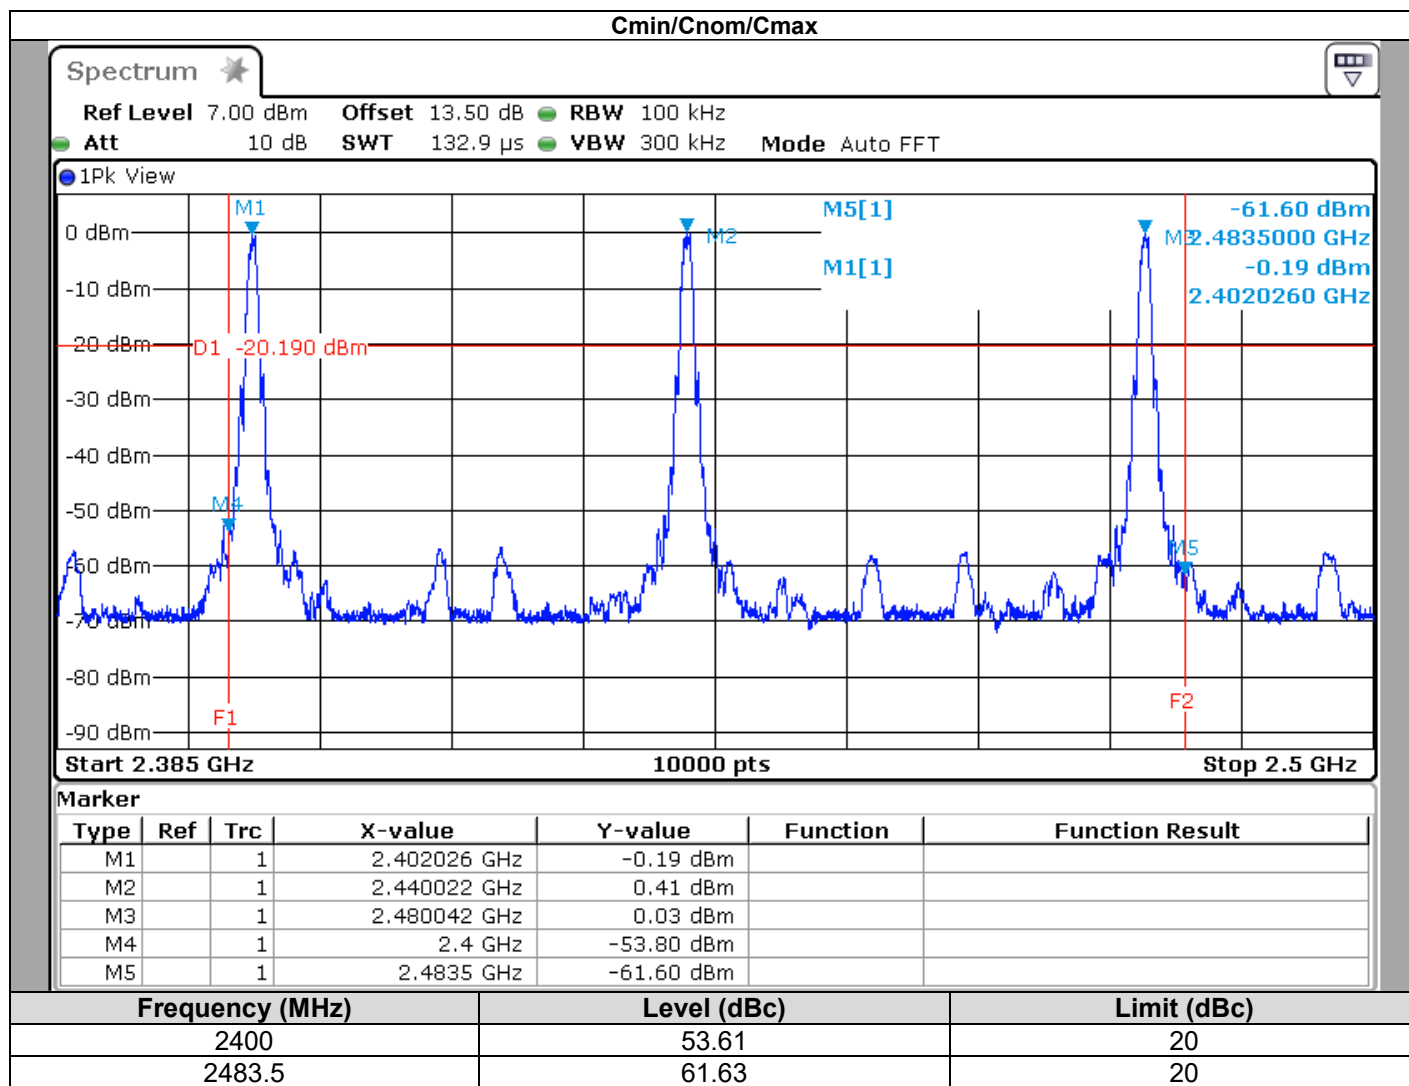

7.6. CONCLUSION

Unwanted Emission into non-restricted frequency bands at the band edge measurement performed on the sample of the product **Michelin Tire Mounted Sensor TMS-AF-01**, SN: **None**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

8. UNWANTED EMISSIONS INTO NON-RESTRICTED FREQUENCY BANDS

8.1. TEST CONDITIONS

Test performed by : Majid MOURZAGH
Date of test : November 22, 2019
Ambient temperature : 20 °C
Relative humidity : 37 %

8.2. TEST SETUP

- The Equipment under Test is installed:


- ☒ On a table
- ☐ In an anechoic chamber

- Measurement is performed with a spectrum analyzer in:


- ☒ Conducted Method
- ☐ Radiated Method

- Test Procedure:

- ☒ KDB 558074 D01 DTS Meas Guidance v05r02 § 8.5

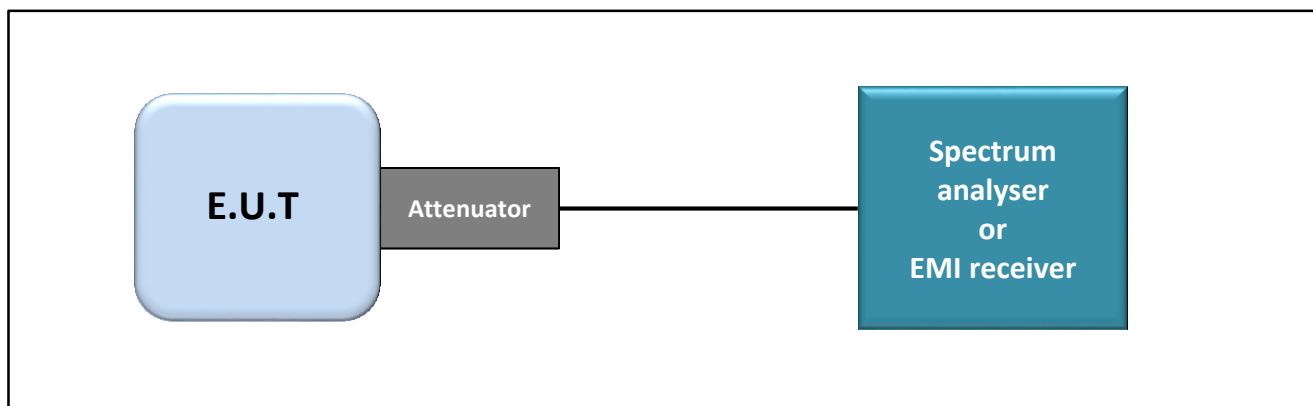

Test set up of Unwanted Emissions into Non-Restricted Frequency Bands

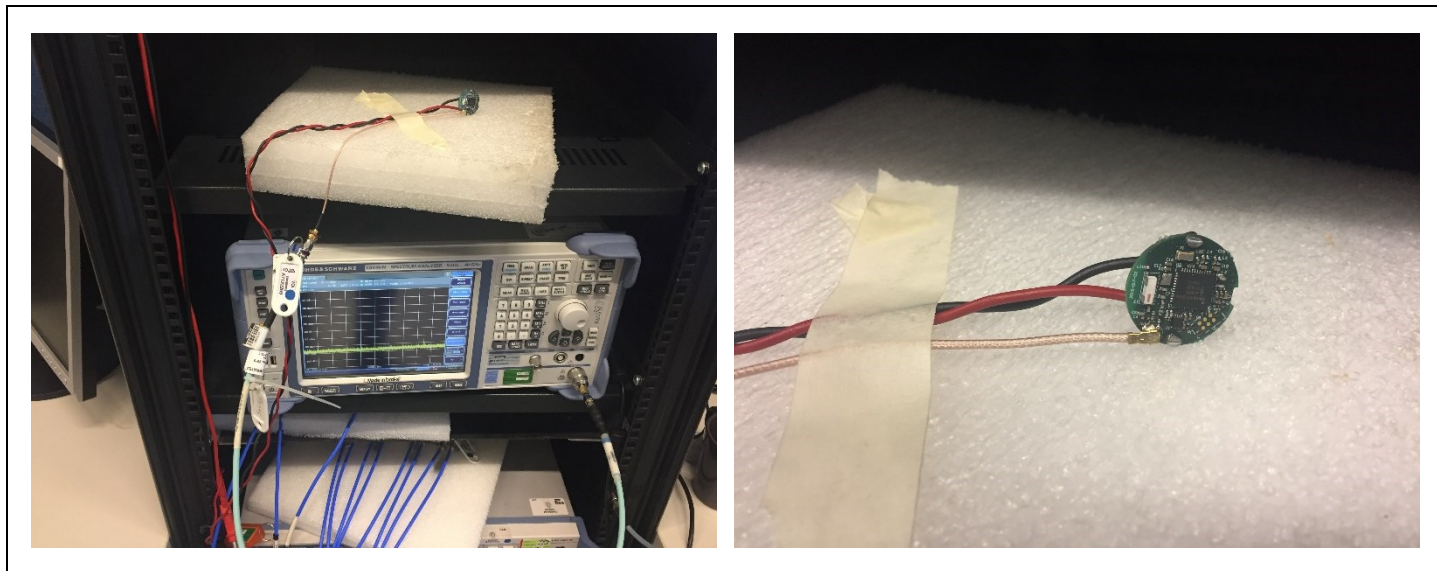

Photograph for Unwanted Emission into non-restricted frequency bands

8.3. LIMIT


All Spurious Emissions must be at least 20 below the Fundamental Radiator Level

8.4. TEST EQUIPMENT LIST

TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	—	A7122269	12/18	12/19
Spectrum analyzer	ROHDE & SCHWARZ	FSV 40	A4060059	05/21	05/23
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20
Cable Measure	—	36G	A5329604	02/19	02/20

Note: In our quality system, the test equipment calibration due is more & less 2 months

8.5. RESULTS

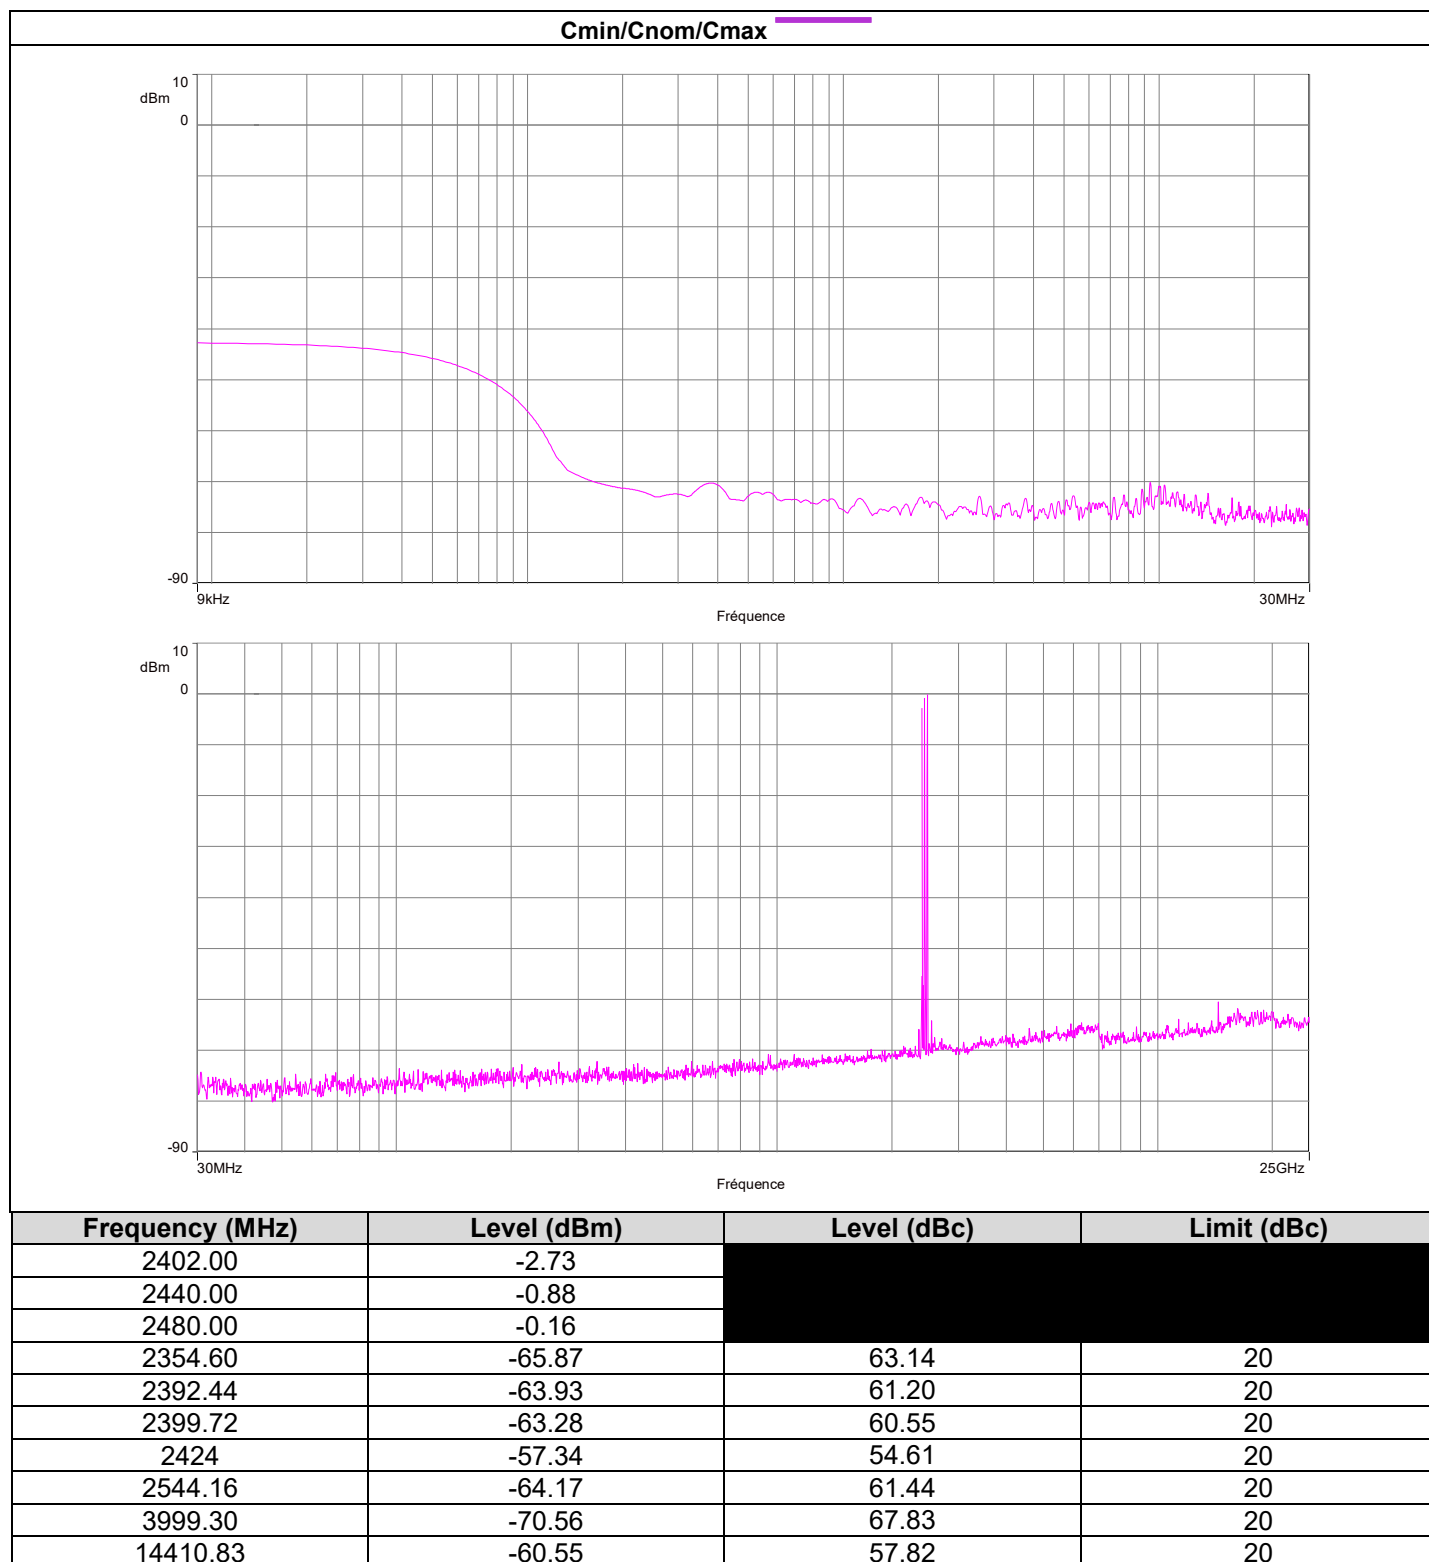



8.6. CONCLUSION

Unwanted Emission into non-restricted frequency bands measurement performed on the sample of the product **Michelin Tire Mounted Sensor TMS-AF-01**, SN: **None**, in configuration and description presented in this test report, show levels **compliant** to the **47 CFR PART 15.247 & RSS 247 ISSUE 2** limits.

9. UNWANTED EMISSIONS IN RESTRICTED FREQUENCY BANDS

9.1. TEST CONDITIONS


Test performed by : Majid MOURZAGH
 Date of test : November 20, 2019
 Ambient temperature : 21 °C
 Relative humidity : 40 %


9.2. TEST SETUP

The product has been tested according to ANSI C63.10 (2013) and FCC part15 subpart C.



Test is performed in parallel, perpendicular and ground parallel axis with a loop antenna below 30MHz. Measurement bandwidth was 200Hz below 150kHz and 9kHz between 150kHz & 30MHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height was 1m. The EUT is placed **Select Test Site**. Distance between measuring antenna and the EUT is **Distance**.

Test is performed in horizontal (H) and vertical (V) polarization with **bilog** between 30MHz & 1GHz and with a horn antenna above 1GHz. Measurement bandwidth was 120kHz below 1GHz and 1MHz above 1GHz. The level has been maximised by the turntable rotation of 360 degrees range on the 3 axis of EUT. Antenna height search was performed from 1 to 4m. The EUT is place at 1.5m high above 1GHz and at 0.8m high under 1GHz. The EUT is placed **in a full anechoic chamber** above 1GHz and **on an open area test site** from 30MHz to 1GHz. Distance between measuring antenna and the EUT is **3m**.

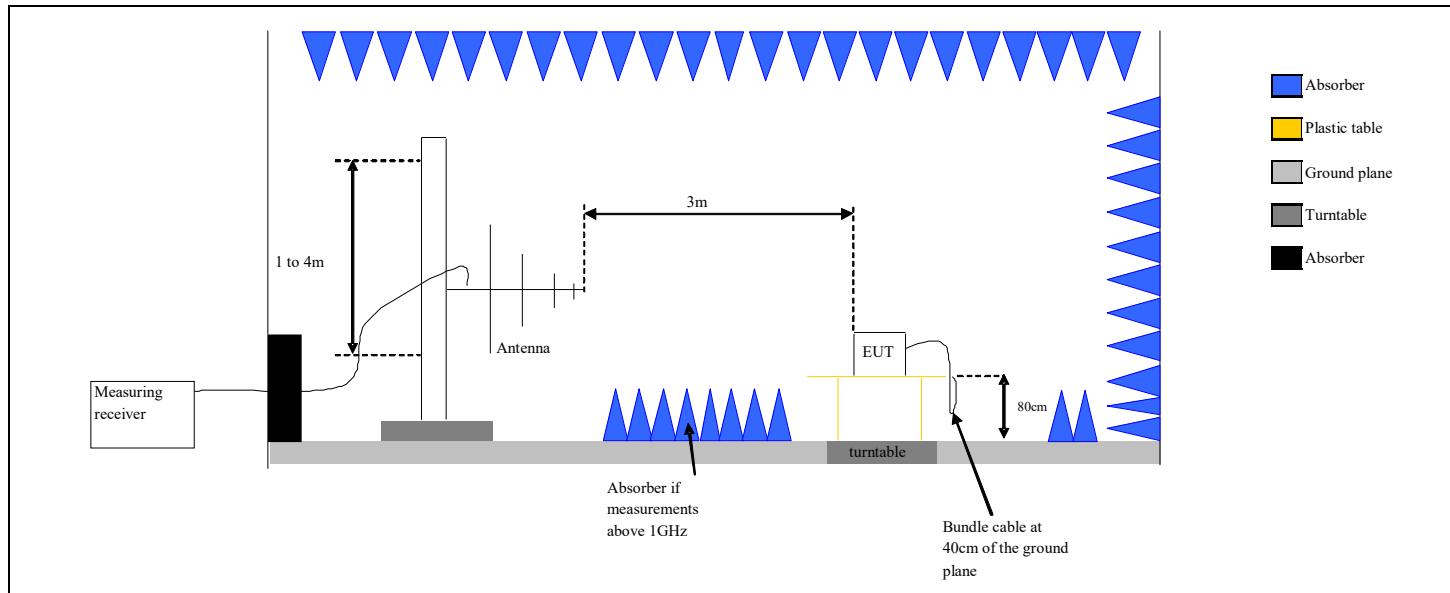

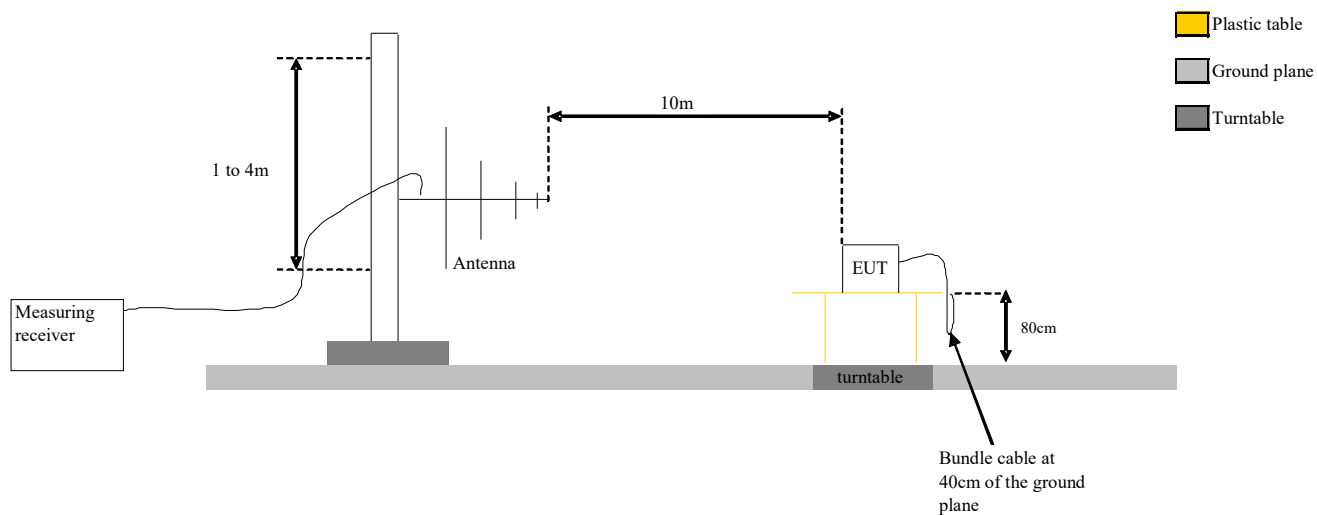



Test Set up for radiated measurement in open area test site

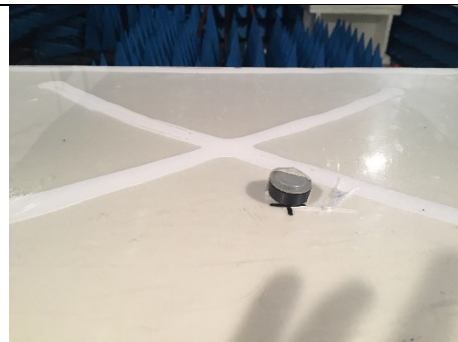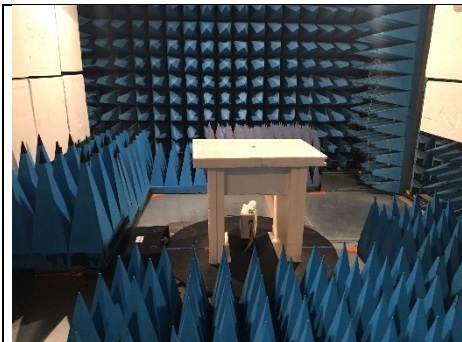




Axis XY Anechoic chamber < 1Gz



Axis Z Anechoic chamber < 1Gz

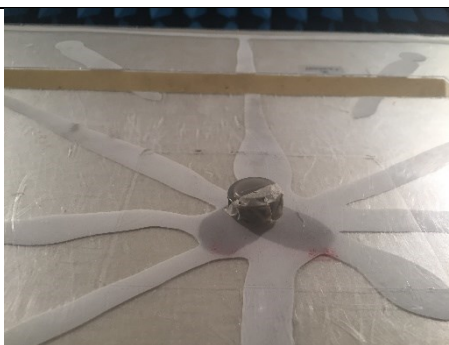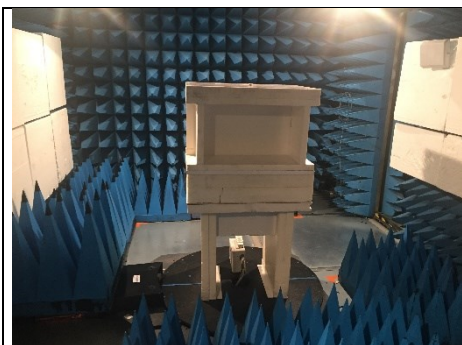

Axis XY Anechoic chamber > 1Gz

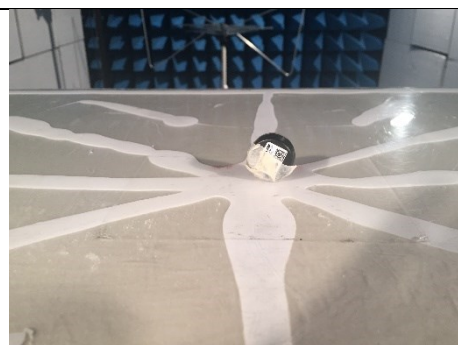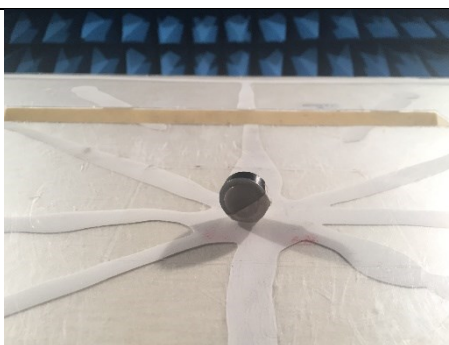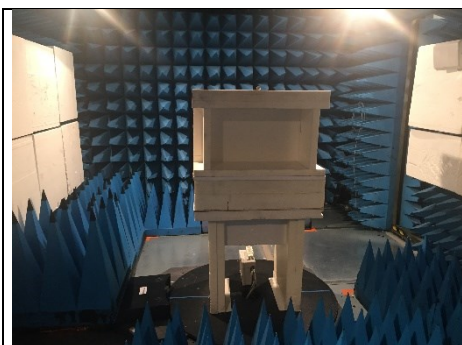

Axis Z Anechoic chamber > 1Gz

Photograph for Unwanted Emission in restricted frequency bands

9.3. LIMIT

Measure at 300m		
Frequency range	Level	Detector
9kHz-490kHz	67.6dB μ V/m /F(kHz)	QPeak
Measure at 30m		
Frequency range	Level	Detector
490kHz-1.705MHz	87.6dB μ V/m /F(kHz)	QPeak
1.705MHz-30MHz	29.5dB μ V/m	QPeak
Measure at 10m		
Frequency range	Level	Detector
30MHz to 88MHz	29.5dB μ V/m	QPeak
88MHz to 216MHz	33dB μ V/m	QPeak
216MHz to 960MHz	35.5dB μ V/m	QPeak
960MHz to 1000MHz	43.5dB μ V/m	QPeak
Above 1000MHz	63.5dB μ V/m	Peak
	43.5dB μ V/m	Average
Measure at 3m		
Frequency range	Level	Detector
30MHz to 88MHz	40dB μ V/m	QPeak
88MHz to 216MHz	43.5dB μ V/m	QPeak
216MHz to 960MHz	46B μ V/m	QPeak
960MHz to 1000MHz	54dB μ V/m	QPeak
Above 1000MHz	74dB μ V/m	Peak
	54dB μ V/m	Average

9.4. TEST EQUIPMENT LIST


TEST EQUIPMENT USED					
Description	Manufacturer	Model	Identifier	Cal_D ate	Cal_Due
Amplifier 9kHz - 40GHz	LCIE SUD EST	—	A7102082	10/18	10/19
Antenna Bi-Log	CHASE	UPA6192	C2040221	01/18	01/20
Antenna horn 18GHz	EMCO	3115	C2042029	09/17	09/20
BAT EMC	NEXIO	v3.9.0.10	L1000115		
Comb EMR HF	YORK	CGE01	A3169114		
Emission Cable (SMA 1m)	TELEDYNE	26GHz	A5329874	01/19	01/20
Emission Cable (SMA 3.3m)	TELEDYNE	26GHz	A5329875	01/19	01/20
Emission Cable (SMA 30cm)	TELEDYNE	26GHz	A5329873	01/19	01/20
Emission Cable <1GHz (Ampl <-> Cage)	-	18GHz	A5329907	08/19	08/20
Emission Cable <1GHz (Ampl <-> Cage)	-	18GHz	A5329562	08/19	08/20
Rehausse Table C3	LCIE	—	F2000507		
Rehausse Table C3	LCIE	—	F2000511		
Semi-Anechoic chamber #3 (BF)	SIEPEL	—	D3044017_BF	03/17	03/20
Semi-Anechoic chamber #3 (VSWR)	SIEPEL	—	D3044017_VSW R	03/17	03/20
Spectrum analyzer	ROHDE & SCHWARZ	FSU 26	A4060058	09/19	09/21
Table C3	LCIE	—	F2000461		
Thermo-hygrometer (PM1/2/3)	KIMO	HQ 210	B4206022	08/18	08/20
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371		
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444		

Note: In our quality system, the test equipment calibration due is more & less 2 months


9.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

☒ None ☐ Divergence:


9.6. RESULTS

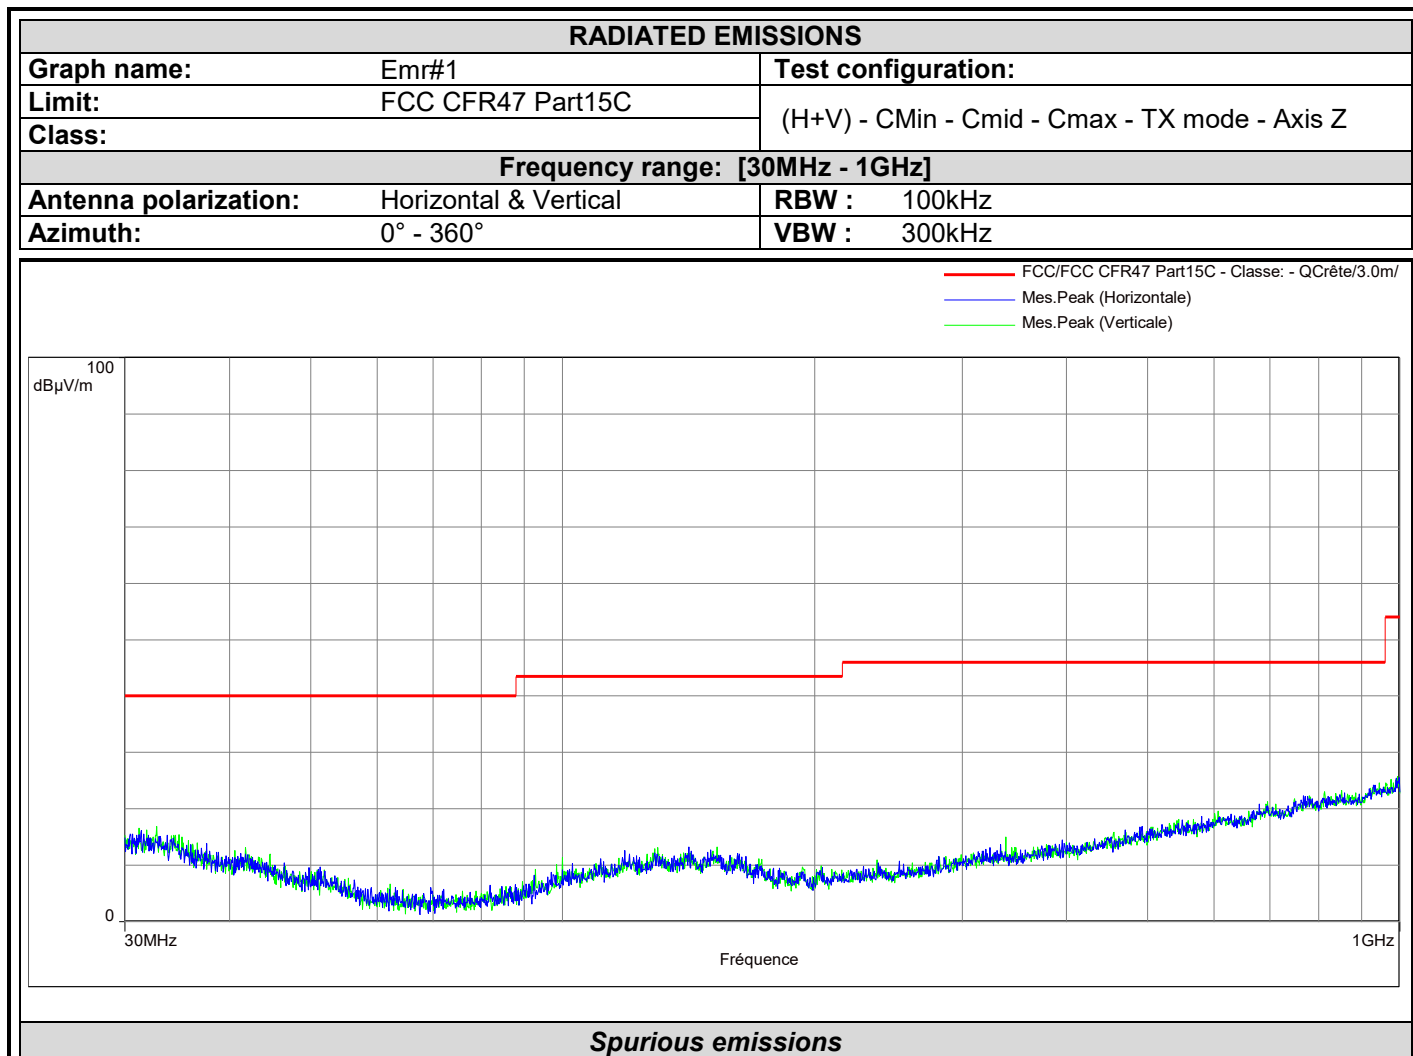


No significant frequency observed

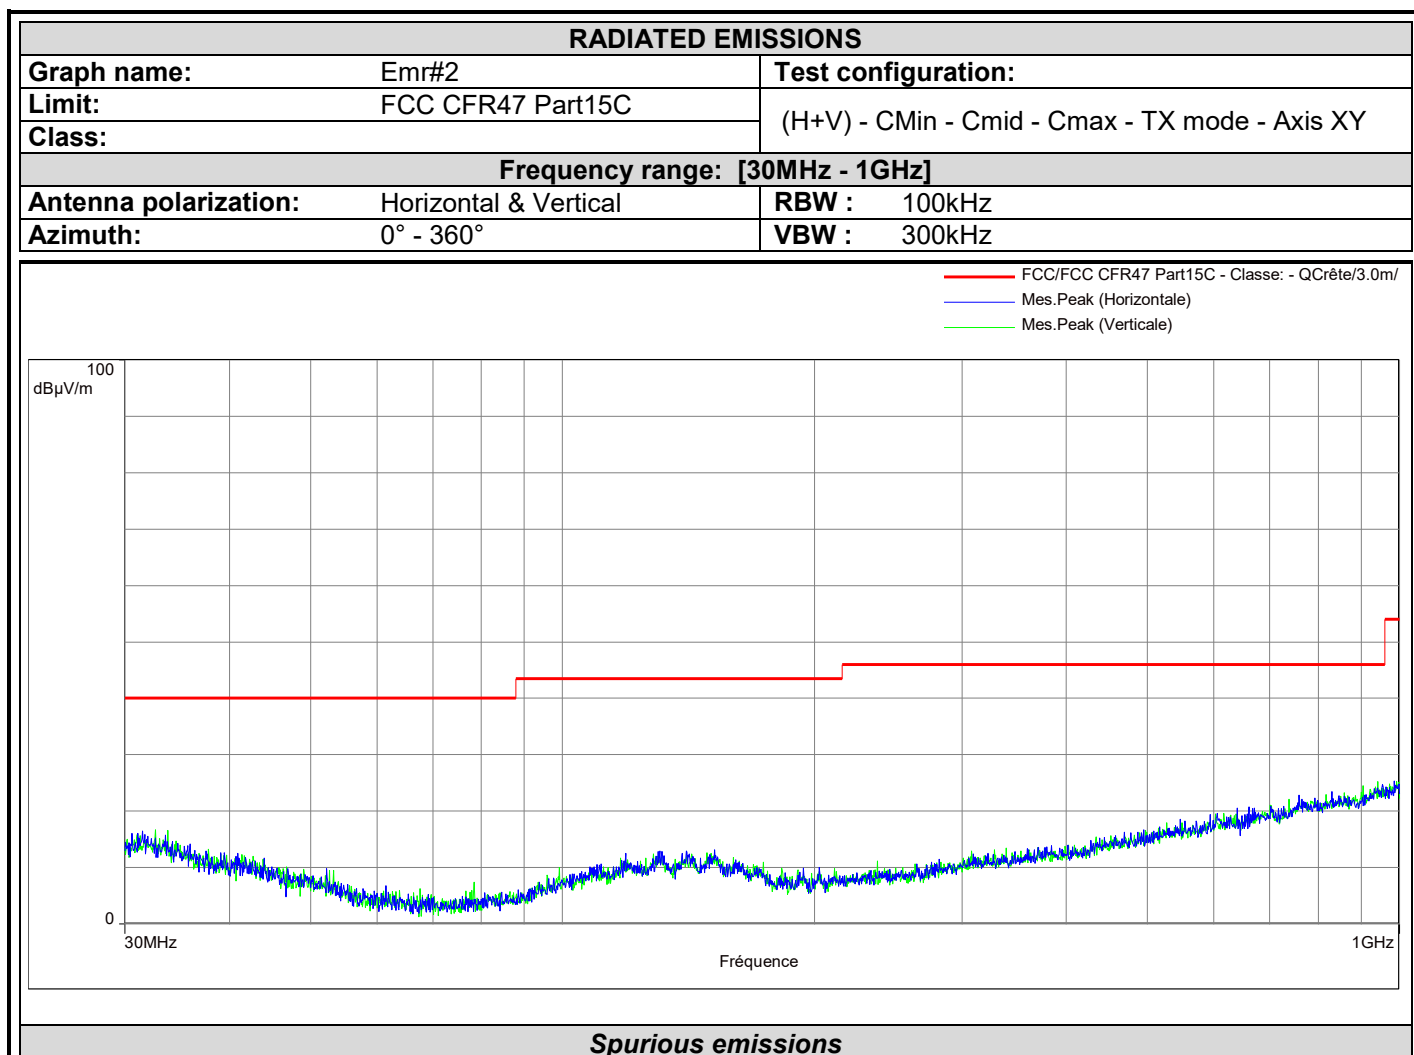


No significative frequency observed

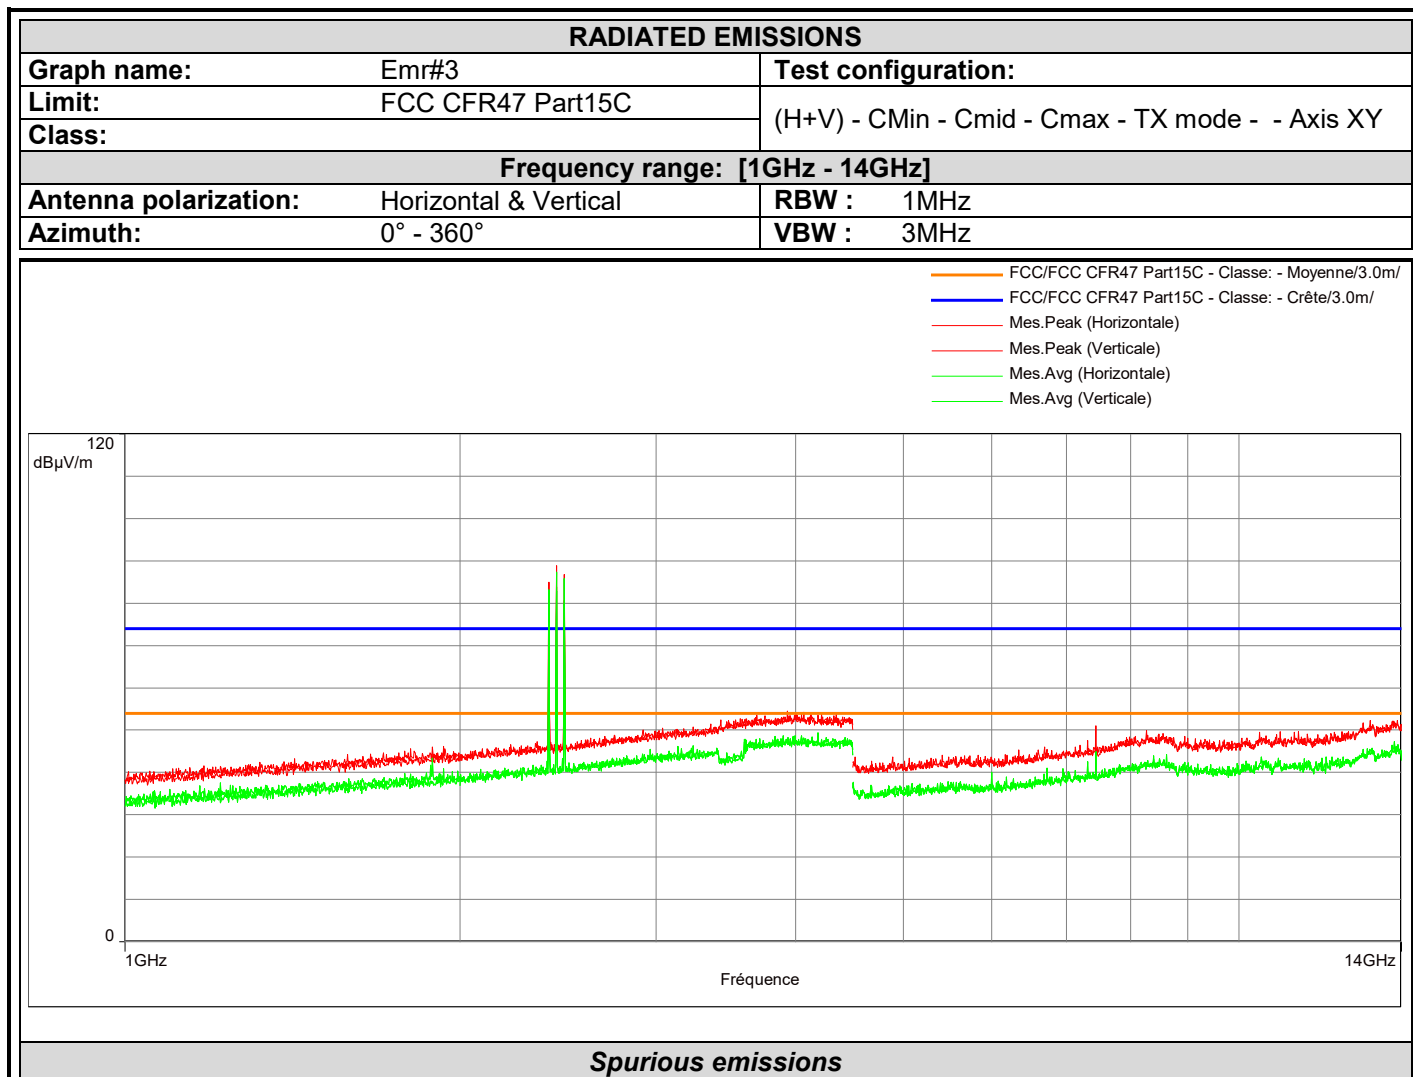


Frequency (MHz)	Peak Level (dBμV/m)	Polarization
2401.786	85.0	Horizontal
2440.357	88.8	Horizontal
2480.357	86.7	Horizontal
2402.500	78.2	Vertical
2440.000	83.9	Vertical
2480.500	80.6	Vertical
7440.250	51.0	Vertical

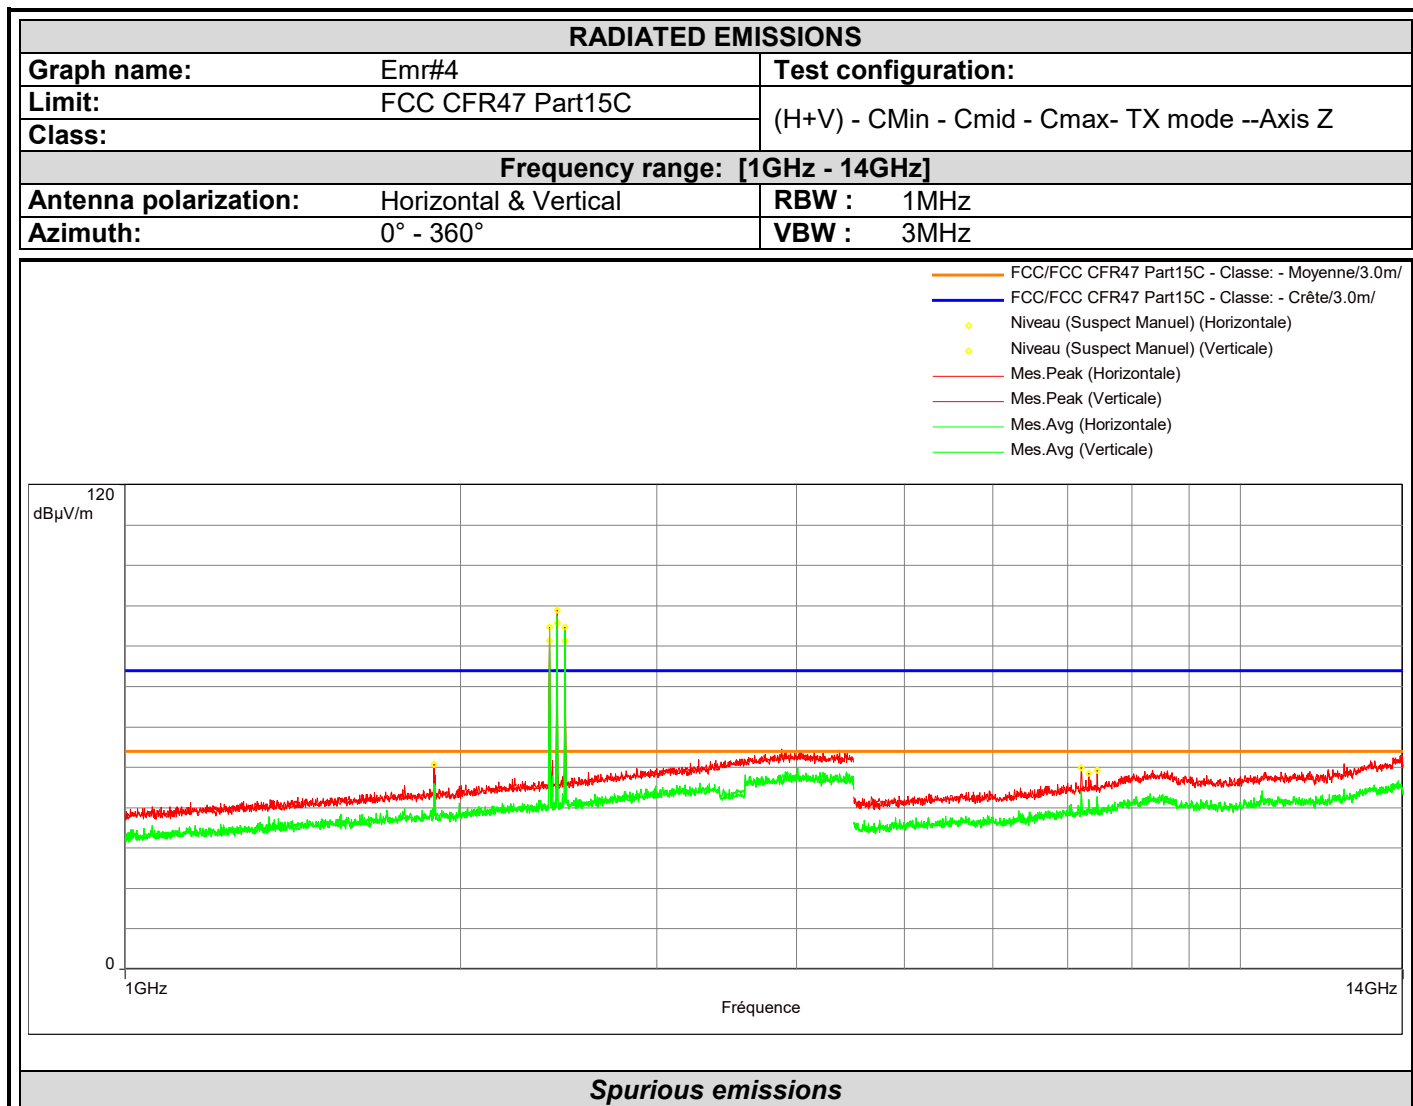

Frequency (MHz)	Peak Level (dBµV/m)	Polarization
1893.429	50.8	Horizontal
2402.143	84.8	Horizontal
2440.357	88.9	Horizontal
2480.000	84.7	Horizontal
2402.000	81.4	Vertical
2440.500	85.7	Vertical
2480.000	81.4	Vertical
7205.600	49.8	Vertical
7319.600	48.6	Vertical
7441.200	49.3	Vertical

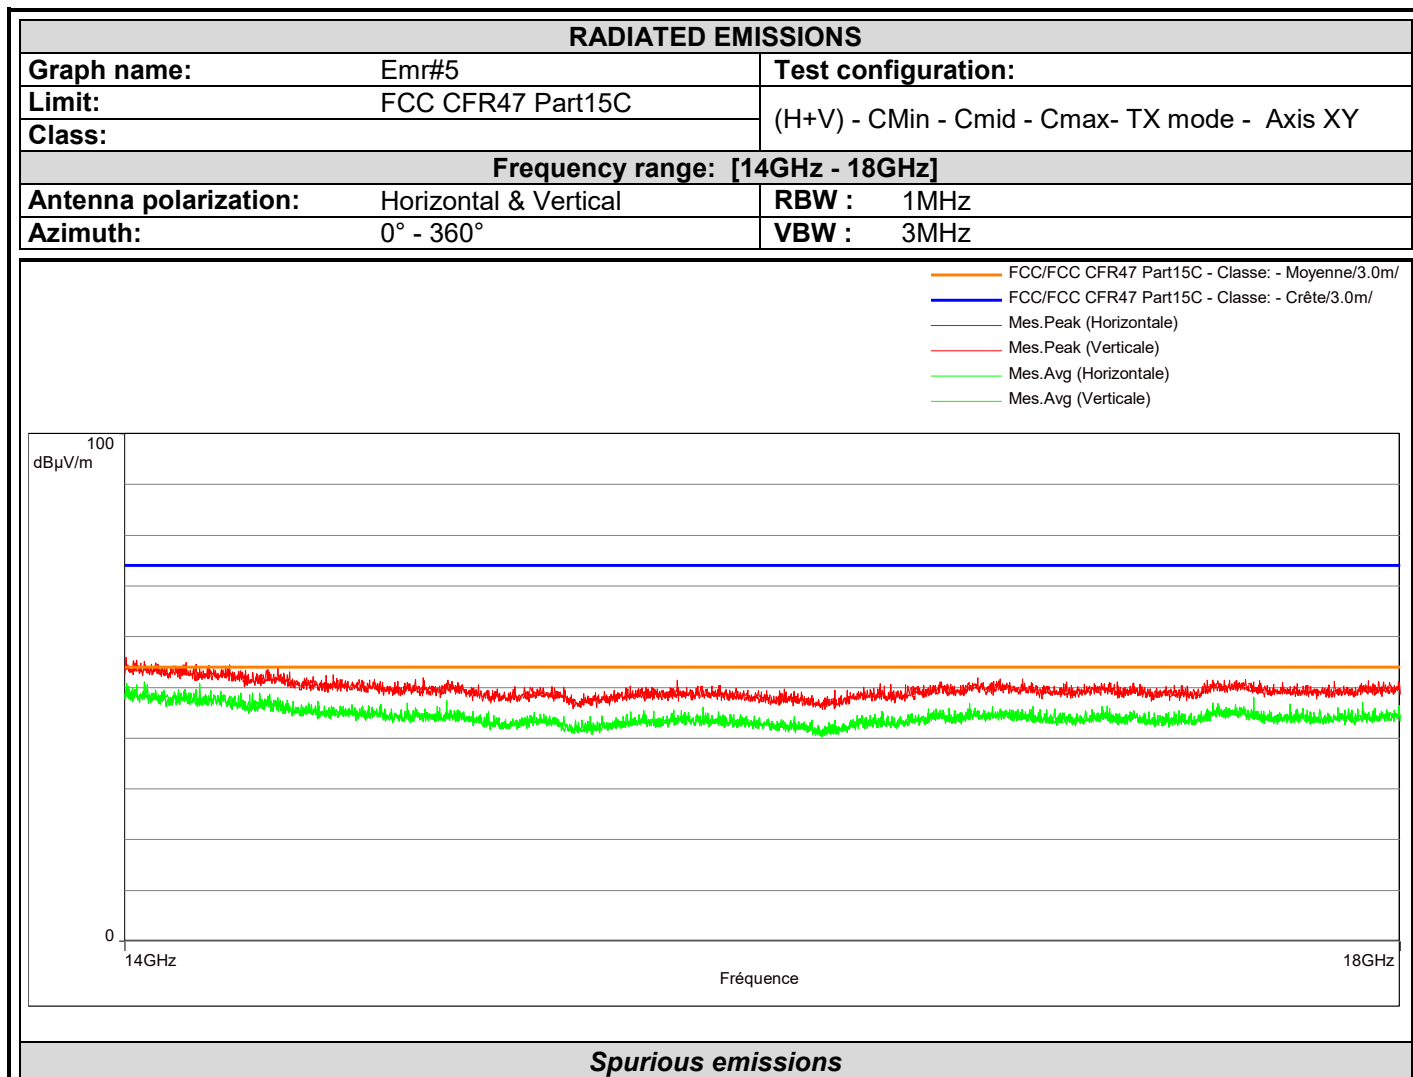

Test Frequency (MHz)	Meter Reading dB(μV)	Detector (Pk/QP/Av)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (cm)	Transducer Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
14010.140	49.4	Av	V	180	150	0.7	50.1	54.0	-3.9
14030.450	49.3	Av	H	0	150	0.6	49.9	54.0	-4.1
14224.000	47.1	Av	V	180	150	0.7	47.8	54.0	-6.2
14010.140	55.9	Pk	V	180	150	0.7	56.6	74.0	-17.4
14030.450	55.8	Pk	H	0	150	0.6	56.4	74.0	-17.6
14224.000	55.0	Pk	V	180	150	0.7	55.7	74.0	-18.3

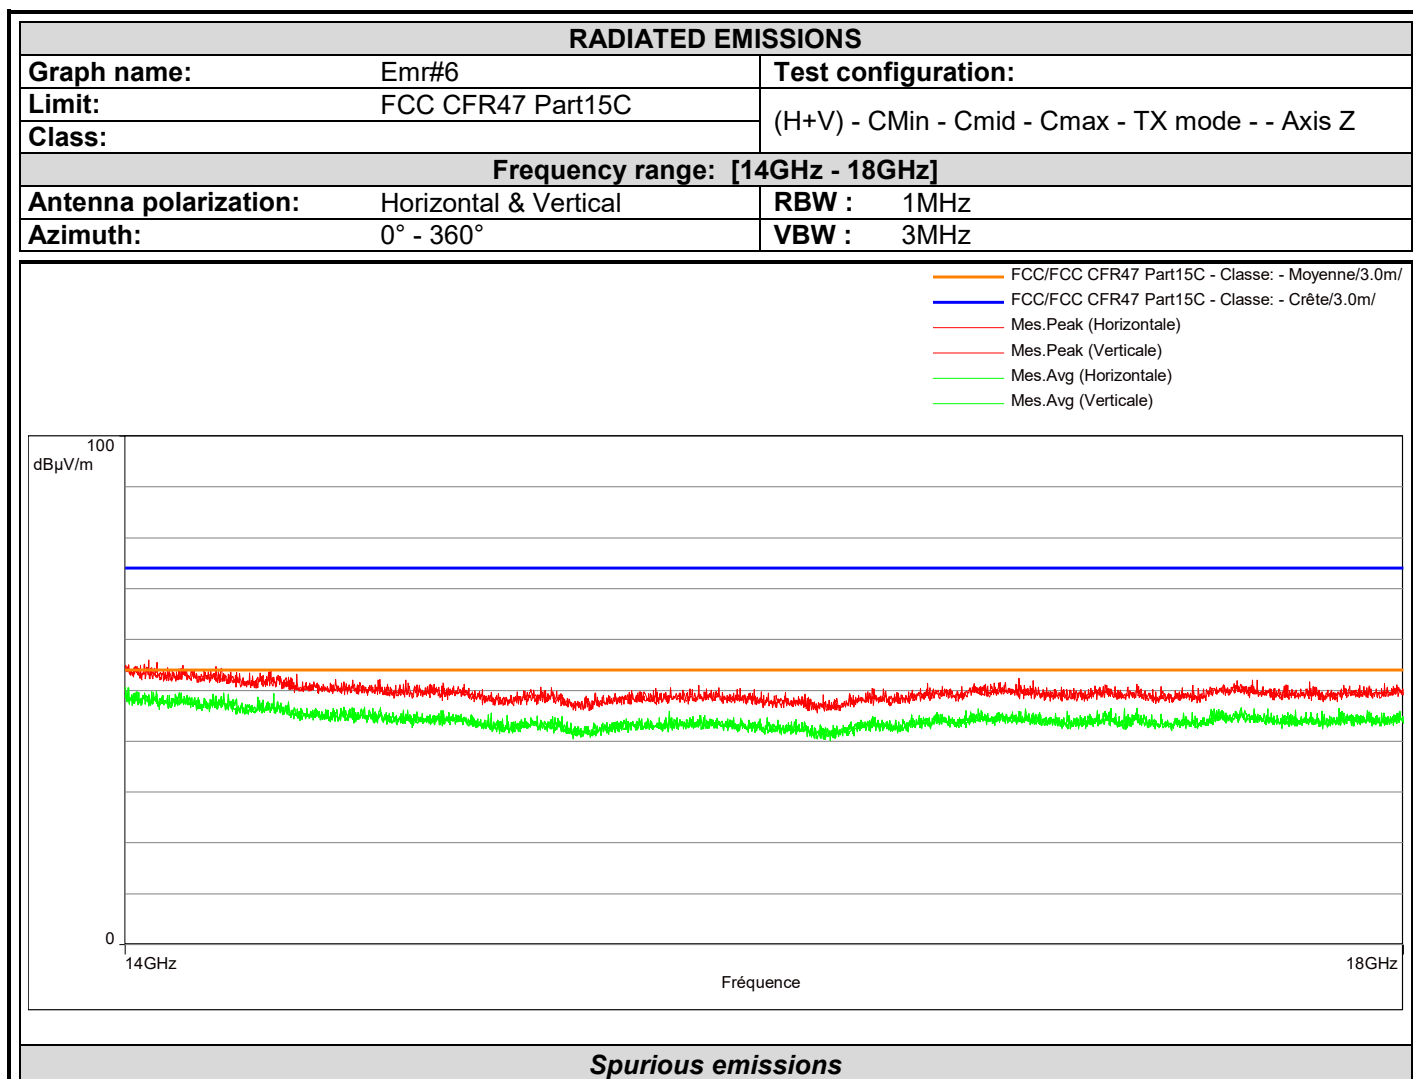

Test Frequency (MHz)	Meter Reading dB(µV)	Detector (Pk/QP/Av)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (cm)	Transducer Factor (dB)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
14053.000	48.8	Av	H	0	150	0.6	49.4	54.0	-4.6
14065.000	47.8	Av	H	0	150	0.6	48.4	54.0	-5.6
14053.000	54.5	Pk	H	0	150	0.6	55.1	74.0	-18.9
14065.000	55.4	Pk	H	0	150	0.6	56.0	74.0	-18.0

9.7. CONCLUSION

Unwanted Emission in restricted frequency bands measurement performed on the sample of the product **Michelin Tire Mounted Sensor TMS-AF-01**, SN: **None**, in configuration and description presented in this test report, show levels **compliant** to the 47 CFR PART 15.247 & RSS 247 ISSUE 2 limits.

10. UNCERTAINTIES CHART

Type de mesure / Kind of measurement	Incertitude élargie laboratoire / Wide uncertainty laboratory (k=2) ± x	Incertitude limite du CISPR / CISPR uncertainty limit ± y
Mesure des perturbations conduites en tension sur le réseau d'énergie <i>Measurement of conducted disturbances in voltage on the power port</i>	3.51 dB	3.6 dB
Mesure des perturbations conduites en tension sur le réseau de télécommunication <i>Measurement of conducted disturbances in voltage on the telecommunication port.</i>	3.26 dB	A l'étude / Under consid.
Mesure des perturbations discontinues conduites en tension <i>Measurement of discontinuous conducted disturbances in voltage</i>	3.45 dB	3.6 dB
Mesure des perturbations conduites en courant <i>Measurement of conducted disturbances in current</i>	3.09 dB	A l'étude / Under consid.
Mesure du champ électrique rayonné sur le site en espace libre de Moirans <i>Measurement of radiated electric field on the Moirans open area test site</i>	5.20 dB	6.3 dB

Les valeurs d'incertitudes calculées du laboratoire étant inférieures aux valeurs d'incertitudes limites établies par la norme, la conformité de l'échantillon est établie directement par les niveaux limites applicables. / The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limits values.