Installation Instructions for the GoAnywhere Pass™

General Installation Information

Metallized Windshields: Some vehicle windshields contain a metallic treatment that could prevent an interior windshield-mounted tag from working correctly. If you have a vehicle with a metalized windshield, contact your local customer service center for more information. If your vehicle's metalized windshield has a metal-free zone, it is typically located near the rearview mirror.

Metal-Free Zone: Some vehicle metalized windshields have a metal-free zone. If your windshield has this zone, center the tag in that area and follow the installation instructions listed on this page.

Tinted Windshields: Some vehicles have a metallic tint across the top of the windshield that might interfere with reading the tag. If your windshield has this metallic tint, install the tag at least 2 inches (5.1 cm) below the tinted area. Nonmetallic tint does not affect performance.

Metal Sun Visors: Some vehicles have an exterior-mounted sun visor that might interfere with reading the tag. If your vehicle has this visor, mount the tag at least 2 inches (5.1 cm) below the visor.

Required Supplies

- GoAnywhere Pass
- Optional suction-cup bracket (sold separately)
- Commercial glass cleaner and paper towels

GoAnywhere Pass Installation and Removal Procedures

The GoAnywhere Pass may be mounted to the interior windshield with 3M™ Dual Lock™ strips, or with an optional bracket that attaches the tag to the windshield with suction cups.

To install the Tag

1. Choose the location for your tag (Figure 1). The tag should be mounted approximately 1 inch (2.54 cm) below the rearview mirror post.
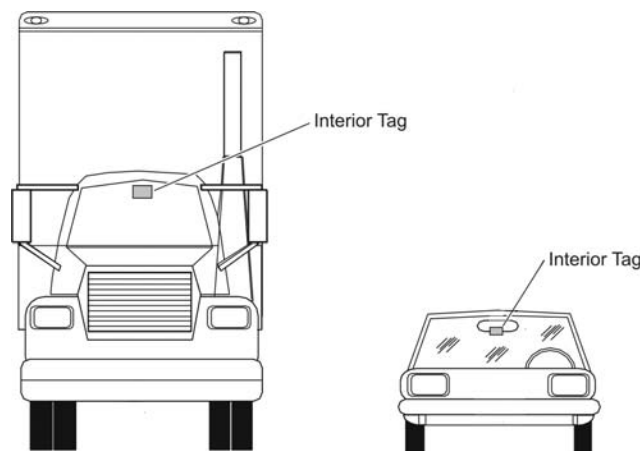

Figure 1. Optimum Locations for Tag Performance

2. Clean and dry the interior windshield surface completely before affixing the fastener strips. The windshield temperature must be at least 68ºF (20ºC) for optimum bonding.

3. Peel off the double-faced barrier on the Dual Lock strips (Figure 2). Apply the tag to the windshield using moderate pressure.

Note: *When installing the tag using Dual Lock strips for the first time, leave the tag in place for at least 24 hours to allow the adhesive to cure.*
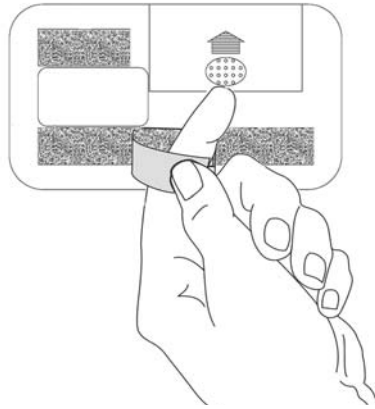

Figure 2 Remove Backing to Expose Adhesive on Dual Lock Strips

4. If using the optional suction cup bracket, moisten the cups and press on the side tabs to stick the bracket to the windshield.

5. Holding the tag so that the arrow on the battery door points up, insert the tag into the bracket. You may also position the tag in the bracket as shown in Figure 3 and then mount it to the windshield.

Figure 3 Correct Tag Orientation

6. To remove a tag mounted with Dual Lock strips from the windshield, grip the tag at the top and bottom sides. Gently lift the tag away from the windshield on one end until the tag is free from the windshield. Be careful not to hit the rearview mirror.

NO UNAUTHORIZED MODIFICATIONS STATEMENT

Caution: This equipment may not be modified, altered, or changed in any way without permission from TransCore, LP. Unauthorized modification may void the equipment authorization from the FCC and will void the TransCore warranty.

RADIO FREQUENCY INTERFERENCE STATEMENTS

Note: *This device complies with Part 15 of the FCC Rules and the Industry Canada Licence-Exempt RSS Standards. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.*

Note: *Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur del'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*

TRANSCORE.

www.**transcore**.com