

Test Report

CFR47 Part 90 and Industry Canada RSS-137

Application for Grant of Certification

Model: 05767

Location and Monitoring Service Transmitter

902.25 - 903.75 and 911.75 – 919.75 MHz

FCC ID: FIH05767

IC: 1584A-05767

FOR

TRANSCORE

AMTECH TECHNOLOGY CENTER

8600 Jefferson Street, NE


Albuquerque, NM 87113

Report Number 131108

Authorized Signatory: *Scot D. Rogers*
Scot D. Rogers



NVLAP Lab Code: 200087-0



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Test Report For Application of Certification

For

Transcore Amtech Technology Center

8600 Jefferson Street, NE
Albuquerque, NM 87113
Phone: (505) 856-8101

Model: 05767

Location Monitoring Service Transmitter
Frequency: 902.25 - 903.75 and 911.75 - 919.75 MHz
FCC ID: FIH05767
IC: 1584A-05767

Test Date: February 10, 2013

Certifying Engineer: *Scot D Rogers*

Scot D. Rogers
Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Telephone / Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



Table Of Contents

TABLE OF CONTENTS..... 3

REVISION HISTORY 4

EXECUTIVE SUMMARY 5

OPINION / INTERPRETATION OF RESULTS 5

APPLICATION FOR CERTIFICATION..... 6

EQUIPMENT UNDER TEST 8

 Equipment Configuration8

APPLICABLE STANDARDS AND TEST PROCEDURES..... 9

UNITS OF MEASUREMENTS 9

TEST SITE LOCATIONS 9

ENVIRONMENTAL CONDITIONS..... 9

LIST OF TEST EQUIPMENT 10

TRANSMITTER POWER OUTPUT 11

 Measurements Required11

 Test Arrangement.....11

 Table 1 Transmitter Power Results.....12

 Figure 1 Power output.....12

MODULATION CHARACTERISTICS..... 13

 Measurements Required13

 Test Arrangement.....13

 Results Modulation Characteristics13

OCCUPIED BANDWIDTH 14

 Measurements Required14

 Test Arrangement.....14

 Table 2 Occupied Bandwidth Results14



Figure 2 Occupied Bandwidth..... 15

SPURIOUS EMISSIONS..... 16

Measurements Required16

Test Arrangement.....16

Table 3 Spurious Emissions Results17

EMISSION MASK 17

Measurements Required17

Test Arrangement.....17

Results Emission Mask.....18

 Figure 3 Emissions Mask 18

FIELD STRENGTH OF SPURIOUS RADIATION..... 19

Measurements Required19

Test Arrangement.....19

Table 4 General Spurious Radiated Emission Results21

Table 5 Results Spurious Radiation21

FREQUENCY STABILITY 21

Measurements Required21

ANNEX..... 22

Annex A Measurement Uncertainty Calculations23

Annex B Rogers Labs Test Equipment List24

Annex C Rogers Qualifications25

Annex D FCC Test Site Registration Letter26

Annex E Industry Canada Test Site Registration Letter27

Revision History

Revision 1 issued December 18, 2013



NVLAP Lab Code: 200087-0

Executive Summary

The following information is submitted for consideration in obtaining Grant of Certification of CFR47 Paragraph 90 (M) and Industry Canada RSS-137 Location Monitoring Service (LMS) transmitter equipment.

Name of Applicant: Transcore - Amtech Technology Center
8600 Jefferson Street, NE
Albuquerque, NM 87113
Phone: (505) 856-8000

Model: 05767

FCC ID: FIH05767 IC: 1584A-05767

Frequency of Operation: 915 MHz

Transmit Power 0.004 watts, Occupied bandwidth 5M29L1D

Opinion / Interpretation of Results

Tests Performed	Results
Emissions Tests	
Requirements per CFR47 paragraphs 2.1031-2.1057 and RSS-137, Issue 2	Complies
Requirements per CFR47 paragraphs 90.205 and RSS-137 paragraph 4.1	Complies
Requirements per CFR47 paragraphs 90.207 and RSS-141 paragraph 6.2	Complies
Requirements per CFR47 paragraphs 90.209 and RSS-141 paragraph 6.1	Complies
Requirements per CFR47 paragraphs 90.210 and RSS-141 paragraph 6.5	Complies
Requirements per CFR47 paragraphs 90.213 and RSS-141 paragraph 6.3	Complies

Application for Certification

1. Manufacturer: Transcore - Amtech Technology Center
8600 Jefferson Street, NE
Albuquerque, NM 87113

2. Identification: Model: 05767

FCC I.D.: FIH05767 IC: 1584A-05767

3. A copy of the installation and operating instructions furnished to the end user. Refer to the instruction manual furnished with this application for details.

4. Emission Types: Modulated in width/duration –L1D

Frequency (MHz)	Emission Designator
915	5M29L1D

5. Frequency Range: 915 MHz

6. Range of operating power values or specific operating power levels, and description of any means provided for variation of operating power. 0.004 Watt (nominal)

7. Maximum power rating as defined in the applicable part(s) of the rules. As stated in CFR47, 90.205(k) the maximum permissible output power allowed is 30 watts.

8. The dc voltages applied to and dc currents into the several elements of the final radio frequency amplifying device for normal operation over the power range. The EUT final amplification stage runs at a maximum of 3.3 volts with 0.0065 amperes current.

9. Provide the tune-up procedure over the power range, or at specific operating power levels. Refer to the tune-up procedure furnished with this application for details.

10. A schematic diagram and a description of all circuitry and devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation, and for limiting power. Refer to the schematics and technical exhibits furnished with this application for details.

11. A photograph or drawing of the equipment identification plate, or label showing the information to be placed thereon shall be provided. Refer to the identification label exhibit and information furnished with this application for details.

12. Photographs (8" x 10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, if any, and labels for controls and meters and sufficient views of the internal construction to define component placement and chassis assembly. Insofar as these requirements are met by photographs or drawings contained in



instruction manuals supplied with the certification request, additional photographs are necessary only to complete the required showing. Refer to the exhibits of this report and or additional information furnished with the application for details.

13. For equipment employing digital modulation techniques, a detailed description of the modulation system to be used, including the response characteristics (frequency, phase, and amplitude) of any filters provided, and a description of the modulating wave train, shall be submitted for the maximum rated conditions under which the equipment will be operated. Information about modulation is contained in Operational description exhibit.
14. The data required by Sections 2.1046 through 2.1057, inclusive, measured in accordance with the procedures set out in Section 2.1041.
15. The application for certification of an external radio frequency power amplifier under Part 97 of this chapter need not be accompanied by the data required by Paragraph (b)(14) of this section. In lieu thereof, measurements shall be submitted to show compliance with the technical specifications in Subpart C of Part 97 of this chapter and such information as required by Section 2.1060 of this part. This paragraph does not apply to this equipment.
16. An application for certification of an AM broadcast stereophonic exciter generator intended for interfacing with existing certified, or formerly type accepted or notified transmitters must include measurements made on a complete stereophonic transmitter. The instruction book must include complete specifications and circuit requirements for interconnecting with existing transmitters. The instruction book must also provide a full description of the equipment and measurement procedures to monitor modulation and to verify that the combination of stereo exciter generator and transmitter meets the emission limitations of section 73.44. This paragraph does not apply to this equipment.
17. A single application may be filed for a composite system that incorporates devices subject to certification under multiple rule parts; however, the appropriate fee must be included for each device. Separate applications must be filed if different FCC Identifiers will be used for each device.
18. The device is not a software-defined radio and requirements of 2.944 do not apply to this application.

Equipment Under Test

The EUT operates as location and monitoring transceiver equipment. Operation of design utilizes industry standardized modulation schemes offering ability to interface and respond with RFID interrogation systems.

The EUT incorporates a transponder operating at 915 MHz frequency band. The unit operates from internal battery power only and provides provision for alternative power source. The test sample provided was modified from production equipment for testing purposes. The modification involved placement of shorting connection pins for use with shorting bar. Shorting the connection bar enabled the transmitter function for testing. In this test mode of operation, the transmitter operated at 100% duty cycle. Test results in this report relate only to the products described in this report

Equipment Configuration





Applicable Standards and Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2012, Part 2 Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057; 90.201 through 90.217, 90.350 through 90.363 and RSS-137 the following information is submitted. Test procedures used were the established Methods of Measurement of Radio-Noise Emissions as described in ANSI 63.4-2009 and ANSI/TIA-603-C-2004. The unit has also been tested and found to comply with other applicable technical standards with relevant data recorded in appropriate test reports.

Units of Measurements

AC Line Conducted EMI Data is in dB μ V; dB referenced to one microvolt.

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Antenna Conducted Data is in dBm, dB referenced to one milliwatt

Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Radiated EMI The radiated emissions testing performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Site Registration Refer to Annex for FCC Site Registration Letter, # 90910, and Industry Canada Site Registration Letter, IC3041A-1.

Environmental Conditions

Ambient Temperature 21.5 ° C

Relative Humidity 36%

Atmospheric Pressure 1020.4 mb



List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input type="checkbox"/> LISN	Comp. Design	FCC-LISN-2-MOD.CD	.15-30MHz	10/13	10/14
<input type="checkbox"/> Antenna	ARA	BCD-235-B	20-350MHz	10/13	10/14
<input type="checkbox"/> Antenna	EMCO	3147	200-1000MHz	10/13	10/14
<input checked="" type="checkbox"/> Antenna	Com Power	AH-118	1-18 GHz	10/13	10/14
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840	18-40 GHz	5/13	5/14
<input checked="" type="checkbox"/> Antenna	EMCO	6509	.001-30 MHz	10/13	10/14
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6	30-1000 MHz	10/13	10/14
<input checked="" type="checkbox"/> Antenna	Standard	FXRY638A	10-18 GHz	5/13	5/14
<input type="checkbox"/> Antenna	EMCO	3143	20-1200 MHz	5/13	5/14
<input type="checkbox"/> Analyzer	HP	8591EM	9kHz-1.8GHz	5/13	5/14
<input type="checkbox"/> Analyzer	HP	8562A	9kHz-110GHz	5/13	5/14
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40	20Hz-40GHz	5/13	5/14
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010	100Hz-30MHz	10/13	10/14
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102	1-1000 MHz	10/13	10/14
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A	0.5-18 GHz	10/13	10/14


Transmitter Power Output

Measurements Required

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

Test Arrangement

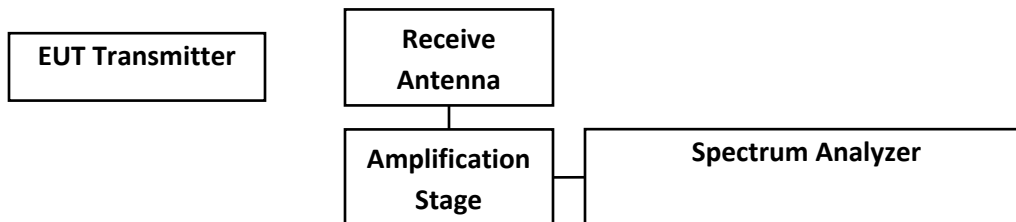

The radio frequency power output was measured on the Open Area Test Site (OATS). The design offers no provision for connection to antenna port. The substitution method was used to predict the transmitter output power level. The EUT was placed on a wooden turntable 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. The turntable was rotated through 360 degrees to locate the position registering the highest amplitude emission. The frequency spectrum was searched for maximum emission generated. Emission level was measured and recorded for the maximum amplitude. The EUT transmitter was then removed and replaced with a substitution antenna, which was powered from a signal generator. The output signal from the generator was then adjusted such that the amplitude received was the same as that previously recorded for each frequency. This step was repeated for both horizontal and vertical polarizations. The power in dBm required to produce the desired signal level was then recorded from the signal generator. The power in dBm was then calculated by reducing the previous readings by the gain in the substitution antenna. The testing procedures used conform to the procedures stated in the TIA/EIA-603 document.

P_{dBm} = power in dB above 1 milliwatt.

Milliwatts = $10^{(PdBm/10)}$

Watts = (Milliwatts)(0.001)(W/mW)

Milliwatts = $10^{(6.27/10)}$

= 4.24 mW

= 0.004 Watts

Table 1 Transmitter Power Results

Frequency (MHz)	P_{dBm}	P_{mw}	P_w	OBW (kHz)
915	6.27	4.24	0.004	5,290

The EUT demonstrated compliance with the specifications of Paragraphs 2.1046(a), 90.205 and RSS-137. There are no deviations to the specifications.

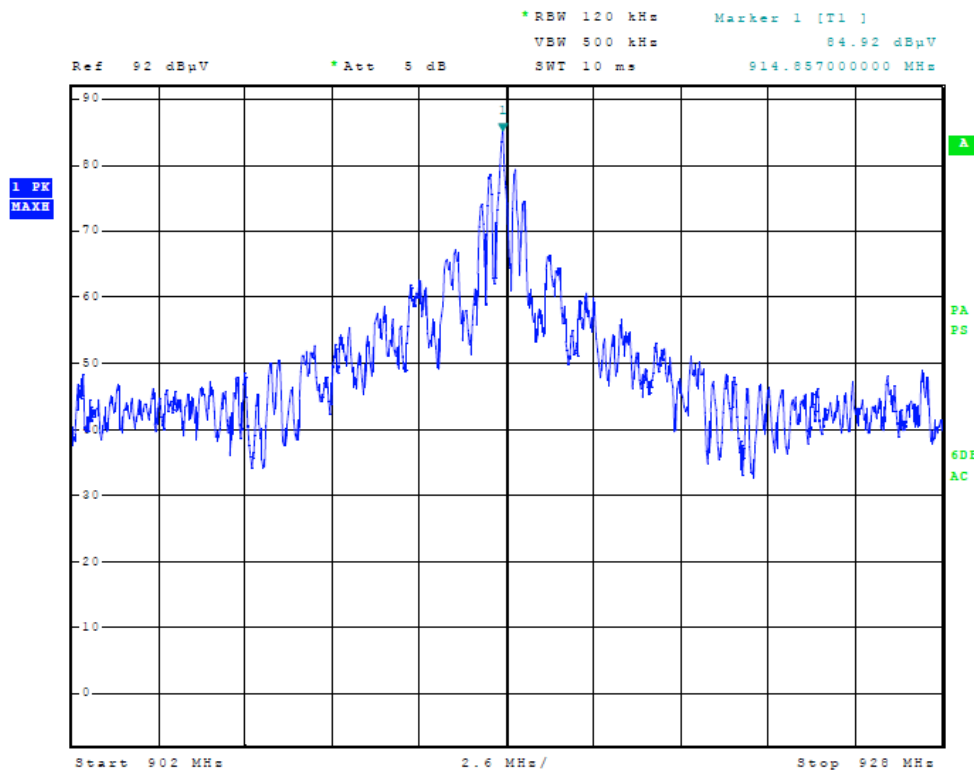



Figure 1 Power output

Modulation Characteristics

Measurements Required

A curve or equivalent data that shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed shall be submitted.

Test Arrangement

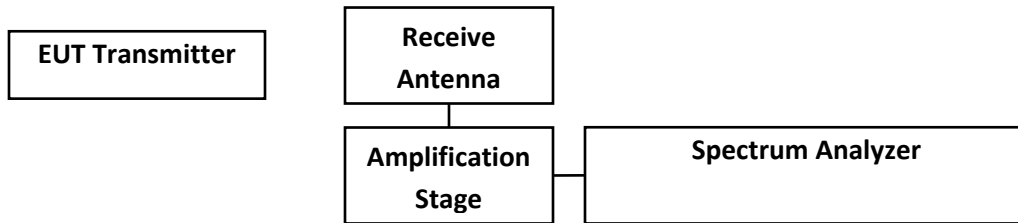

The radio frequency output was coupled to a Rohde &Schwarz ESU40 Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in its normal mode.

Results Modulation Characteristics

The transmitter operates providing digital data transmitted signals modulated in amplitude/width/duration. The EUT demonstrated compliance with the specifications of Paragraphs 2.1046(a), 90.205 and RSS-137. There are no deviations to the specifications.

Occupied Bandwidth

Measurements Required

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are equal to 0.5 percent of the total mean power radiated by a given emission. Refer to figure two displaying a plot of the occupied bandwidth measurements.

Test Arrangement

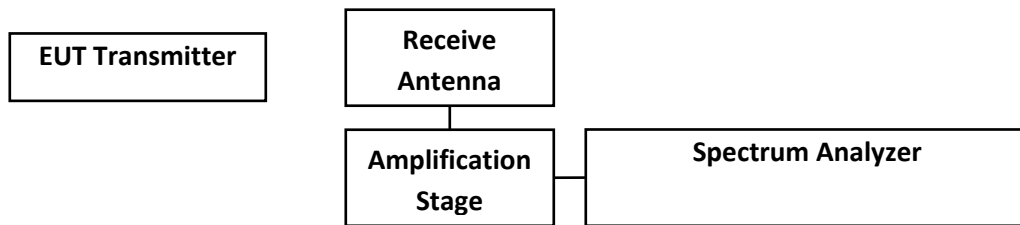


Table 2 Occupied Bandwidth Results

Operational Frequency Band (MHz)	Occupied Bandwidth (kHz)
915	5,290

The EUT demonstrated compliance with the requirements of Paragraphs 2.1046(a) 90.209 and RSS-137 paragraph 6.1. There are no deviations to the specifications.

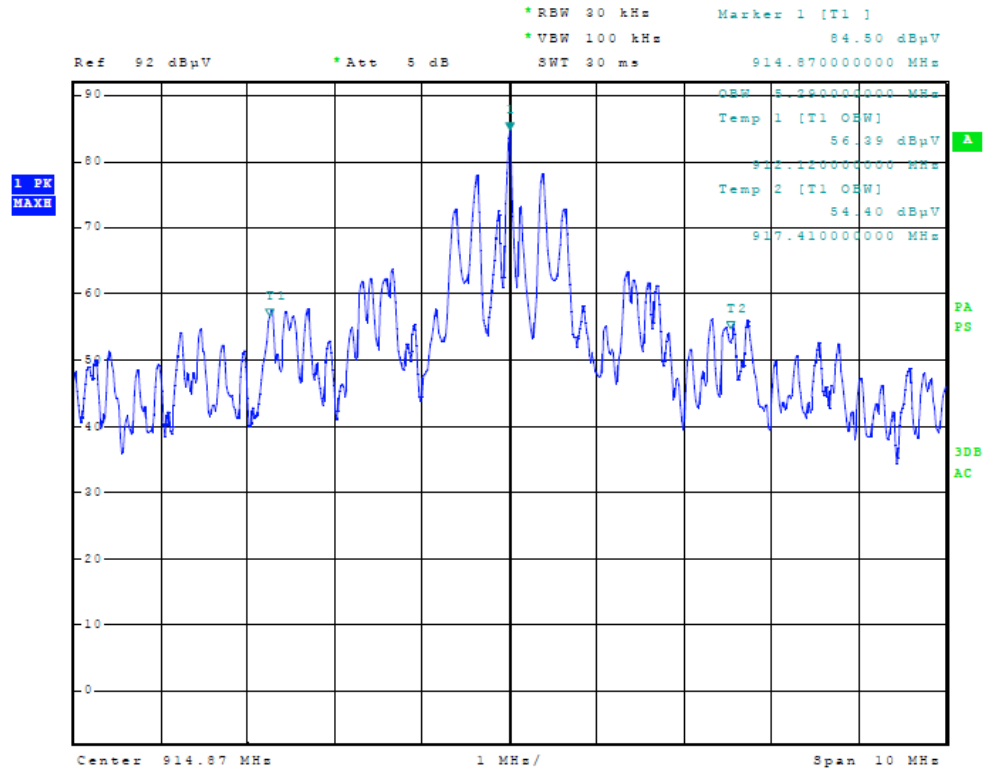



Figure 2 Occupied Bandwidth

Spurious Emissions

Measurements Required

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. To gain dynamic range in the test equipment, a high pass filter attenuated the fundamental frequency of operation was used to observe the harmonic emissions.

Test Arrangement

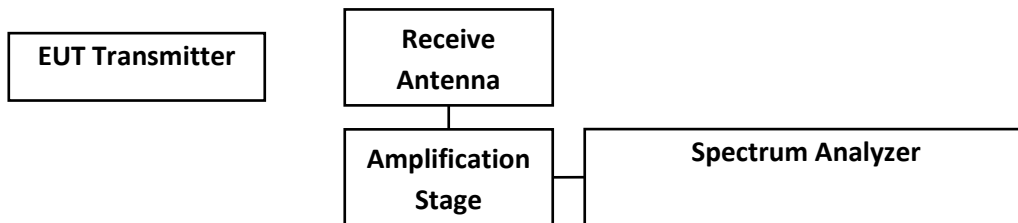

The radio frequency output was coupled to a Rohde & Schwarz ESU40 Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in its normal mode. The frequency spectrum from 9 kHz to 10 GHz was observed. Data was taken per CFR47 2.1051 and applicable paragraphs of Part 90 and RSS-137.

Limit: Spurious emissions must be attenuated below the peak output power by the at least $55 + 10 \text{ Log}(P_o)$ dB.

0.004-watt transmitter limit specifies the out of band emissions must be suppressed by at least 31.0 dBc.

$$\begin{aligned}
 \text{Attenuation} &= 55 + 10 \text{ Log}_{10}(P_w) \\
 &= 55 + 10 \text{ Log}_{10}(0.004) \\
 &= 31.0 \text{ dBc}
 \end{aligned}$$

Table 3 Spurious Emissions Results

Channel MHz	Spurious Freq. (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
915.00	1830.0	-62.83	-69.1
	2745.0	-61.93	-68.2
	3660.0	-64.03	-70.3
	4575.0	-61.53	-67.8
	5490.0	-61.63	-67.9
	6405.0	-62.73	-69.0


Data was taken per 2.1051 and applicable parts of CFR47 90.210 and RSS-137. The EUT demonstrated compliance with the specifications of Paragraphs CFR47 2.1051, 2.1057 and 90.210(k) and RSS-137 paragraph 6.5. There are no deviations to the specifications.

Emission Mask

Measurements Required

Transmitters used in the radio services governed by this part must comply with the emissions masks outlined in this section. Paragraph 90.210(K) specifies the out of band emission limitations for this equipment. The spurious emissions for the device were measured at the maximum power output condition. .

Test Arrangement

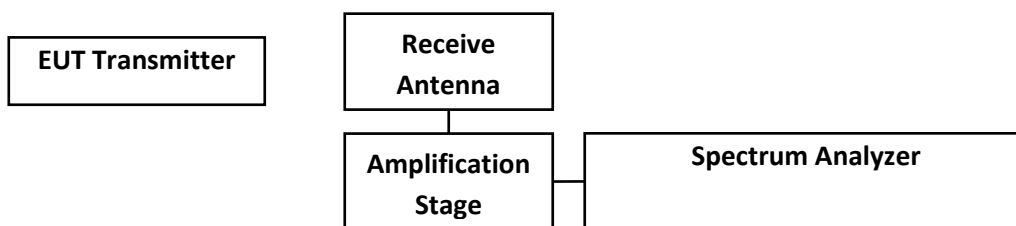

The radio frequency output was coupled to a Rohde & Schwarz ESU40 Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating through normal modes with maximum output power. The frequency spectrum at the band edges were observed and plots produced. Refer to figure three for plot representing emission mask compliance at the band edges. Data was taken per CFR47 2.1051 and applicable parts of Part 90.210 (k) and RSS-137.

Results Emission Mask

The EUT demonstrated compliance with the specifications of Paragraphs CFR47 2.1051, 2.1057 and 90.210(k) and RSS-137 paragraph 6.5. There are no deviations to the specifications.

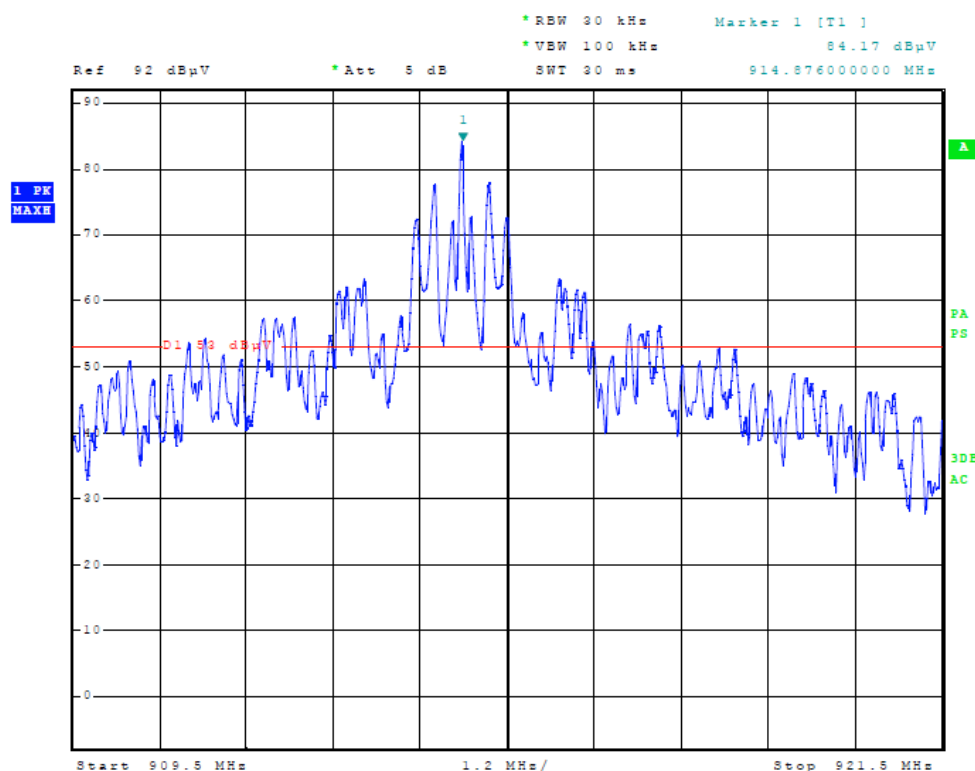



Figure 3 Emissions Mask

Field Strength of Spurious Radiation

Measurements Required

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

Test Arrangement

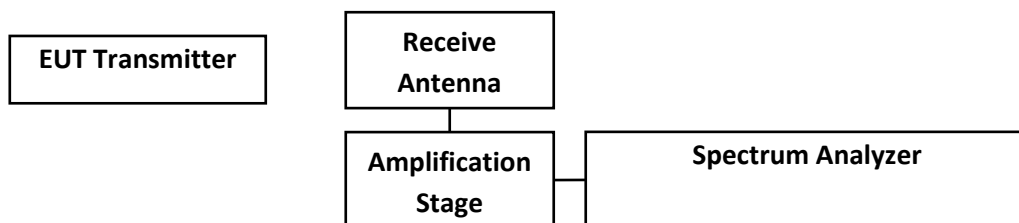

Preliminary radiated emissions investigation was made in a screen room to determine frequencies of emissions. The transmitter spurious emissions were measured at the OATS with the antenna port connected to a 50-ohm load. The EUT was placed on a wooden turntable 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. The turntable was rotated through 360 degrees to locate the position registering the highest amplitude emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter. Raising and lowering the FSM antenna and rotating the turntable to maximize the emission. Data was measured and recorded for the maximum amplitude of each spurious emission. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas from 1 GHz to 10 GHz. Emissions were measured in dB μ V/m @ 3 meters. The substitution method was used to measure harmonic emissions. Harmonic emission levels from the EUT were measured and amplitude levels were recorded. The EUT transmitter was then removed and replaced with a substitution antenna, which was powered from a signal generator. The output signal from the generator was then adjusted such that the amplitude received was the same as that previously recorded for each frequency. This step was repeated for both horizontal and vertical polarizations. The power in dBm required to produce the desired signal level was then recorded



from the signal generator. The power in dBm was then calculated by reducing the previous readings by the gain in the substitution antenna. The testing procedures used conform to the procedures stated in the TIA/EIA-603 document.

The limits for the spurious radiated emissions are defined by the following equation.

Limit = Amplitude of the spurious emission must be attenuated by this amount below the level of the fundamental. On any frequency removed from the assigned frequency outside the assigned sub-band edges: at least $55 + 10 \text{ Log } (P_o)$ dB.

0.004 -watt transmitter limit specifies the level below the carrier must be suppressed more than 31.0 dB.

$$\begin{aligned} \text{Attenuation} &= 55 + 10 \text{ Log}_{10}(P_w) \\ &= 55 + 10 \text{ Log}_{10} (0.004) \\ &= 31.0 \text{ dBc} \end{aligned}$$

The radiated spurious emission below the carrier in dB is calculated from the following equation:

Decibels below Carrier = dBc

$$\text{dBc} = \text{signal level required to reproduce measured emission} - 10 \text{ Log}_{10}[\text{Tx power(W)}/0.001]$$

example:

$$\text{dBc} = -62.8 - 10 \text{ Log}_{10}[0.004/0.001] = -96.1 \text{ dBc}$$

Data was taken per 2.1051 and applicable parts of CFR47 90. The EUT demonstrated compliance with the specifications of Paragraphs CFR47 2.1051, 2.1057 and 90.210(k) and RSS-137 paragraph 6.5. There are no deviations to the specifications.

Table 4 General Spurious Radiated Emission Results

Frequency	Amplitude of Emission (dB μ V)		Signal Level to dipole required to Reproduce(dBm)		Emission level below carrier (dBc)		Limit (dBc)
	MHz	Horizontal	Vertical	Horizontal	Vertical	Horizontal	
312.3	16.8	18.8	-78.43	-76.43	-84.70	-82.70	-31.0
336.3	18.3	23.1	-76.93	-72.13	-83.20	-78.40	-31.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 5 Results Spurious Radiation

Frequency	Amplitude of Emission (dB μ V)		Signal Level to dipole required to Reproduce(dBm)		Emission level below carrier (dBc)		Limit (dBc)
	MHz	Horizontal	Vertical	Horizontal	Vertical	Horizontal	
915MHz							
1830.00	32.4	32.3	-62.83	-62.93	-69.1	-69.2	-31.0
2745.00	33.3	33.4	-61.93	-61.83	-68.2	-68.1	-31.0
3660.00	31.2	31.6	-64.03	-63.63	-70.3	-69.9	-31.0
4575.00	33.7	31.4	-61.53	-63.83	-67.8	-70.1	-31.0
5490.00	33.6	32.6	-61.63	-62.63	-67.9	-68.9	-31.0
6405.00	32.5	32.3	-62.73	-62.93	-69.0	-69.2	-31.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Frequency Stability

Measurements Required

Pursuant to 90.213(a), Note 13, frequency stability testing is not required for this equipment.

The equipment design incorporates frequency-determining components with acceptable operational frequency and tolerances rating. The equipment complies with the requirements of CFR47 part 90 and RSS-137 paragraph 6.3.



NVLAP Lab Code: 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter



Annex A Measurement Uncertainty Calculations

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43



Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration Date
Spectrum Analyzer: Rohde & Schwarz ESU40	5/13
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520	5/13
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
Spectrum Analyzer: HP 8591EM	5/13
Antenna: EMCO Biconilog Model: 3143	5/13
Antenna: Sunol Biconilog Model: JB6	10/13
Antenna: EMCO Log Periodic Model: 3147	10/13
Antenna: Com Power Model: AH-118	10/13
Antenna: Com Power Model: AH-840	10/13
Antenna: Antenna Research Biconical Model: BCD 235	10/13
Antenna: EMCO 6509	10/13
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf	10/13
R.F. Preamp CPPA-102	10/13
Attenuator: HP Model: HP11509A	10/13
Attenuator: Mini Circuits Model: CAT-3	10/13
Attenuator: Mini Circuits Model: CAT-3	10/13
Cable: Belden RG-58 (L1)	10/13
Cable: Belden RG-58 (L2)	10/13
Cable: Belden 8268 (L3)	10/13
Cable: Time Microwave: 4M-750HF290-750	10/13
Cable: Time Microwave: 10M-750HF290-750	10/13
Frequency Counter: Leader LDC825	2/13
Oscilloscope Scope: Tektronix 2230	2/13
Wattmeter: Bird 43 with Load Bird 8085	2/13
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/13
R.F. Generators: HP 606A, HP 8614A, HP 8640B	2/13
R.F. Power Amp 65W Model: 470-A-1010	2/13
R.F. Power Amp 50W M185- 10-501	2/13
R.F. Power Amp A.R. Model: 10W 1010M7	2/13
R.F. Power Amp EIN Model: A301	2/13
LISN: Compliance Eng. Model 240/20	2/13
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08	2/13
Antenna: EMCO Dipole Set 3121C	2/13
Antenna: C.D. B-101	2/13
Antenna: Solar 9229-1 & 9230-1	2/13
Audio Oscillator: H.P. 201CD	2/13
ELGAR Model: 1751	2/13
ELGAR Model: TG 704A-3D	2/13
ESD Test Set 2010i	2/13
Fast Transient Burst Generator Model: EFT/B-101	2/13
Field Intensity Meter: EFM-018	2/13
KEYTEK Ecat Surge Generator	2/13
Shielded Room 5 M x 3 M x 3.0 M	



Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Work experience includes six years working in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University
- 2) Bachelor of Science Degree in Business Administration Kansas State University
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



NVLAP Lab Code: 200087-0

Annex D FCC Test Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

June 28, 2013

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace,
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: June 28, 2013

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

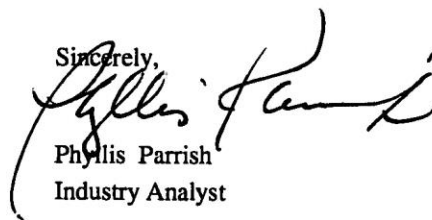


Phyllis Parrish
Industry Analyst



NVLAP Lab Code: 200087-0

Annex E Industry Canada Test Site Registration Letter



June 19, 2013

OUR FILE: 46405-3041

Submission No: 168037

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg
KS, USA
66053

Attention: Mr. Scot D. Rogers

Dear Sir:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

Bill Payn
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station "H"
Ottawa, Ontario K2H 8S2
Email: Bill.Payn@ic.gc.ca
Tel. No. (613) 990-3639
Fax. No. (613) 990-4752

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Transcore Amtech Technology Center
Models: 05767 S/N: ENG1
Test #: 131108
Test to: CFR47 Parts 2, 90 and RSS-137
File: Transcore 05767 90 TstRpt 131108

FCC ID#: F1H05767
IC: 1584A-05767
Date: December 18, 2013
Page 27 of 27