

Test Report

47CFR Part 90 and Industry Canada RSS-137

Application for Grant of Certification

Model: 05985

Location and Monitoring Service Transmitter

915 MHz

FCC ID: FIH05985

IC: 1584A-05985

FOR

Transcore

- Amtech Technology Center

8600 Jefferson Street, NE

Albuquerque, NM 87113


Report Number 170413

Authorized Signatory: *Scot D Rogers*
Scot D. Rogers

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Transcore - Amtech Technology Center
Model: 05985
Test #: 170413
Test to: 47CFR Parts 2, 90 and RSS-137
File: Transcore 05985 TstRpt 170413

SN: ENG1
FCC ID: FIH05985
IC: 1584A-05985
Date: May 5, 2017
Page 1 of 32



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Test Report For Application of Certification

For

Transcore Amtech Technology Center

8600 Jefferson Street, NE
Albuquerque, NM 87113
Phone: (505) 856-8101

Model: 05985

Location Monitoring Service Transmitter
Frequency: 915 MHz
FCC ID: FIH05985
IC: 1584A-05985

Test Date: April 13, 2017

Certifying Engineer: *Scot D Rogers*

Scot D. Rogers
Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Telephone / Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Transcore - Amtech Technology Center
Model: 05985
Test #: 170413
Test to: 47CFR Parts 2, 90 and RSS-137
File: Transcore 05985 TstRpt 170413

SN: ENG1
FCC ID: FIH05985
IC: 1584A-05985
Date: May 5, 2017
Page 2 of 32

Table Of Contents

TABLE OF CONTENTS.....	3
REVISION HISTORY	5
EXECUTIVE SUMMARY.....	6
OPINION / INTERPRETATION OF RESULTS	6
EQUIPMENT UNDER TEST	6
Equipment Function and Configuration	7
Equipment Configuration	7
APPLICATION FOR CERTIFICATION.....	8
APPLICABLE STANDARDS AND TEST PROCEDURES.....	10
UNITS OF MEASUREMENTS	10
TEST SITE LOCATIONS	10
ENVIRONMENTAL CONDITIONS.....	10
LIST OF TEST EQUIPMENT	11
TRANSMITTER POWER OUTPUT	12
Measurements Required	12
Test Arrangement	12
Table 1 Transmitter Power Results.....	13
Figure 1 Transmitter Output across Frequency Band Low power mode.....	14
Figure 2 Transmitter Output across Frequency Band Low power mode.....	14
MODULATION CHARACTERISTICS.....	15
Measurements Required	15
Test Arrangement	15
Results Modulation Characteristics	15

OCCUPIED BANDWIDTH 16

Measurements Required16

Test Arrangement16

Table 2 Occupied Bandwidth Results16

 Figure 3 Occupied Bandwidth.....17

SPURIOUS EMISSIONS..... 18

Measurements Required18

Test Arrangement18

Table 3 Spurious Emissions Results19

EMISSION MASK 20

Measurements Required20

Test Arrangement20

Results Emission Mask.....20

 Figure 4 Emissions Mask Low power21

 Figure 5 Emissions Mask High power21

FIELD STRENGTH OF SPURIOUS RADIATION..... 22

Measurements Required22

Test Arrangement22

Table 4 General Radiated Emission Results (worst-case)23

Table 5 Results Spurious Radiation24

FREQUENCY STABILITY 25

Measurements Required25

Test Arrangement25

Table 6 Frequency Stability Results.....26

ANNEX..... 27

Annex A Measurement Uncertainty Calculations28

Annex B Rogers Labs Test Equipment List29

Annex C Rogers Qualifications.....30

Annex D FCC Test Site Registration Letter31

Annex E Industry Canada Test Site Registration Letter32

Revision History

Revision 1 Issued May 5, 2017

Executive Summary

The following information is submitted for consideration in obtaining Grant of Certification of 47CFR Paragraph 90 (M) and Industry Canada RSS-137 Location Monitoring Service (LMS) transmitter equipment.

Name of Applicant: Transcore
 Amtech Technology Center 8600 Jefferson Street, NE
 Albuquerque, NM 87113
 Phone: (505) 856-8000

Model: 05985

FCC ID: FIH05985 IC: 1584A-05985

Frequency of Operation: 915 MHz

Transmit Power: 0.004 (low power) or 0.008 (high power) watts, occupied bandwidth 11,336.0 kHz

Opinion / Interpretation of Results

Tests Performed	Results
Emissions Tests	
Requirements per 47CFR paragraphs 2.1031-2.1057 and RSS-137, Issue 2	Complies
Requirements per 47CFR paragraphs 90.205 and RSS-137	Complies
Requirements per 47CFR paragraphs 90.207 and RSS-137	Complies
Requirements per 47CFR paragraphs 90.209 and RSS-137	Complies
Requirements per 47CFR paragraphs 90.210 and RSS-137	Complies
Requirements per 47CFR paragraphs 90.213 and RSS-137	Complies

Equipment Under Test

<u>Equipment</u>	<u>Model / PN</u>	<u>Serial Number</u>
EUT sample 1	05985	ENG1

Test results in this report relate only to the items tested.

Equipment Function and Configuration

The EUT functions as location and monitoring transceiver equipment. Operation of design utilizes industry standardized modulation scheme offering ability to interface and respond with Industry Radio Frequency Identification Device (RFID) interrogation systems.

The EUT is an active transponder operating at 915 MHz frequency band. The unit operates from internal replaceable battery power only and provides no provision for alternative power source. The test sample provided was modified from production equipment for testing purposes. The modification involved placement of two temporary switches connected to the PCB external to the enclosure which enabled the operation of the transmitter in one of two output power modes. The design has ability to operate in a low or high power state in the range of 5-9 mW. The end user has no control over operational output power as it is predetermined in software. Activation of one switch placed the EUT in a test mode operating the transmitter at 100% duty cycle in low power state. Enabling the second switch provided high output power operation. The testing mode of operation greatly exceeds typical duty cycle operation of production equipment or use as it typically resides in a low power sleep state until activated by interrogation. The transmitter transmits bursts of 500 kbps Manchester-encoded data resembling actual packet data in the test mode. Test results in this report relate only to the products described in this report.

Equipment Configuration



Application for Certification

1. Manufacturer: Transcore
 Amtech Technology Center 8600 Jefferson Street, NE
 Albuquerque, NM 87113
2. Identification: **Model:** 05985 **FCC ID:** FIH05985 **IC:** 1584A-05985
3. A copy of the installation and operating instructions furnished to the end user. Refer to the instruction manual furnished with this application for details.
4. Emission Types: Continuous wave (P0N) and Modulated in width/duration/data – L1D

Frequency (MHz)	Emission Designator
915	L1D
5. Frequency Range: 915 MHz
6. Range of operating power values or specific operating power levels, and description of any means provided for variation of operating power. Minimum to maximum Watts approximately 0.004 or 0.008 watts.
7. Maximum power rating as defined in the applicable part(s) of the rules. As stated in 47CFR, 90.205(k) the maximum permissible output power allowed is 30 watts.
8. The dc voltages applied to and dc currents into the several elements of the final radio frequency amplifying device for normal operation over the power range. The maximum operating mode runs at 3.60 volts consuming 7.6 milliamps high power and 2.61 volts consuming 4.9 milliamps low power operation.
9. Provide the tune-up procedure over the power range, or at specific operating power levels. Refer to the tune-up procedure furnished with this application for details.
10. A schematic diagram and a description of all circuitry and devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation, and for limiting power. Refer to the schematics and technical exhibits furnished with this application for details.
11. A photograph or drawing of the equipment identification plate, or label showing the information to be placed thereon shall be provided. Refer to the identification label exhibit and information furnished with this application for details.
12. Photographs (8" x 10") of the equipment of sufficient clarity to reveal equipment construction and layout, including meters, if any, and labels for controls and meters and sufficient views of the internal construction to define component placement and chassis assembly. Insofar as these requirements are met by photographs or drawings contained in instruction manuals supplied with the certification request, additional photographs are necessary only to complete the required showing. Refer to the exhibits of this report and or additional information furnished with the application for details.
13. For equipment employing digital modulation techniques, a detailed description of the modulation system to be used, including the response characteristics (frequency, phase, and amplitude) of any filters provided, and a description of the modulating wave train, shall be submitted for the maximum rated conditions under which the equipment will be operated. Information about modulation is contained in Operational description exhibit.

Rogers Labs, Inc.
 4405 West 259th Terrace
 Louisburg, KS 66053
 Phone/Fax: (913) 837-3214
 Revision 1

Transcore - Amtech Technology Center
 Model: 05985
 Test #: 170413
 Test to: 47CFR Parts 2, 90 and RSS-137
 File: Transcore 05985 TstRpt 170413

SN: ENG1
 FCC ID: FIH05985
 IC: 1584A-05985
 Date: May 5, 2017
 Page 8 of 32

14. The data required by Sections 2.1046 through 2.1057, inclusive, measured in accordance with the procedures set out in Section 2.1041.
15. The application for certification of an external radio frequency power amplifier under Part 97 of this chapter need not be accompanied by the data required by Paragraph (b)(14) of this section. In lieu thereof, measurements shall be submitted to show compliance with the technical specifications in Subpart C of Part 97 of this chapter and such information as required by Section 2.1060 of this part. This paragraph does not apply to this equipment.
16. An application for certification of an AM broadcast stereophonic exciter generator intended for interfacing with existing certified, or formerly type accepted or notified transmitters must include measurements made on a complete stereophonic transmitter. The instruction book must include complete specifications and circuit requirements for interconnecting with existing transmitters. The instruction book must also provide a full description of the equipment and measurement procedures to monitor modulation and to verify that the combination of stereo exciter generator and transmitter meets the emission limitations of section 73.44. This paragraph does not apply to this equipment.
17. A single application may be filed for a composite system that incorporates devices subject to certification under multiple rule parts; however, the appropriate fee must be included for each device. Separate applications must be filed if different FCC Identifiers will be used for each device.
18. The device is not a software-defined radio and requirements of 2.944 do not apply to this application.
19. Applications for certification of equipment operating under part 27 of this chapter, that a manufacturer is seeking to certify for operation in the:
 - (i) 1755-1780 MHz, 2155-2180 MHz, or both bands shall include a statement indicating compliance with the pairing of 1710-1780 and 2110-2180 MHz specified in §§27.5(h) and 27.75 of this chapter.
 - (ii) 1695-1710 MHz, 1755-1780 MHz, or both bands shall include a statement indicating compliance with §27.77 of this chapter.
 - (iii) 600 MHz band shall include a statement indicating compliance with §27.75 of this chapter.
20. Applications for certification of equipment operating under part 90 of this chapter and capable of operating on the 700 MHz interoperability channels (See §90.531(b)(1) of this chapter) shall include a Compliance Assessment Program Supplier's Declaration of Conformity and Summary Test Report or, alternatively, shall include a document detailing how the applicant determined that its equipment complies with §90.548 of this chapter and that the equipment is interoperable across vendors.
21. Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used.

Applicable Standards and Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, 47CFR dated Oct 31, 2016, Part 2 Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057; 90.201 through 90.217, 90.350 through 90.363 and RSS-137 the following information is submitted. Test procedures used were the established Methods of Measurement of Radio-Noise Emissions as described in ANSI/TIA-603-E-2016 and ANSI 63.4-2014.

Units of Measurements

AC Line Conducted EMI Data is in dB μ V; dB referenced to one microvolt.

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Antenna Conducted Data is in dBm, dB referenced to one milliwatt

Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Radiated EMI The radiated emissions testing performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS.

Site Registration Refer to Annex for FCC Site Registration Letter, # 90910, and Industry Canada Site Registration Letter, IC3041A-1.

Environmental Conditions

Ambient Temperature 25.7 ° C

Relative Humidity 47%

Atmospheric Pressure 1020.2 mb

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table.

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHz	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 500 kHz	VBW = 3 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Equipment	Manufacturer	Model (SN)	Band	Cal Date	Due
<input type="checkbox"/> LISN	FCC	FCC-LISN-50-2-10(1PA) (160611)	.15-30MHz	5/16	5/17
<input checked="" type="checkbox"/> Cable	Time Microwave	750HF290-750 (L10M)	9kHz-40 GHz	10/16	10/17
<input type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/16	10/17
<input type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/16	10/17
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/16	10/17
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/16	10/17
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	5/16	5/18
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/15	10/17
<input type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/16	5/18
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/16	10/17
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/16	10/17
<input type="checkbox"/> Antenna	EMCO	3143 (9607-1277)	20-1200 MHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP	8591EM (3628A00871)	9kHz-1.8GHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-110GHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP External Mixers	11571, 11970	25GHz-110GHz	5/16	5/17
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/16	5/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/16	10/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/16	10/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/16	10/17

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Transcore - Amtech Technology Center
Model: 05985
Test #: 170413
Test to: 47CFR Parts 2, 90 and RSS-137
File: Transcore 05985 TstRpt 170413

SN: ENG1
FCC ID: FIH05985
IC: 1584A-05985
Date: May 5, 2017
Page 11 of 32


Transmitter Power Output

Measurements Required

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

Test Arrangement

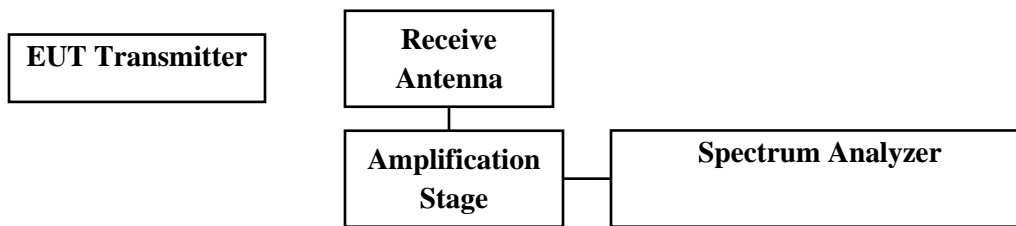

The radio frequency power output was measured on the Open Area Test Site (OATS). The design offers no provision for connection to antenna port. The substitution method was used to predict the transmitter output power level. The EUT was placed on a rotatable platform elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. The platform was rotated through 360 degrees to locate the position registering the highest amplitude emission. The frequency spectrum was searched for maximum emission generated. Emission level was measured and recorded for the maximum amplitude. The EUT transmitter was then removed and replaced with a substitution antenna, which was powered from a signal generator. The output signal from the generator was then adjusted such that the amplitude received was the same as that previously recorded for each frequency. This step was repeated for both horizontal and vertical polarizations. The power in dBm required to produce the desired signal level was then recorded from the signal generator. The power in dBm was then calculated by reducing the previous readings by the gain in the substitution antenna. The testing procedures used conform to the procedures stated in the TIA/EIA-603 document. Data was taken per 47CFR Paragraph 2.1046(a) and applicable paragraphs of Part 90 and RSS-137.

P_{dBm} = power in dB above 1 milliwatt
 Milliwatts = $10^{(P_{dBm}/10)}$
 Watts = (Milliwatts)(0.001)(W/mW)
 Milliwatts = $10^{(8.87/10)}$
 = 7.711 mW
 = 0.008 Watts power

Table 1 Transmitter Power Results

Frequency (MHz)	P_{dBm}	P_{mw}	P_w	OBW (kHz)
915 (Low power)	6.07	4.05	0.004	11,336.0
915 (High power)	8.87	7.71	0.008	11,336.0

The EUT demonstrated compliance with specifications of 47CFR Paragraph 2.1046(a) and applicable Parts of 2 and 90.205 and RSS-137. There are no deviations to the specifications.

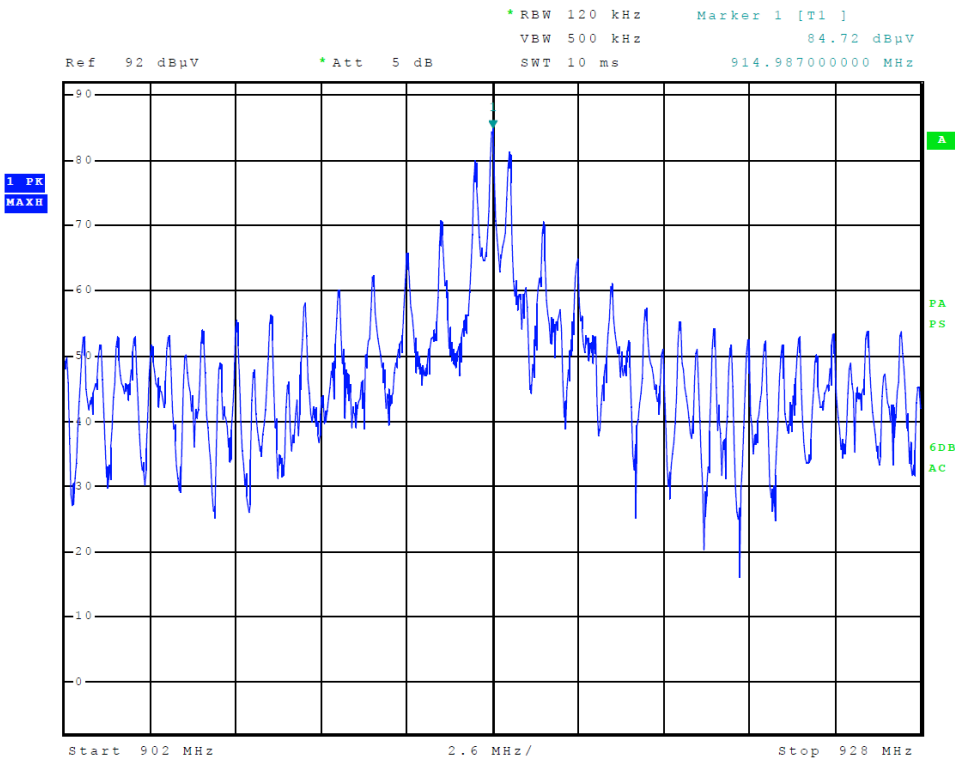


Figure 1 Transmitter Output across Frequency Band Low power mode

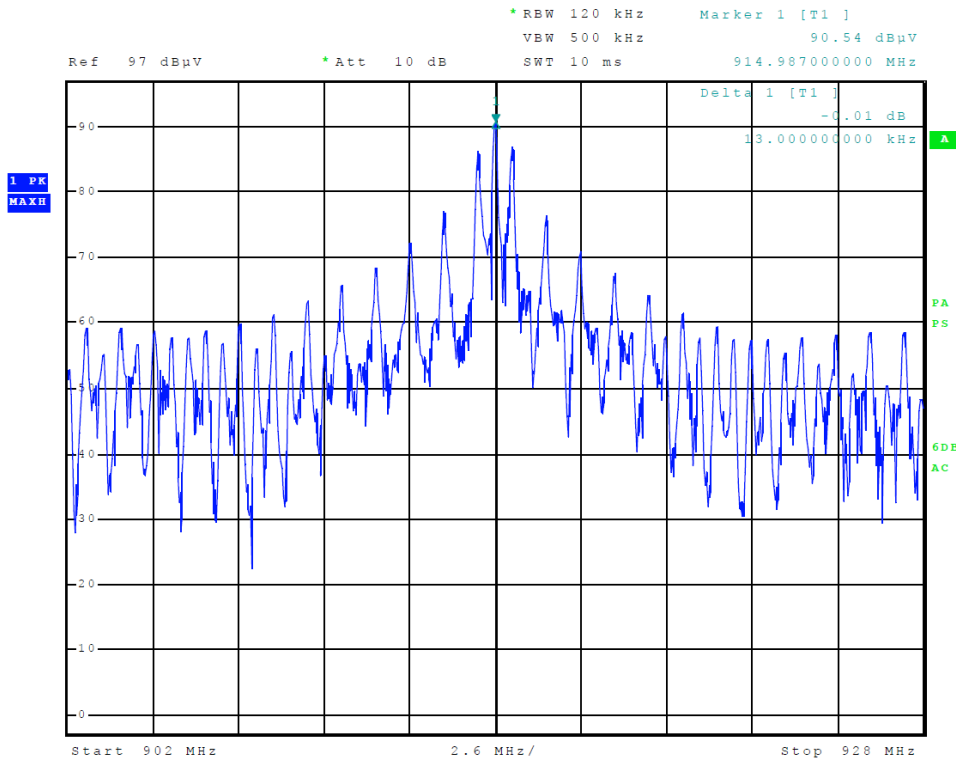



Figure 2 Transmitter Output across Frequency Band Low power mode

Modulation Characteristics

Measurements Required

A curve or equivalent data that shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed shall be submitted.

Test Arrangement

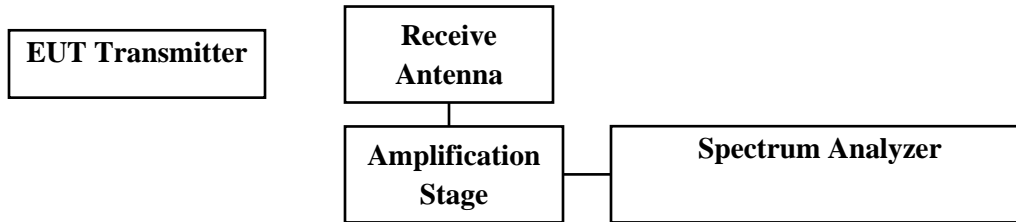

The radio frequency output was coupled to a Rohde & Schwarz ESU40 Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in its normal mode.

Results Modulation Characteristics

The transmitter operates providing digital data, transmitted signals modulated in amplitude/width/duration. The EUT demonstrated compliance with the specifications of Paragraphs 2.1046(a), 90.205 and RSS-137. There are no deviations to the specifications.

Occupied Bandwidth

Measurements Required

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are equal to 0.5 percent of the total mean power radiated by a given emission. Refer to figure three displaying plot of the occupied bandwidth measurement.

Test Arrangement

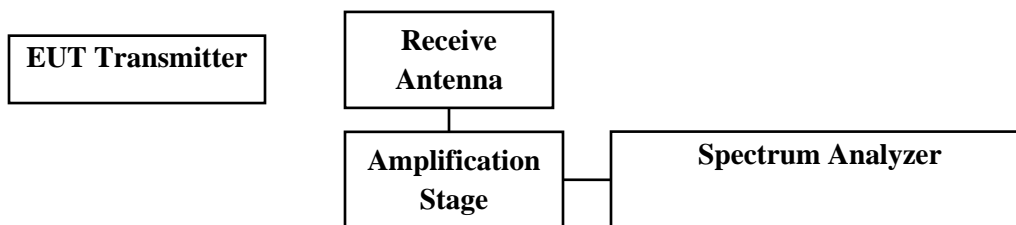


Table 2 Occupied Bandwidth Results

Operational Frequency Band (MHz)	Occupied Bandwidth (kHz)
915.00	11,336.0

The EUT demonstrated compliance with the requirements of Paragraphs 2.1046(a) 90.209 and RSS-137 paragraph 6.1. There are no deviations to the specifications.

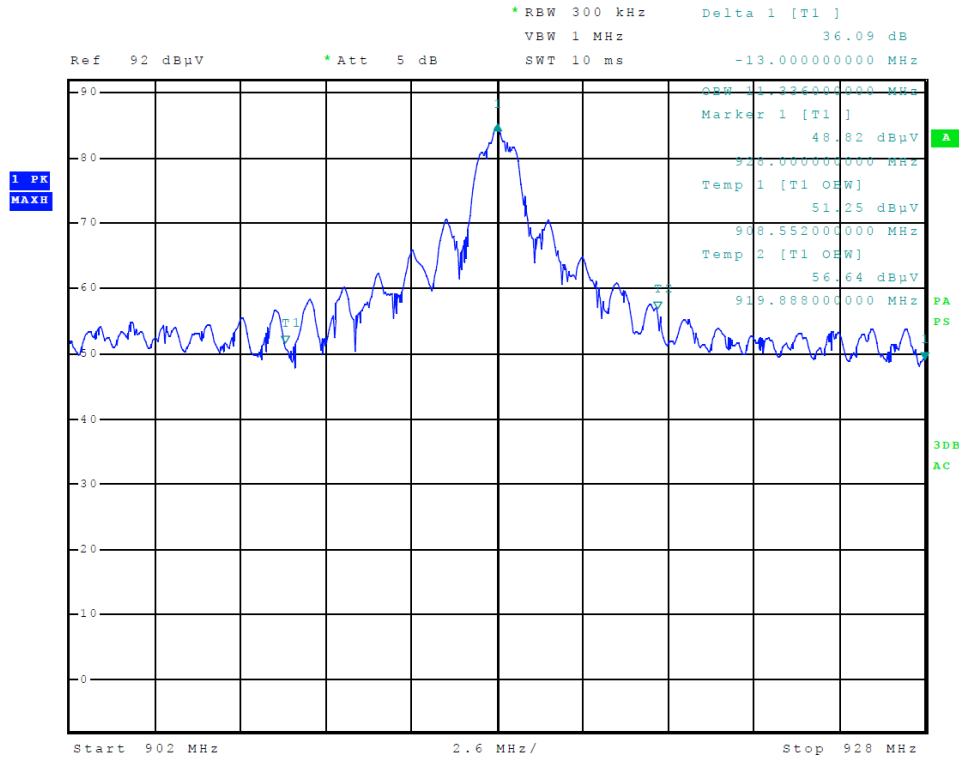



Figure 3 Occupied Bandwidth

Spurious Emissions

Measurements Required

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. To gain dynamic range in the test equipment, a high pass filter attenuated the fundamental frequency of operation was used to observe the harmonic emissions.

Test Arrangement

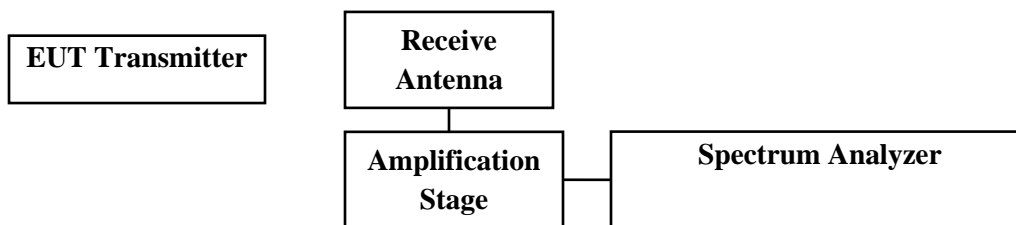

The radio frequency output was passively coupled to a Rohde & Schwarz ESU40 Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in its normal mode. The frequency spectrum from 9 kHz to 10 GHz was observed. Data was taken per 47CFR 2.1051 and applicable paragraphs of Part 90 and RSS-137.

Limit: Spurious emissions must be attenuated below the peak output power by the at least $55 + 10 \text{ Log } (P_o)$ dB.

0.004-watt transmitter limit requires the out of band emissions must be suppressed by at least 31.0 dBc and for full high power

$$\begin{aligned}
 \text{Attenuation} &= 55 + 10 \text{ Log}_{10}(P_w) \\
 &= 55 + 10 \text{ Log}_{10}(0.004) \quad \text{and high power} = 55 + 10 \text{ Log}_{10}(0.008) \\
 &= 31.0 \text{ dBc} \qquad \qquad \qquad = 34.0 \text{ dBc}
 \end{aligned}$$

Table 3 Spurious Emissions Results

Channel MHz	Spurious Freq. (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
Low Power			
915.00	1830.0	-43.13	49.1
	2745.0	-51.63	57.6
	3660.0	-52.93	58.9
	4575.0	-50.33	56.3
	5490.0	-50.33	56.3
	6405.0	-49.53	55.5
High Power			
915.00	1830.0	-43.73	38.0
	2745.0	-49.93	44.2
	3660.0	-53.23	47.5
	4575.0	-50.33	44.6
	5490.0	-50.33	44.6
	6405.0	-49.63	43.9


Data was taken per 2.1051 and applicable parts of 47CFR 90.210 and RSS-137. The EUT demonstrated compliance with the specifications of Paragraphs 47CFR 2.1051, 2.1057 and 90.210(k) and RSS-137 paragraph 6.5. There are no deviations to the specifications.

Emission Mask

Measurements Required

Transmitters used in the radio services governed by this part must comply with the emissions masks outlined in this section. Paragraph 90.210(K) specifies the out of band emission limitations for this equipment. The spurious emissions for the device were measured at the maximum output power condition.

Test Arrangement

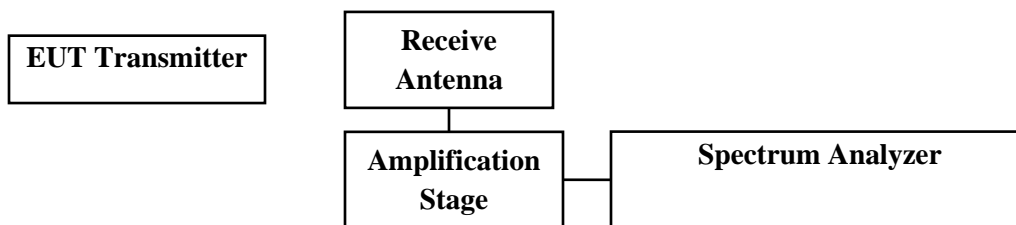

The radio frequency output was passively coupled to a Rohde & Schwarz ESU40 Spectrum Analyzer. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating through normal modes with maximum output power. The frequency spectrum at the band edges were observed and plots produced. Refer to figures four and five for plots presenting compliance with emission mask requirements at the band edges. Data was taken per 47CFR 2.1051 and applicable parts of Part 90.210 (k) and RSS-137.

Results Emission Mask

The EUT demonstrated compliance with the specifications of Paragraphs 47CFR 2.1051, 2.1057 and 90.210(k) and RSS-137 paragraph 6.5. There are no deviations to the specifications.

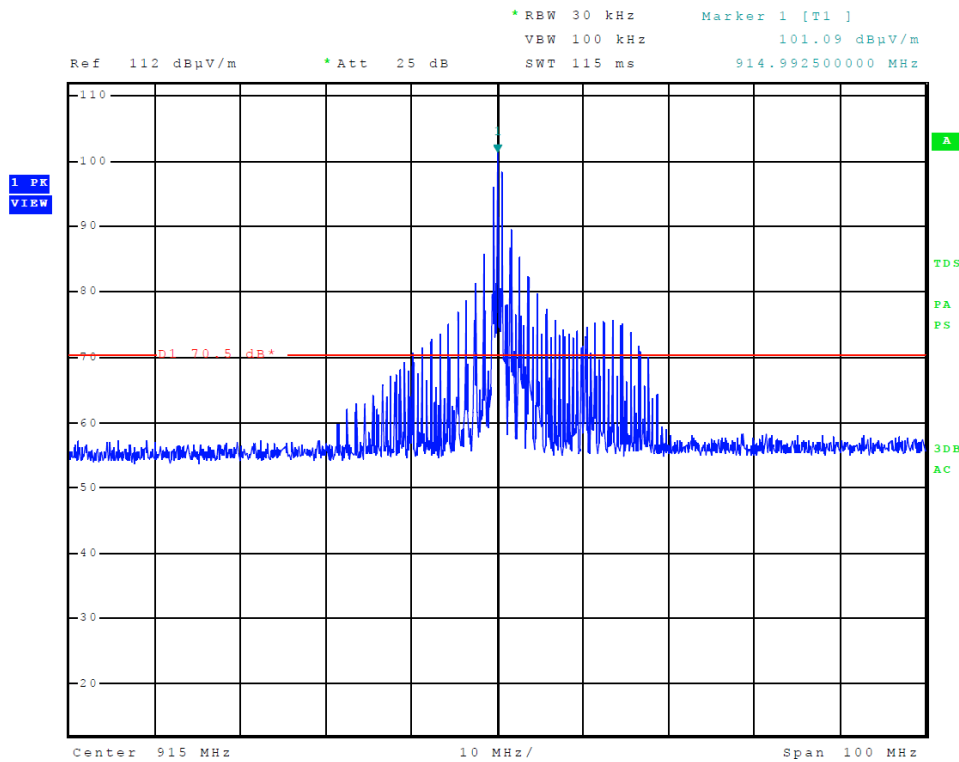


Figure 4 Emissions Mask Low power

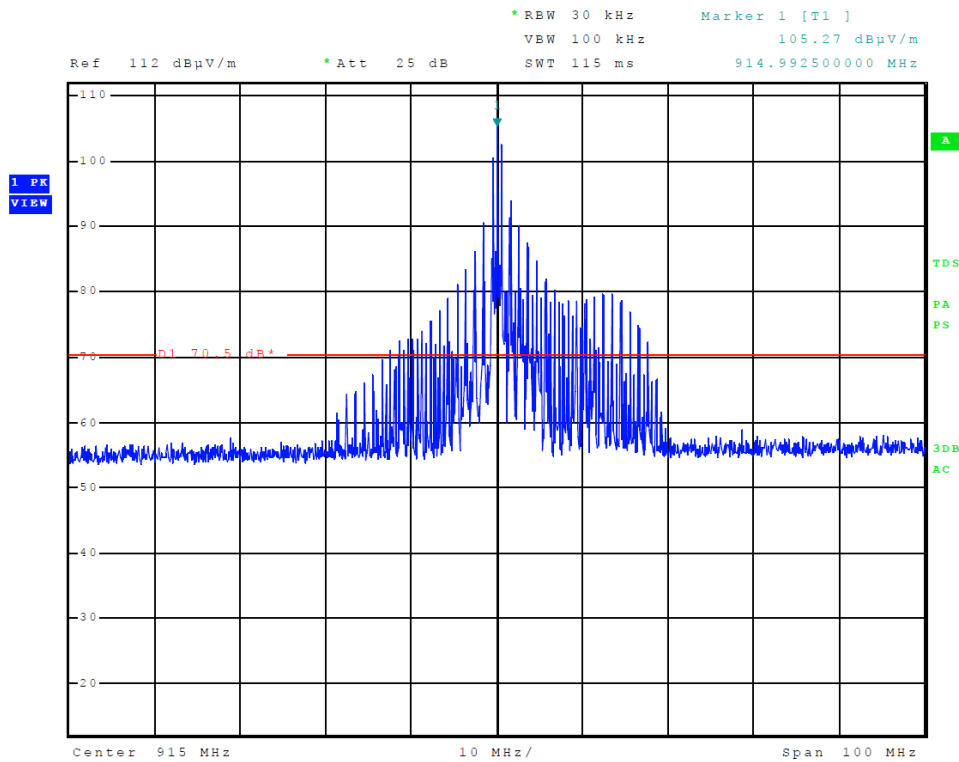



Figure 5 Emissions Mask High power

Field Strength of Spurious Radiation

Measurements Required

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation.

Test Arrangement

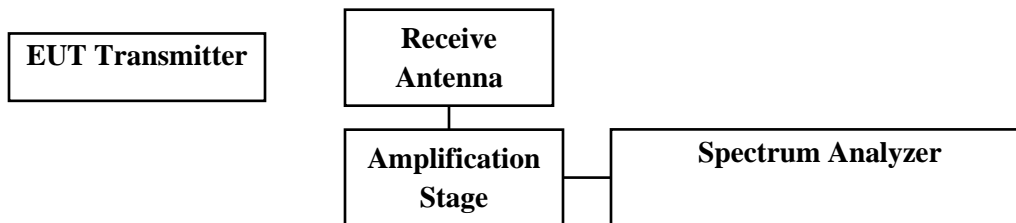

Preliminary radiated emissions investigation was made in a screen room to determine frequencies of emissions for investigation on the Open Area Test Site (OATS). The transmitter spurious emissions were measured on the OATS. The EUT was placed on a turntable elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. The turntable was rotated though 360 degrees to locate the position registering the highest amplitude emission. The frequency spectrum was then searched for spurious emissions generated from the transmitter. Raising and lowering the FSM antenna and rotating the turntable to maximize the emission. Data was measured and recorded for the maximum amplitude of each spurious emission. A Loop antenna was used for measuring emissions from 0.009 to 30 MHz, Biconilog Antenna for 30 to 1000 MHz, Double-Ridge, and/or Pyramidal Horn Antennas above 1 GHz. Emissions were measured in dB μ V/m @ 3 meters. The substitution method was used to measure harmonic emissions. Harmonic emission levels from the EUT were measured and amplitude levels were recorded. The EUT transmitter was then removed and replaced with a substitution antenna, which was powered from a signal generator. The output signal from the generator was then adjusted such that the amplitude received was the same as that previously recorded for each frequency. This step was repeated for both horizontal and vertical polarizations. The power in

dBm required to produce the desired signal level was then recorded from the signal generator. The power in dBm was then calculated by reducing the previous readings by the gain in the substitution antenna.

The limits for the spurious radiated emissions are defined by the following equation.

Limit = Amplitude of the spurious emission must be attenuated by this amount below the level of the fundamental. On any frequency removed from the assigned frequency outside the assigned sub-band edges: at least $55 + 10 \text{ Log } (P_o)$ dB.

0.004-watt transmitter limit specifies the level below the carrier must be suppressed more than 31.0 dB.

$$\begin{aligned} \text{Attenuation} &= 55 + 10 \text{ Log}_{10}(P_w) \\ &= 55 + 10 \text{ Log}_{10}(0.004) \\ &= 31.0 \text{ dBc} \end{aligned}$$

Therefore, emissions must be less than $5.7 - 31 = -25.3 \text{ dBm}$

Or for the high-power mode $8.8 - 34 = -25.2$

Data was taken per 2.1051 and applicable parts of 47CFR 90. The EUT demonstrated compliance with the specifications of Paragraphs 47CFR 2.1051, 2.1057 and 90.210(k) and RSS-137 paragraph 6.5. There are no deviations to the specifications.

Table 4 General Radiated Emission Results (worst-case)

Frequency	Amplitude of Emission (dBμV)		Signal Level to dipole required to Reproduce(dBm)		Emission level below carrier (dBc)		Limit (dBc)
	MHz	Horizontal	Vertical	Horizontal	Vertical	Horizontal	
118.0	18.7	18.1	-76.53	-77.13	-82.5	-83.1	-25.3
119.2	19.7	17.1	-75.53	-78.13	-81.5	-84.1	-25.3
122.4	20.9	17.4	-74.33	-77.83	-80.3	-83.8	-25.3
138.4	23.2	17.5	-72.03	-77.73	-78.0	-83.7	-25.3
142.0	21.2	16.1	-74.03	-79.13	-80.0	-85.1	-25.3
319.0	13.6	13.0	-81.63	-82.23	-87.6	-88.2	-25.3

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 5 Results Spurious Radiation

Frequency MHz	Amplitude of Emission (dBμV)		Signal Level to dipole required to Reproduce(dBm)		Emission level below carrier (dBc)		Limit (dBc)
	Horizontal	Vertical	Horizontal	Vertical	Horizontal	Vertical	
915.00 Low power							
1830.0	52.1	47.3	-43.13	-47.93	-49.1	-42.2	-25
2745.0	43.6	45.0	-51.63	-50.23	-57.6	-44.5	-25
3660.0	42.3	41.9	-52.93	-53.33	-58.9	-47.6	-25
4575.0	44.9	44.9	-50.33	-50.33	-56.3	-44.6	-25
5490.0	44.9	44.9	-50.33	-50.33	-56.3	-44.6	-25
6405.0	45.7	45.8	-49.53	-49.43	-55.5	-43.7	-25
915.00 High power							
1830.0	47.8	51.5	-47.43	-43.73	-53.4	-38.0	-25
2745.0	43.2	45.3	-52.03	-49.93	-58.0	-44.2	-25
3660.0	41.7	42.0	-53.53	-53.23	-59.5	-47.5	-25
4575.0	44.9	44.9	-50.33	-50.33	-56.3	-44.6	-25
5490.0	44.9	44.9	-50.33	-50.33	-56.3	-44.6	-25
6405.0	45.7	45.6	-49.53	-49.63	-55.5	-43.9	-25

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.


Frequency Stability

Measurements Required

The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade. Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability, the frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Test Arrangement

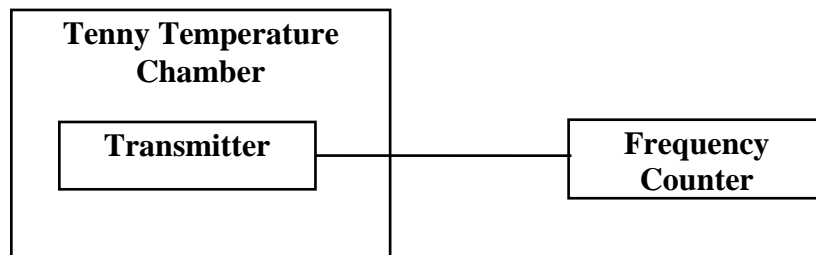

The measurement procedure outlined below shall be followed.

Step 1: The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.

Step 2: With the transmitter inoperative (power switched “OFF”), the temperature of the test chamber shall be adjusted to +25°C. After a temperature stabilization period of one hour at +25°C, the transmitter shall be switched “ON” with standard test voltage applied.

Step 3: The carrier shall be keyed “ON”, and the transmitter shall be operated at full radio frequency power output at the duty cycle, for which it is rated, for duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.

Step 4: The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified, -30°C to +50°C in 10-degree increments.

The frequency stability was measured with variations in the power supply voltage from 85 to 115 percent of the nominal value. A Sorensen DC Power Supply was used to vary the DC voltage for the power input nominally (3.3 V_{dc}) from 2.80 V_{dc} to 3.80 V_{dc}. The frequency was measured and the variation in parts per million calculated. Data was taken per 47CFR Paragraphs 2.1055 and applicable paragraphs of part 90.213 and RSS-137.

Table 6 Frequency Stability Results

Frequency 915.04192MHz	Frequency Stability Vs Temperature								
Temperature °C	-30	-20	-10	0	+10	+20	+30	+40	+50
Change (Hz)	1,078	1,052	1,050	1,047	1,053	269	2	273	1,021
PPM	1.178	1.150	1.147	1.144	1.150	0.294	0.002	0.299	1.116
%	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Limit (PPM)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Frequency 915.04192 MHz	Frequency Stability Vs Voltage Variation 3.3 volts nominal; Results in Hz change		
Voltage V _{dc}	2.80	3.30	3.80
Change (Hz)	-25.000	0.000	5.000

The EUT demonstrated compliance with specifications of 47CFR Paragraph 2.1046(a) and applicable Parts of 90.213 and RSS-137. There are no deviations or exceptions to the specifications.

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

Annex A Measurement Uncertainty Calculations

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43

Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration	Date	Due
Spectrum Analyzer: Rohde & Schwarz ESU40		5/16	5/17
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520		5/16	5/17
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W			
Spectrum Analyzer: HP 8591EM		5/16	5/17
Antenna: EMCO Biconilog Model: 3143		5/16	5/17
Antenna: Sunol Biconilog Model: JB6		10/16	10/17
Antenna: EMCO Log Periodic Model: 3147		10/16	10/17
Antenna: Com Power Model: AH-118		10/16	10/17
Antenna: Com Power Model: AH-840		5/16	5/18
Antenna: Antenna Research Biconical Model: BCD 235		10/16	10/17
Antenna: Com Power Model: AL-130		10/16	10/17
Antenna: EMCO 6509		10/16	10/17
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 μ Hy/50 ohms/0.1 μ f		10/16	10/17
R.F. Preamp CPPA-102		10/16	10/17
Attenuator: HP Model: HP11509A		10/16	10/17
Attenuator: Mini Circuits Model: CAT-3		10/16	10/17
Attenuator: Mini Circuits Model: CAT-3		10/16	10/17
Cable: Belden RG-58 (L1)		10/16	10/17
Cable: Belden RG-58 (L2)		10/16	10/17
Cable: Belden 8268 (L3)		10/16	10/17
Cable: Time Microwave: 4M-750HF290-750		10/16	10/17
Cable: Time Microwave: 10M-750HF290-750		10/16	10/17
Frequency Counter: Leader LDC825		2/17	2/18
Oscilloscope Scope: Tektronix 2230		2/17	2/18
Wattmeter: Bird 43 with Load Bird 8085		2/17	2/18
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140		2/17	2/18
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/17	2/18
R.F. Power Amp 65W Model: 470-A-1010		2/17	2/18
R.F. Power Amp 50W M185- 10-501		2/17	2/18
R.F. Power Amp A.R. Model: 10W 1010M7		2/17	2/18
R.F. Power Amp EIN Model: A301		2/17	2/18
LISN: Compliance Eng. Model 240/20		2/17	2/18
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		2/17	2/18
Antenna: EMCO Dipole Set 3121C		2/17	2/18
Antenna: C.D. B-101		2/17	2/18
Antenna: Solar 9229-1 & 9230-1		2/17	2/18
Audio Oscillator: H.P. 201CD		2/17	2/18
ELGAR Model: 1751		2/17	2/18
ELGAR Model: TG 704A-3D		2/17	2/18
ESD Test Set 2010i		2/17	2/18
Fast Transient Burst Generator Model: EFT/B-101		2/17	2/18
Field Intensity Meter: EFM-018		2/17	2/18
Shielded Room 5 M x 3 M x 3.0 M			

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Work experience includes six years working in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University
- 2) Bachelor of Science Degree in Business Administration Kansas State University
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Annex D FCC Test Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

**Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046**

April 16, 2015

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: April 16, 2015

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

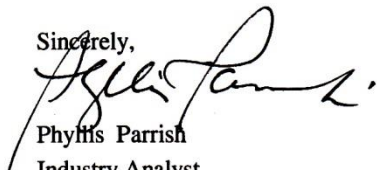

Phyllis Parrish
Industry Analyst

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Transcore - Amtech Technology Center
Model: 05985
Test #: 170413
Test to: 47CFR Parts 2, 90 and RSS-137
File: Transcore 05985 TstRpt 170413

SN: ENG1
FCC ID: FIH05985
IC: 1584A-05985
Date: May 5, 2017
Page 31 of 32

Annex E Industry Canada Test Site Registration Letter



June 08, 2015

OUR FILE: 46405-3041
Authorization No: 010277847-001

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg, KS
USA
66053

Attention: Mr. Scot D. Rogers

Dear Sir:

The Bureau has received your application for the renewal of 3m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2009 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2009 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2009 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed **three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL; http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

A handwritten signature in black ink that reads "Bill Payn".

Bill Payn
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station AH@
Ottawa, Ontario K2H 8S2
Email: certification.bureau@ic.gc.ca

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

Transcore - Amtech Technology Center
Model: 05985
Test #: 170413
Test to: 47CFR Parts 2, 90 and RSS-137
File: Transcore 05985 TstRpt 170413

SN: ENG1
FCC ID: FIH05985
IC: 1584A-05985
Date: May 5, 2017
Page 32 of 32