

AA3153 Toll Antenna

Features

- ▶ Low-profile antenna
- ▶ Virtually no side or back lobes
- ▶ Weatherproof enclosure



The AA3153 Toll Antenna broadcasts and receives radio frequency signals in the 902 to 928 MHz radio frequency band. It is specifically designed for toll lane applications, with virtually no side or back lobes, which helps confine antenna coverage to a single lane width. The AA3153 Toll Antenna is ideally suited to applications requiring a low profile antenna.

A weatherproof enclosure provides favorable electrical characteristics, resistance to ultraviolet radiation, and maximum corrosion resistance. The AA3153 Toll Antenna includes a sturdy aluminum backplate with mounting hardware, a multi-patch array, and matching network.

AA3153 Toll Antenna

COMMUNICATIONS

Frequency Range

902 to 928 MHz

Gain

10.5 dBi

Polarization

Linear — horizontal

Cross Polarization

< -15 dB

Side Lobes

£ -25 dB

VSWR

1.9:1

Impedance

50 ohms nominal

Half-Power Beam Width

50° E-plane and 60° H-plane

HARDWARE FEATURES

Connector

N-Type socket

PHYSICAL

Dimensions

Size (LxHxD): 20.06* x 15.13 x 2.50 in.
(50.96 x 38.43 x 6.35 cm)

*Length includes mounting flanges

Weight: 6.4 lb (2.9 kg)

Mounting Location

15 to 20 ft (4.6 to 6 m) above lane

Mounting Method

To support pipe with a maximum outer diameter of 3.0 in. (7.6 cm)

ENVIRONMENTAL

Temperature

-40°F to +167°F (-40°C to +75°C)

Humidity

100% condensing



Vibration Tolerance

0.5 G_{rms}, 10 to 500 Hz

OPTIONS

Check Tag

The AA3153 Toll Antenna may be ordered without an internal check tag or with the AT5720 external check tag installed.

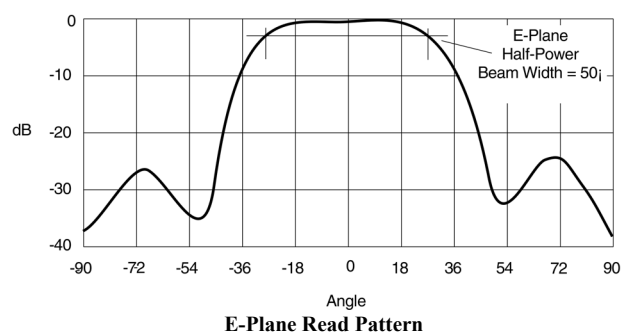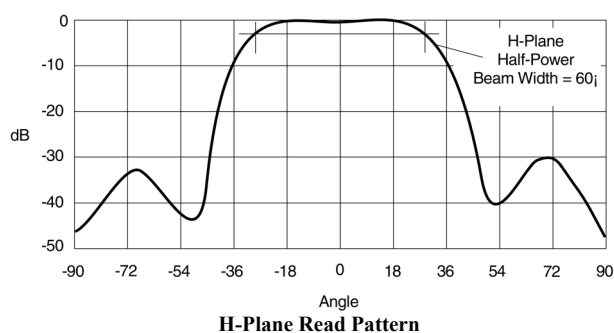

For more information:

Call **800.923.4824** (Sales Support) **505.856.8007** (Technical Support)

© 2000-2016 TransCore LP. All rights reserved. TRANSCORE is a registered trademark and is used under license. All other trademarks are the property of their respective owners. Contents subject to change. Printed in the U.S.A.

411271-010 - 06/16

TRANSCORE
transcore.com