

# AA3152 Universal Toll Antenna

## Features

- ▶ Toll lane suitability
- ▶ Symmetrical broadcast pattern
- ▶ Low-profile design
- ▶ Weatherproof enclosure



The AA3152 Universal Toll Antenna (UTA) broadcasts and receives radio frequency (RF) signals in the 902 to 928 MHz frequency band.

For installations requiring a relatively symmetrical, three-dimensional reading area, the UTA offers a broadcast pattern of similar size and shape in both the horizontal and vertical planes. The UTA read area is ideal for toll lane applications because the read area has virtually no side or back lobes, helping to confine antenna coverage to a single lane width.

Only 2.25 inches (5.7 centimeters) in depth, the AA3152 antenna is also ideally suited to applications requiring a low-profile antenna. The weatherproof enclosure provides favorable electrical characteristics, resistance to ultraviolet radiation, and maximum corrosion resistance.

# AA3152 Universal Toll Antenna

## COMMUNICATIONS

### Frequency Range

902 to 928 MHz

### Gain

14 dBi

### Polarization

Linear-horizontal

### Cross Polarization (with respect to main beam)

-20 dB

### Side Lobes (with respect to peak of main beam)

< -25 dB (E-plane) and < -17 dB (H-plane)

### VSWR

1.9:1

### Impedance

50 ohms nominal

### Half-Power Beam Width

36° E-plane and 38° H-plane

## HARDWARE FEATURES

### Connector

Type N female

## PHYSICAL

### Dimensions

Size: 31.5 x 2.25 x 20 in. (80 x 5.7 x 50.8 cm)

Weight: 26 lb (11.7 kg)

### Mounting Height

15 to 20 ft (4.6 m to 6 m) above lane

16 ft (4.9 m) optimum

### Mounting Method

To support pipe with a maximum outer diameter of 3.0 in. (7.6 cm)

### Enclosure

Weatherproof radome

## ENVIRONMENTAL

### Operating Temperature

-40°F to +167°F (-40°C to +75°C)

### Humidity

100% condensing


### Vibration Tolerance

1 G<sub>rms</sub>, 10 to 500 Hz

## OPTIONS


### Check Tag

May be ordered with the AT5720 Check Tag installed

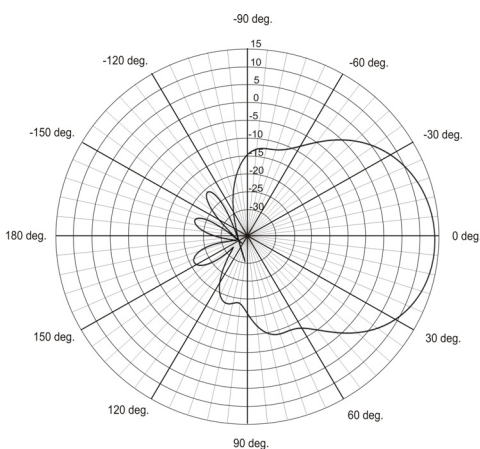

Normalized E-Plane (Azimuth) Pattern (H-Pol), Gpk = 14 dBi

## Radiation Patterns

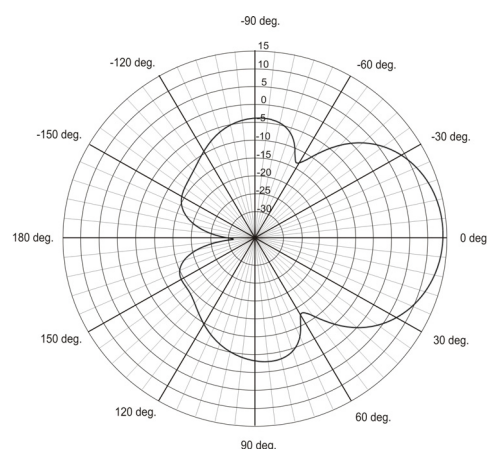

Normalized H-Plane (Elevation) Pattern (H-Pol), Gpk = 14 dBi @915 MHz

For more information:

Call **800.923.4824** (Sales Support) **505.856.8007** (Technical Support)

© 1996-2016 Transcore LP. All rights reserved. TRANSCORE is a registered trademark and is used under license. All other trademarks listed are the property of their respective owners. Contents subject to change. Printed in the U.S.A.