

APPLICANT: Monterey International Corp.

FCC ID: FKD46AK380

1/22

CERTIFICATION

We hereby certify that:

The test data , data evaluation , test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992)/CISPR 22 (1996) and the energy emitted by the sample EUT tested as described in this report is in compliance with CLASS B conducted and radiated emission limits of FCC Rules Part 15 , Subpart B/CISPR 22 (1996).

Prepared by : Patty Chiang



Reviewed by : Vincent Su



Approved by : George Yao



Issued Date : Sep 07, 2000

Report No. : NEI-FCCB-00110

Company Stamp :



NEUTRON ENGINEERING INC.

No. 132-1, Lane 329, Sec. 2, Palain Road,
Shijr Jen Taipei, Taiwan, R.O.C.

TEL: (02) 2646-5426 FAX: (02) 2646-6815

Table of Contents

1. General Information.....	
1-1 Product Description.....	4
1-2 Related Submittal(s)/Grant(s).....	4
1-3 Tested System Details.....	5
1-4 Test Methodology.....	6
1-5 Test Facility.....	6
2. System Test Configuration.....	
2-1 Justification.....	7
2-2 EUT Exercise Software.....	7
2-3 Special Accessories.....	8
2-4 Equipment Modifications.....	8
2-5 Configuration of Tested System.....	10
Figure 2-1 Configuration of Tested System.....	12
3. Conducted and Radiated Measurement Photos.....	
Figure 3-1. Conducted Measurement Photos.....	13
Figure 3-2 Radiated Measurement Photos.....	15
4. Conducted Emission Datas.....	17
5. Radiated Emission Datas	
5-1 Reaiated Emission Data.....	19
5-2 Field Strength Calculation.....	21
5-3 Correction Factor Table VS Frequency.....	22

1. GENERAL INFORMATION

1-1. Product Description

The Monterey International Corp. Model: K380 (referred to as the EUT in this report) is a 104/105 keys enhanced layout. Especially with new key support for Microsoft Windows key.

The summarized feature of EUT are described as following:

- Fashion Styling
- 107/108 enhanced layout
- Multifunction keys
- Microsoft Windows compatible
- PS/2; USB compatible
- Laser engraved printing
- Compact low profile

Please see User Manual of this submittals for features descriptions and details.

1-2. Related Submittal(s) / Grant (s)

1-2-1. Models Covered

Models covering in this test report is :K380

1-2-2. Models Difference

N/A

1-3. Tested System Details

The FCC IDs for all equipments, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Model No.	FCC ID	Equipment	Cable
K380 ⁽¹⁾	FKD46AK380	Keyboard	Shielded Data Cable.
CM753ET	N/A(3)	Monitor	Shielded Data Cable ⁽²⁾ Un-Shielded Power Cord
444	N/A(3)	PC	Shielded Power Cord.
DPU-414	N/A(3)	Printer	Shielded Data Cable Un-Shielded Power Cord
DM-1414V	N/A(3)	Modem	Shielded Data Cable Un-Shielded Power Cord
SERUES.2-7S	DZL6QBS2	Mouse	Shielded Data Cable

Notes:

(1) EUT submitted for grant.

(2) Monitor's attached video cable without ferrite core.

(3) The support Equipment was authorized by Declaration of Confirmation.

1-4. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992)/CISPR 22 (1996). Radiated testing was performed at an antenna to EUT distance 10 meters.

1-5. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of No. 132-1, Lane 329, Sec. 2, Palain Road, Shijr 221, Taipei, Taiwan, R.O.C. of NEUTRON ENGINEERING INC. This site has been fully described in report dated Jun. 25, 1999 Submitted to your office, and accepted in a letter dated Sep. 02, 1999 (Reg. No. 95335).

2. System Test Configuration

2-1. Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). The Keyboard was connected to support equipment-personal computer. Peripherals of PC, such as monitor, mouse, modem and printer were contained in this system in order to comply with the CISPR22 (1996) Rules requirement. The PC operated in the default 640 x 480 / 31.5 KHz VGA Graphic mode. This operating condition was tested and used to collect the included data.

2-2. EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disk, was inserted into driver A and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read (write) from (to) mass storage device (Disk).
2. Send "H" pattern to video port device (Monitor).
3. Send " H " pattern to parallel port device (Printer).
4. Send " H " pattern to serial port device (Modem).
5. Repeated from 2 to 4 continuously.

As the EUT and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.

2-3. Special Accessories

No any other special accessory used for compliance testing.

2-4. Equipment Modifications

In order to achieve in compliance with Class B levels, the following change(s) were made
By NEUTRON test house during the compliance testing:

Please refer to the next page as the modifications described and cross reference of photos of
Tested EUT.

The above modifications will be implemented in all product models of this equipment.

Applicant Signature : Eric Weng

Date: Sep 08, 2000

Type/Printed Name : Eric Weng

Position: Mech. Eng./R&D



MONTEREY International Corp.

*IFL, No. 40 Deh Hwei St., Taipei, Zip Code 104, Taiwan, R.O.C.
Tel:886-2-591-7138 Telex:25171 Monterey
Fax:886-2-593-1075/591-7378*

Modification Report

Company: Monterey International Corp.

Model No.: K380

Page 1 of 1

FCC ID:FKD46AK380

Date: Sep. 15, 2000

A. Add a trorid core on the data cable.

All the above modification will be implemented and relayout in the mass production to meer the FCC Class B requirements.

Monterey International Corp.

Eric Weng

Eric Weng

Mech. Eng./R&D

2.5 Configuration of Tested System

The configuration of tested system is described as the block diagram shown in next page Figure 3.1 and details information of I/O cable an power cord connection are tabulated as Table A and B. The monitor is powered from a floor mounted receptacle (referred to as the wall outlet in the previous described)was tested.

TABLE A - Test Equipment

Item	Equipment	Mfr.	Model/Type No.	I/O Port	FCC ID	Remark
E-1	Keyboard	Monterey	K38 Ø	PS/2 Port USB Port	FKD46AK38 Ø	EUT
E-2	Monitor	HITACHI	CM753ET	VGA Port	N/A(3)	
E-3	PC	IBM	444		N/A(3)	
E-4	Printer	SII	DPU-414	Printer Port	N/A(3)	
E-5	Modem	ACEEX	DM-1414V	Com Port	N/A(3)	
E-6	Mouse PS2	Logitech	SERUES.2-7S	PS/2 Port	DZL6QBS2	

Remark:

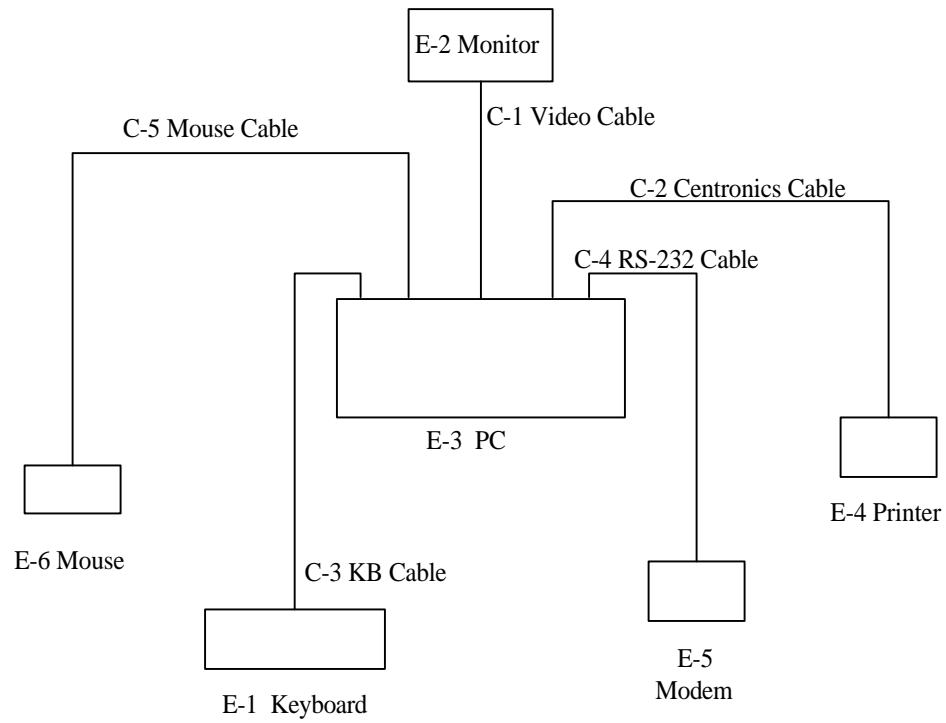
- (1) Unless otherwise denoted as EUT in (Remark) column , device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as * in(Remark)column, Neutron consigns the supporting equipment(s) to the tested system.
- (3) The support equipment was authorized by Declaration of Confirmation.

Table B. - Informations Cable Information

Item	I/O Cable	Device Connected	Shielded	Ferrite	Detachable/Permanently	Note
C-1	Video Cable	PC-Monitor	Yes	No	Permanently attached	
C-2	Centronics Cable	PC-Printer	Yes	No	Detachable type	
C-3	Keyboard Cable	EUT-PC	Yes	No	Permanently attached	*
C-4	RS-232 Cable	PC-Modem	Yes	No	Detachable type	
C-5	Mouse Cable	PC-Mouse	Yes	No	Permanently attached.	

Note:

(1) Unless otherwise marked as * in (Remark) column, Neutron consigns the supporting equipment(s) to the tested system.

Figure 2.1 Configuration of Tested System


3. Conducted and Radiated Measurement Photos

3-1. Conducted Measurement Photos(PS2)



3. Conducted and Radiated Measurement Photos

3-1. Conducted Measurement Photos(USB)

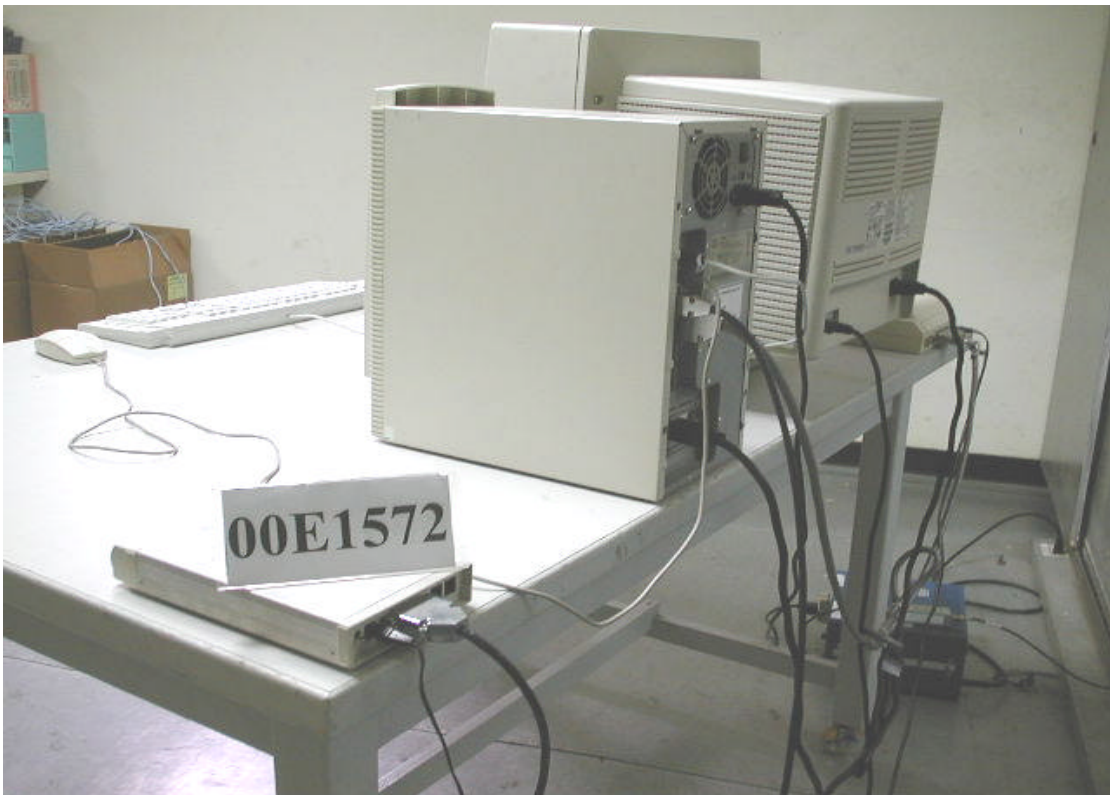

3-2. Radiated Measurement Photos(PS2)



3-2. Radiated Measurement Photos(USB)



4. Conducted Emission Datas

4.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Mode : PS/2 Port

Judgement: Passed by **-15.20** dB in mode of **Line** terminal **6.84** MHz

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins (dBuV)	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dBuV)	Note
0.17	Line	47.19	*	64.91	54.91	-17.72	(QP)
1.43	Line	32.17	*	56.00	46.00	-23.83	(QP)
3.35	Line	36.30	*	56.00	46.00	-19.70	(QP)
6.84	Line	44.80	*	60.00	50.00	-15.20	(QP)
27.86	Line	39.67	*	60.00	50.00	-20.33	(QP)
0.17	Neutral	47.19	*	64.99	37.40	-17.80	(QP)
0.26	Neutral	37.61	*	61.37	51.37	-23.76	(QP)
0.97	Neutral	32.41	*	56.00	46.00	-23.59	(QP)
8.28	Neutral	41.41	*	60.00	50.00	-18.59	(QP)
28.30	Neutral	37.07	*	60.00	50.00	-22.93	(QP)

Remark :

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=100KHz,VBW =100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of(Note). If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " *" marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review:

Timent Su

Test Personnel.:

Em c

Date:

June 01, 2000

4. Conducted Emission Datas

4.1 The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Mode : USB Port

Judgement: Passed by **-13.02** dB in mode of **Line** terminal **8.19** MHz

Freq. (MHz)	Terminal L/N	Measured(dBuV)		Limits(dBuV)		Safe Margins	
		QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dBuV)	Note
0.16	Line	45.36	*	65.25	55.25	-19.89	(QP)
0.71	Line	37.01	*	56.00	46.00	-18.99	(QP)
2.41	Line	37.61	*	56.00	46.00	-18.39	(QP)
6.09	Line	46.21	*	60.00	50.00	-13.79	(QP)
11.81	Line	44.87	*	60.00	50.00	-15.13	(QP)
0.16	Neutral	48.36	*	65.25	37.40	-16.89	(QP)
2.41	Neutral	37.61	*	56.00	46.00	-18.39	(QP)
6.19	Neutral	45.83	*	60.00	50.00	-14.17	(QP)
8.19	Neutral	46.98	*	60.00	50.00	-13.02	(QP)
12.92	Neutral	44.67	*	60.00	50.00	-15.33	(QP)

Remark:

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz;SPA setting in RBW=100KHz,VBW =100KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=1MHz,VBW=10Hz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of(Note). If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (3) Measuring frequency range from 150KHz to 30MHz.

Review:

Timothée Su

Test Personnel.:

Emil

Date:

June 01, 2000

5. Radiated Emission Datas

- 5.1** The following data lists the significant emission frequency, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test Mode : PS/2 Port

Judgement: Passed by **-2.60** dB in polarity of **Horizontal** **111.79** MHz

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
37.97	V	39.80	- 15.08	24.72	30.00	- 5.28	
62.66	H	39.20	- 15.97	23.23	30.00	- 6.77	
64.30	V	42.80	- 16.19	26.61	30.00	- 3.39	
111.79	H	39.00	- 11.60	27.40	30.00	- 2.60	
139.80	V	38.70	- 12.76	25.94	30.00	- 4.06	
171.99	H	36.20	- 13.24	22.96	30.00	- 7.04	
221.60	H	40.25	- 14.66	25.59	30.00	- 4.41	
226.40	V	40.94	- 14.48	26.46	30.00	- 3.54	
314.40	V	43.00	- 10.64	32.36	37.00	- 4.64	
440.80	H	39.30	- 7.15	32.15	37.00	- 4.85	
486.40	V	38.22	- 6.01	32.21	37.00	- 4.79	
488.00	H	38.80	- 5.96	32.84	37.00	- 4.16	

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz; SFA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of(Note). Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

Review:

Timothy Su

Test Personnel. :

Timothy Su

Date:

June 01, 2000

5. Radiated Emission Datas

- 5.1** The following data lists the significant emission frequency, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Test Mode : USB Port

Judgement: Passed by **-2.14 dB** in polarity of **Vertical** **226.47 MHz**

Freq. (MHz)	Ant. H/V	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Safe Margins (dBuV/m)	Note
36.01	H	41.30	- 15.25	26.05	30.00	- 3.95	
72.34	V	40.60	- 17.66	22.94	30.00	- 7.06	
120.58	V	36.60	- 13.94	22.66	30.00	- 7.34	
168.20	V	34.70	- 12.72	21.98	30.00	- 8.02	
168.78	H	38.00	- 12.89	25.11	30.00	- 4.89	
198.91	H	39.00	- 15.06	23.94	30.00	- 6.06	
204.96	H	39.50	- 15.10	24.40	30.00	- 5.60	
204.96	V	41.20	- 15.10	26.10	30.00	- 3.90	
210.98	H	37.60	- 15.13	22.47	30.00	- 7.53	
223.03	H	37.20	- 14.62	22.58	30.00	- 7.42	
226.47	V	42.30	- 14.44	27.86	30.00	- 2.14	
336.01	V	43.40	- 10.18	33.22	37.00	- 3.78	

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz;SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of(Note). Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

Review:

Timothée

Test Personnel. :

Eric

Date:

June 01, 2000

5-2. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where **FS = Field Strength**

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor (1)

AG = Amplifier Gain (1) (2)

Remark :

(1) The Correction Factor = AF + CL - AG, as shown in the data tables' Correction Factor column.

(2) AG is not available for Neutron's Open Site Facility

Example of Calculation:

Assume a Receiver Reading of 23.7 dBuV is obtained with an Antenna Factor of 7.2 dBuV and a Cable Factor of 1.1 dBuV. Then:

1. The Correction Factor will be calculated by

$$\text{Correction Factor} = AF + CL - AG = 7.2 + 1.1 - 0 = 8.3 \text{ (dB)}$$

as shown in the data tables' Correction Factor column.

2. The Field Strength will be calculated by

$$FS = RA + \text{Correction Factor} = 23.7 + 8.3 = 32 \text{ (dBuV/m)}.$$

FS is the value shown in the data tables' Corrected Reading column and RA is the value shown in

the data tables' Receiver Reading column. The 32 dBuV/m value was mathematically converted

to its corresponding level in uV/m as:

$$\text{Log}^{-1}\{(32.0\text{dBuV/m})/20\} \times 39.8 \text{ (uV/m)}$$

5-3. Correction Factor VS Frequency

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30.00	11.10	0.90
35.00	10.80	0.50
40.00	11.20	1.00
45.00	11.50	0.80
50.00	11.30	1.00
55.00	10.50	1.30
60.00	9.90	1.00
65.00	8.70	1.50
70.00	7.60	1.20
75.00	6.40	1.40
80.00	6.10	1.30
85.00	7.00	1.40
90.00	8.00	1.70
95.00	10.00	1.50
100.00	11.20	1.90
110.00	12.60	2.00
120.00	13.00	1.80
130.00	12.50	1.80
140.00	12.00	2.00
150.00	12.00	2.20
160.00	13.20	2.40
170.00	14.80	2.50
180.00	16.30	2.50
190.00	17.00	2.50
200.00	17.30	2.40
225.00	10.50	2.70
250.00	11.70	3.10
275.00	12.80	3.70
300.00	14.50	4.00
325.00	14.00	4.50
350.00	14.20	4.50
375.00	14.60	4.60
400.00	15.10	4.80
450.00	16.20	5.40
500.00	17.60	6.50
550.00	17.80	7.00
600.00	18.40	7.10
650.00	19.50	7.10
700.00	20.80	7.20
750.00	20.50	7.50
800.00	21.10	8.00
850.00	22.40	8.60
900.00	23.50	8.90
950.00	24.00	9.70
1000.00	24.80	10.30

