

## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.293$  S/m;  $\epsilon_r = 48.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11a/Ch44/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.52 W/kg

**Rear/Main Ant/802.11a/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.10 W/kg

**SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.272 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.97 W/kg

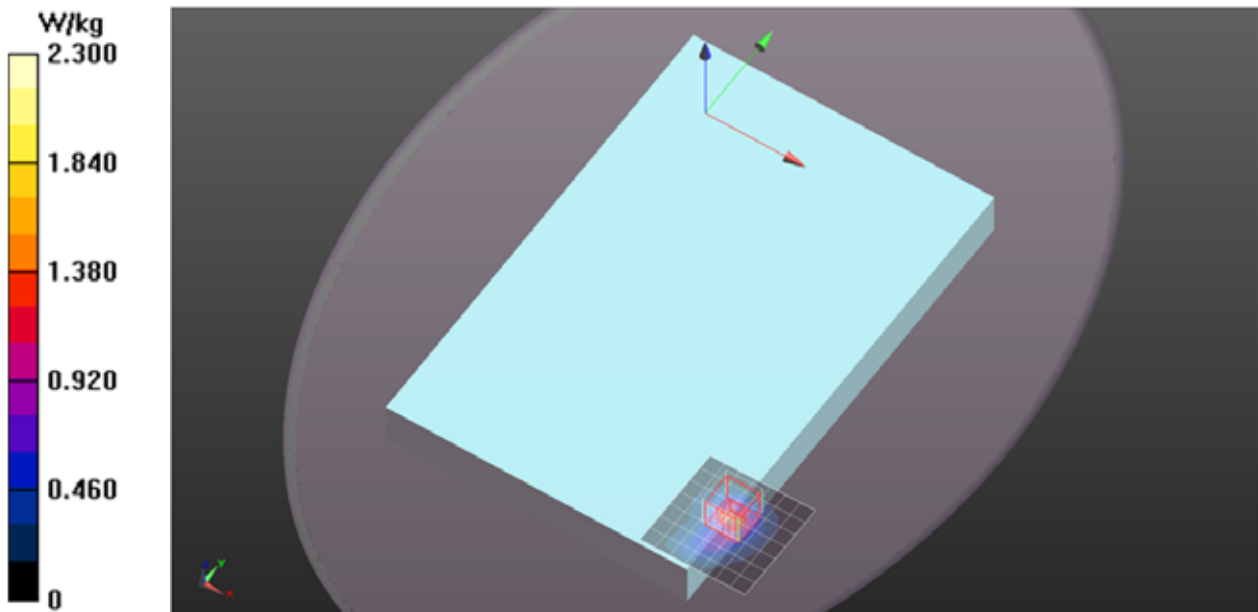

## 5GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5200$  MHz;  $\sigma = 5.266$  S/m;  $\epsilon_r = 48.586$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11a/Ch40/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.14 W/kg

**Rear/Main Ant/802.11a/Ch40/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 4.23 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.369 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.66 W/kg

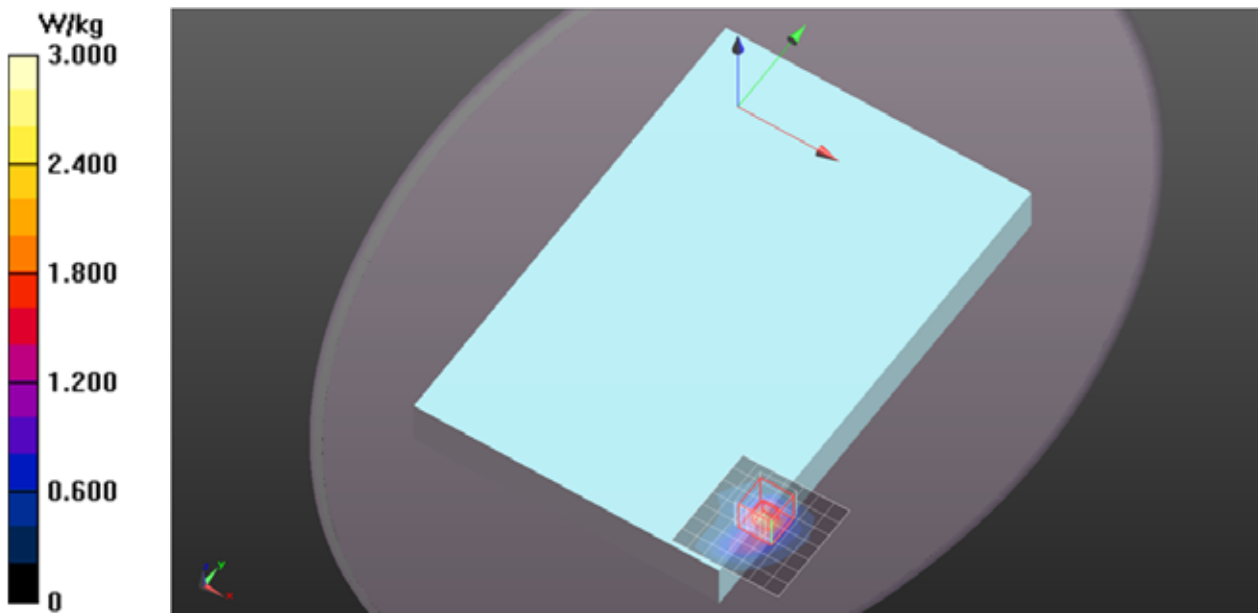

## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.386$  S/m;  $\epsilon_r = 48.427$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11a/Ch60/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.07 W/kg

**Rear/Main Ant/802.11a/Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm,


dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 4.32 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.366 W/kg**

Maximum value of SAR (measured) = 2.68 W/kg

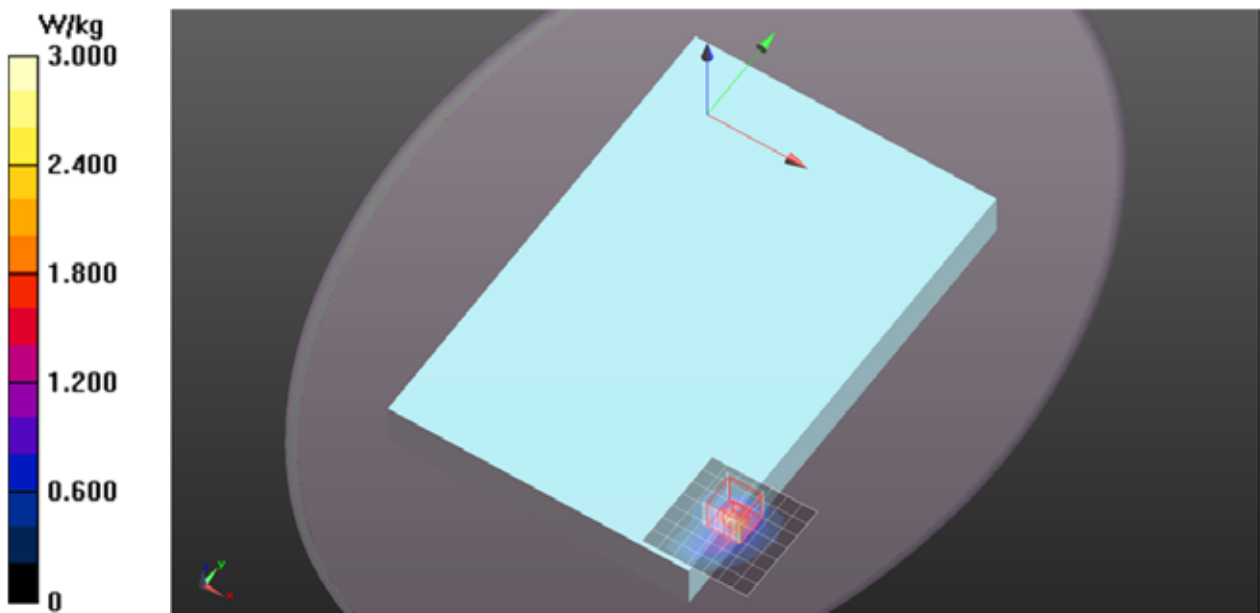

## 5GHz Band

Frequency: 5280 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5280.4$  MHz;  $\sigma = 5.368$  S/m;  $\epsilon_r = 48.464$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11a/Ch56/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.05 W/kg


**Rear/Main Ant/802.11a/Ch56/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.889 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.88 W/kg

**SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.277 W/kg**

Maximum value of SAR (measured) = 1.79 W/kg

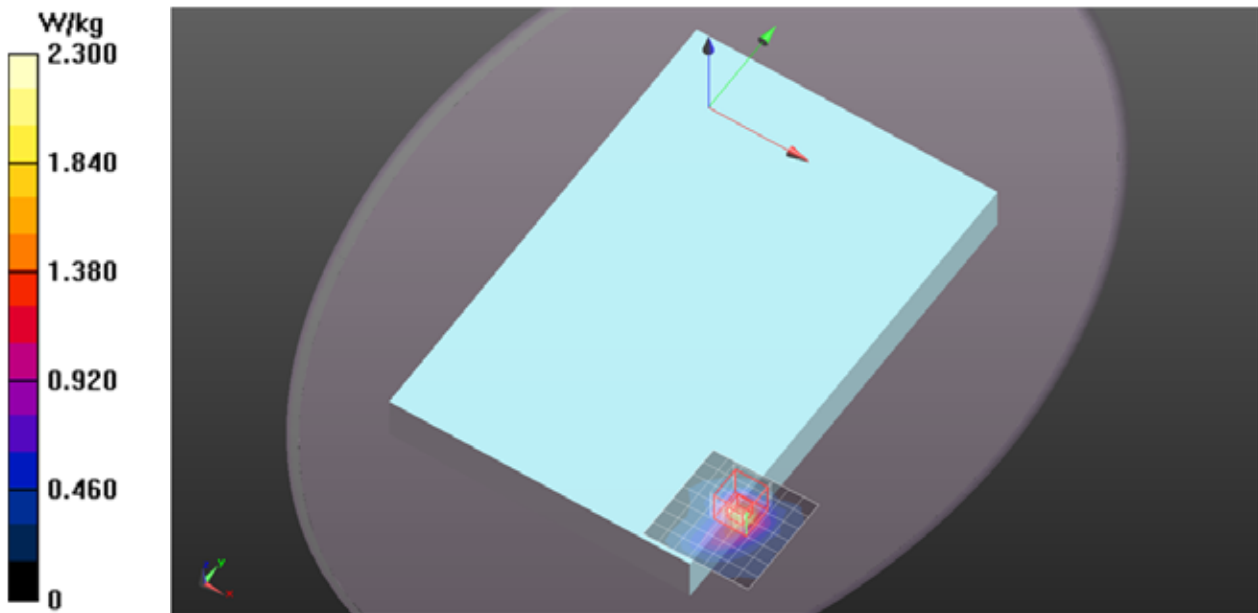

## 5GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5560.9$  MHz;  $\sigma = 5.712$  S/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11a/Ch112/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.94 W/kg


**Rear/Main Ant/802.11a/Ch112/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 4.59 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.354 W/kg**

Maximum value of SAR (measured) = 2.73 W/kg

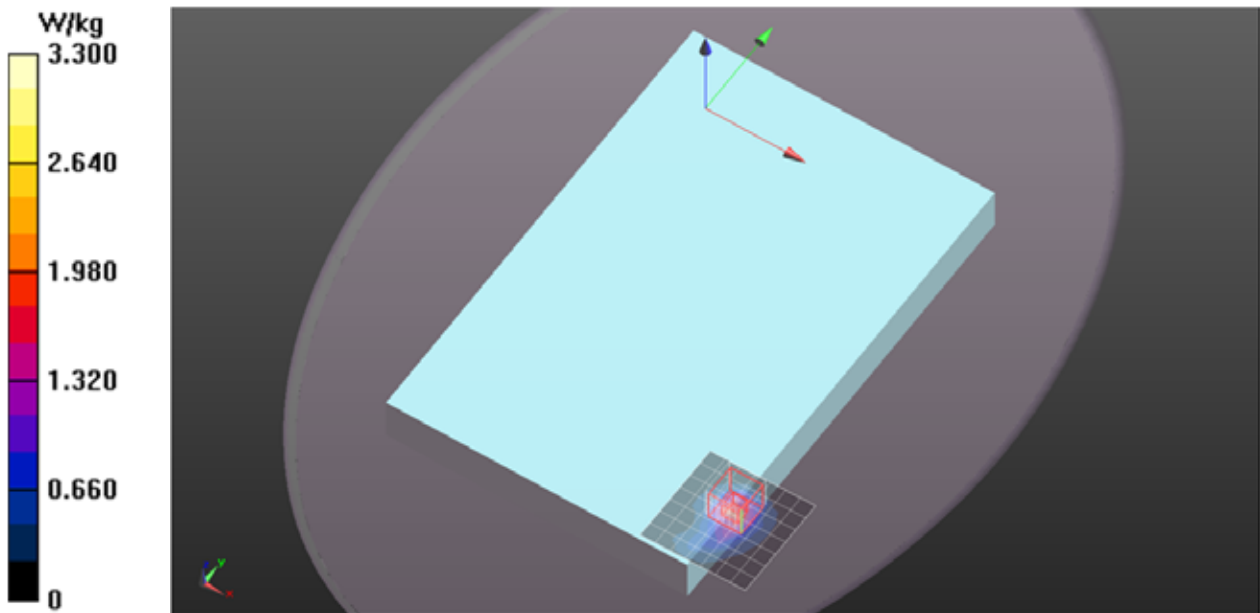

## 5GHz Band

Frequency: 5660 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5660$  MHz;  $\sigma = 5.839$  S/m;  $\epsilon_r = 47.863$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Rear/Main Ant/802.11a/Ch132/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.14 W/kg

**Rear/Rear/Main Ant/802.11a/Ch132/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.41 W/kg

**SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.276 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.01 W/kg

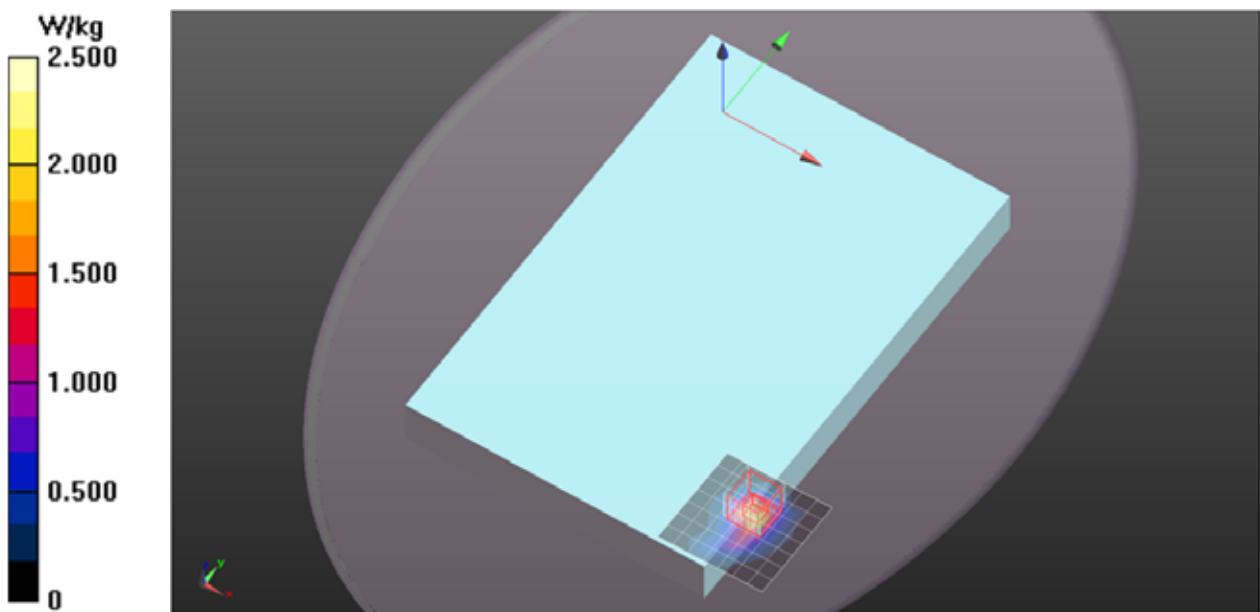

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 5.996$  S/m;  $\epsilon_r = 47.666$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11a/Ch157/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.40 W/kg

**Rear/Main Ant/802.11a/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm,


dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.56 W/kg

**SAR(1 g) = 0.816 W/kg; SAR(10 g) = 0.253 W/kg**

Maximum value of SAR (measured) = 2.08 W/kg

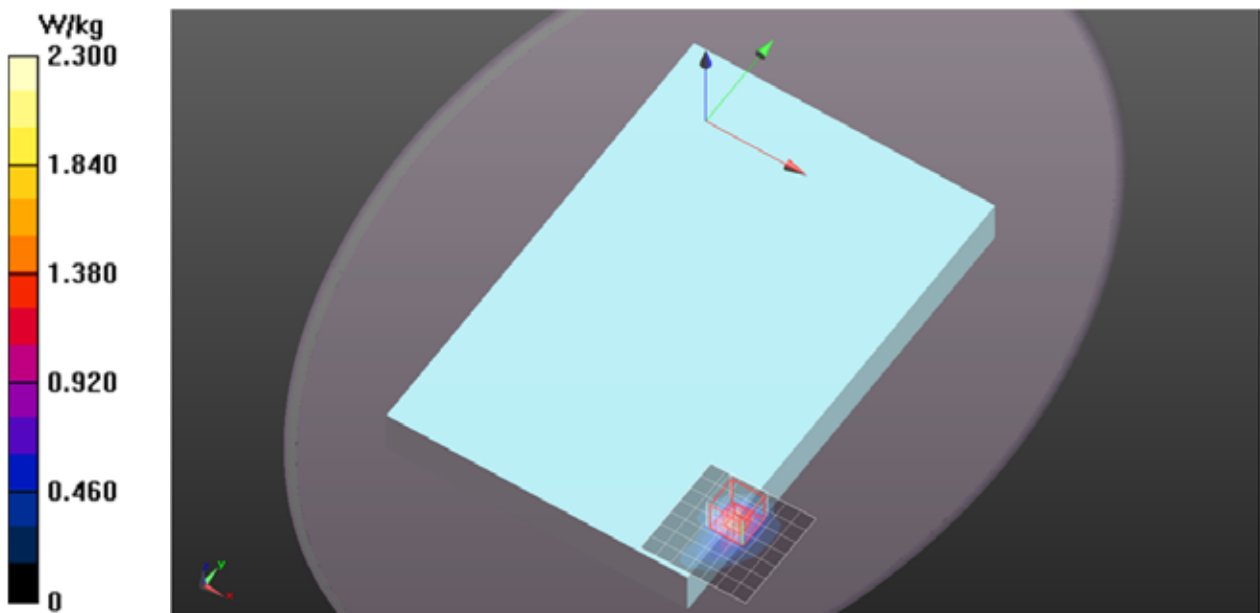

## 5GHz Band

Frequency: 5745 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5745.7$  MHz;  $\sigma = 5.947$  S/m;  $\epsilon_r = 47.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11a/Ch149/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.13 W/kg


**Rear/Main Ant/802.11a/Ch149/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm,

dz=2mm

Reference Value = 0 V/m; Power Drift = 999.00 dB

Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.146 W/kg**

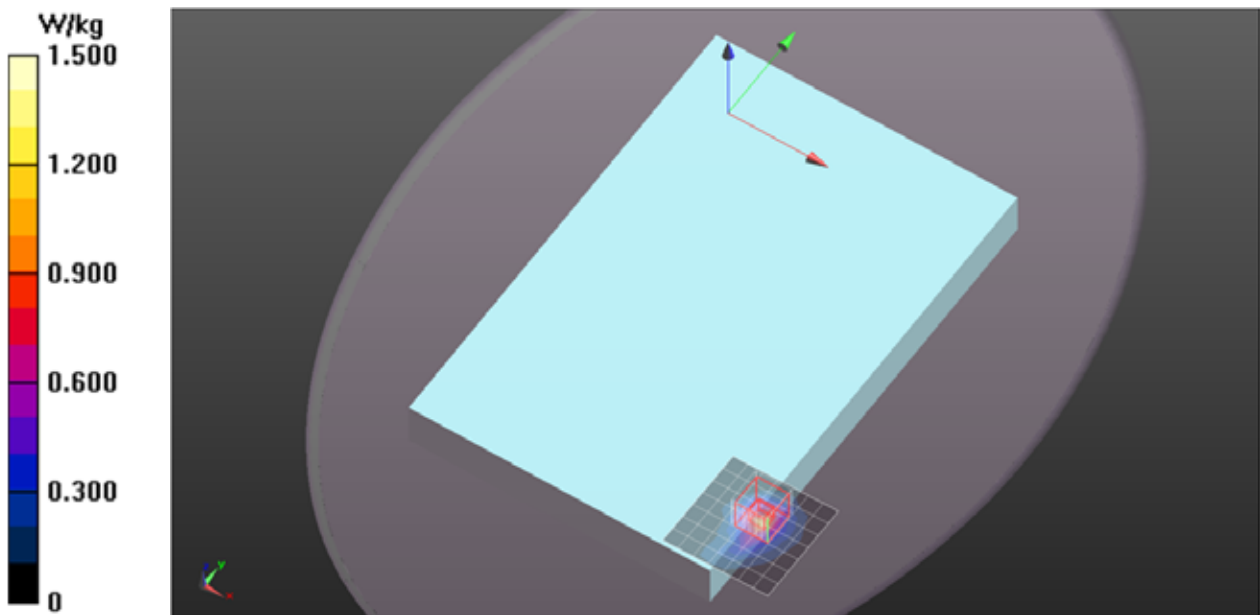



## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.293$  S/m;  $\epsilon_r = 48.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11a/Ch44/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.456 W/kg

**Rear/Aux Ant/802.11a/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.899 W/kg

**SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.073 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.562 W/kg

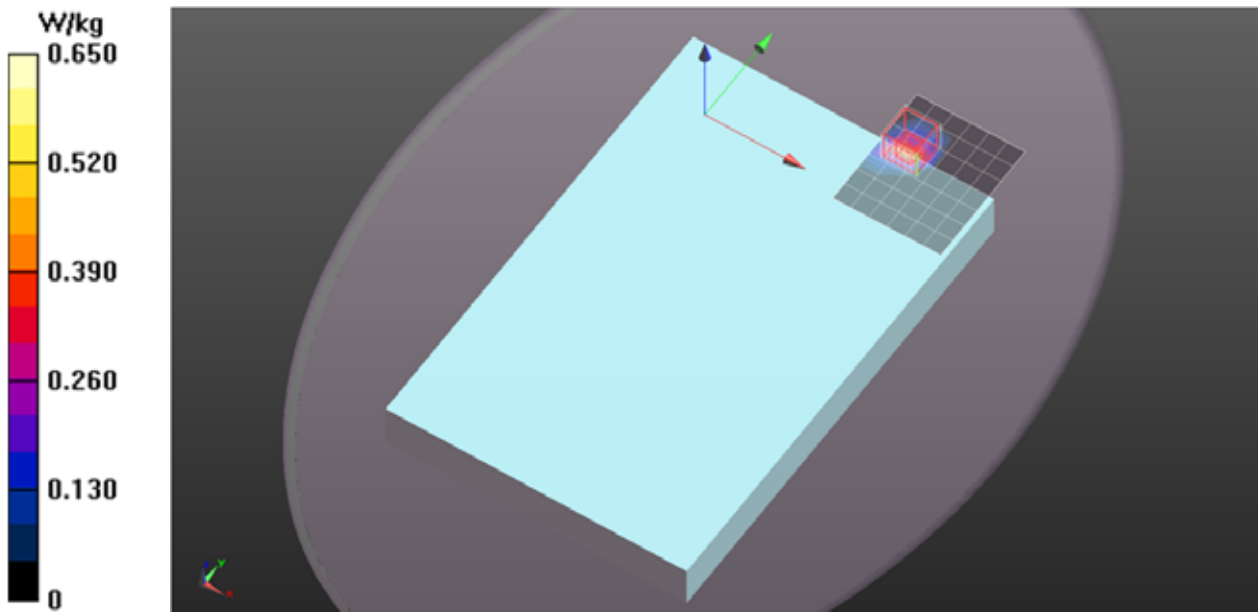

## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.386$  S/m;  $\epsilon_r = 48.427$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11a/Ch60/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.316 W/kg


**Rear/Aux Ant/802.11a/Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.681 W/kg

**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.399 W/kg

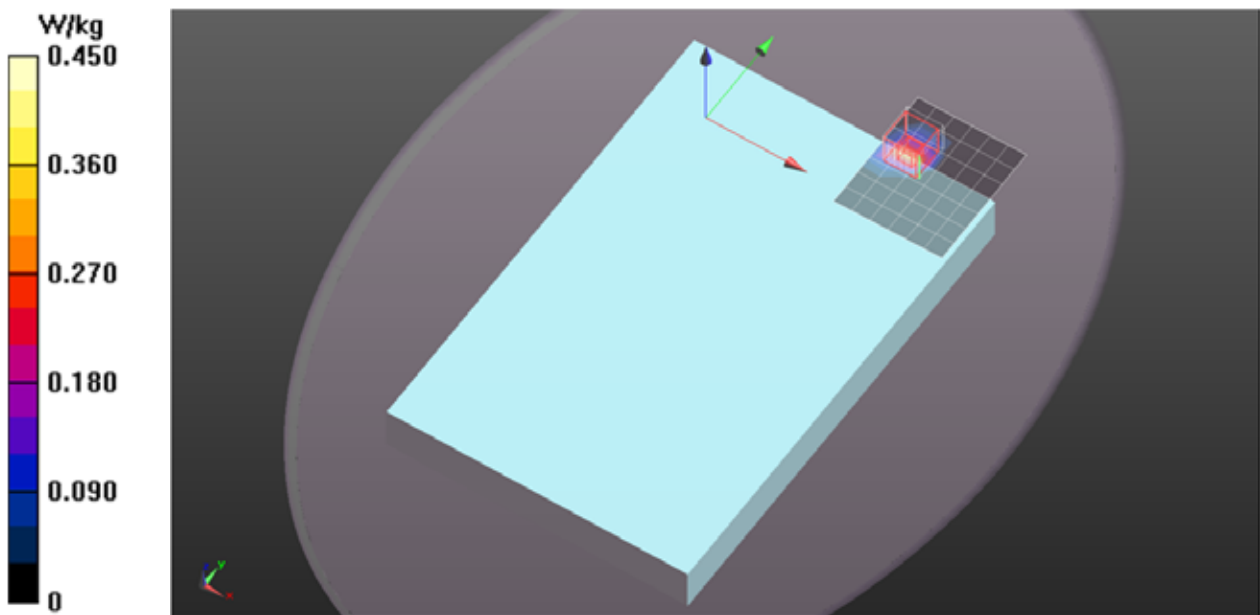

## 5GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5560.9$  MHz;  $\sigma = 5.712$  S/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11a/Ch112/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.734 W/kg


**Rear/Aux Ant/802.11a/Ch112/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.106 W/kg**

Maximum value of SAR (measured) = 0.854 W/kg

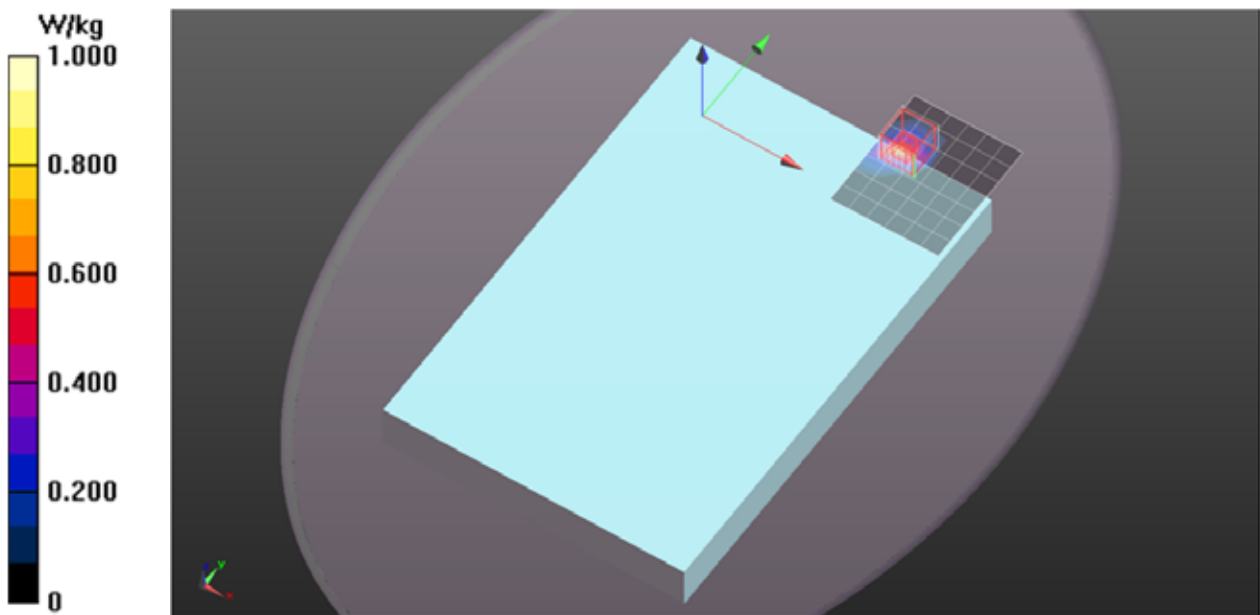

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 5.996$  S/m;  $\epsilon_r = 47.666$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11a/Ch157/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.688 W/kg


**Rear/Aux Ant/802.11a/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.711 W/kg

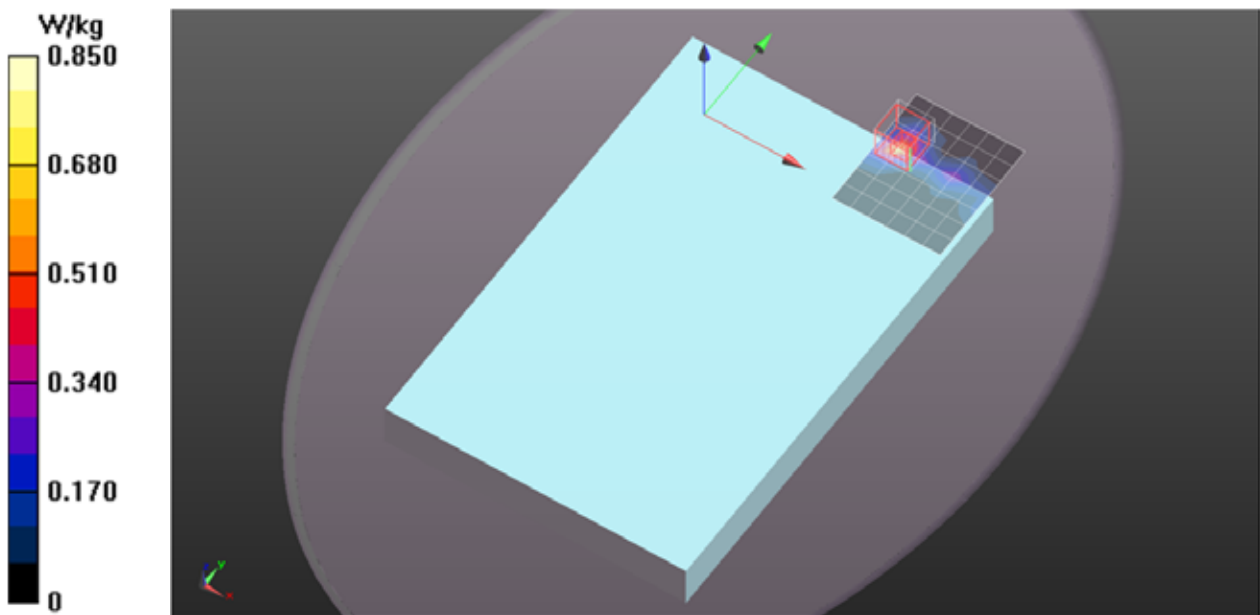

## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.293$  S/m;  $\epsilon_r = 48.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11a/Ch44/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.53 W/kg

**Edge 1/Main Ant/802.11a/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 1.755 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.17 W/kg

**SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.280 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.38 W/kg

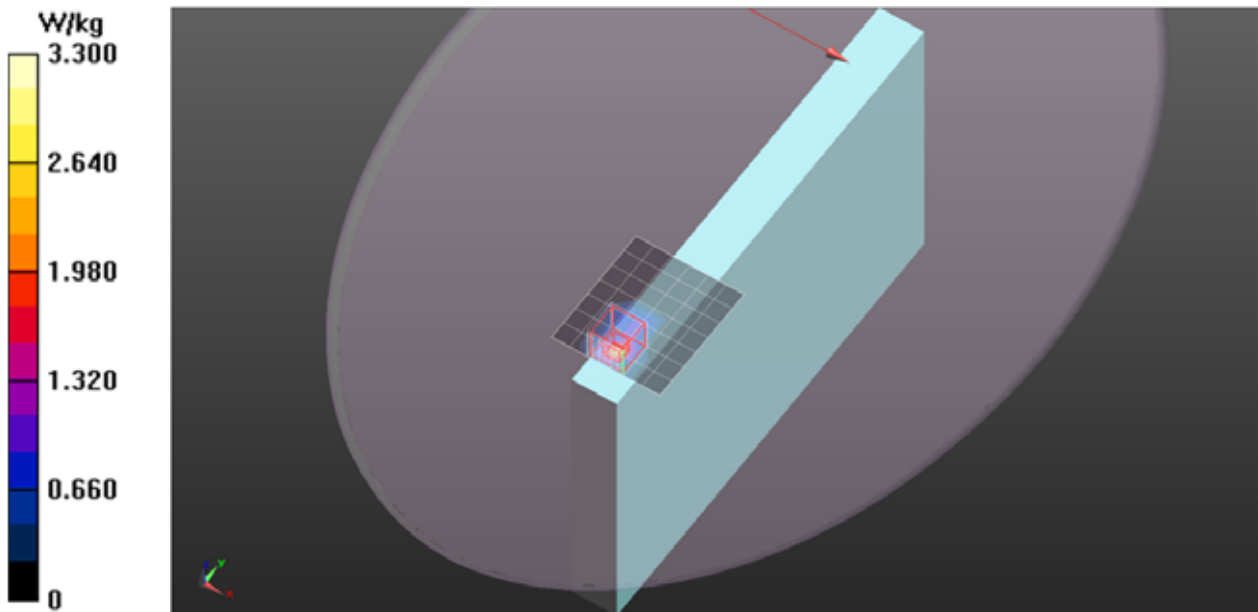

## 5GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5200$  MHz;  $\sigma = 5.266$  S/m;  $\epsilon_r = 48.586$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11a/Ch40/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.66 W/kg

**Edge 1/Main Ant/802.11a/Ch40/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 4.552 V/m; Power Drift = -012 dB

Peak SAR (extrapolated) = 4.41 W/kg

**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.381 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.75 W/kg

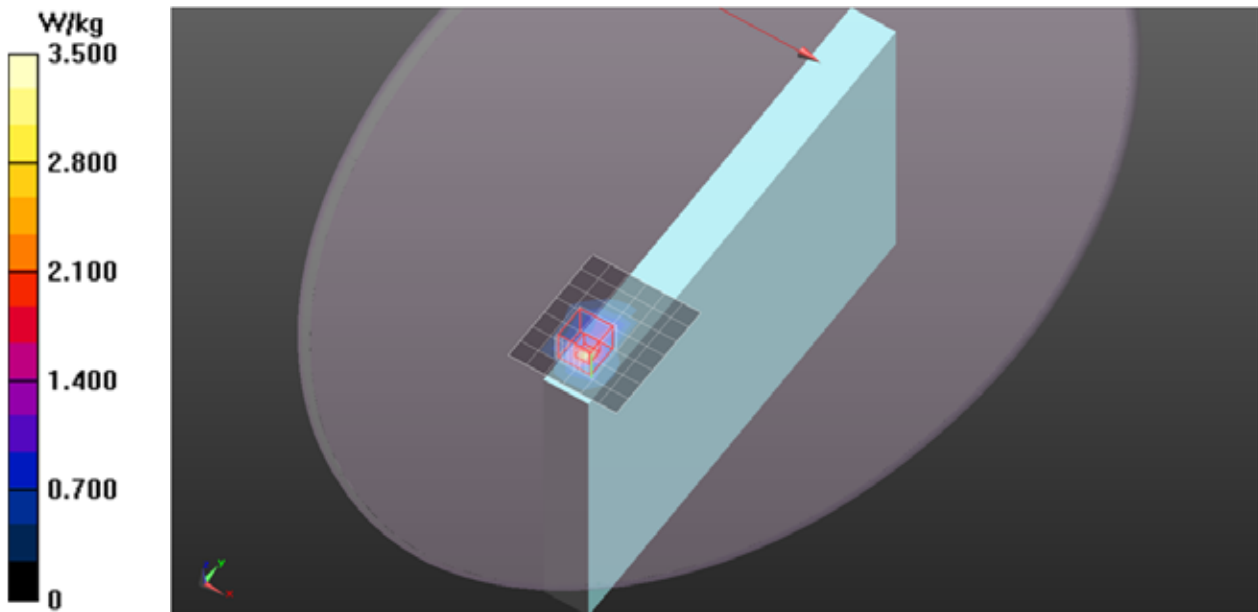

## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.386$  S/m;  $\epsilon_r = 48.427$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11a/Ch60/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.19 W/kg


**Edge 1/Main Ant/802.11a/Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.904 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 5.34 W/kg

**SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.353 W/kg**

Maximum value of SAR (measured) = 3.02 W/kg

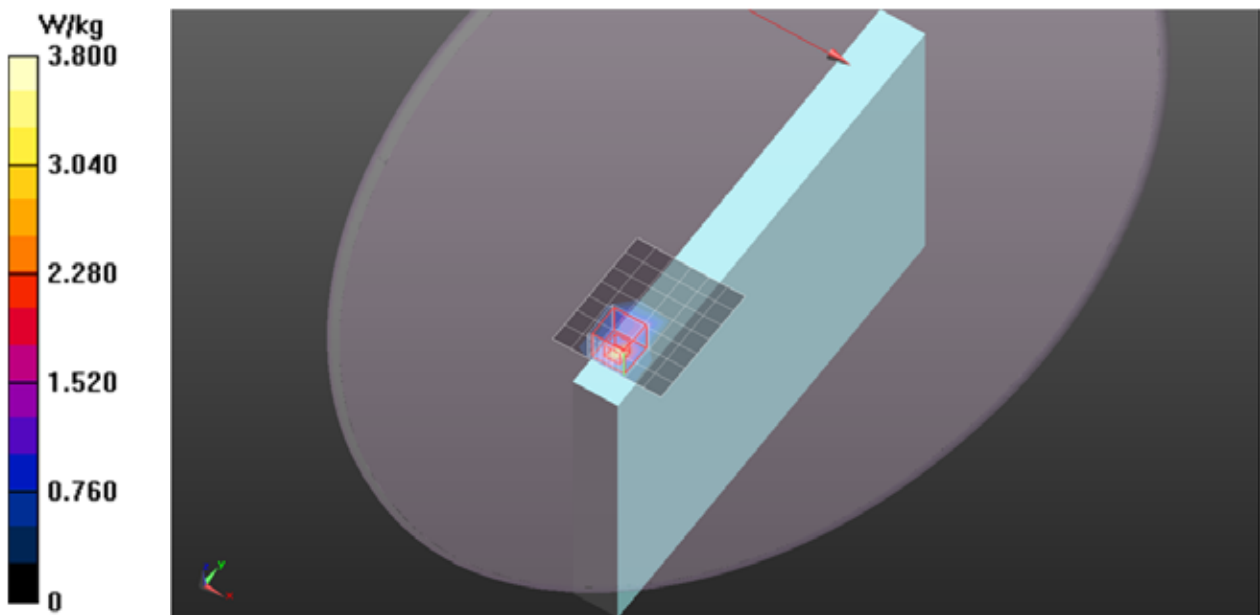

## 5GHz Band

Frequency: 5280 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5280.4$  MHz;  $\sigma = 5.368$  S/m;  $\epsilon_r = 48.464$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11a/Ch56/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.55 W/kg


**Edge 1/Main Ant/802.11a/Ch56/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.528 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.58 W/kg

**SAR(1 g) = 0.907 W/kg; SAR(10 g) = 0.287 W/kg**

Maximum value of SAR (measured) = 2.20 W/kg

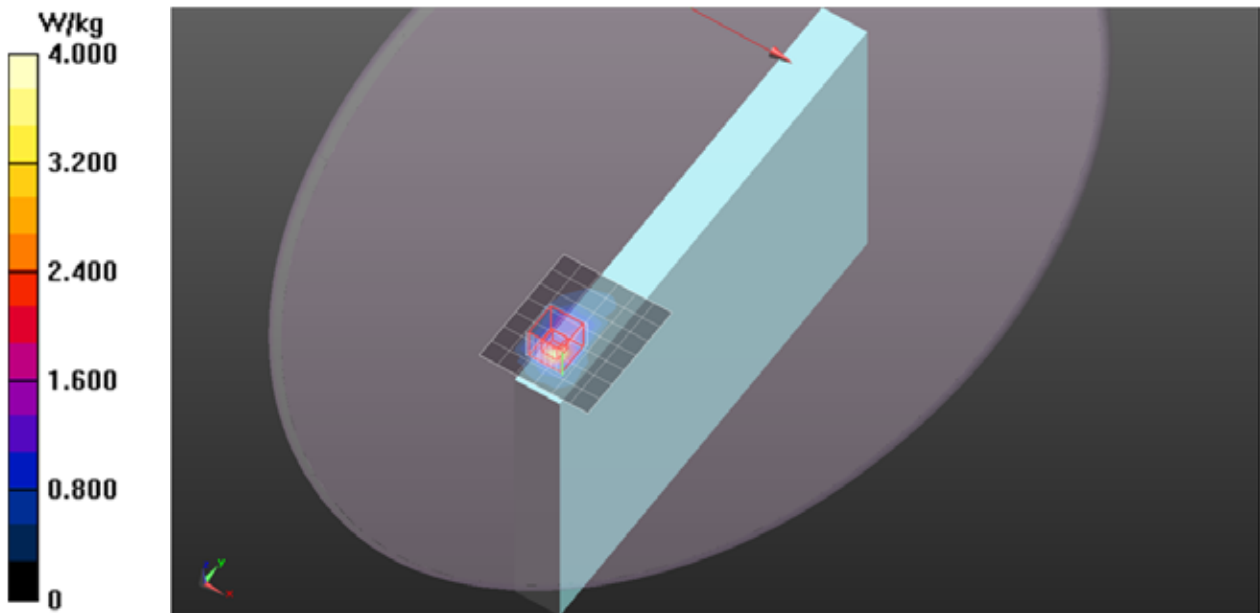



## 5GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5560.9$  MHz;  $\sigma = 5.712$  S/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11a/Ch112/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.44 W/kg


**Edge 1/Main Ant/802.11a/Ch112/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.719 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.46 W/kg

**SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.282 W/kg**

Maximum value of SAR (measured) = 2.08 W/kg

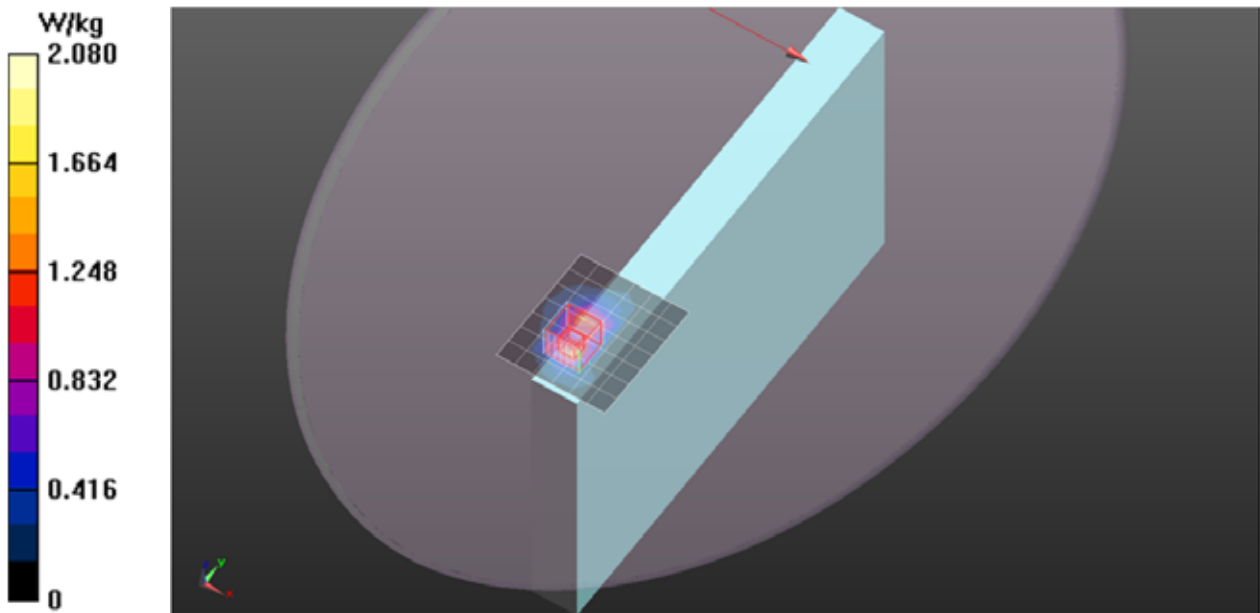

## 5GHz Band

Frequency: 5660 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5660$  MHz;  $\sigma = 5.839$  S/m;  $\epsilon_r = 47.863$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11a/Ch132/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.38 W/kg

**Edge 1/Main Ant/802.11a/Ch132/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm,

dy=4mm, dz=2mm


Reference Value = 1.579 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.93 W/kg

**SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.247 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.78 W/kg

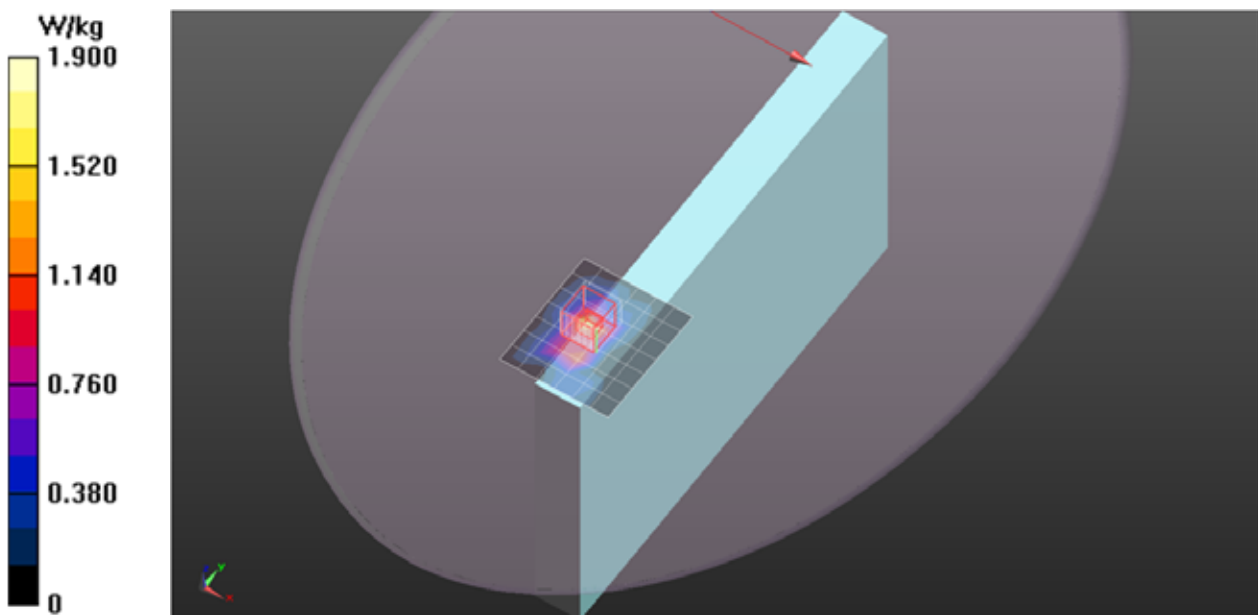

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 5.996$  S/m;  $\epsilon_r = 47.666$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11a/Ch157/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.24 W/kg


**Edge 1/Main Ant/802.11a/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9610 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.94 W/kg

**SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.235 W/kg**

Maximum value of SAR (measured) = 1.75 W/kg

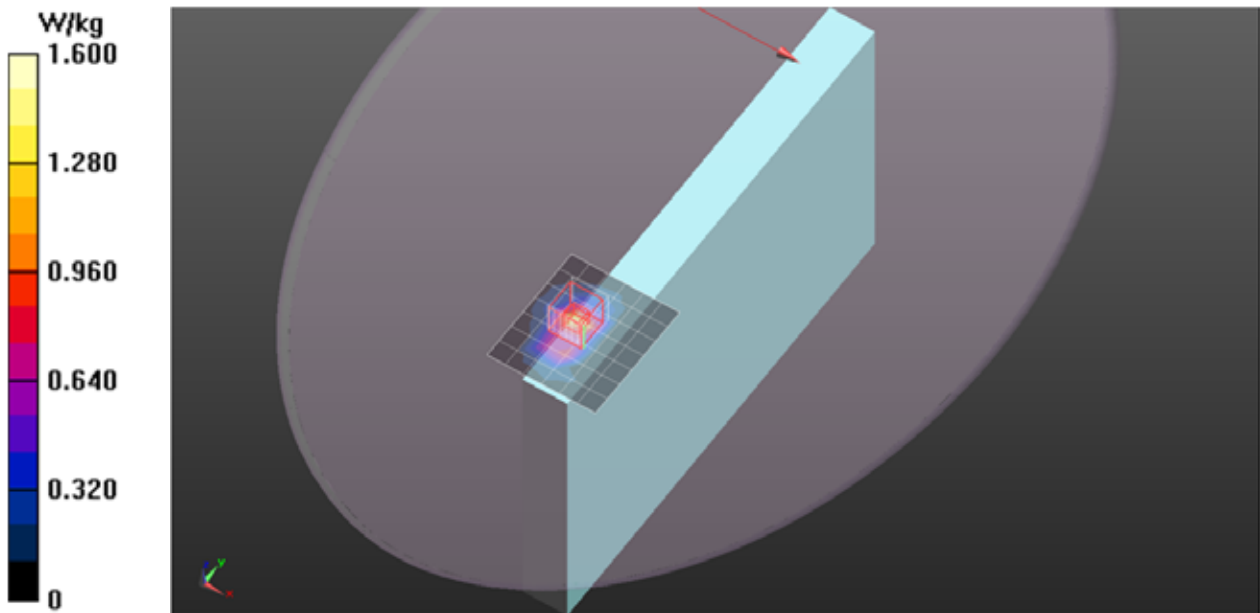

## 5GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5560.9$  MHz;  $\sigma = 5.712$  S/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Aux Ant/802.11a/Ch112/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.197 W/kg


**Edge 1/Aux Ant/802.11a/Ch112/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.391 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.244 W/kg

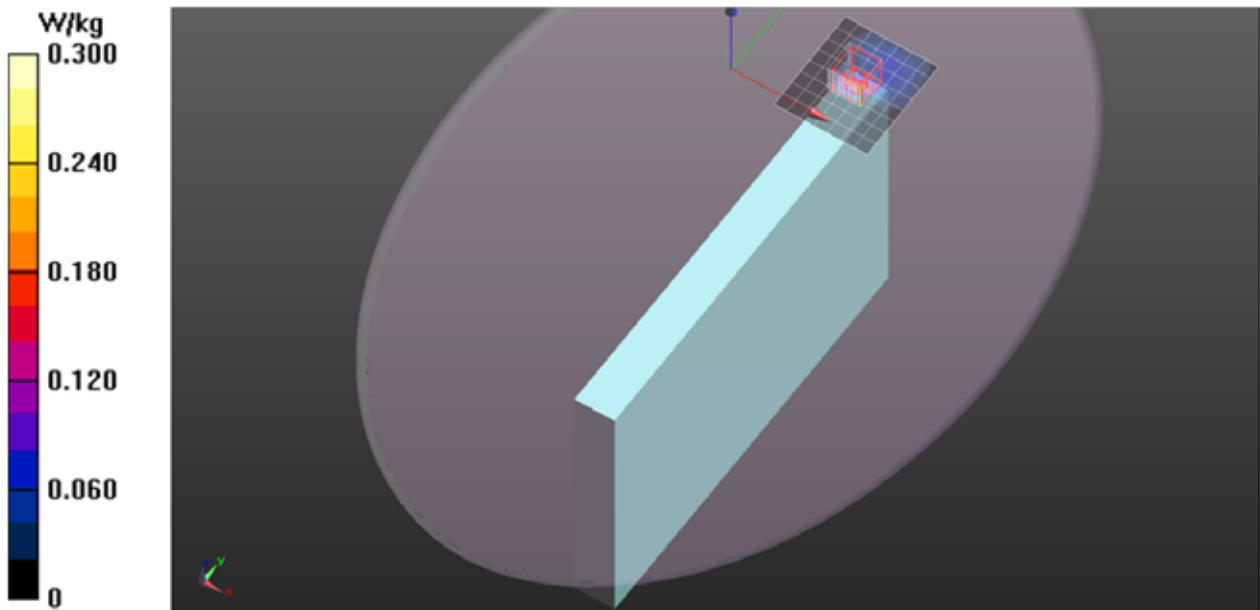

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 5.996$  S/m;  $\epsilon_r = 47.666$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Aux Ant/802.11a/Ch157/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.389 W/kg

**Edge 1/Aux Ant/802.11a/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.89 W/kg

Peak SAR (extrapolated) = 1.89 W/kg

**SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.436 W/kg

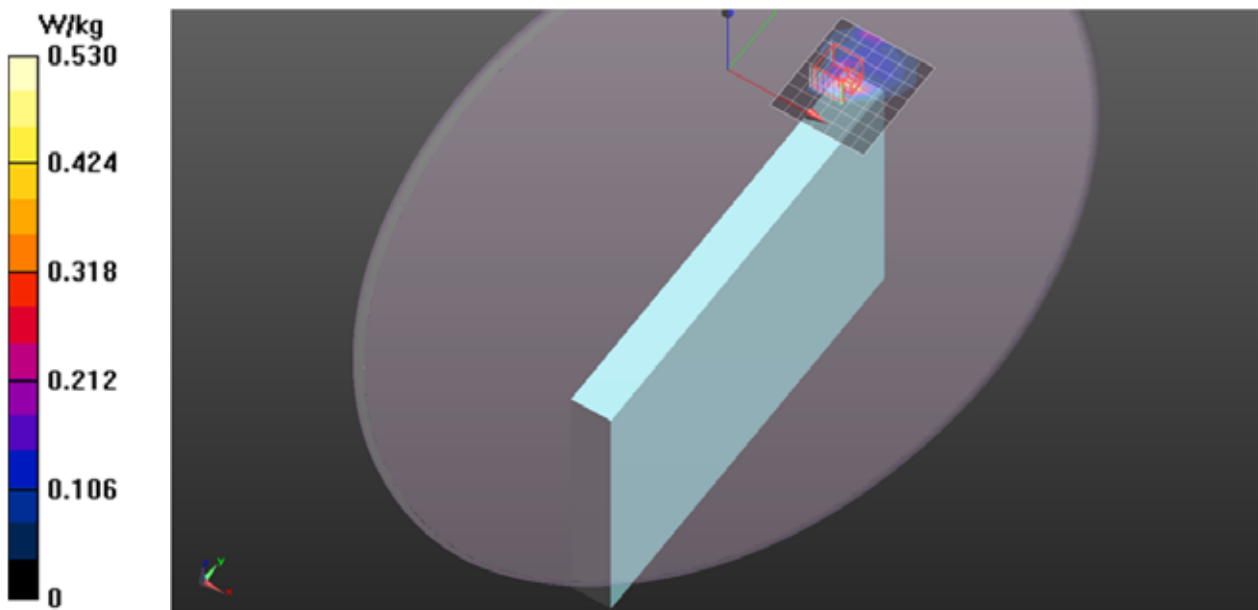

## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.293$  S/m;  $\epsilon_r = 48.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11a/Ch44/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.897 W/kg

**Edge 2/Aux Ant/802.11a/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 2.492 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.154 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 W/kg

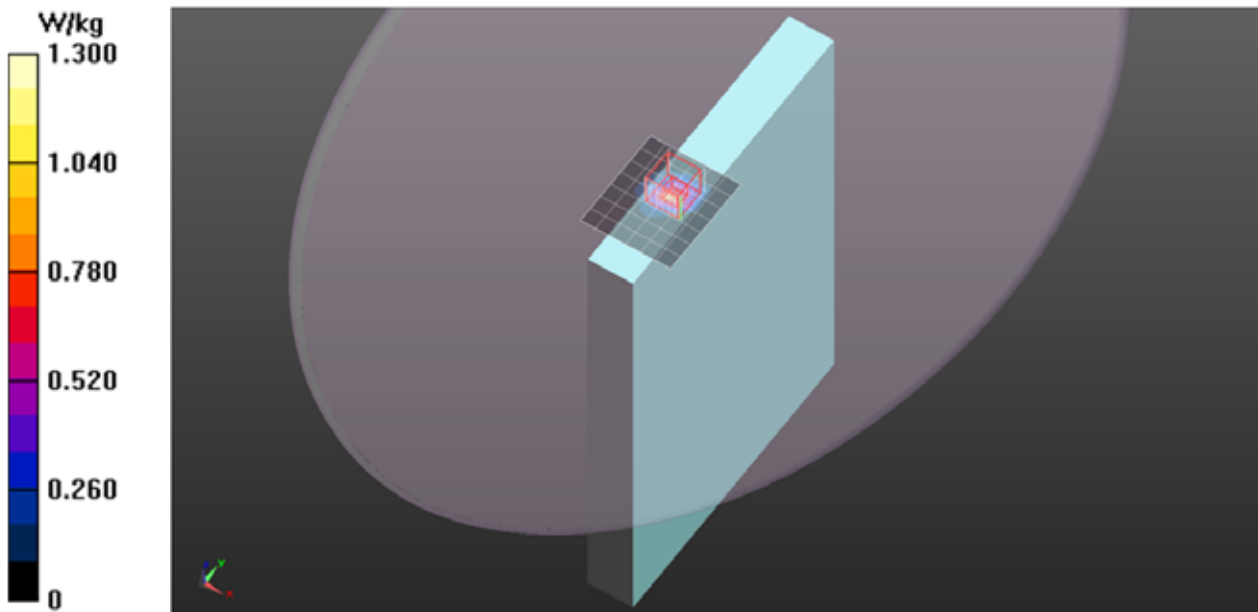

## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.386$  S/m;  $\epsilon_r = 48.427$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11a/Ch60/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.721 W/kg


**Edge 2/Aux Ant/802.11a/Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.213 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.814 W/kg

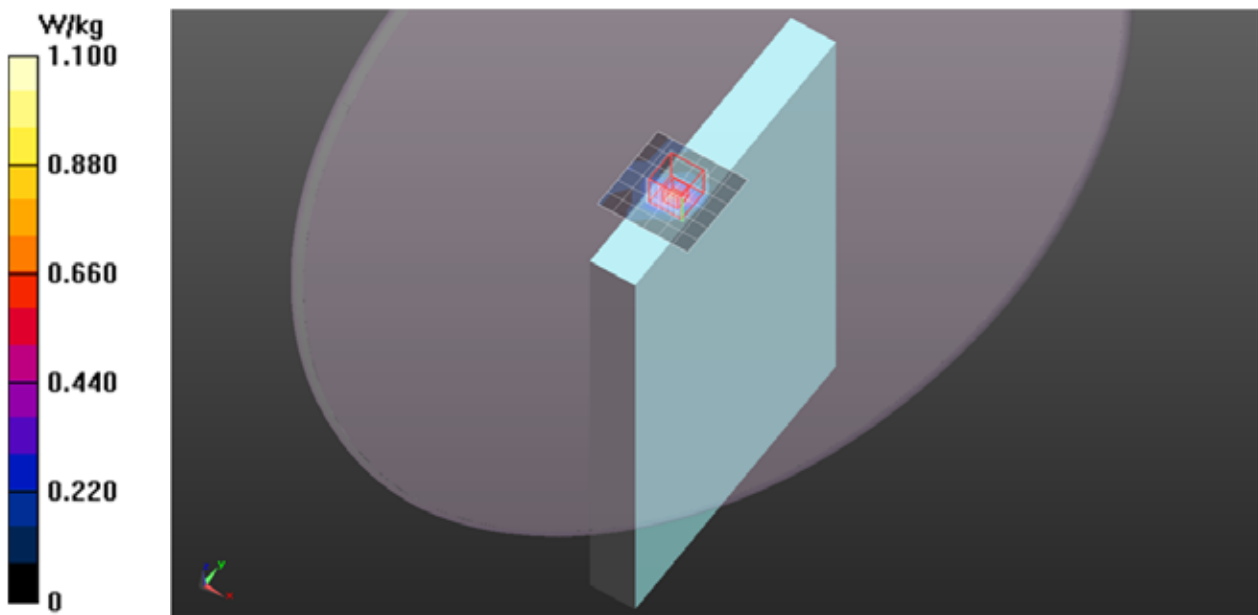

## 5GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C  
Medium parameters used:  $f = 5560.9$  MHz;  $\sigma = 5.712$  S/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11a/Ch112/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 1.37 W/kg


**Edge 2/Aux Ant/802.11a/Ch112/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.106 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.98 W/kg

**SAR(1 g) = 0.718 W/kg; SAR(10 g) = 0.202 W/kg**

Maximum value of SAR (measured) = 1.79 W/kg

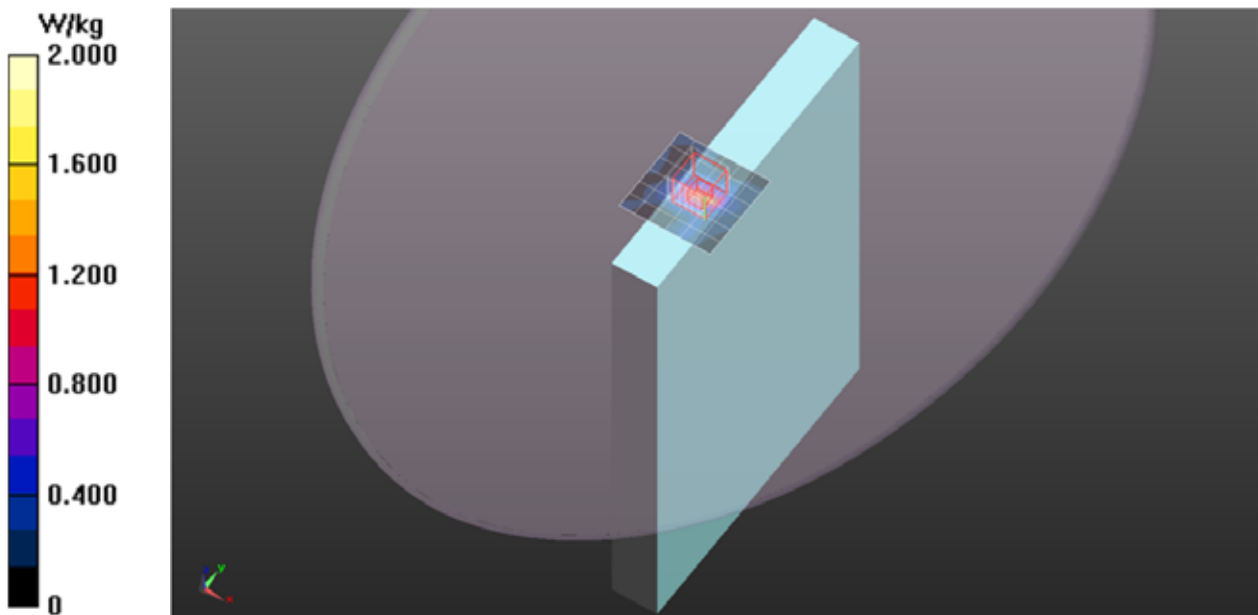



## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 5.996$  S/m;  $\epsilon_r = 47.666$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11a/Ch157/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.62 W/kg


**Edge 2/Aux Ant/802.11a/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.281 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 3.01 W/kg

**SAR(1 g) = 0.785 W/kg; SAR(10 g) = 0.243 W/kg**

Maximum value of SAR (measured) = 1.87 W/kg

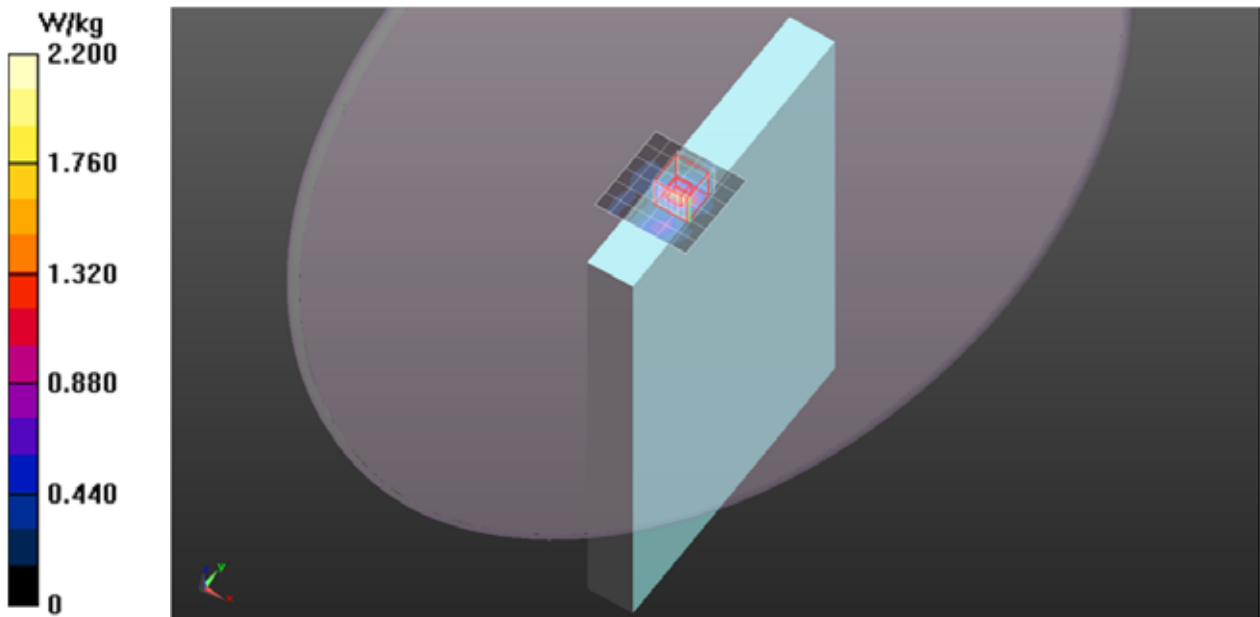

## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.293$  S/m;  $\epsilon_r = 48.565$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 4/Main Ant/802.11a/Ch44/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.402 W/kg

**Edge 4/Main Ant/802.11a/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 1.309 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.804 W/kg

**SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.065 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.488 W/kg

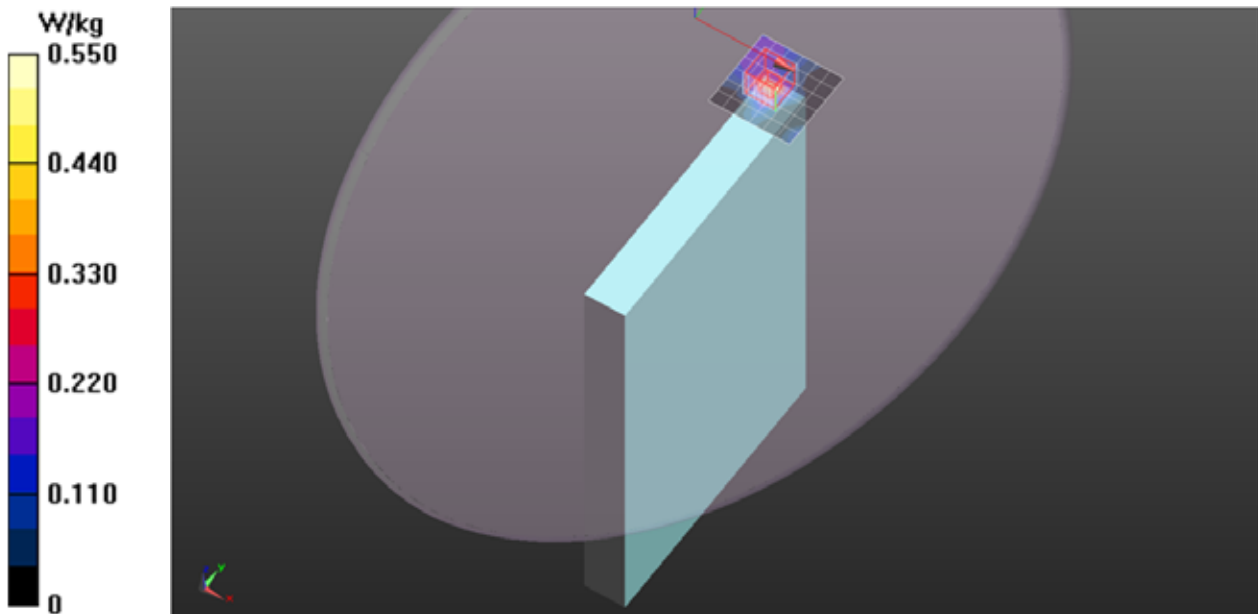

## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.386$  S/m;  $\epsilon_r = 48.427$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 4/Main Ant/802.11a/Ch60/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.522 W/kg


**Edge 4/Main Ant/802.11a/Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.476 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.07 W/kg

**SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.084 W/kg**

Maximum value of SAR (measured) = 0.634 W/kg

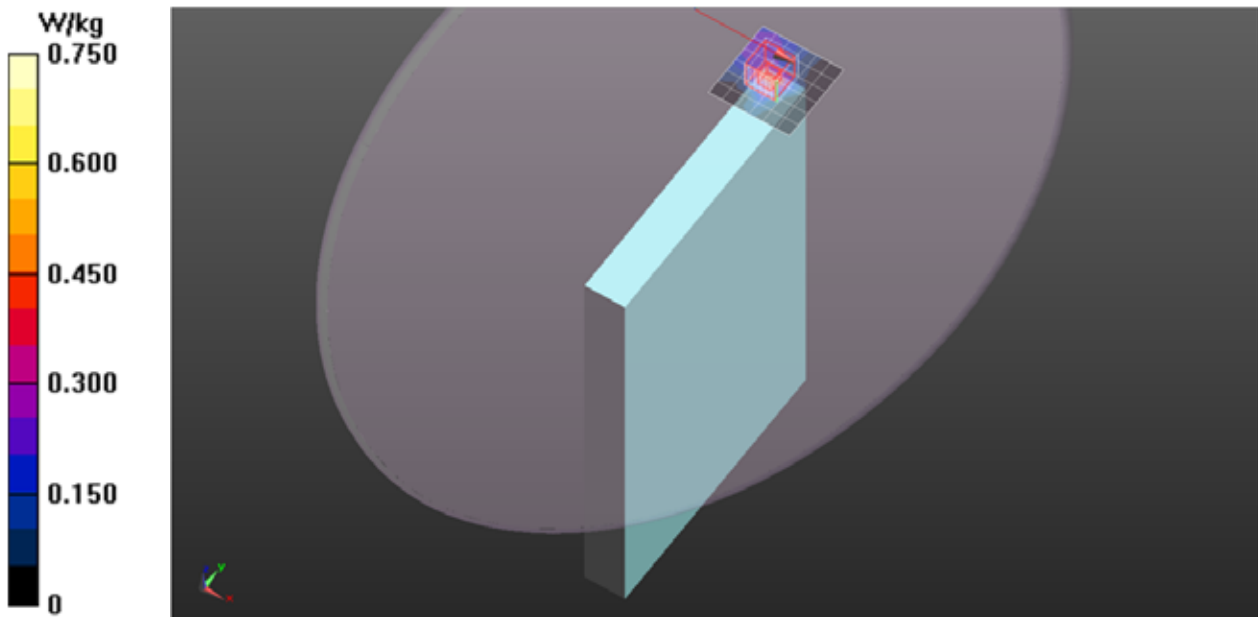

## 5GHz Band

Frequency: 5560 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5560.9$  MHz;  $\sigma = 5.712$  S/m;  $\epsilon_r = 48.02$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 4/Main Ant/802.11a/Ch112/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.480 W/kg

**Edge 4/Main Ant/802.11a/Ch112/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 1.449 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.05 W/kg

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.588 W/kg

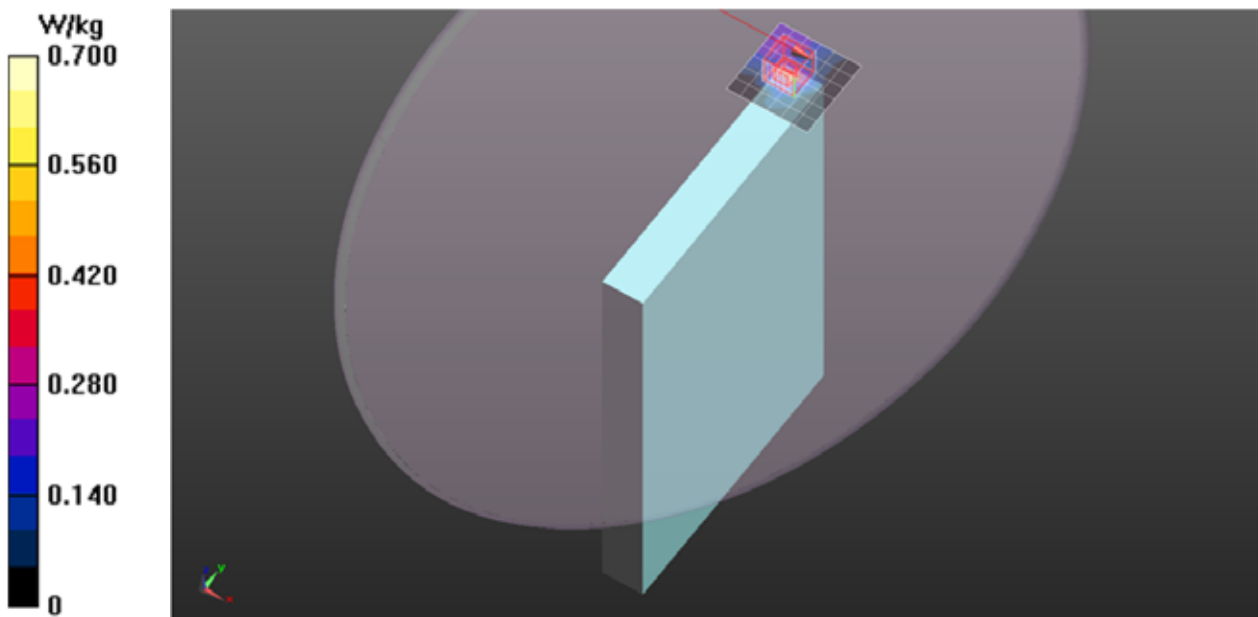

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 5.996$  S/m;  $\epsilon_r = 47.666$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 4/Main Ant/802.11a/Ch157/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.304 W/kg


**Edge 4/Main Ant/802.11a/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.188 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.743 W/kg

**SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.384 W/kg

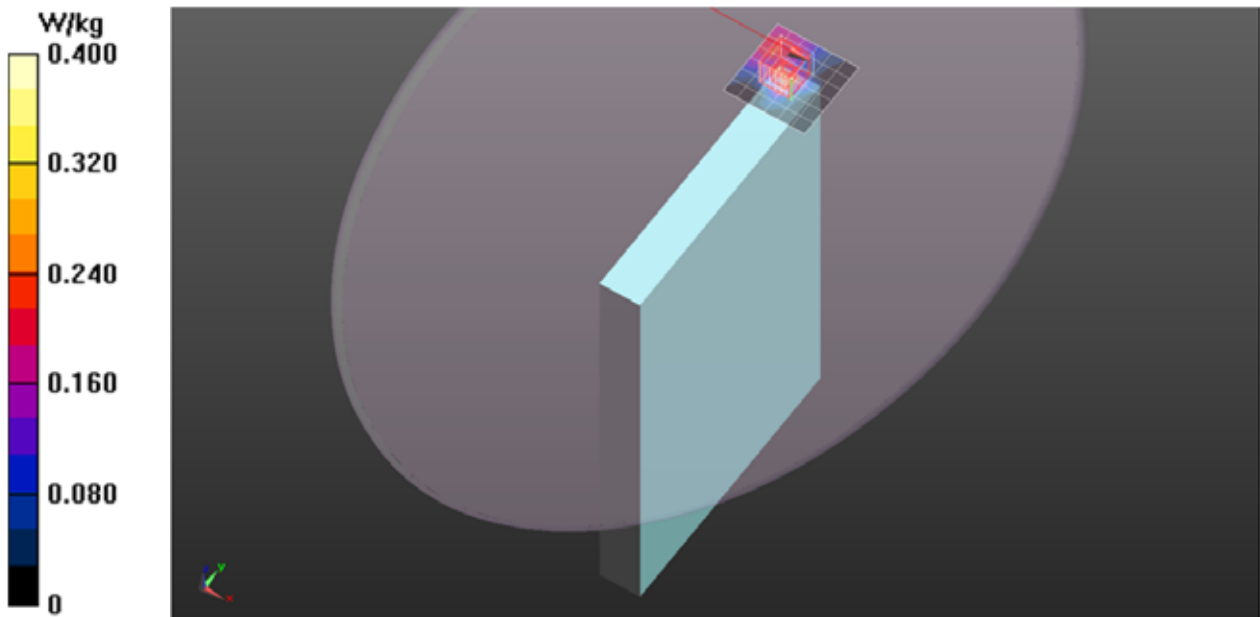

## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.386$  S/m;  $\epsilon_r = 48.427$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11a/Ch60\_Repeat/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 2.63 W/kg

**Edge 1/Main Ant/802.11a/Ch60\_Repeat/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.387 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 5.30 W/kg

**SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.341 W/kg**

Maximum value of SAR (measured) = 3.17 W/kg

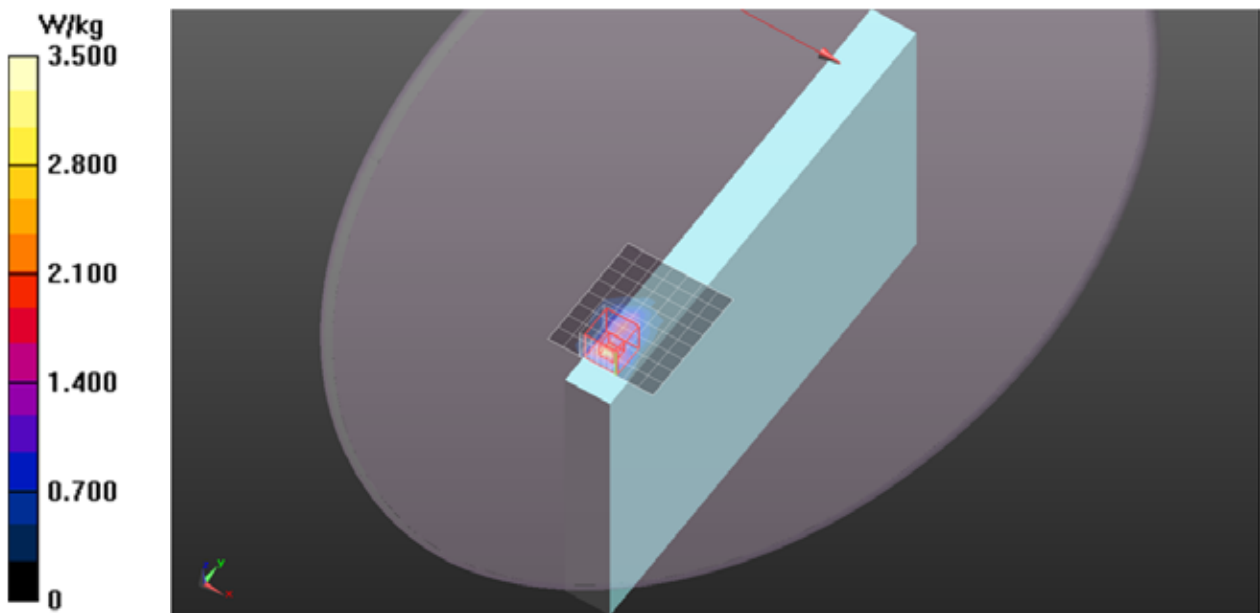

## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.393$  S/m;  $\epsilon_r = 48.919$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11n HT20/Ch44/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.98 W/kg

**Rear/Main Ant/802.11n HT20/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.45 W/kg

**SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.310 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.13 W/kg

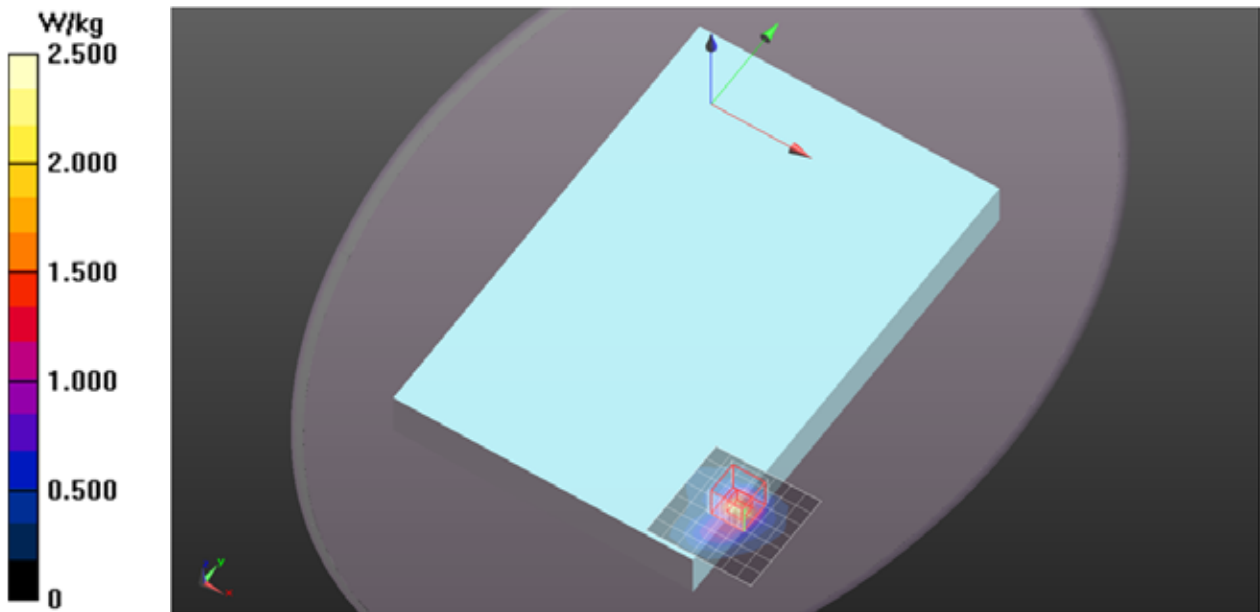

## 5GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5200$  MHz;  $\sigma = 5.335$  S/m;  $\epsilon_r = 48.953$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11n HT20/Ch40/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.01 W/kg

**Rear/Main Ant/802.11n HT20/Ch40/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm,

dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 4.06 W/kg

**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.374 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.52 W/kg

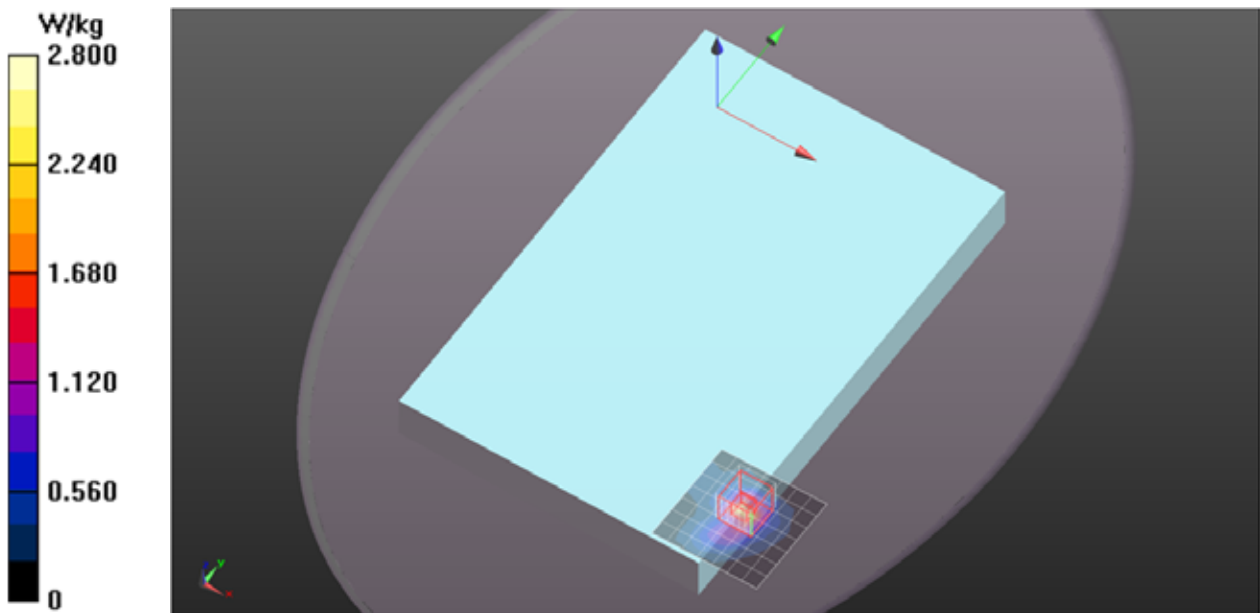



## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.459$  S/m;  $\epsilon_r = 48.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11n HT20/Ch60/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.23 W/kg

**Rear/Main Ant/802.11n HT20/Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm,


dy=4mm, dz=2mm

Reference Value = 3.042 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 2.63 W/kg

**SAR(1 g) = 0.703 W/kg; SAR(10 g) = 0.242 W/kg**

Maximum value of SAR (measured) = 1.68 W/kg

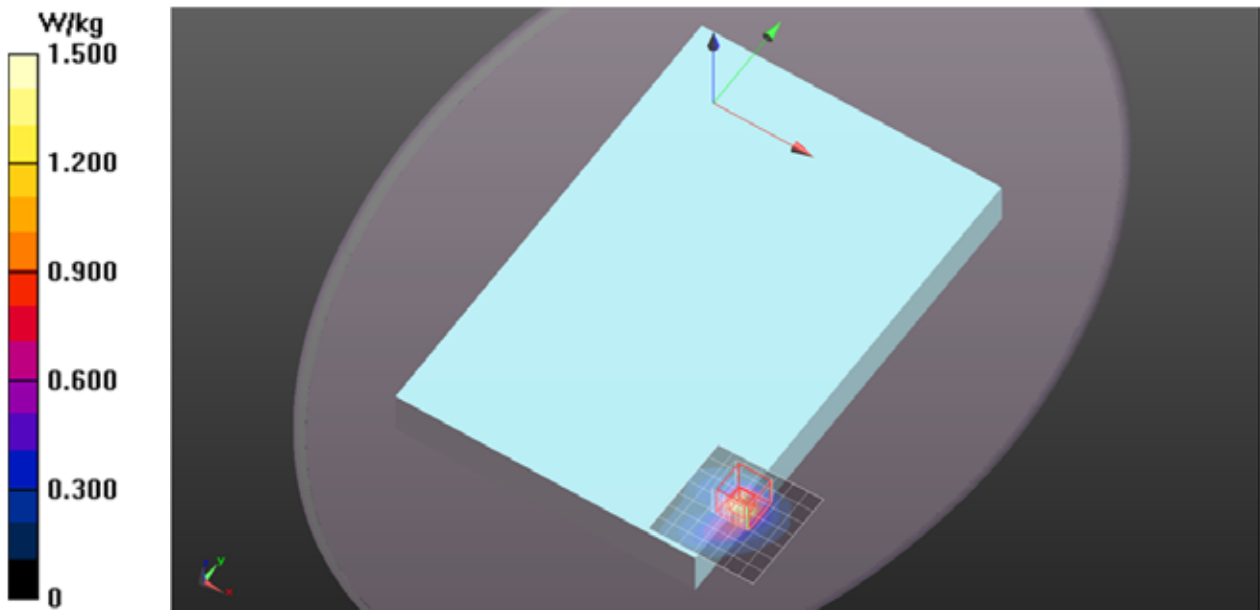

## 5GHz Band

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5620.3$  MHz;  $\sigma = 5.912$  S/m;  $\epsilon_r = 48.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11n HT20/Ch124/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.55 W/kg


**Rear/Main Ant/802.11n HT20/Ch124/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.297 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.72 W/kg

**SAR(1 g) = 0.902 W/kg; SAR(10 g) = 0.332 W/kg**

Maximum value of SAR (measured) = 2.15 W/kg

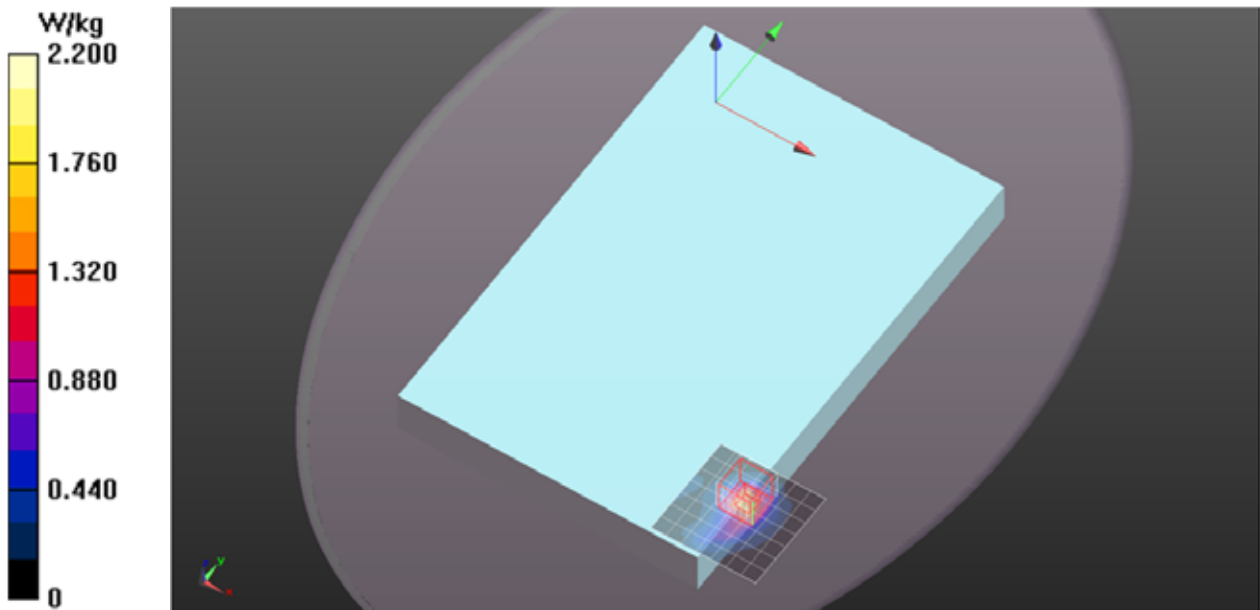

## 5GHz Band

Frequency: 5600 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5600.5$  MHz;  $\sigma = 5.914$  S/m;  $\epsilon_r = 48.433$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11n HT20/Ch120/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.97 W/kg


**Rear/Main Ant/802.11n HT20/Ch120/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 8.22 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.314 W/kg**

Maximum value of SAR (measured) = 2.65 W/kg

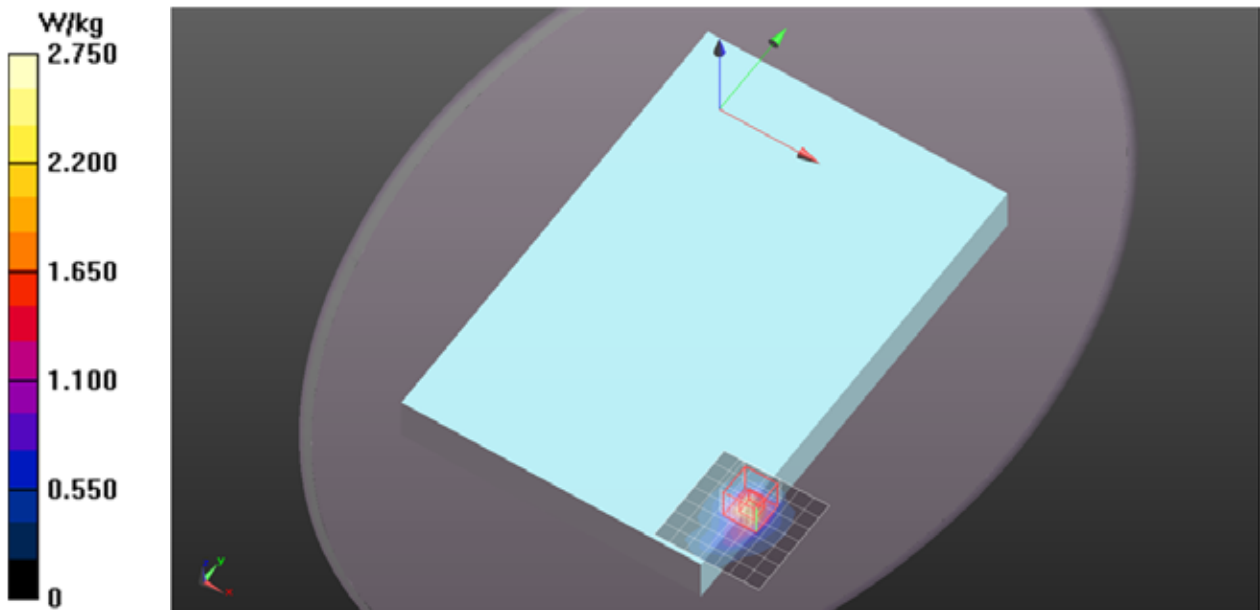

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 6.146$  S/m;  $\epsilon_r = 48.034$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11n HT20/Ch157/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.12 W/kg


**Rear/Main Ant/802.11n HT20/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.76 W/kg

**SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.240 W/kg**

Maximum value of SAR (measured) = 1.65 W/kg

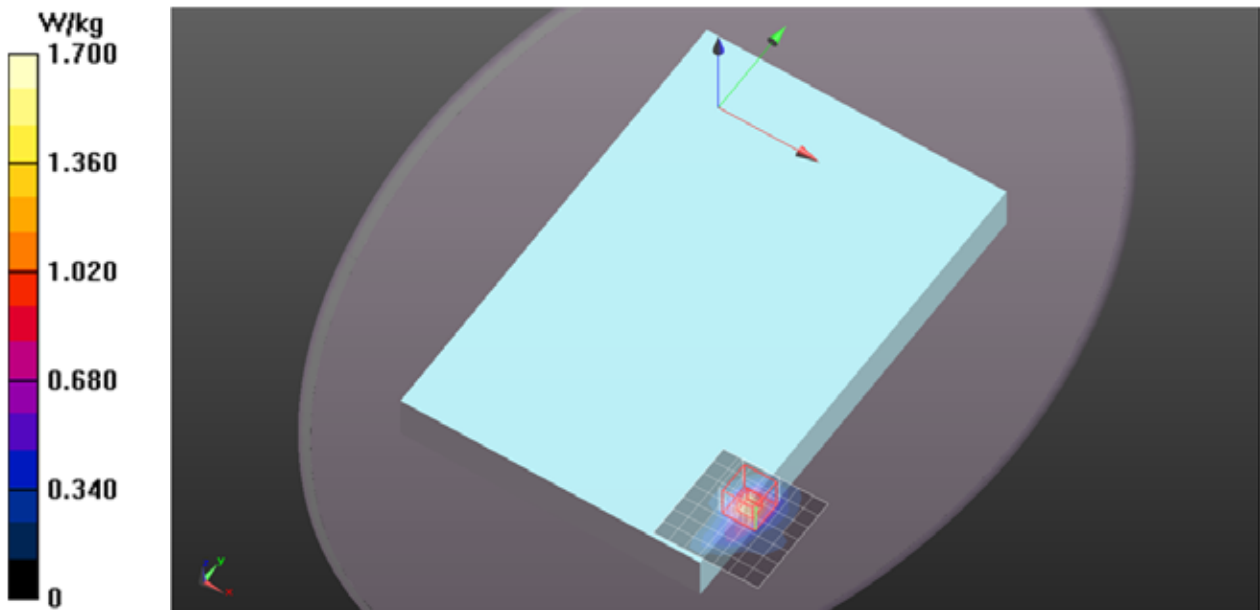

## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.393$  S/m;  $\epsilon_r = 48.919$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11n HT20/Ch44/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.333 W/kg

**Rear/Aux Ant/802.11n HT20/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 4.355 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.629 W/kg

**SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.084 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.370 W/kg

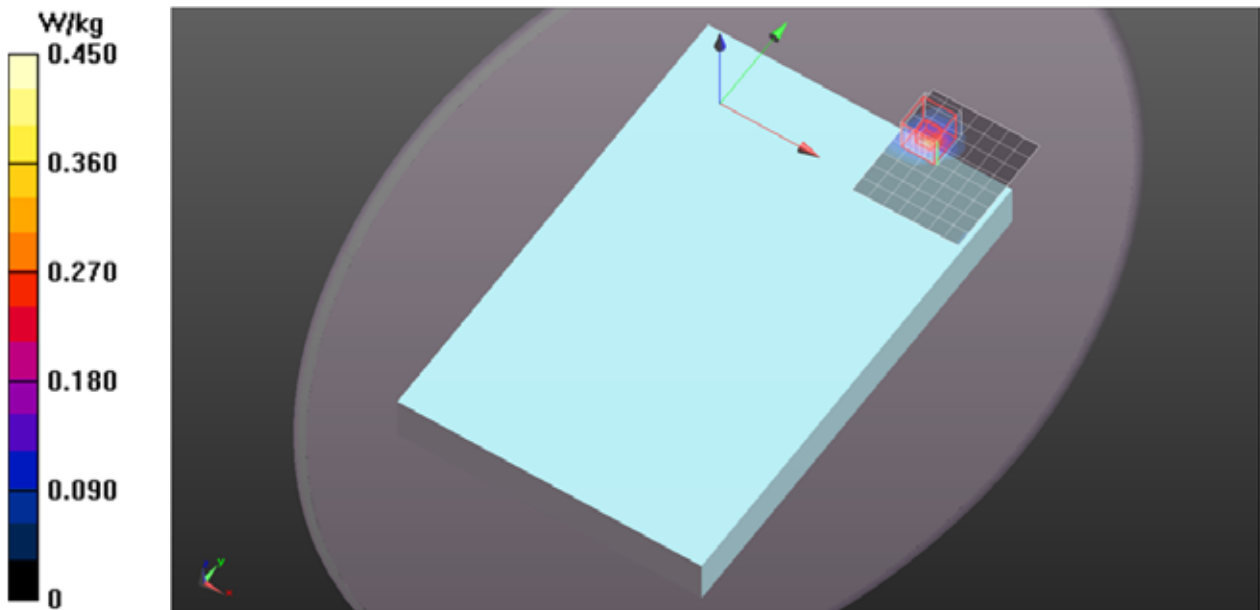

## 5GHz Band

Frequency: 5280 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5280.4$  MHz;  $\sigma = 5.461$  S/m;  $\epsilon_r = 49.001$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11n HT20/Ch56/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.290 W/kg


**Rear/Aux Ant/802.11n HT20/Ch56/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.532 W/kg

**SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.059 W/kg**

Maximum value of SAR (measured) = 0.403 W/kg

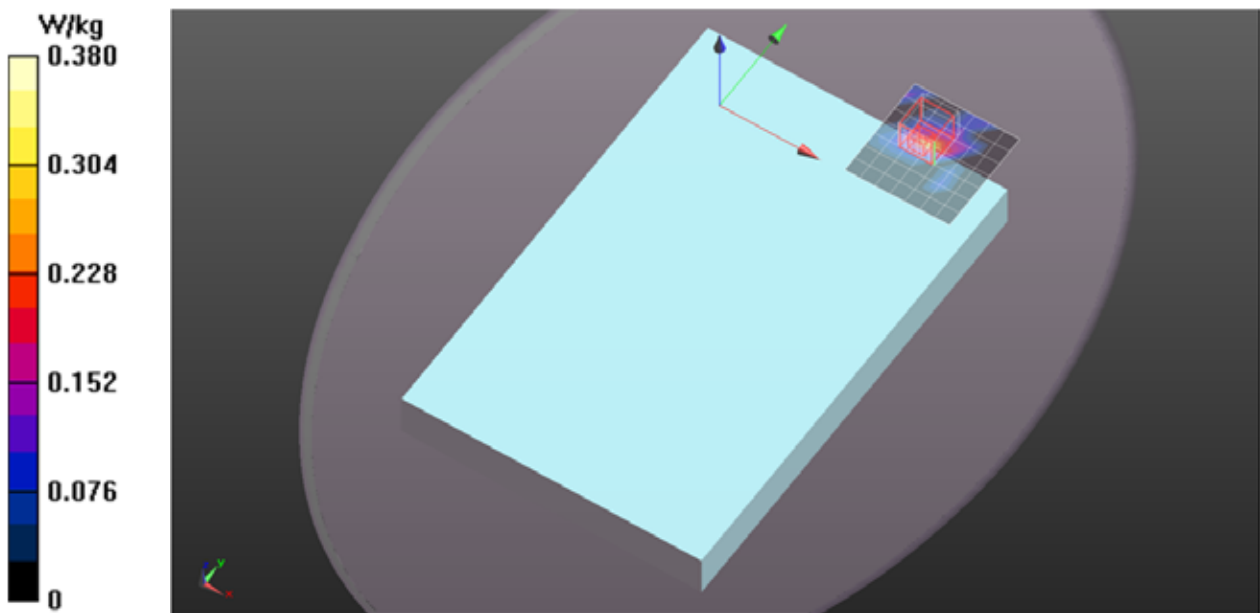

## 5GHz Band

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5580.7$  MHz;  $\sigma = 5.89$  S/m;  $\epsilon_r = 48.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11n HT20/Ch116/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.572 W/kg

**Rear/Aux Ant/802.11n HT20/Ch116/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.05 W/kg

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.086 W/kg**

Maximum value of SAR (measured) = 0.635 W/kg

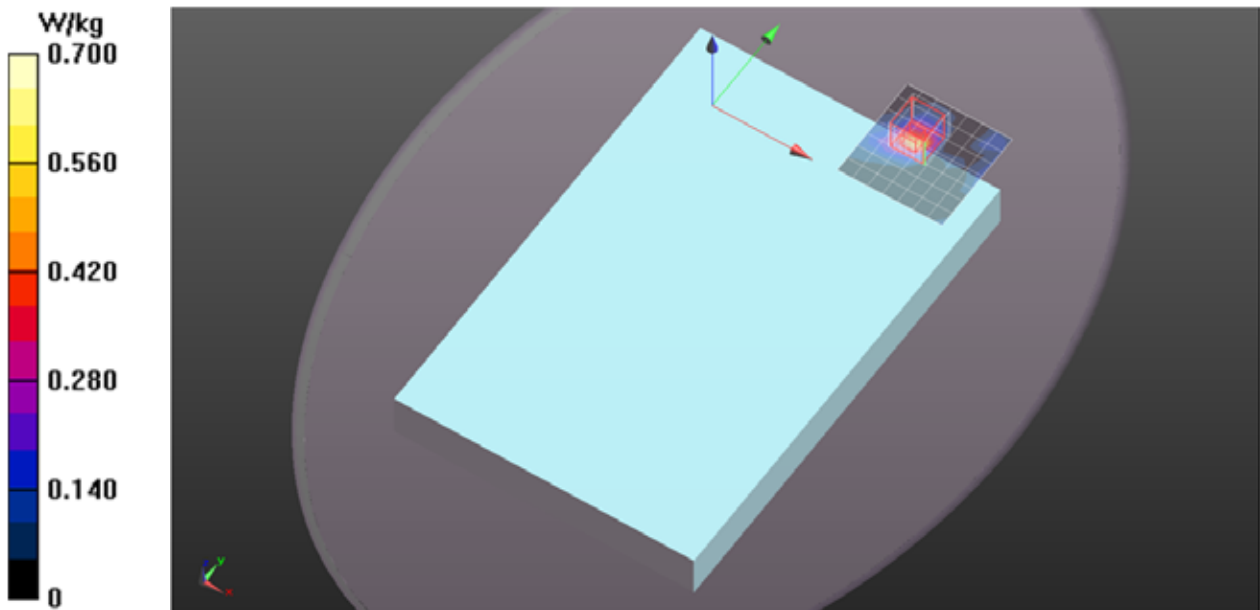

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 6.146$  S/m;  $\epsilon_r = 48.034$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11n HT20/Ch153/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.406 W/kg

**Rear/Aux Ant/802.11n HT20/Ch153/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.805 W/kg

Peak SAR (extrapolated) = 0.805 W/kg

**SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.511 W/kg

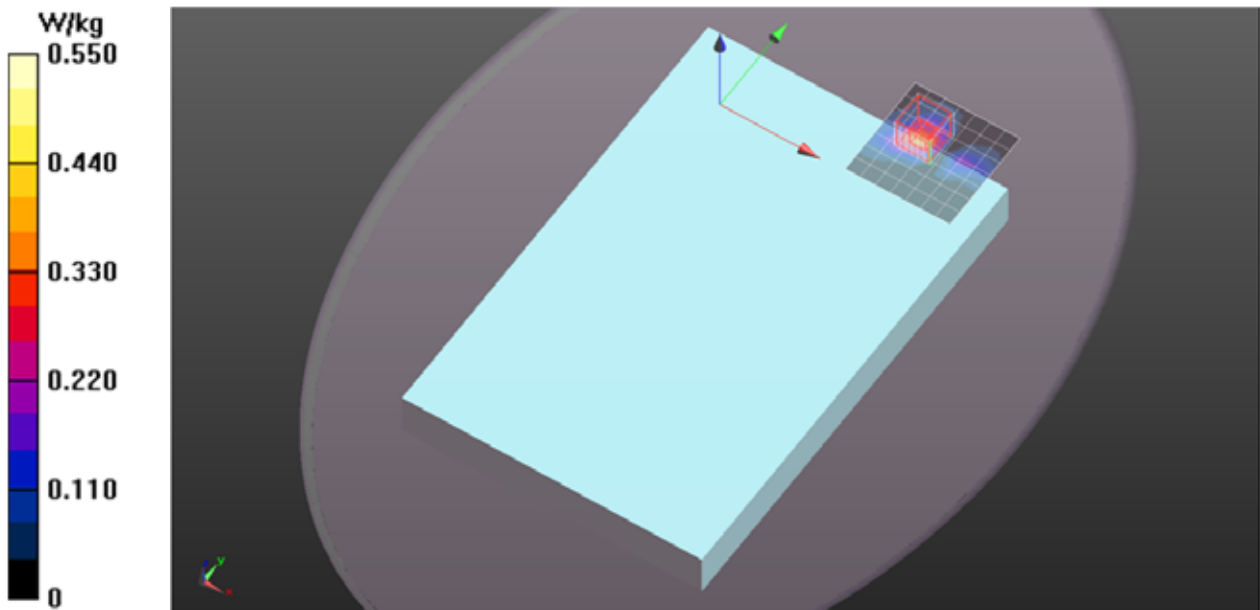



## 5GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5200$  MHz;  $\sigma = 5.335$  S/m;  $\epsilon_r = 48.953$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11n HT20/Ch40/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.83 W/kg

**Edge 1/Main Ant/802.11n HT20/Ch40/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.855 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 4.77 W/kg

Peak SAR (extrapolated) = 4.77 W/kg

**SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.356 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.89 W/kg

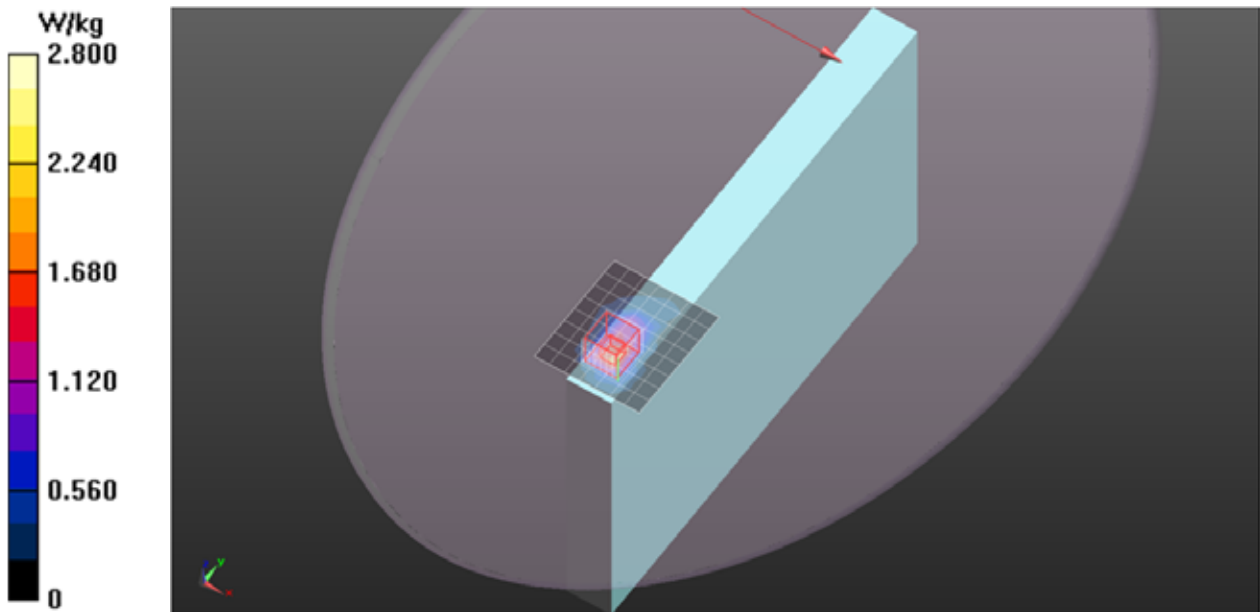


## 5GHz Band

Frequency: 5200 MHz; Duty Cycle: 1:1

**Edge 1/Edge 1/Main Ant/802.11n HT20/Ch40/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.92 W/kg

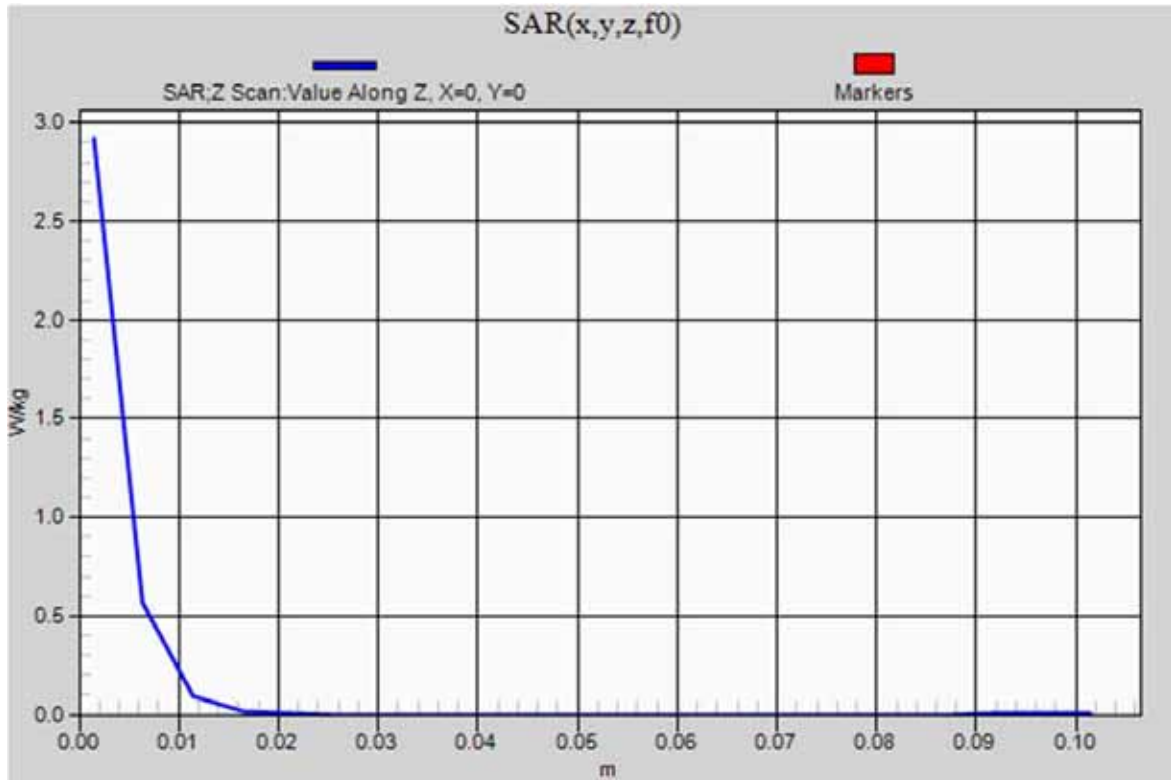

## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.393$  S/m;  $\epsilon_r = 48.919$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11n HT20/Ch44/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.27 W/kg

**Edge 1/Main Ant/802.11n HT20/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.287 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 3.66 W/kg

Peak SAR (extrapolated) = 3.66 W/kg

**SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.260 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 2.23 W/kg

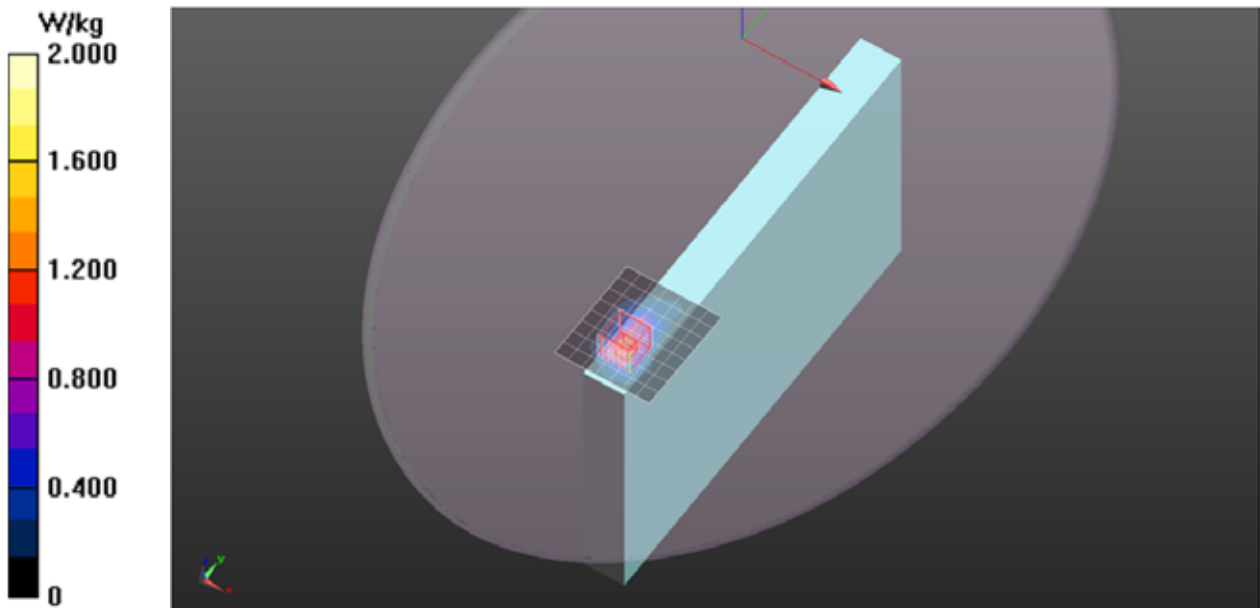

## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.459$  S/m;  $\epsilon_r = 48.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11n HT20/Ch60/Area Scan (7x8x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.74 W/kg


**Edge 1/Main Ant/802.11n HT20/Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.08 W/kg

**SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.216 W/kg**

Maximum value of SAR (measured) = 1.84 W/kg

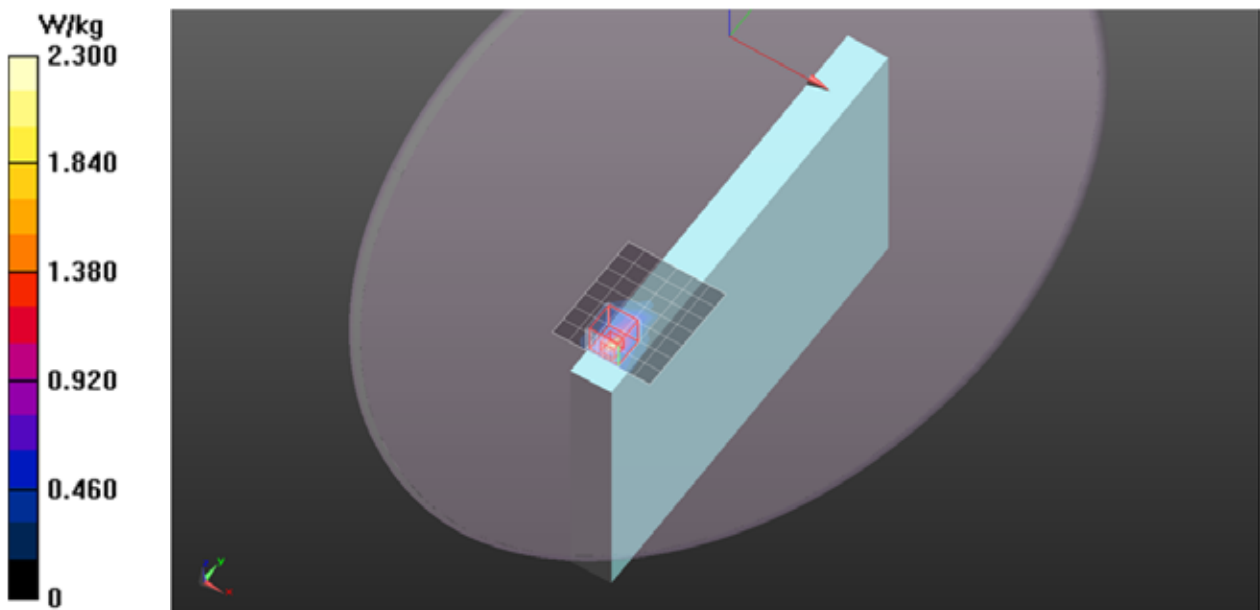

## 5GHz Band

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5620.3$  MHz;  $\sigma = 5.912$  S/m;  $\epsilon_r = 48.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11n HT20/Ch124/Area Scan (7x8x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 2.00 W/kg


**Edge 1/Main Ant/802.11n HT20/Ch124/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift =0.12 dB

Peak SAR (extrapolated) = 3.32 W/kg

**SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.212 W/kg**

Maximum value of SAR (measured) = 1.81 W/kg

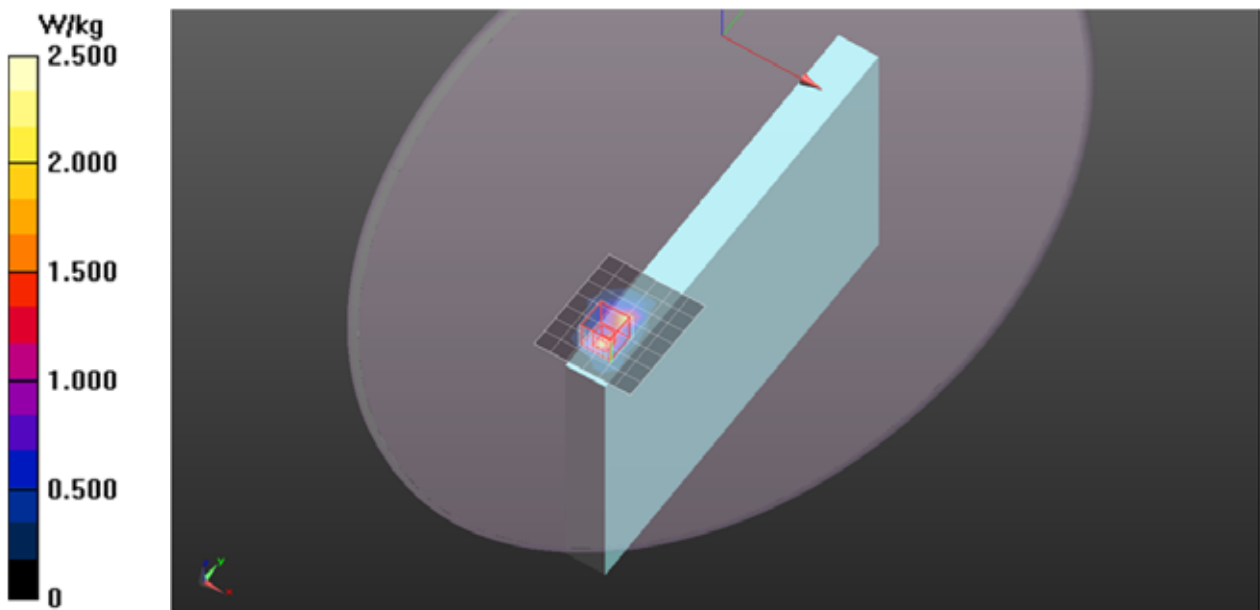

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 6.146$  S/m;  $\epsilon_r = 48.034$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11n HT20/Ch157/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.37 W/kg

**Edge 1/Main Ant/802.11n HT20/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.55 W/kg

Peak SAR (extrapolated) = 2.55 W/kg

**SAR(1 g) = 0.614 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 1.53 W/kg

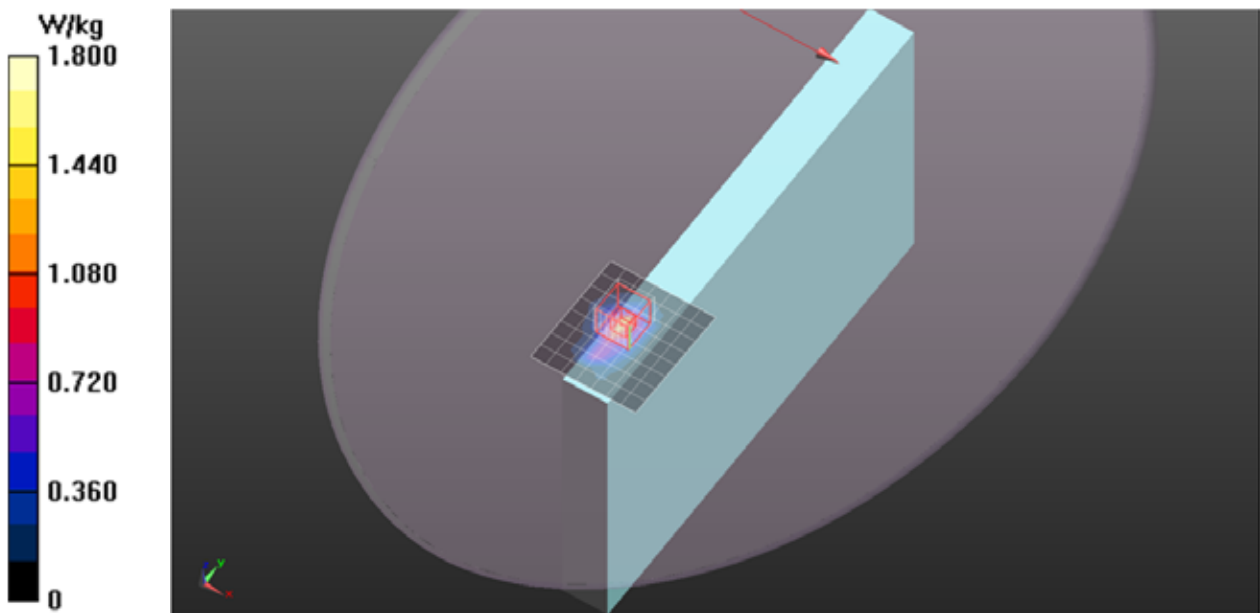

## 5GHz Band

Frequency: 5580 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5580.7$  MHz;  $\sigma = 5.89$  S/m;  $\epsilon_r = 48.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Aux Ant/802.11n HT20/Ch116/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.115 W/kg


**Edge 1/Aux Ant/802.11n HT20/Ch116/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.275 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.010 W/kg**

Maximum value of SAR (measured) = 0.161 W/kg

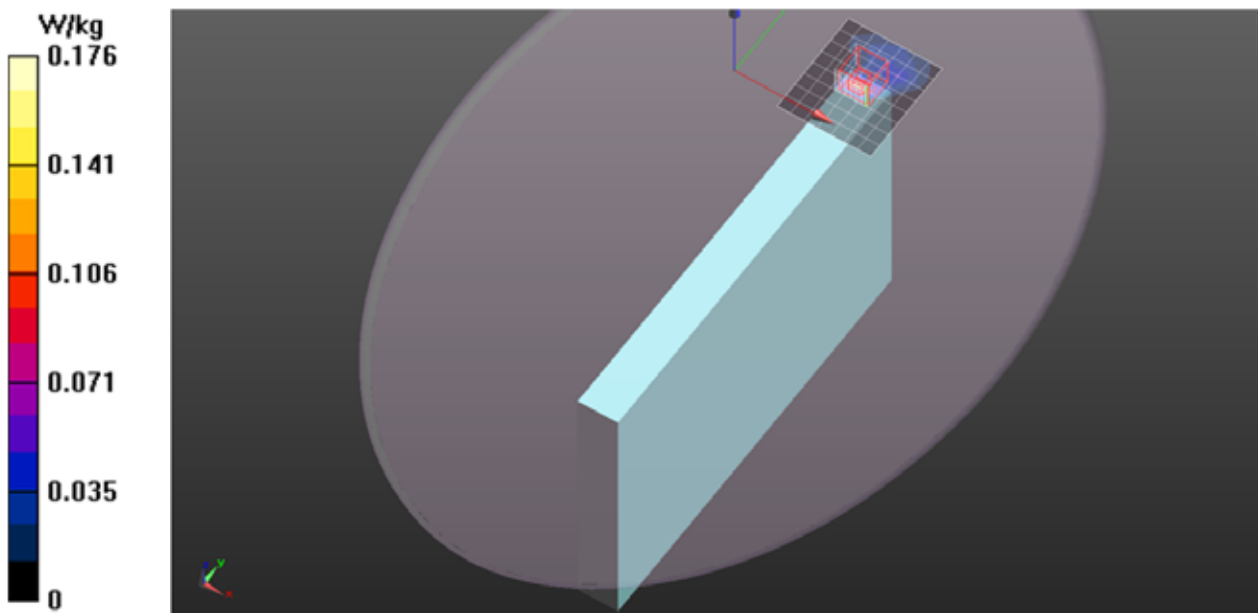

## 5GHz Band

Frequency: 5765 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5765.5$  MHz;  $\sigma = 6.112$  S/m;  $\epsilon_r = 48.057$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Aux Ant/802.11n HT20/Ch153/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.251 W/kg

**Edge 1/Aux Ant/802.11n HT20/Ch153/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.418 W/kg

Peak SAR (extrapolated) = 0.418 W/kg

**SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.235 W/kg

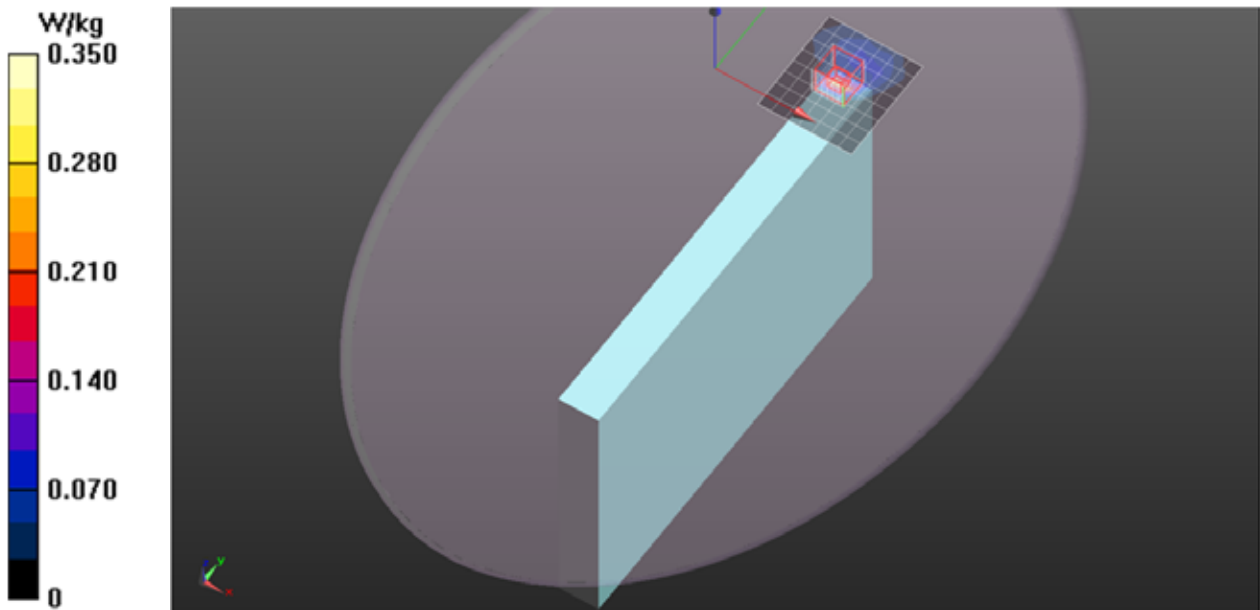



## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.393$  S/m;  $\epsilon_r = 48.919$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11n HT20/Ch44/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.549 W/kg

**Edge 2/Aux Ant/802.11n HT20/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 2.065 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.079 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.682 W/kg

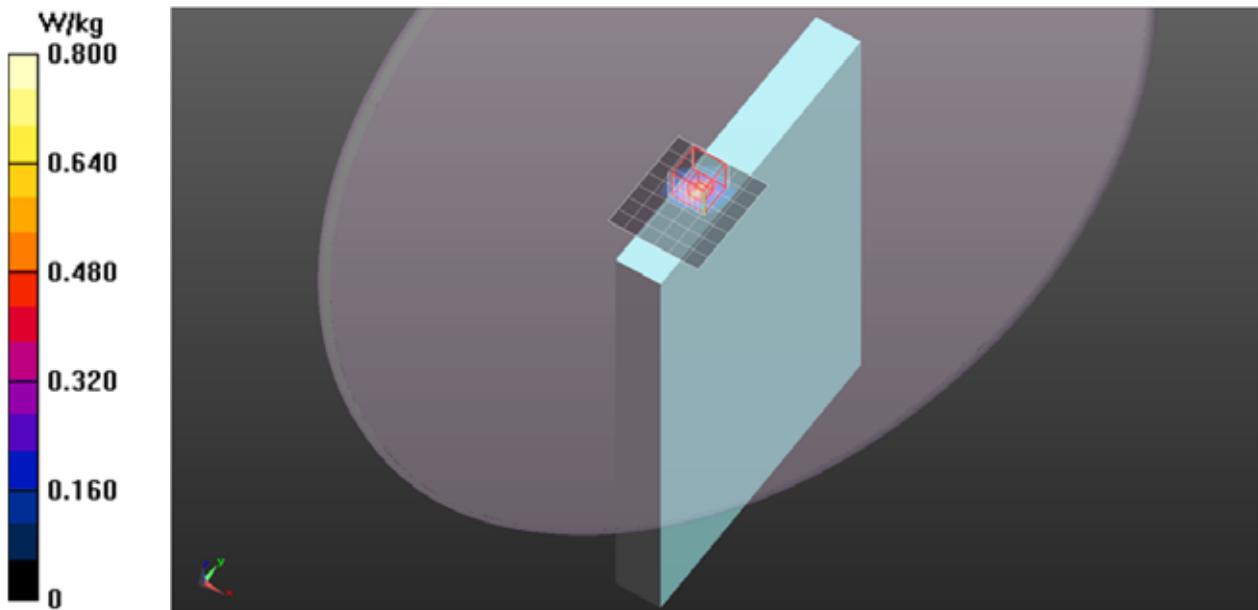

## 5GHz Band

Frequency: 5280 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5280.4$  MHz;  $\sigma = 5.461$  S/m;  $\epsilon_r = 49.001$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11n HT20/Ch56/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.487 W/kg

**Edge 2/Aux Ant/802.11n HT20/Ch56/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 2.129 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.969 W/kg

Peak SAR (extrapolated) = 0.969 W/kg

**SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.624 W/kg

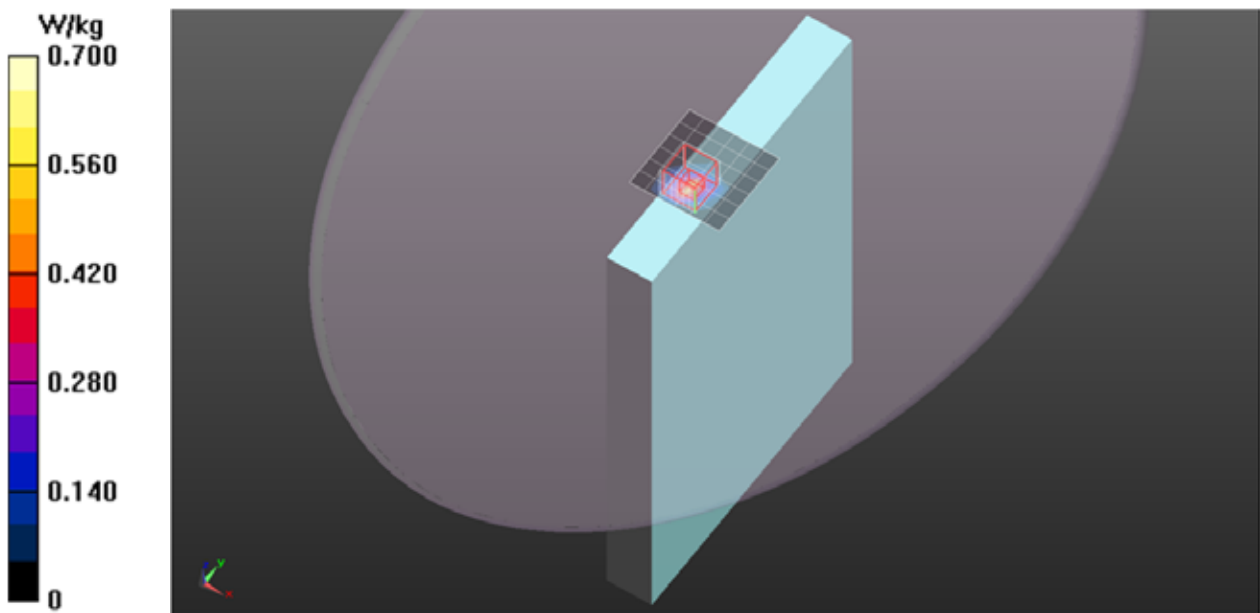

## 5GHz Band

Frequency: 5765 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5765.5$  MHz;  $\sigma = 6.112$  S/m;  $\epsilon_r = 48.057$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11n HT20/Ch116/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.12 W/kg

**Edge 2/Aux Ant/802.11n HT20/Ch116/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 3.406 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.92 W/kg

Peak SAR (extrapolated) = 1.92 W/kg

**SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.150 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

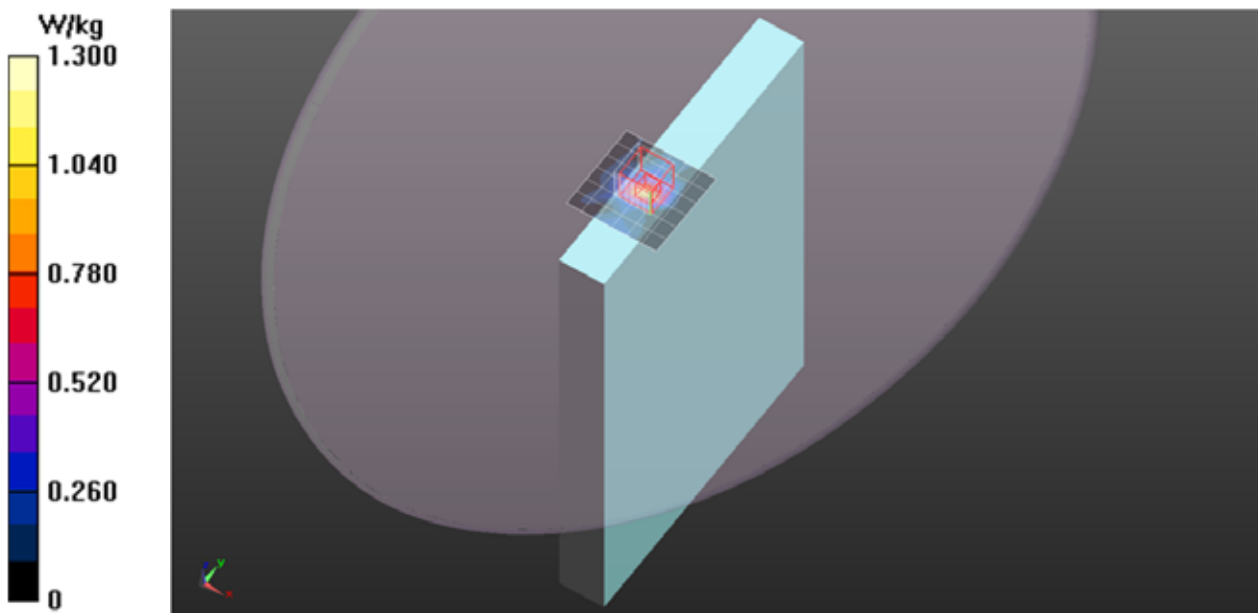

## 5GHz Band

Frequency: 5765 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5765.5$  MHz;  $\sigma = 6.112$  S/m;  $\epsilon_r = 48.057$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11n HT20/Ch153/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.07 W/kg


**Edge 2/Aux Ant/802.11n HT20/Ch153/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.540 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 2.08 W/kg

**SAR(1 g) = 0.533 W/kg; SAR(10 g) = 0.159 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

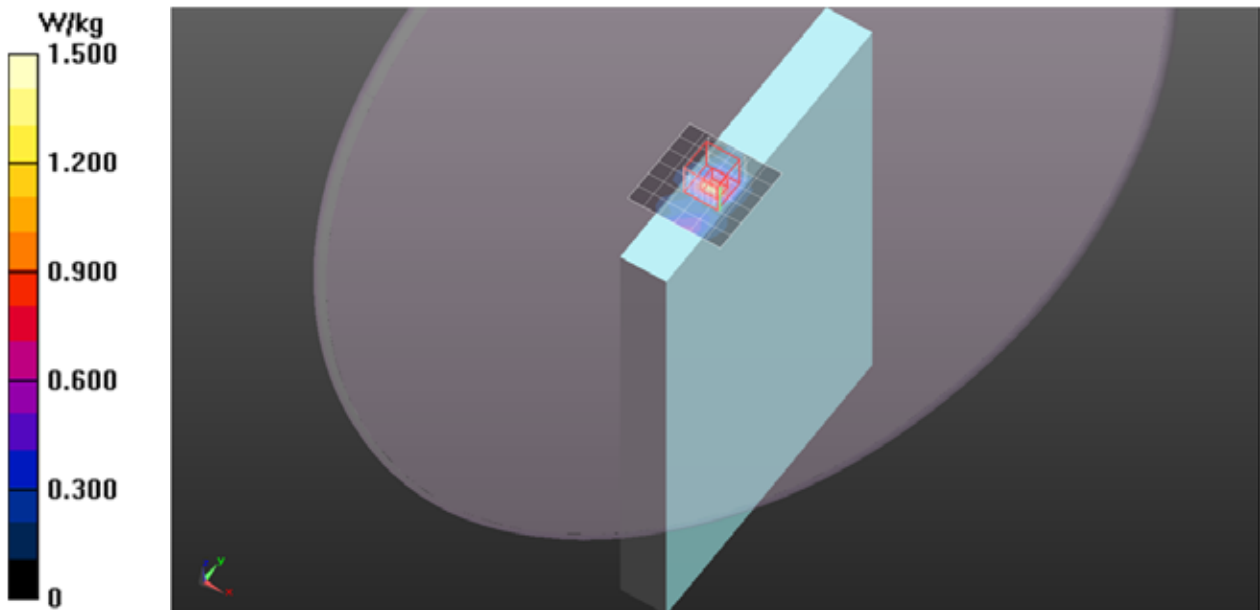

## 5GHz Band

Frequency: 5220 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5220$  MHz;  $\sigma = 5.393$  S/m;  $\epsilon_r = 48.919$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 4/Main Ant/802.11n HT20/Ch44/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.276 W/kg

**Edge 4/Main Ant/802.11n HT20/Ch44/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm,

dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.518 W/kg

**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.063 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.421 W/kg

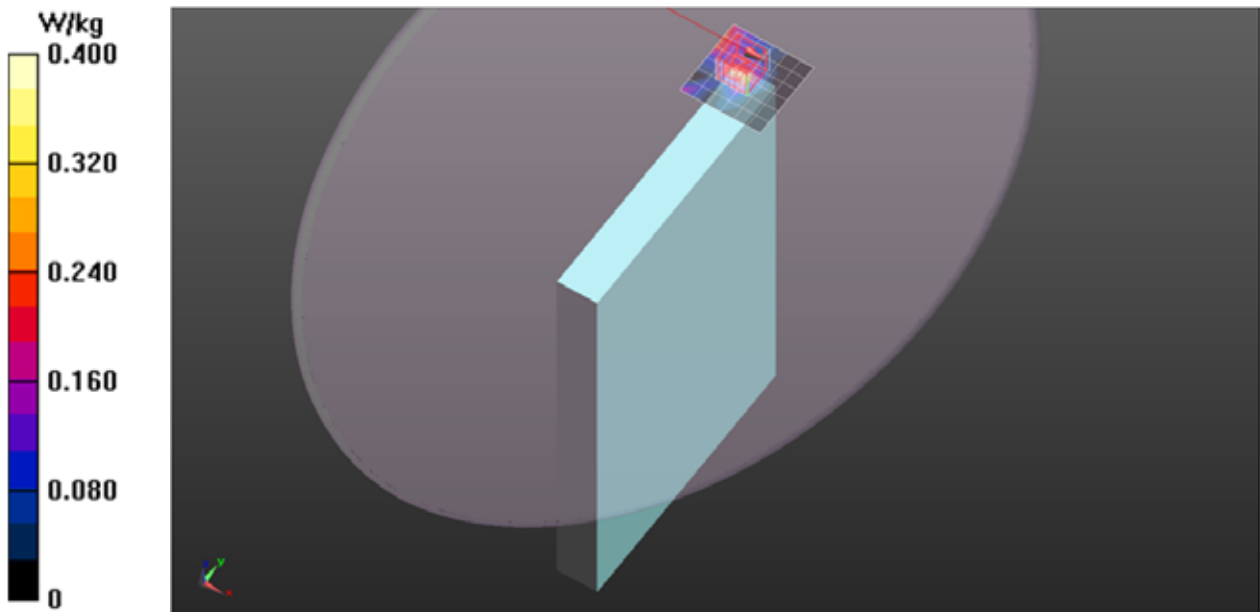

## 5GHz Band

Frequency: 5300 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5300.2$  MHz;  $\sigma = 5.459$  S/m;  $\epsilon_r = 48.861$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 4/Main Ant/802.11n HT20/Ch60/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.286 W/kg


**Edge 4/Main Ant/802.11n HT20/Ch60/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.166 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.601 W/kg

**SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.067 W/kg**

Maximum value of SAR (measured) = 0.390 W/kg

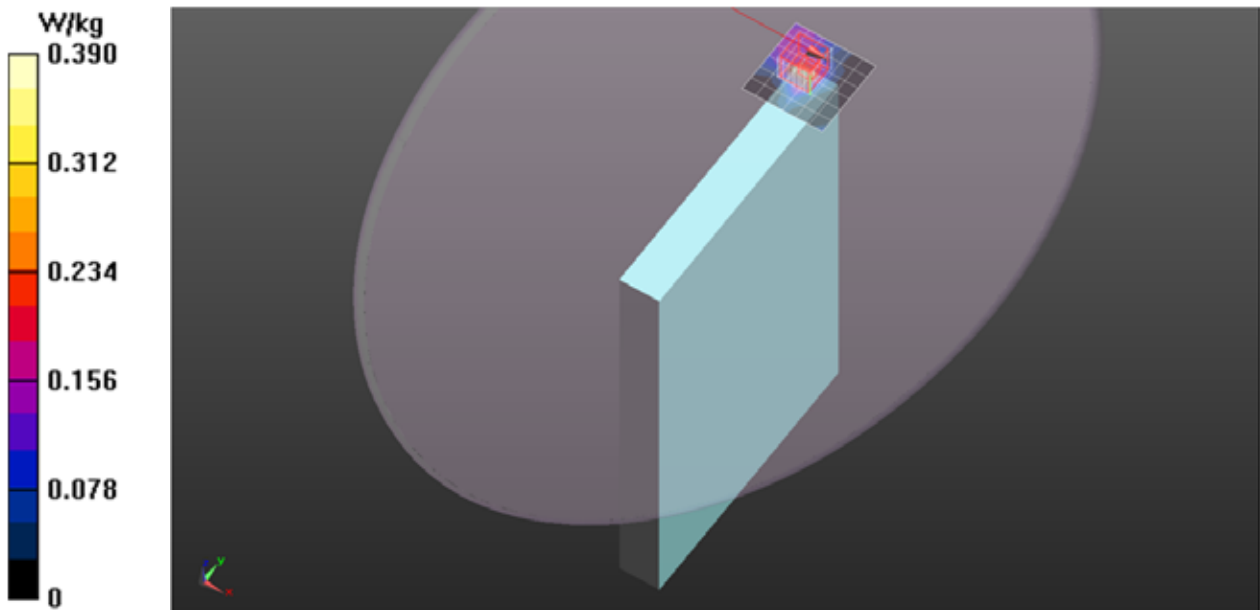

## 5GHz Band

Frequency: 5620 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5620.3$  MHz;  $\sigma = 5.912$  S/m;  $\epsilon_r = 48.402$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 4/Main Ant/802.11n HT20/Ch124/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.388 W/kg


**Edge 4/Main Ant/802.11n HT20/Ch124/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9620 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.621 W/kg

**SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.397 W/kg

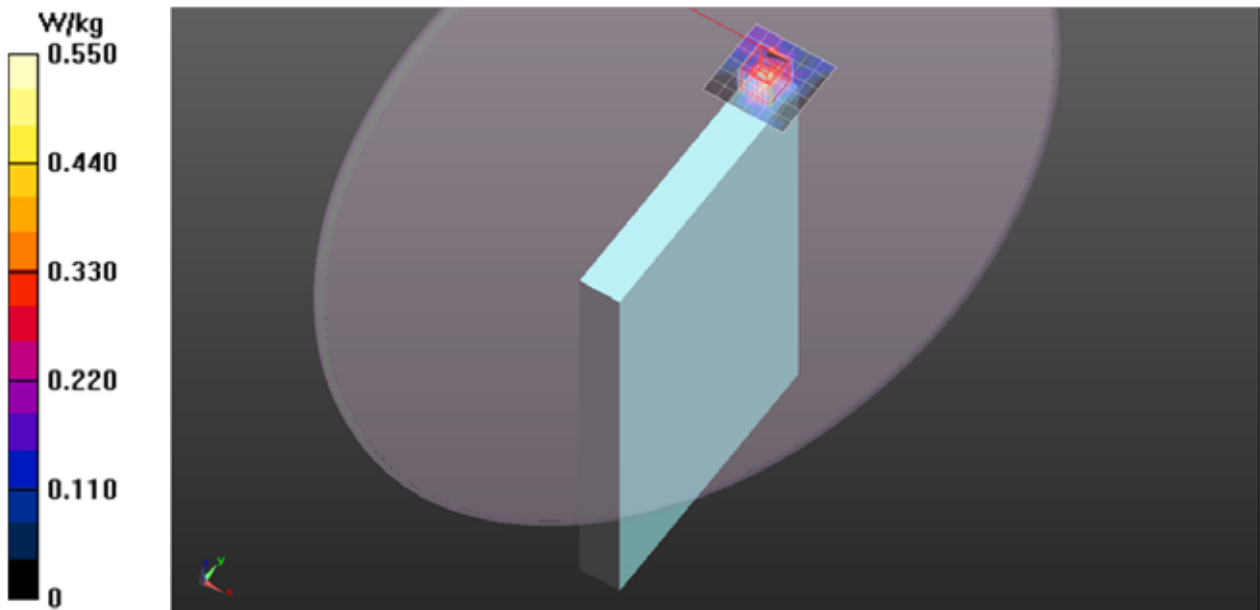

## 5GHz Band

Frequency: 5785 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5785.3$  MHz;  $\sigma = 6.146$  S/m;  $\epsilon_r = 48.034$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 4/Main Ant/802.11n HT20/Ch157/Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.211 W/kg


**Edge 4/Main Ant/802.11n HT20/Ch157/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.5140 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.468 W/kg

**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.273 W/kg

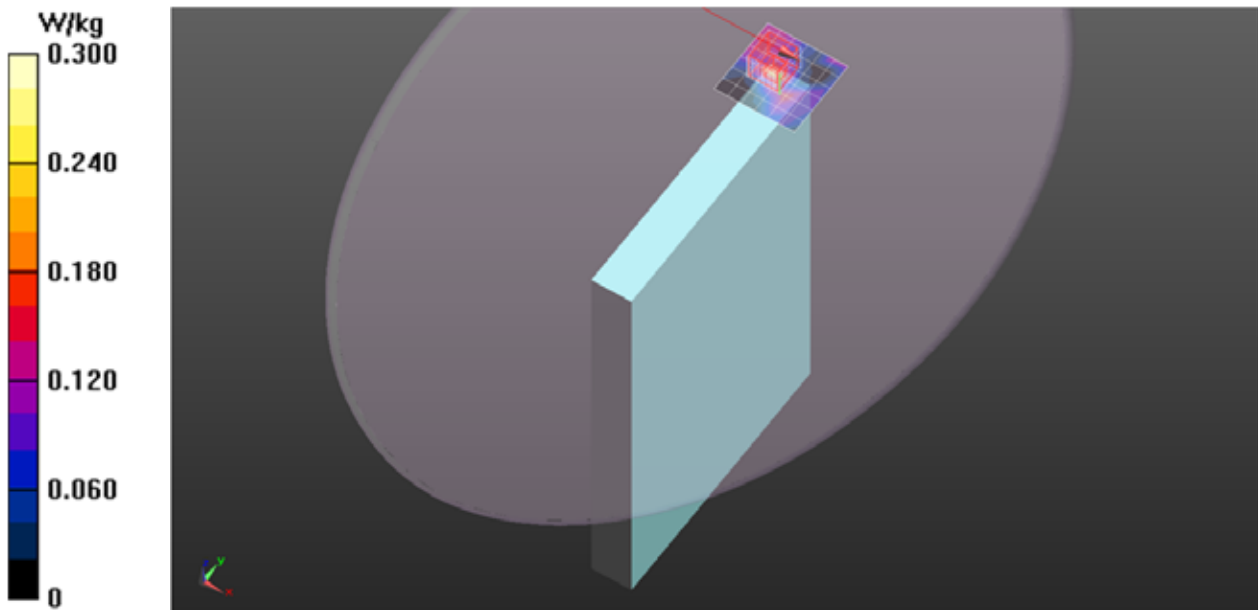



## 5GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5210$  MHz;  $\sigma = 5.155$  S/m;  $\epsilon_r = 48.561$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11ac/Ch42/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.570 W/kg

**Rear/Main Ant/802.11ac/Ch42/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.096 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.719 W/kg

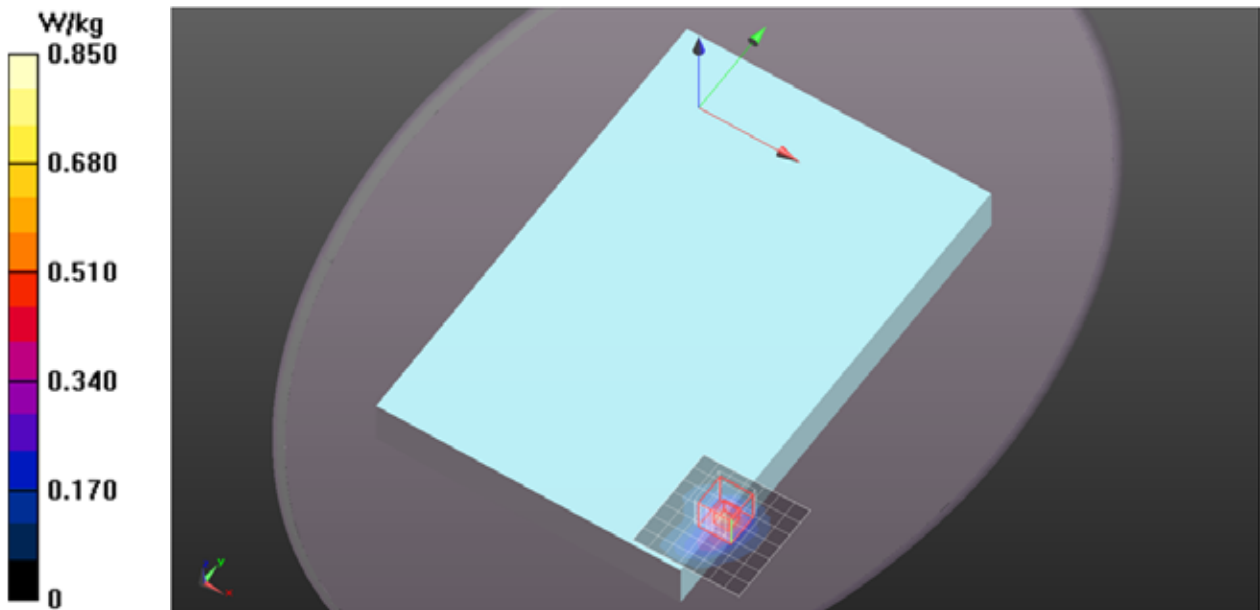

## 5GHz Band

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5290.3$  MHz;  $\sigma = 5.265$  S/m;  $\epsilon_r = 48.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11ac/Ch58/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.627 W/kg


**Rear/Main Ant/802.11ac/Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.111 W/kg**

Maximum value of SAR (measured) = 0.847 W/kg

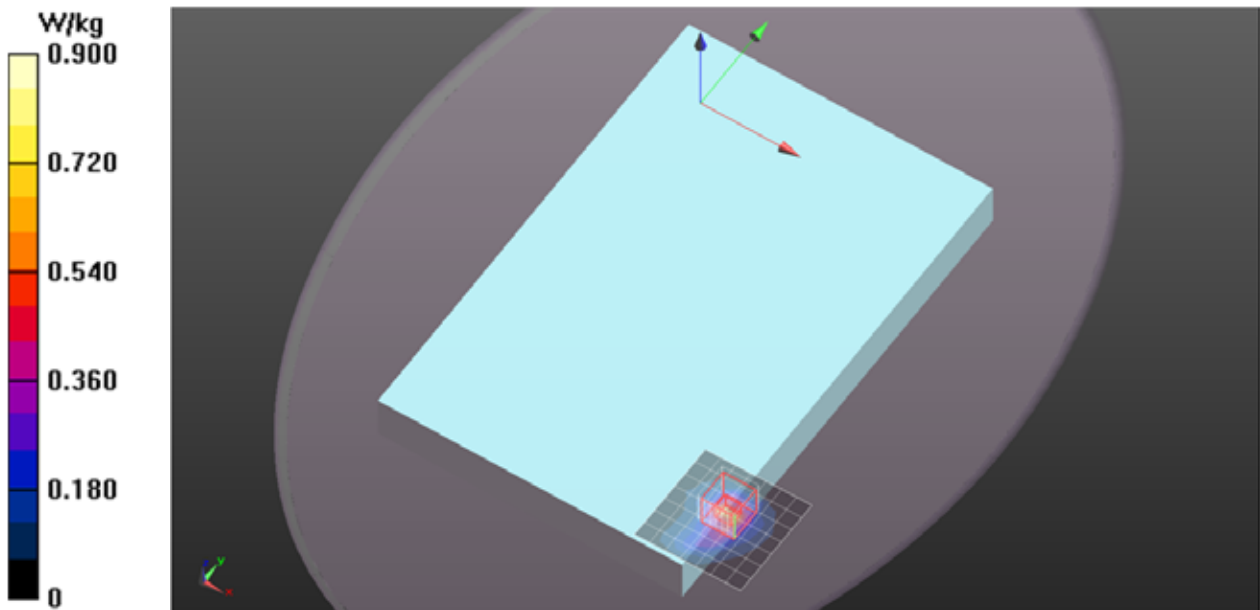

## 5GHz Band

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.764$  S/m;  $\epsilon_r = 47.841$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11ac/Ch138/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.842 W/kg

**Rear/Main Ant/802.11ac/Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.03 W/kg

**SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.14 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 W/kg

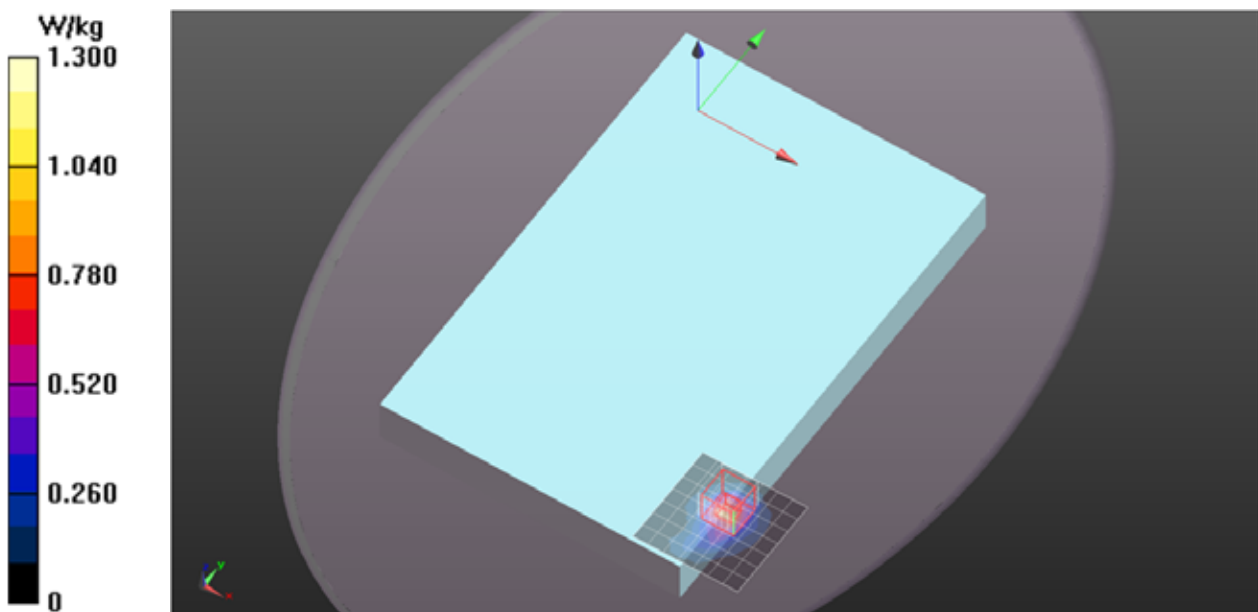

## 5GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C  
Medium parameters used:  $f = 5775.4$  MHz;  $\sigma = 5.849$  S/m;  $\epsilon_r = 47.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main Ant/802.11ac/Ch155/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 0.712 W/kg


**Rear/Main Ant/802.11ac/Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 1.03 W/kg

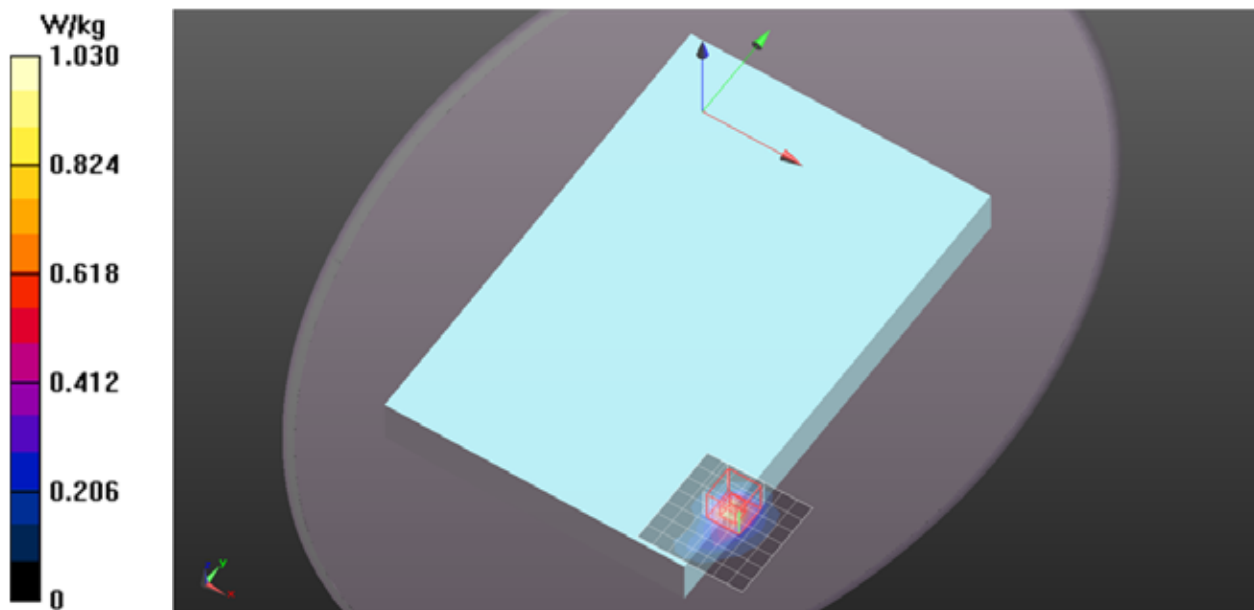

## 5GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5210$  MHz;  $\sigma = 5.155$  S/m;  $\epsilon_r = 48.561$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11ac/Ch42/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.112 W/kg

**Rear/Aux Ant/802.11ac/Ch42/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.194 W/kg

**SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.015 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.132 W/kg

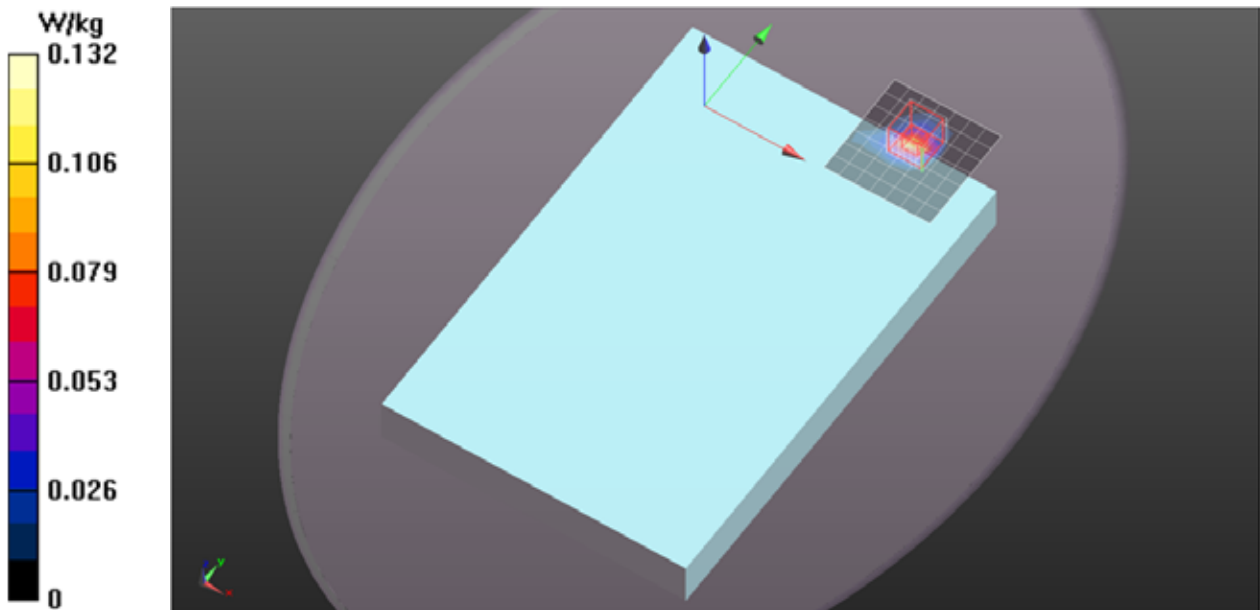

## 5GHz Band

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5290.3$  MHz;  $\sigma = 5.265$  S/m;  $\epsilon_r = 48.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11ac/Ch58/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.178 W/kg


**Rear/Aux Ant/802.11ac/Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.294 W/kg

**SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.187 W/kg

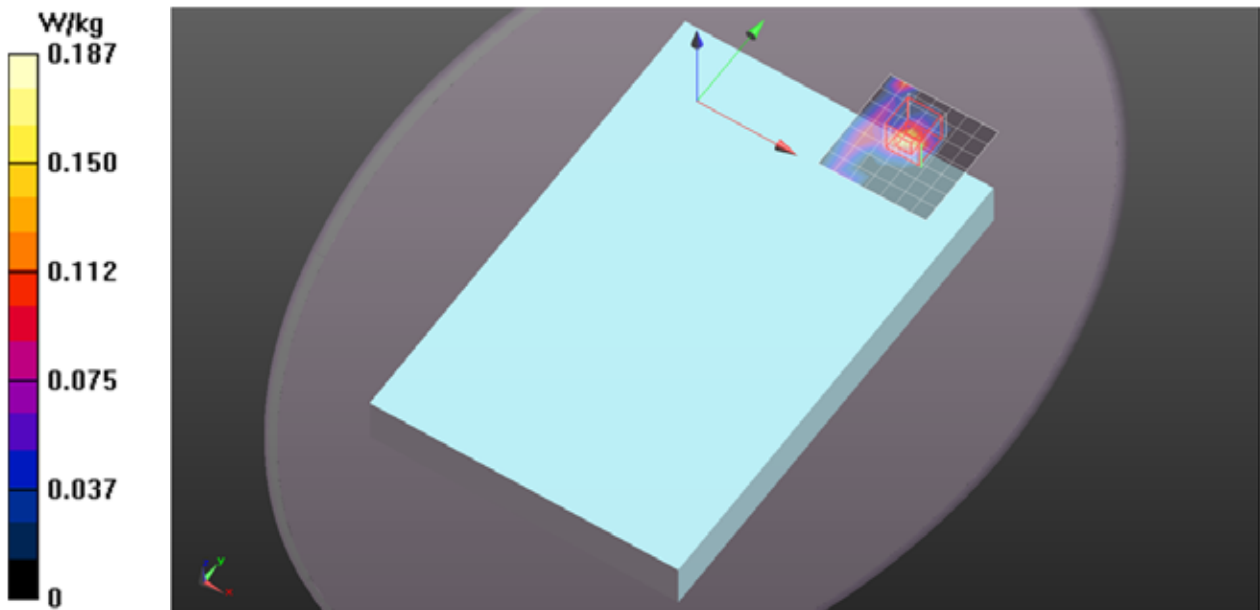

## 5GHz Band

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.764$  S/m;  $\epsilon_r = 47.841$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11ac/Ch138/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.374 W/kg

**Rear/Aux Ant/802.11ac/Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.689 W/kg

**SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.042 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.376 W/kg

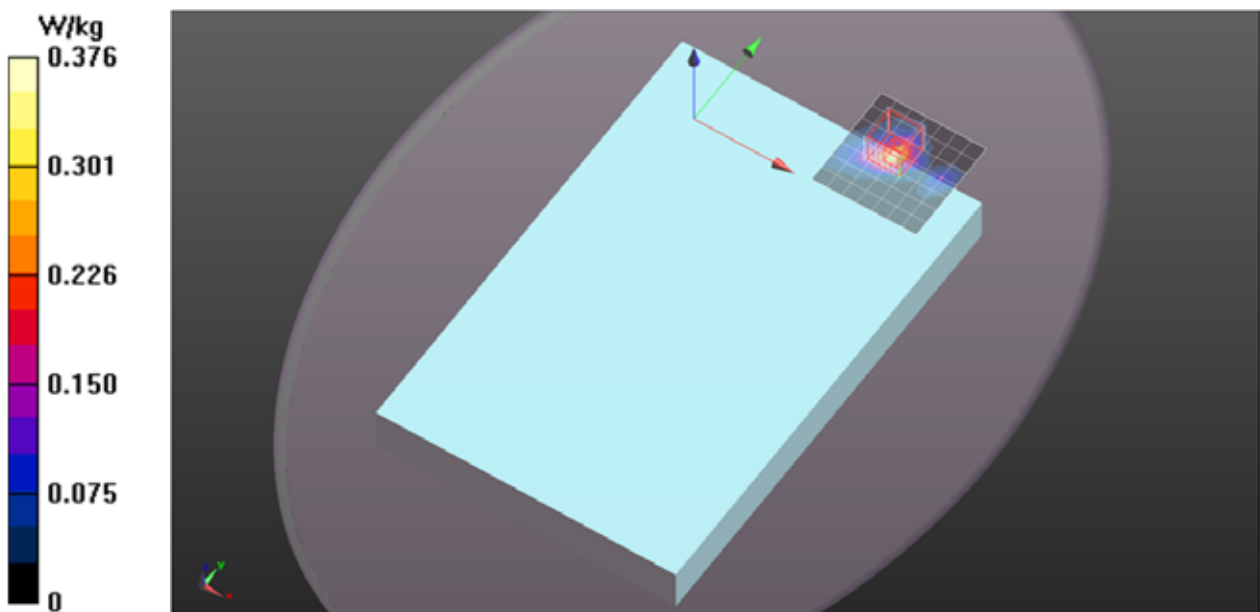

## 5GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5775.4$  MHz;  $\sigma = 5.849$  S/m;  $\epsilon_r = 47.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Aux Ant/802.11ac/Ch155/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.399 W/kg


**Rear/Aux Ant/802.11ac/Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.686 W/kg

**SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.391 W/kg

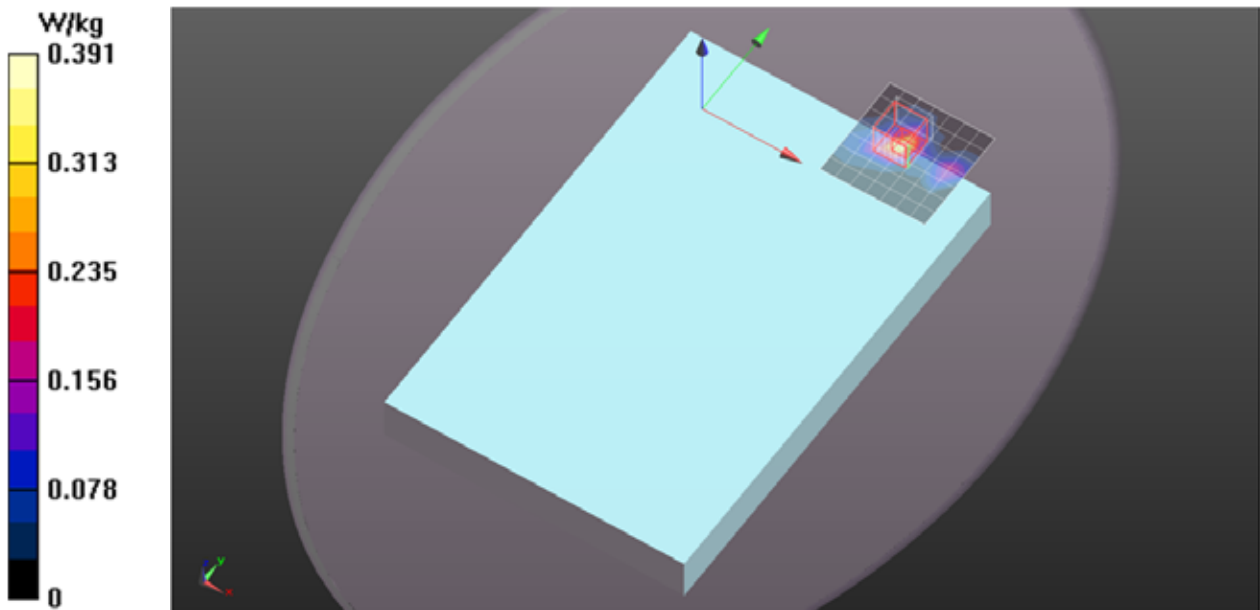



## 5GHz Band

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.764$  S/m;  $\epsilon_r = 47.841$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main+Aux Ant/802.11ac/Ch138/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.650 W/kg

**Rear/Main+Aux Ant/802.11ac/Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.56 W/kg

**SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.113 W/kg**

Maximum value of SAR (measured) = 0.921 W/kg

**Rear/Main+Aux Ant/802.11ac/Ch138/Area Scan 2 (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.295 W/kg


**Rear/Main+Aux Ant/802.11ac/Ch138/Zoom Scan 2 (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.540 W/kg

**SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.356 W/kg

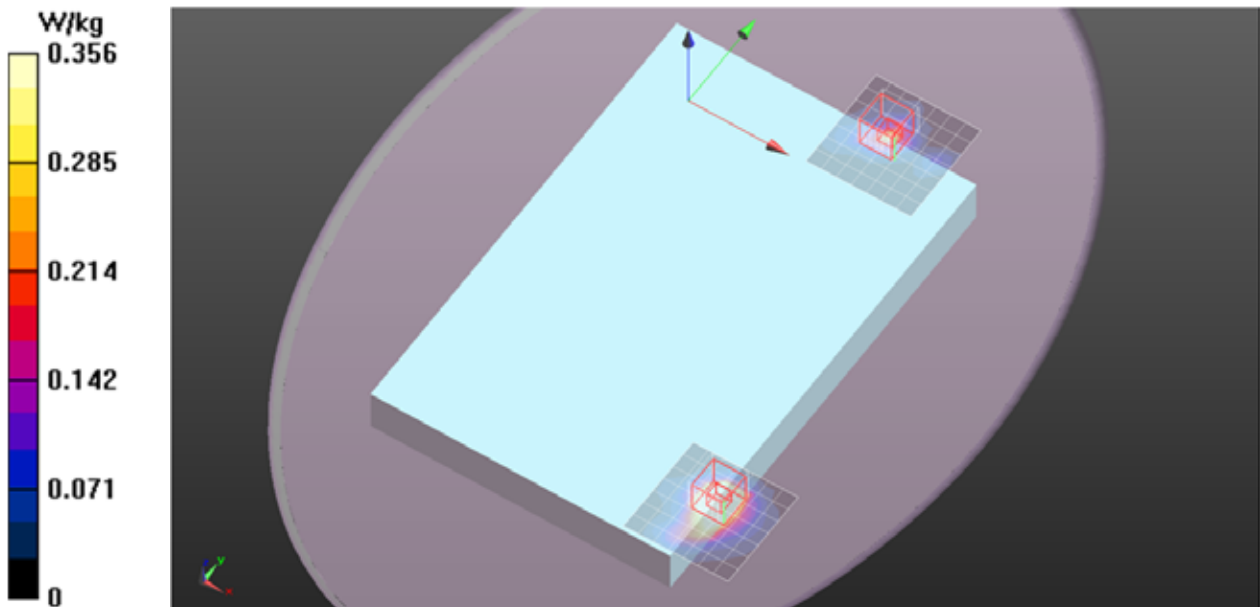

## 5GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5775.4$  MHz;  $\sigma = 5.849$  S/m;  $\epsilon_r = 47.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/Main+Aux Ant/802.11ac/Ch155/Area Scan (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.504 W/kg

**Rear/Main+Aux Ant/802.11ac/Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.096 W/kg**

Maximum value of SAR (measured) = 0.755 W/kg

**Rear/Main+Aux Ant/802.11ac/Ch155/Area Scan 2 (8x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.233 W/kg


**Rear/Main+Aux Ant/802.11ac/Ch155/Zoom Scan 2 (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.445 W/kg

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.230 W/kg

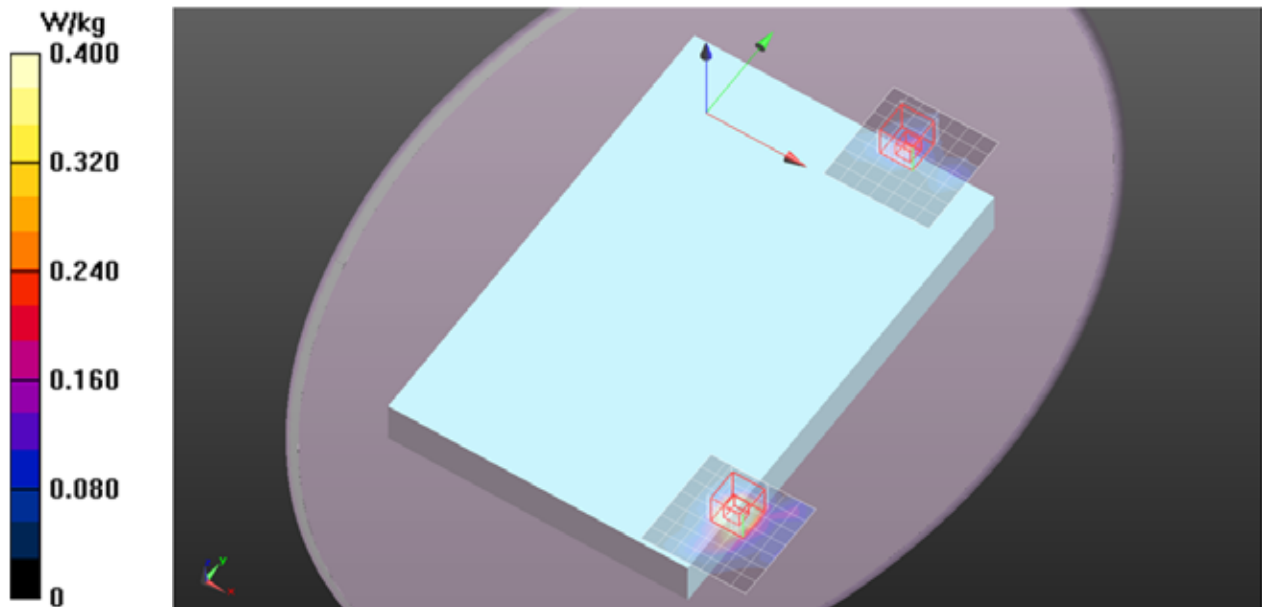

## 5GHz Band

Frequency: 5210 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5210$  MHz;  $\sigma = 5.155$  S/m;  $\epsilon_r = 48.561$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.43, 4.43, 4.43); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11ac/Ch42/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.666 W/kg

**Edge 1/Main Ant/802.11ac/Ch42/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.103 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.930 W/kg

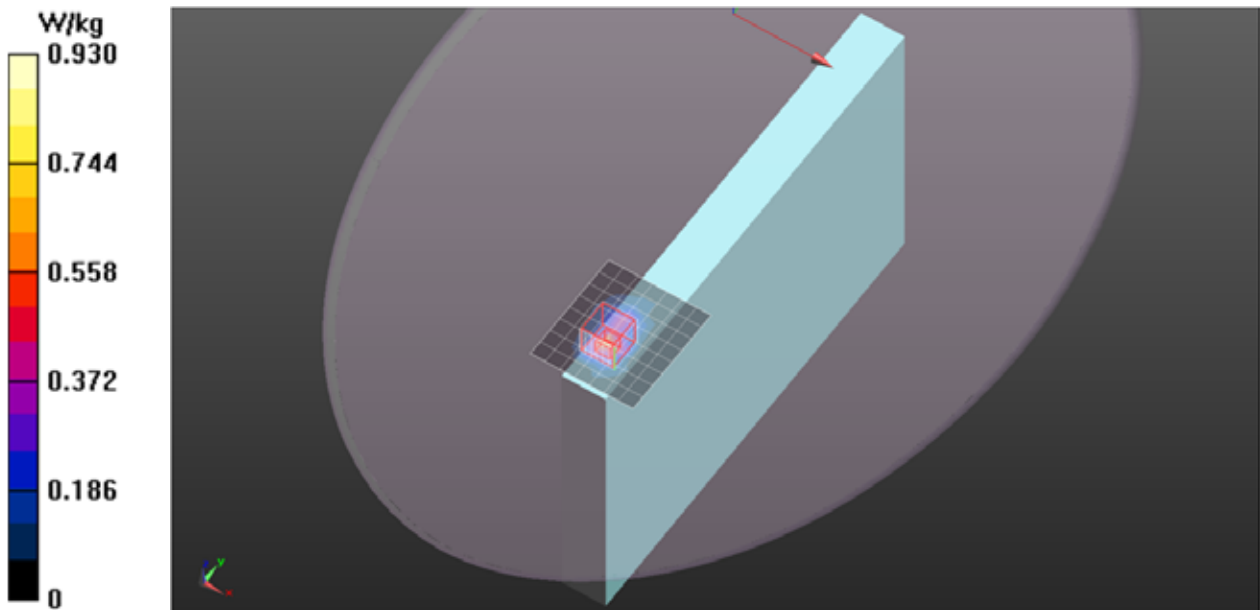

## 5GHz Band

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5290.3$  MHz;  $\sigma = 5.265$  S/m;  $\epsilon_r = 48.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11ac/Ch58/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.717 W/kg


**Edge 1/Main Ant/802.11ac/Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.111 W/kg**

Maximum value of SAR (measured) = 1.07 W/kg

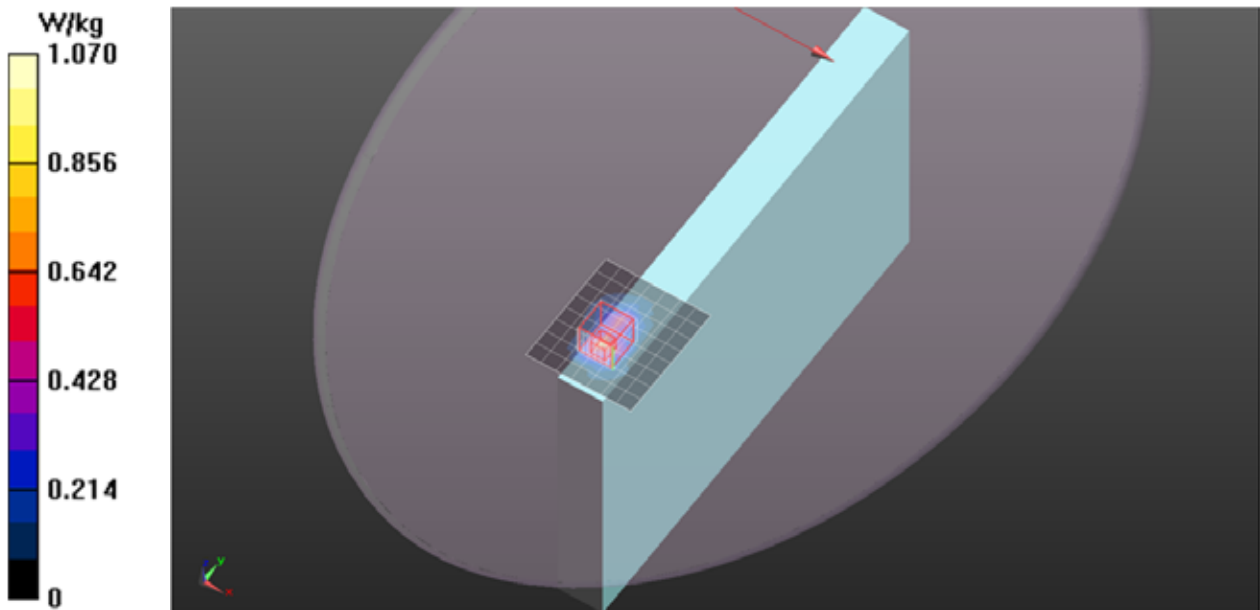

## 5GHz Band

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.764$  S/m;  $\epsilon_r = 47.841$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11ac/Ch138/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.44 W/kg

**Edge 1/Main Ant/802.11ac/Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 2.54 W/kg

Peak SAR (extrapolated) = 2.54 W/kg

**SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.194 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.52 W/kg

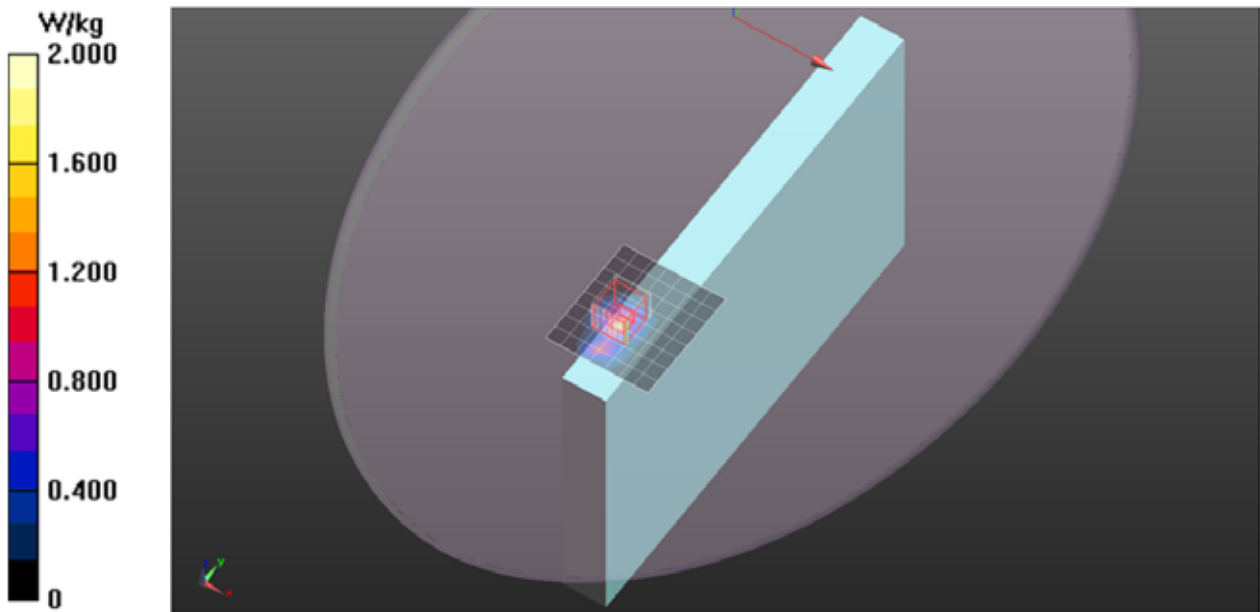

## 5GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5775.4$  MHz;  $\sigma = 5.849$  S/m;  $\epsilon_r = 47.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main Ant/802.11ac/Ch155/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.07 W/kg

**Edge 1/Main Ant/802.11ac/Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.79 W/kg

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 0.442 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 1.08 W/kg

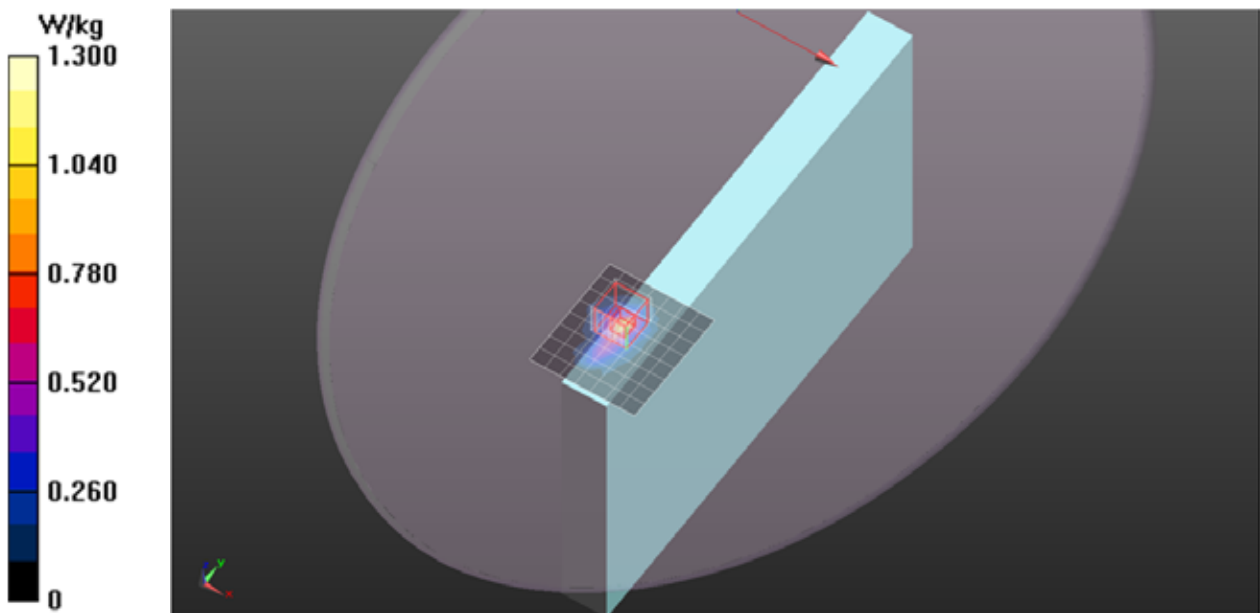

## 5GHz Band

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.764$  S/m;  $\epsilon_r = 47.841$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main+Aux Ant/802.11ac/Ch138/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.864 W/kg

**Edge 1/Main+Aux Ant/802.11ac/Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.107 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.880 W/kg

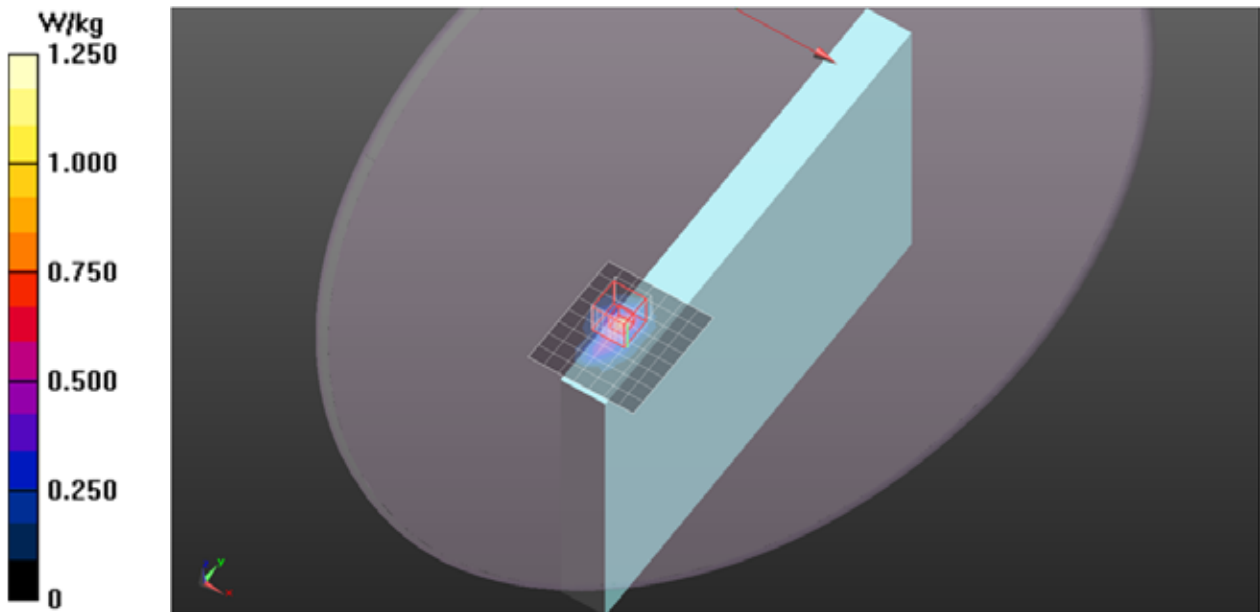

## 5GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5775.4$  MHz;  $\sigma = 5.849$  S/m;  $\epsilon_r = 47.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/Main+Aux Ant/802.11ac/Ch155/Area Scan (8x9x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.671 W/kg

**Edge 1/Main+Aux Ant/802.11ac/Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:


dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.689 W/kg

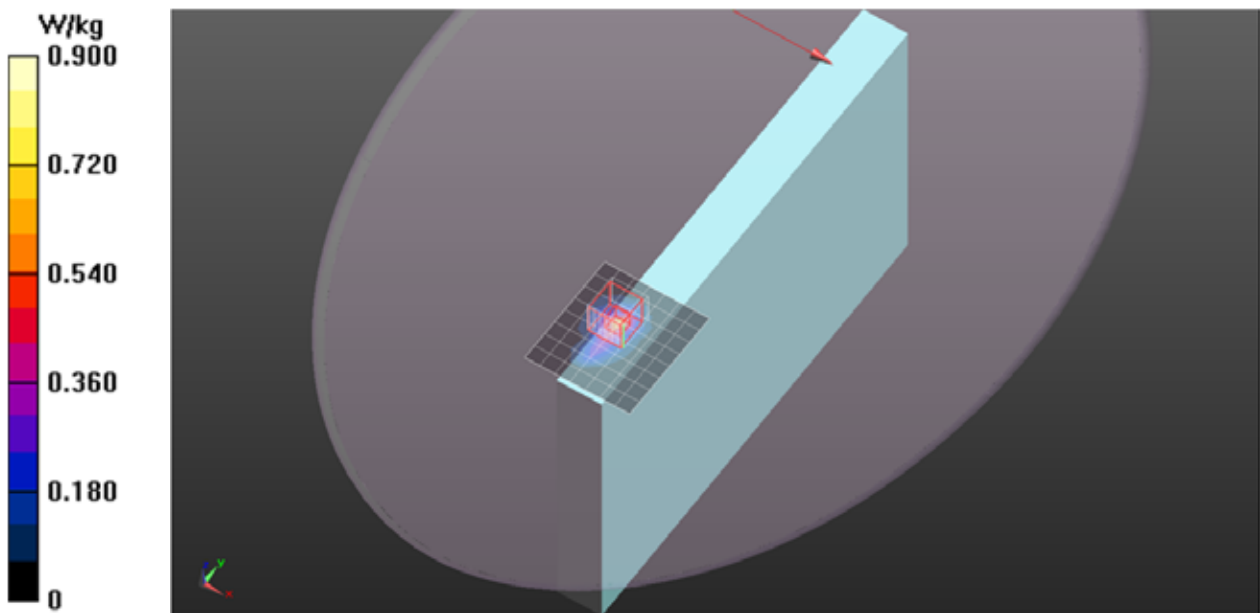



## 5GHz Band

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5290.3$  MHz;  $\sigma = 5.265$  S/m;  $\epsilon_r = 48.515$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.23, 4.23, 4.23); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11ac/Ch58/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.288 W/kg

**Edge 2/Aux Ant/802.11ac/Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm


Reference Value = 1.415 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.581 W/kg

Peak SAR (extrapolated) = 0.581 W/kg

**SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.366 W/kg

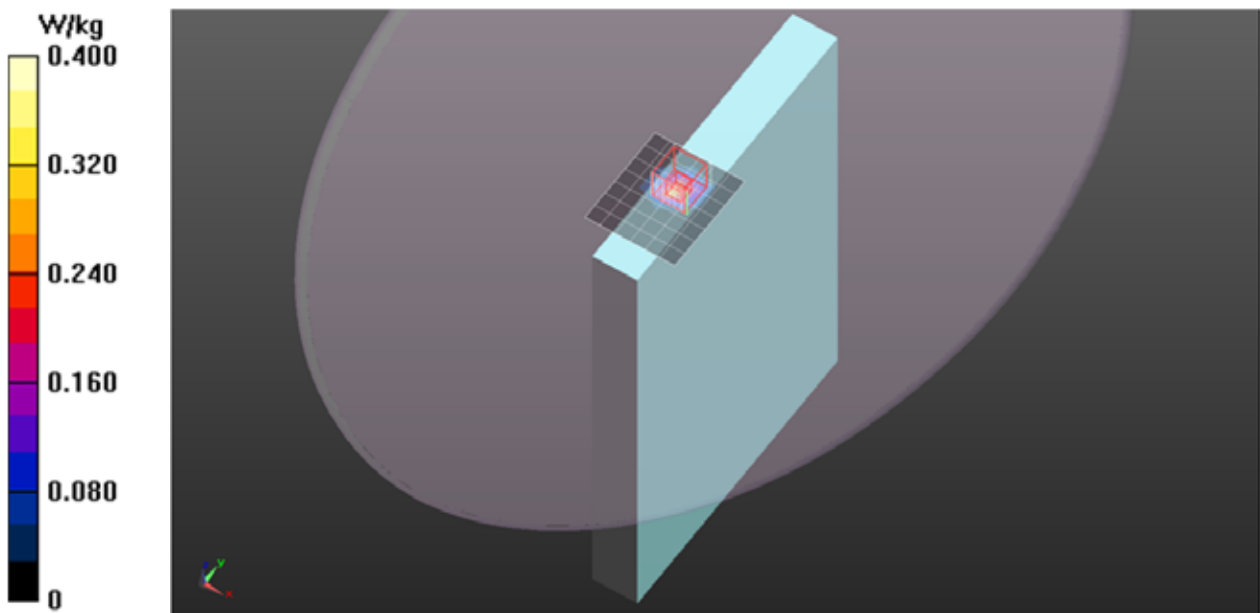

## 5GHz Band

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.764$  S/m;  $\epsilon_r = 47.841$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11ac/Ch138/Area Scan (7x8x1)**: Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.747 W/kg

**Edge 2/Aux Ant/802.11ac/Ch138/Zoom Scan (7x7x12)/Cube 0**: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.841 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.45 W/kg

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.087 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.866 W/kg

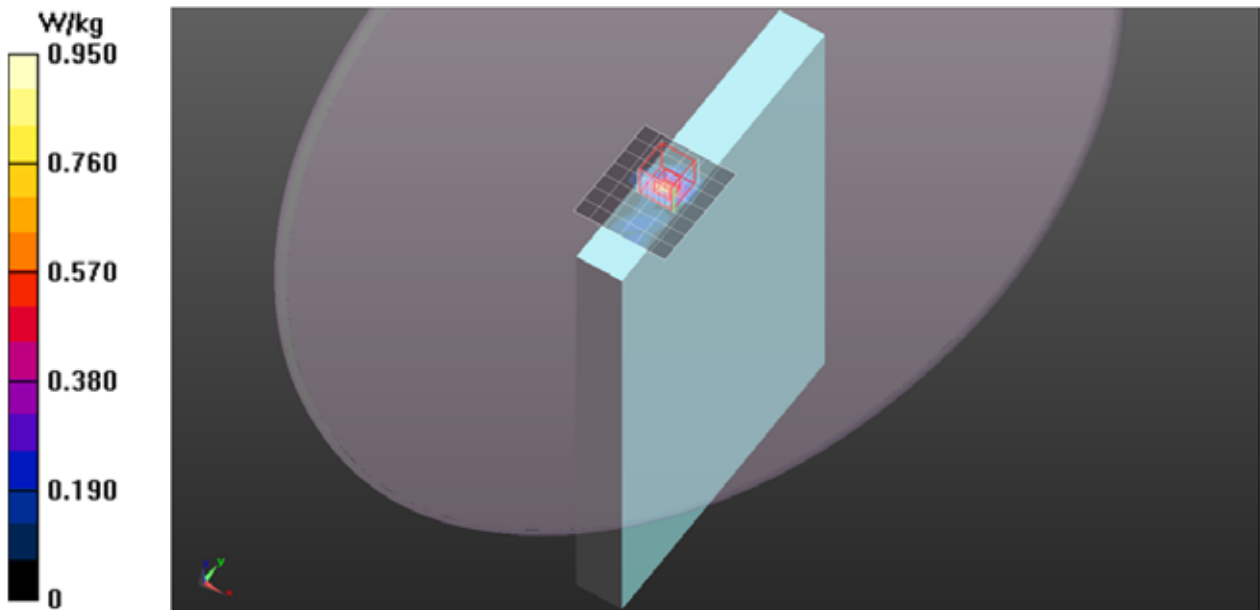

## 5GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5775.4$  MHz;  $\sigma = 5.849$  S/m;  $\epsilon_r = 47.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Aux Ant/802.11ac/Ch155/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.837 W/kg


**Edge 2/Aux Ant/802.11ac/Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 2.942 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.63 W/kg

**SAR(1 g) = 0.379 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.956 W/kg

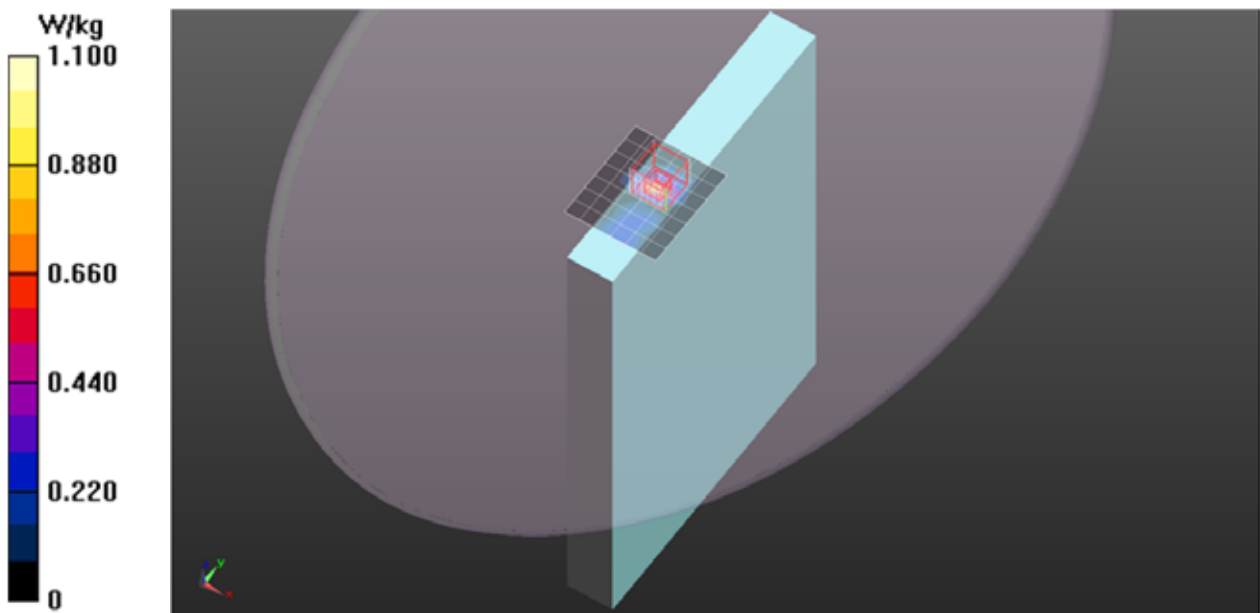

## 5GHz Band

Frequency: 5690 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.764$  S/m;  $\epsilon_r = 47.841$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(3.82, 3.82, 3.82); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Main+Aux Ant/802.11ac/Ch138/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.579 W/kg

**Edge 2/Main+Aux Ant/802.11ac/Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:

dx=4mm, dy=4mm, dz=2mm


Reference Value = 2.533 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.066 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.659 W/kg

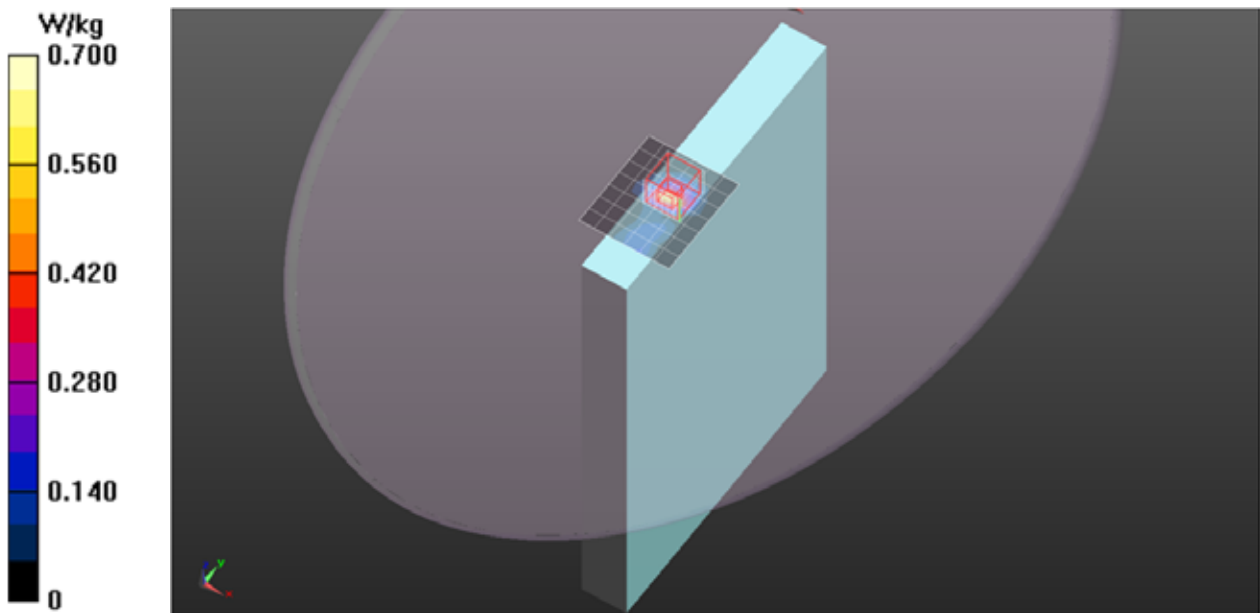

## 5GHz Band

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.5°C; Liquid Temperature: 24.0°C

Medium parameters used:  $f = 5775.4$  MHz;  $\sigma = 5.849$  S/m;  $\epsilon_r = 47.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(4.22, 4.22, 4.22); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/Main+Aux Ant/802.11ac/Ch155/Area Scan (7x8x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.455 W/kg

**Edge 2/Main+Aux Ant/802.11ac/Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid:

dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.767 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.917 W/kg

**SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.531 W/kg

