

WCDMA Band IV

Frequency: 1752.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1752.7$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 52.994$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(8.06, 8.06, 8.06); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/WCDMA Band IV/CH 1513/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 W/kg

Edge 1/WCDMA Band IV/CH 1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 4.464 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.87 W/kg

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.512 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

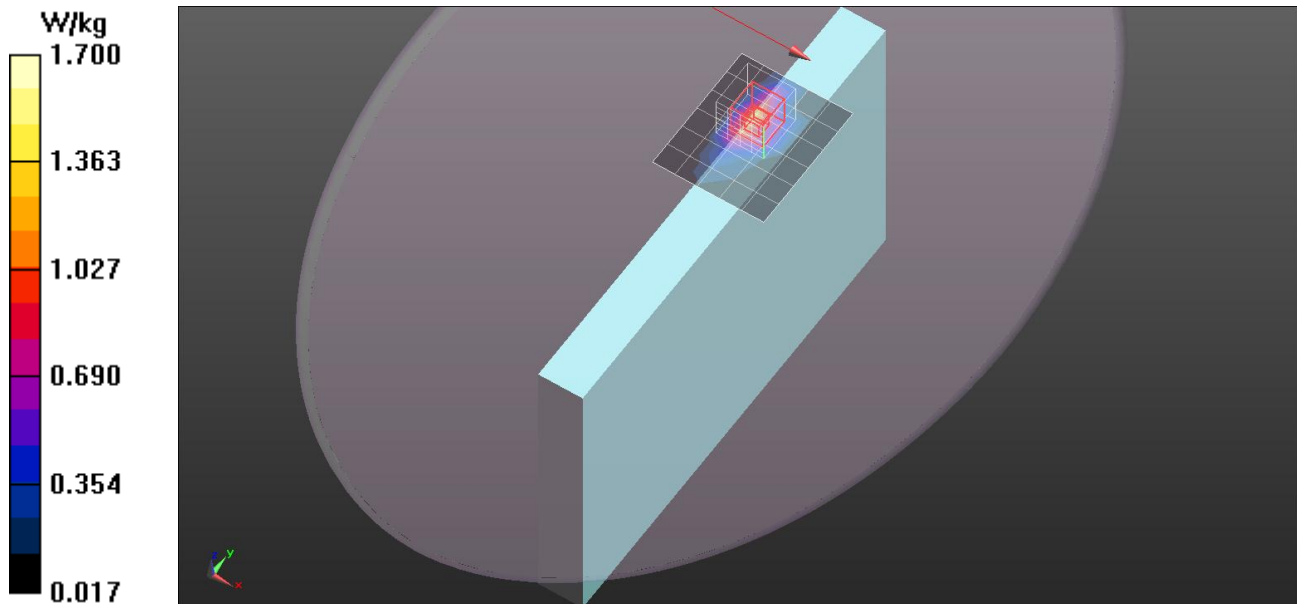


WCDMA Band IV

Frequency: 1752.6 MHz; Duty Cycle: 1:1

Edge/Edge 1/WCDMA Band IV/CH 1513/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.150 W/kg

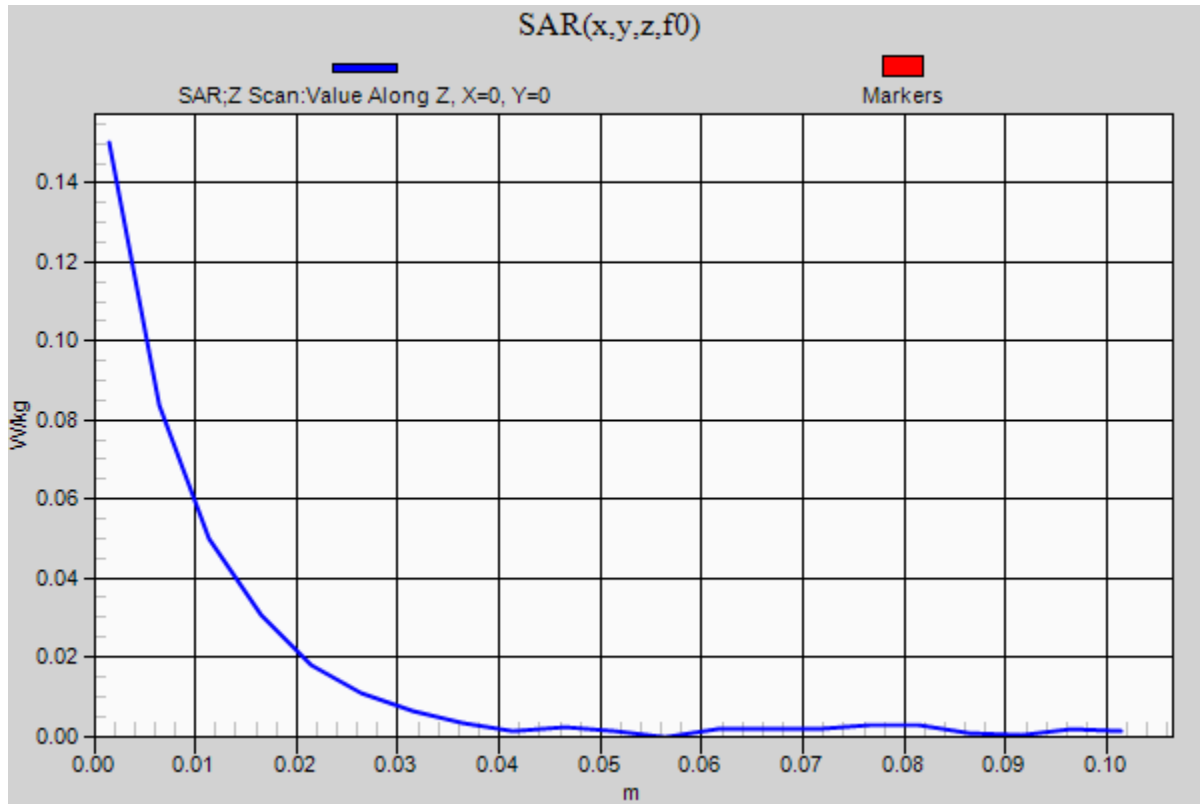

WCDMA Band IV

Frequency: 1712.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1713.1$ MHz; $\sigma = 1.458$ S/m; $\epsilon_r = 52.949$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(8.06, 8.06, 8.06); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/WCDMA Band IV/CH 1312/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 W/kg

Edge 1/WCDMA Band IV/CH 1312/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.556 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 1.69 W/kg

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.910 W/kg; SAR(10 g) = 0.466 W/kg

Maximum value of SAR (measured) = 1.40 W/kg

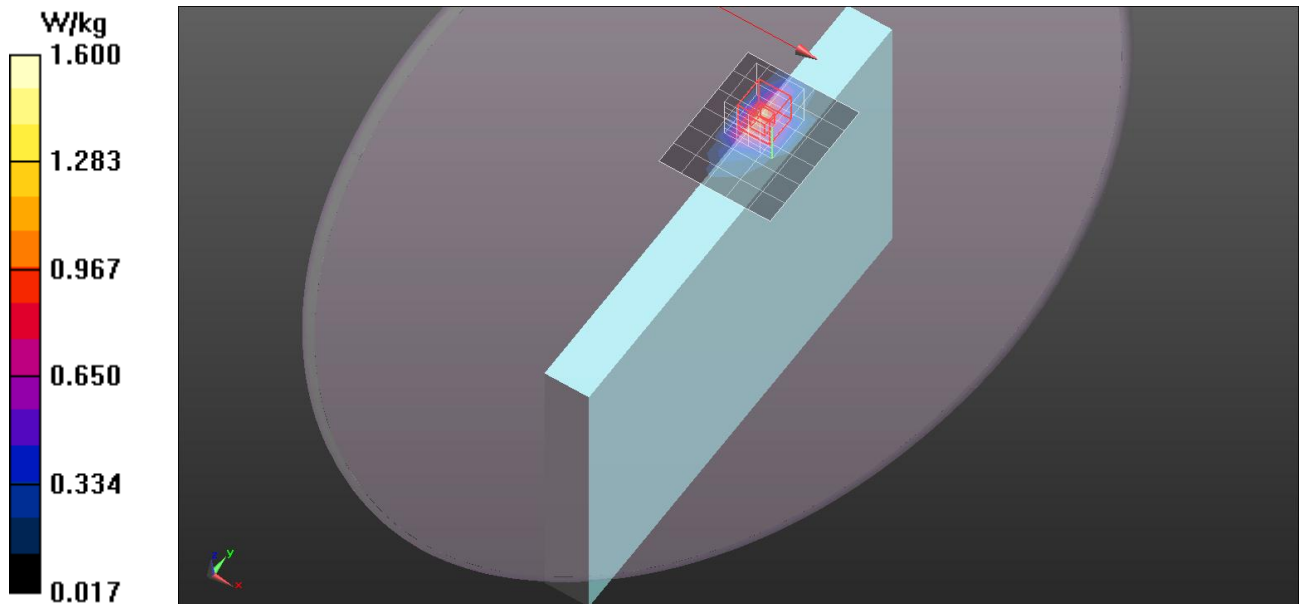

WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1732.9$ MHz; $\sigma = 1.481$ S/m; $\epsilon_r = 52.981$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(8.06, 8.06, 8.06); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/WCDMA Band IV/CH 1413/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 W/kg

Edge 1/WCDMA Band IV/CH 1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.548 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.79 W/kg

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.962 W/kg; SAR(10 g) = 0.489 W/kg

Maximum value of SAR (measured) = 1.48 W/kg

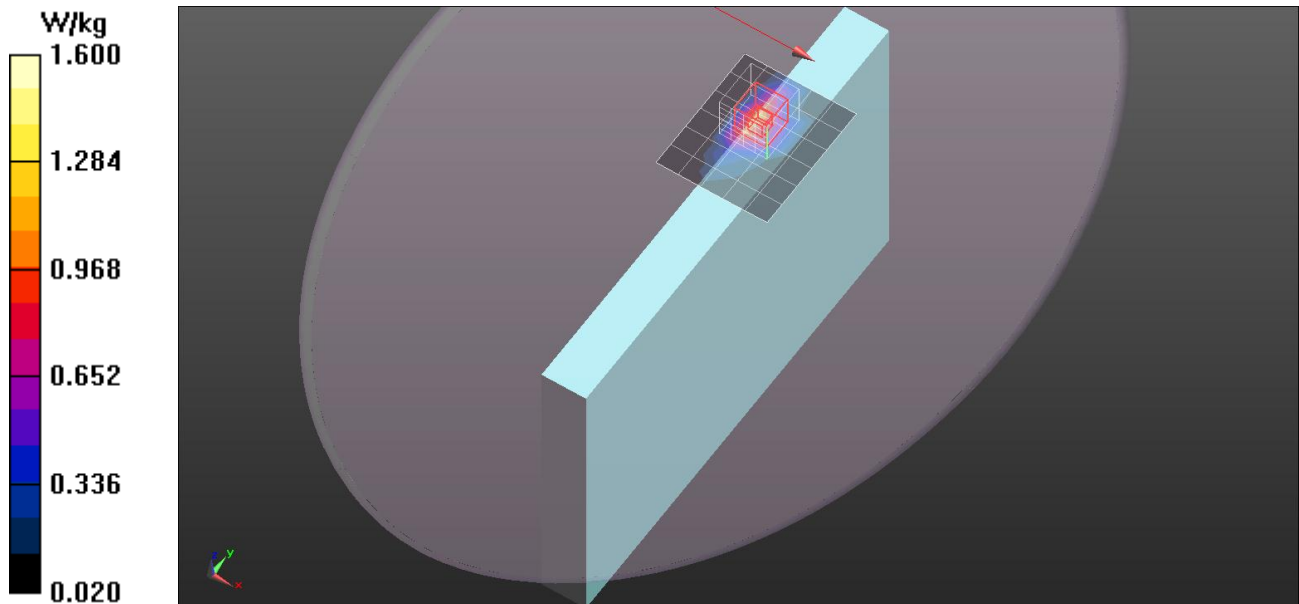

WCDMA Band IV

Frequency: 1752.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1752.7$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 52.994$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(8.06, 8.06, 8.06); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/WCDMA Band VI/CH 1513/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.329 W/kg

Rear/WCDMA Band VI/CH 1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm,


dz=5mm

Reference Value = 4.898 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.473 W/kg

SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.400 W/kg

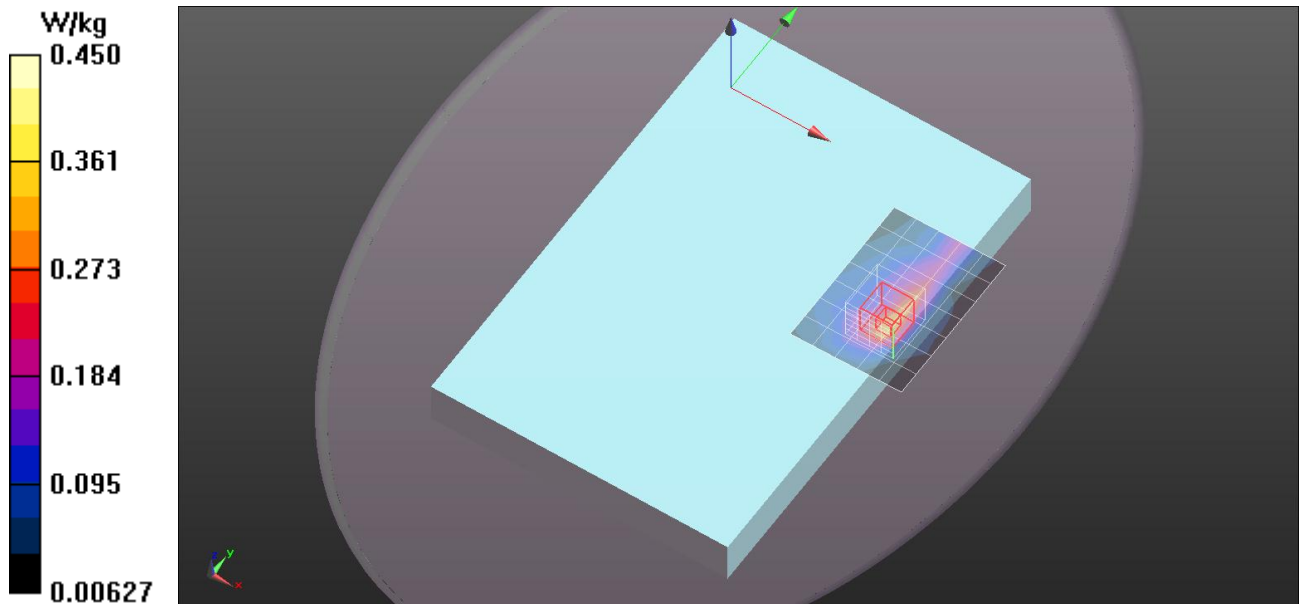

WCDMA Band IV

Frequency: 1752.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1752.7$ MHz; $\sigma = 1.499$ S/m; $\epsilon_r = 52.994$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(8.06, 8.06, 8.06); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge 1/WCDMA Band IV/CH 1513_Repeat/Area Scan (6x7x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 W/kg

Edge/Edge 1/WCDMA Band IV/CH 1513_Repeat/Zoom Scan (5x5x7)/Cube 0: Measurement



grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.27 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 1 W/kg; SAR(10 g) = 0.514 W/kg

Maximum value of SAR (measured) = 1.55 W/kg

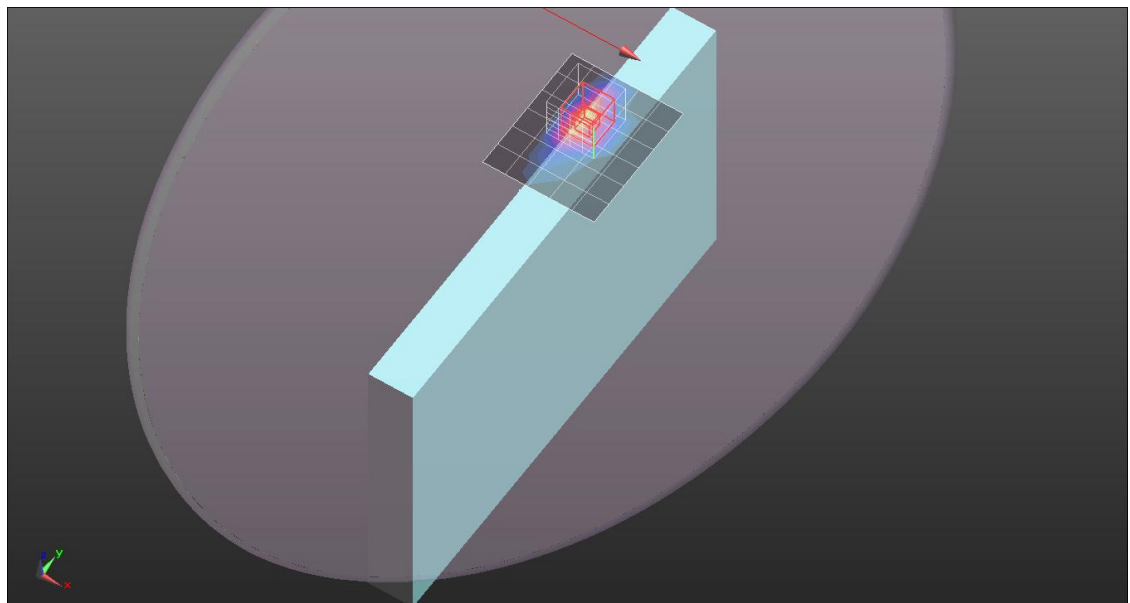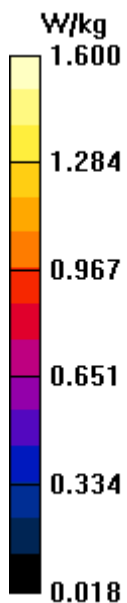

WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 1732.9$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 52.432$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(8.06, 8.06, 8.06); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge 1/WCDMA Band VI/CH 1413/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.684 W/kg

Edge 1/WCDMA Band VI/CH 1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.12 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.835 W/kg

Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.511 W/kg; SAR(10 g) = 0.306 W/kg

Maximum value of SAR (measured) = 0.722 W/kg

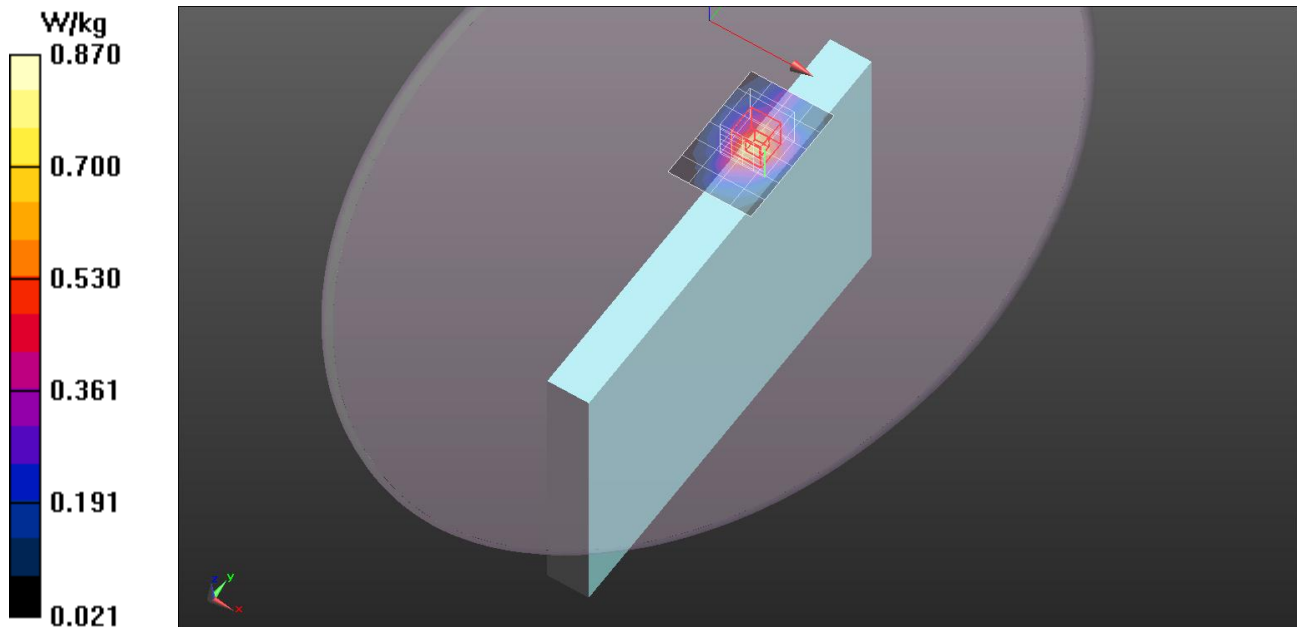

WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
 Medium parameters used: $f = 1732.9$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 52.432$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(8.06, 8.06, 8.06); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear/WCDMA Band VI/CH 1413/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.334 W/kg


Rear/WCDMA Band VI/CH 1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.232 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.413 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.359 W/kg

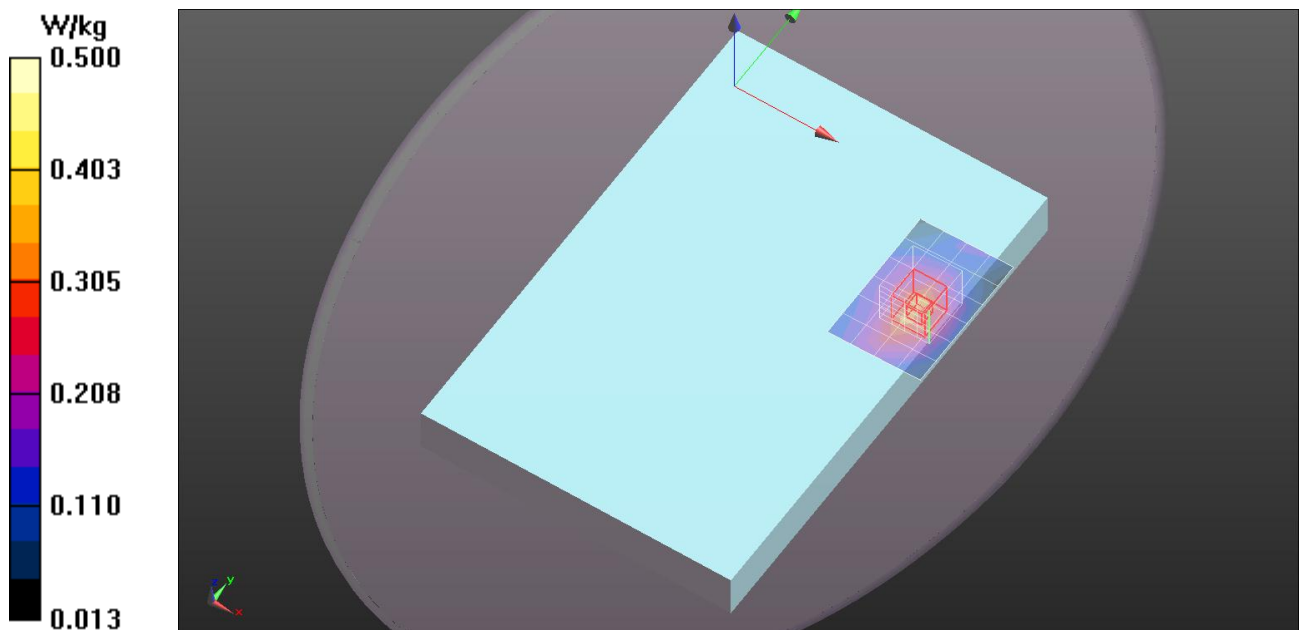

WCDMA Band IV

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
Medium parameters used: $f = 1732.9$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 52.432$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(8.06, 8.06, 8.06); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge2/Edge 2/WCDMA Band VI/CH 1413/Area Scan (5x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.305 W/kg

Edge2/Edge 2/WCDMA Band VI/CH 1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.442 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.393 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

