

## CDMA Cellular

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used:  $f = 825.4$  MHz;  $\sigma = 0.953$  S/m;  $\epsilon_r = 57.954$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/CDMA BC0/Ch1013/Area Scan (6x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.22 W/kg

**Edge 1/CDMA BC0/Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm,


dz=5mm

Reference Value = 8.946 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 1.95 W/kg

**SAR(1 g) = 0.968 W/kg; SAR(10 g) = 0.496 W/kg**


Maximum value of SAR (measured) = 1.31 W/kg

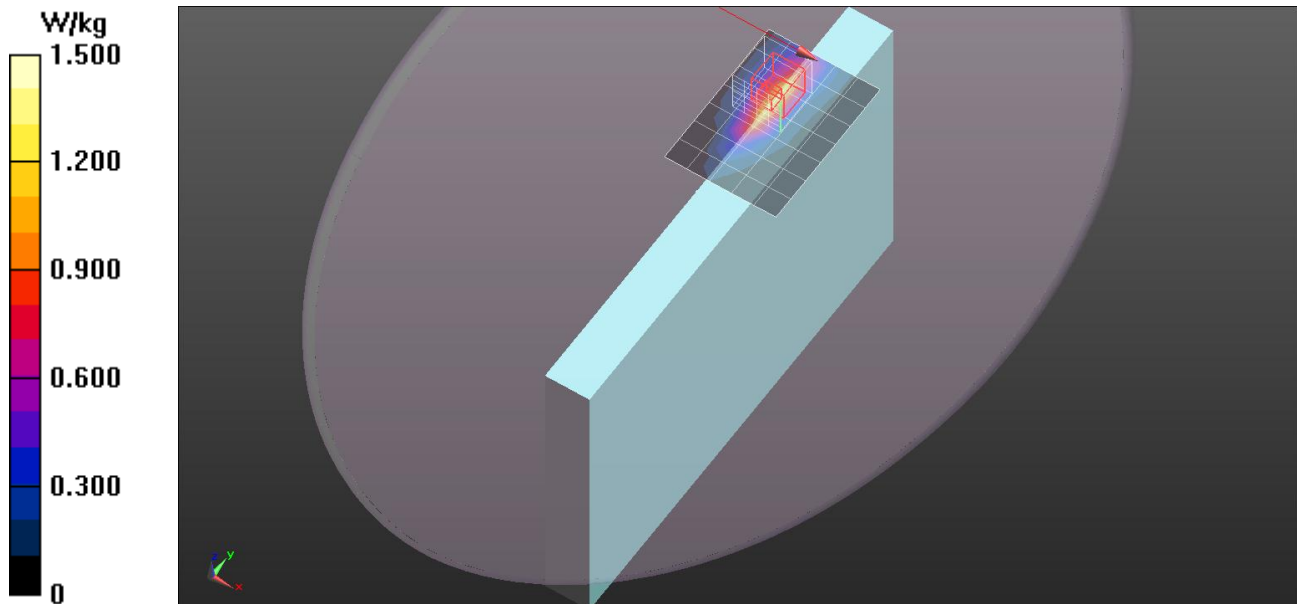

## CDMA Cellular

Frequency: 824.7 MHz; Duty Cycle: 1:1

**Edge/Edge 1/CDMA BC0/Ch1013/Z Scan (1x1x21):** Measurement grid: dx=20mm, dy=20mm, dz=5mm  
Maximum value of SAR (measured) = 0.0127 W/kg

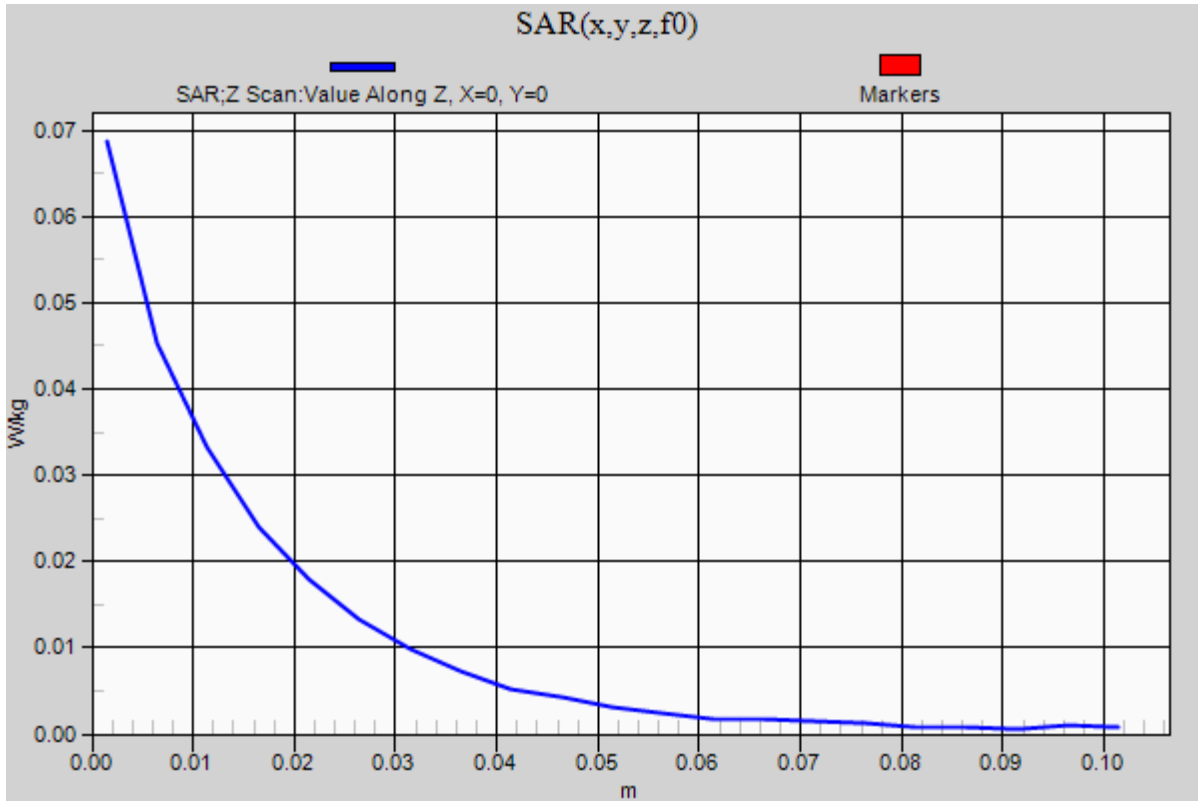

## CDMA Cellular

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated):  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.964 \text{ S/m}$ ;  $\epsilon_r = 57.857$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/CDMA BC0/Ch384/Area Scan (6x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.08 W/kg

**Edge 1/CDMA BC0/Ch384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.362 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.413 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.19 W/kg

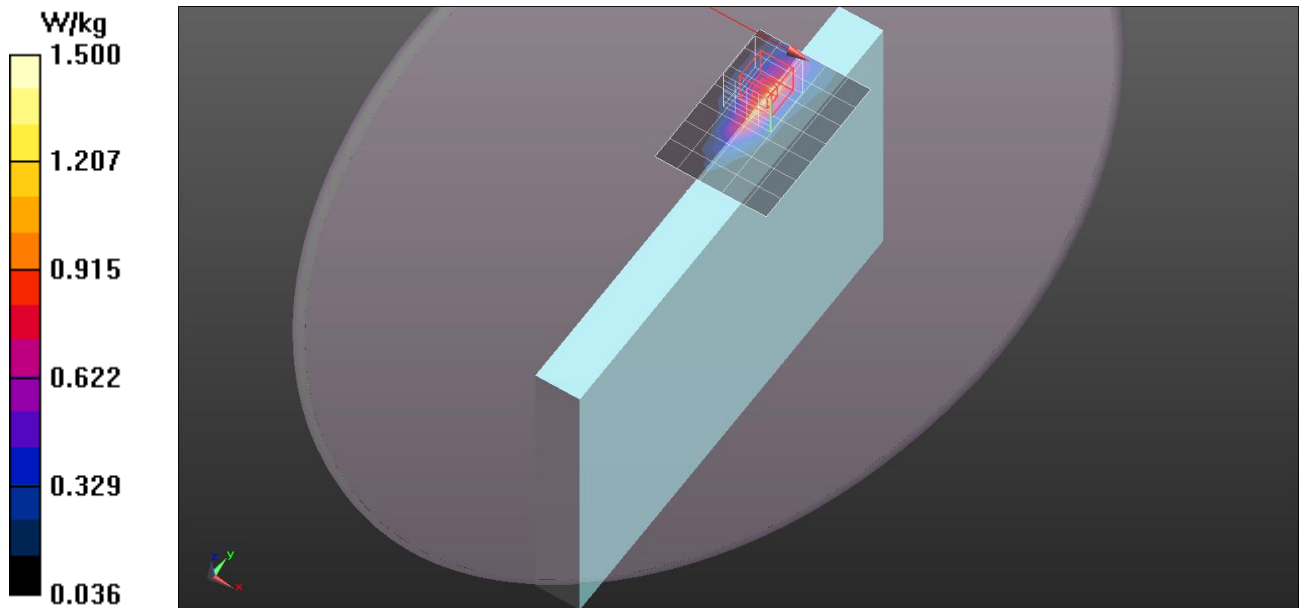

## CDMA Cellular

Frequency: 848.3 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used:  $f = 848.5$  MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 57.75$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/CDMA BC0/Ch777/Area Scan (6x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.19 W/kg


**Edge 1/CDMA BC0/Ch777/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.229 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.429 W/kg**

Maximum value of SAR (measured) = 1.26 W/kg

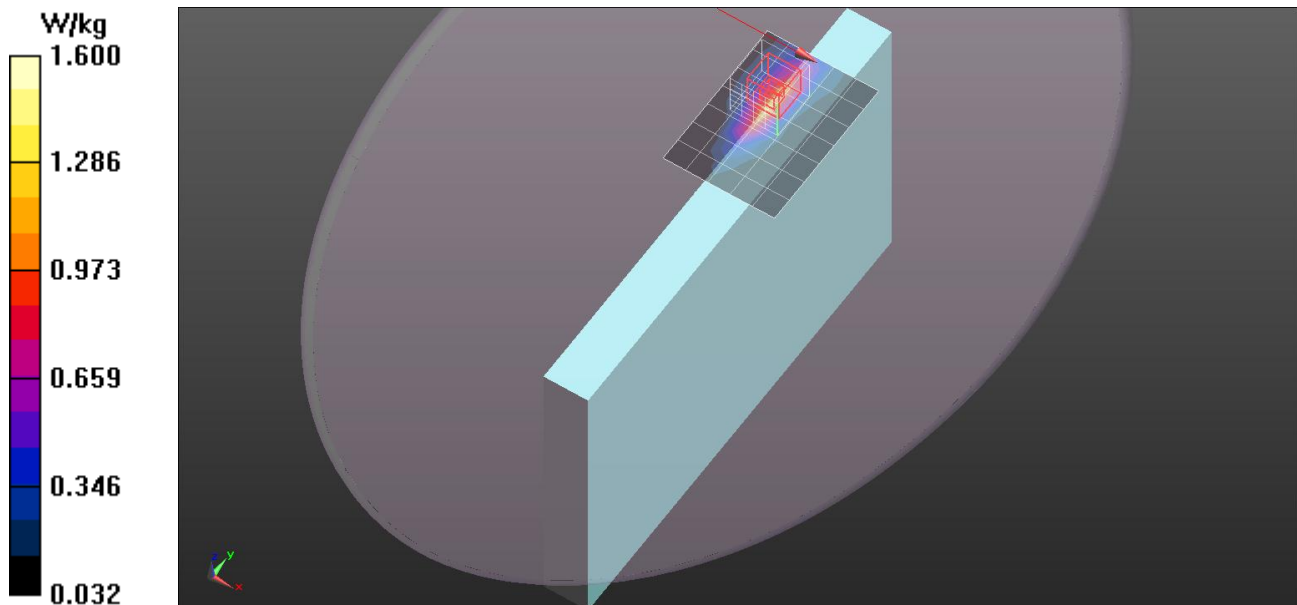

## CDMA Cellular

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used:  $f = 825.4$  MHz;  $\sigma = 0.939$  S/m;  $\epsilon_r = 57.207$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/CDMA BC0/Ch1013/Area Scan (6x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.691 W/kg


**Rear/CDMA BC0/Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.110 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.316 W/kg**

Maximum value of SAR (measured) = 0.737 W/kg

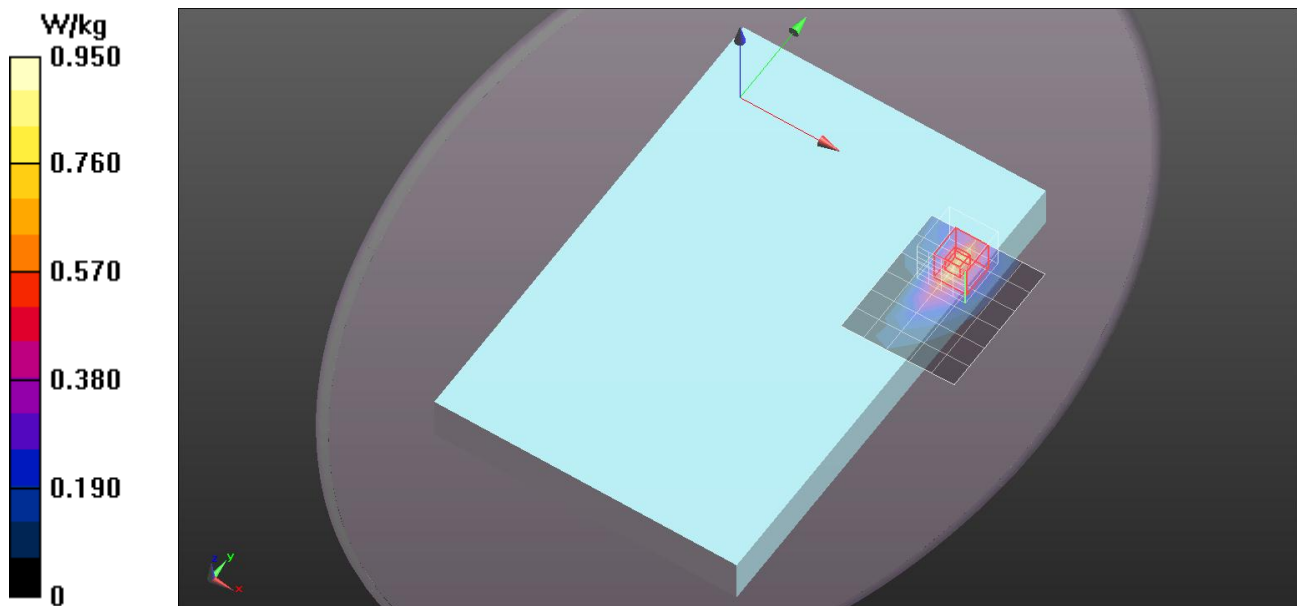

## CDMA Cellular

Frequency: 824.7 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used:  $f = 825.4$  MHz;  $\sigma = 0.953$  S/m;  $\epsilon_r = 57.954$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/CDMA BC0/Ch1013\_Repeat/Area Scan (6x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.25 W/kg

**Edge 1/CDMA BC0/Ch1013\_Repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.606 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.55 W/kg

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.830 W/kg; SAR(10 g) = 0.468 W/kg**

Maximum value of SAR (measured) = 1.29 W/kg

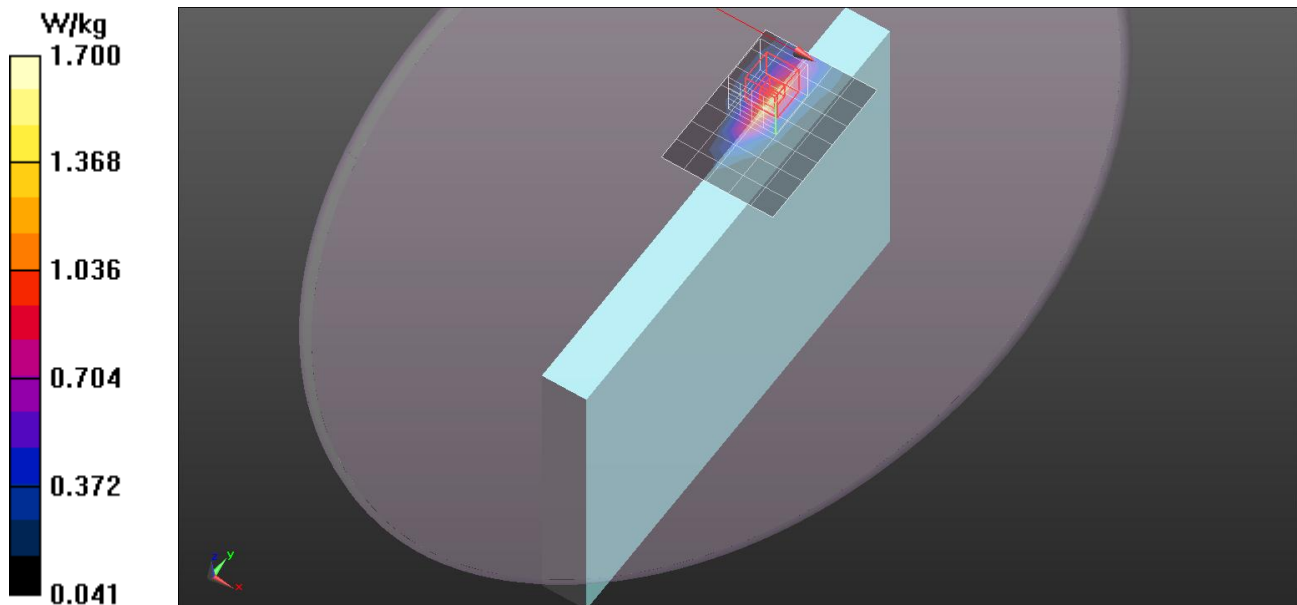

## CDMA Cellular

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.952$  S/m;  $\epsilon_r = 57.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 1/CDMA Cellular/CH384/Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.480 W/kg

**Edge 1/CDMA Cellular/CH384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.734 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.541 W/kg

**SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.264 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.484 W/kg

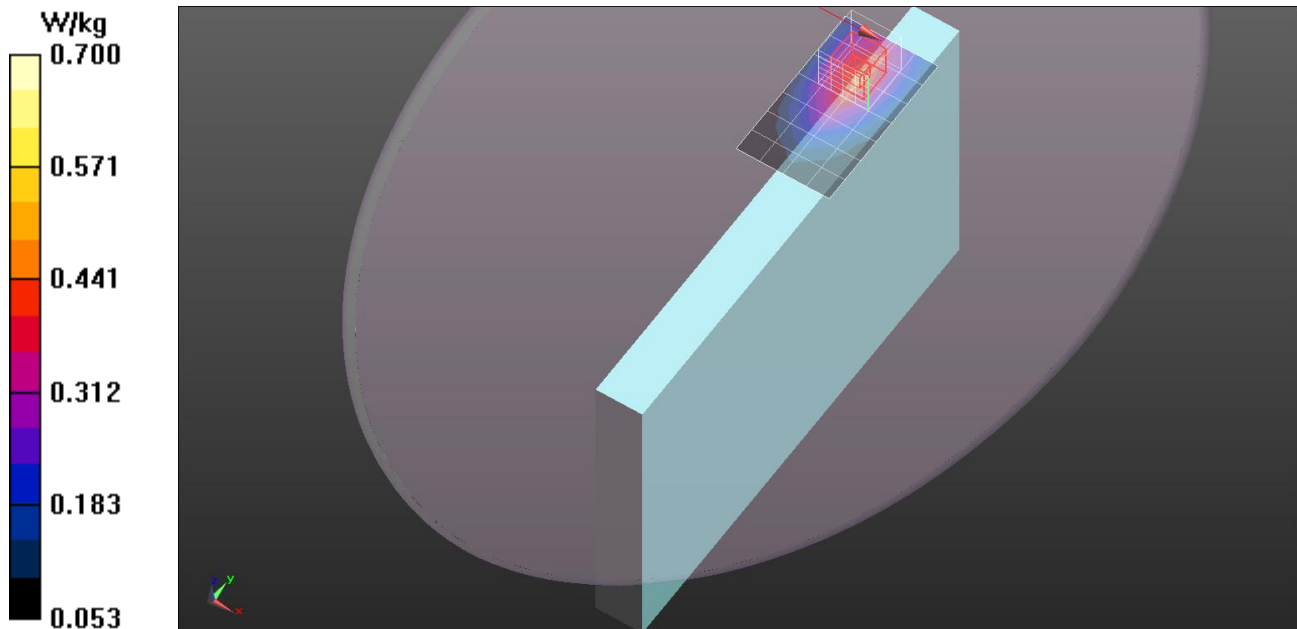

## CDMA Cellular

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.952$  S/m;  $\epsilon_r = 57.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Rear/CDMA Cellular/CH384/Area Scan (6x7x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.413 W/kg

**Rear/CDMA Cellular/CH384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.340 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.533 W/kg

**SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.248 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.473 W/kg

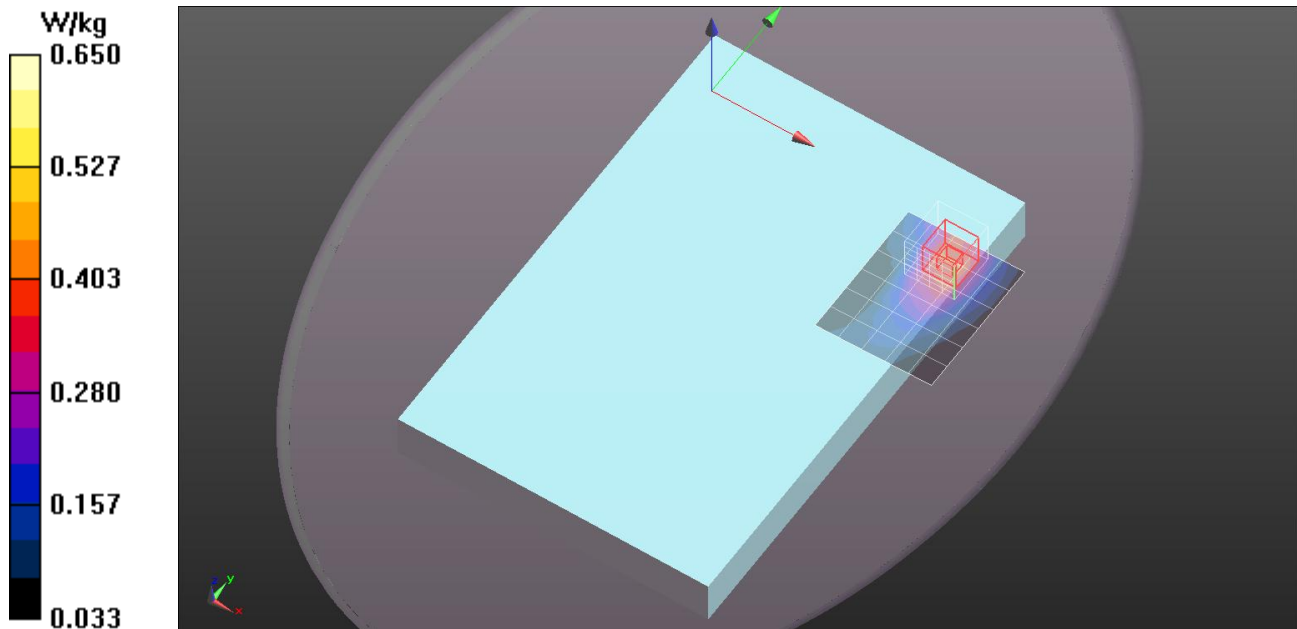



## CDMA Cellular

Frequency: 836.52 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used (interpolated):  $f = 836.52$  MHz;  $\sigma = 0.952$  S/m;  $\epsilon_r = 57.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn877; Calibrated: 2014/03/26
- Probe: EX3DV4 - SN3665; ConvF(9.52, 9.52, 9.52); Calibrated: 2014/05/22;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

**Edge 2/CDMA Cellular/CH384/Area Scan (5x6x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.125 W/kg

**Edge 2/CDMA Cellular/CH384/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.524 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.323 W/kg

**SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.055 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.240 W/kg

