

Bluetooth

Frequency: 2402 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2402$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 38.721$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.61, 7.61, 7.61) @ 2402 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 2_0mm/Bluetooth_Ch 0/Area Scan (7x8x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0700 W/kg

Tablet/Aux Ant/Edge 2_0mm/Bluetooth_Ch 0/Zoom Scan (7x7x7)/Cube

0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.027 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.021 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.5%

Maximum value of SAR (measured) = 0.0710 W/kg

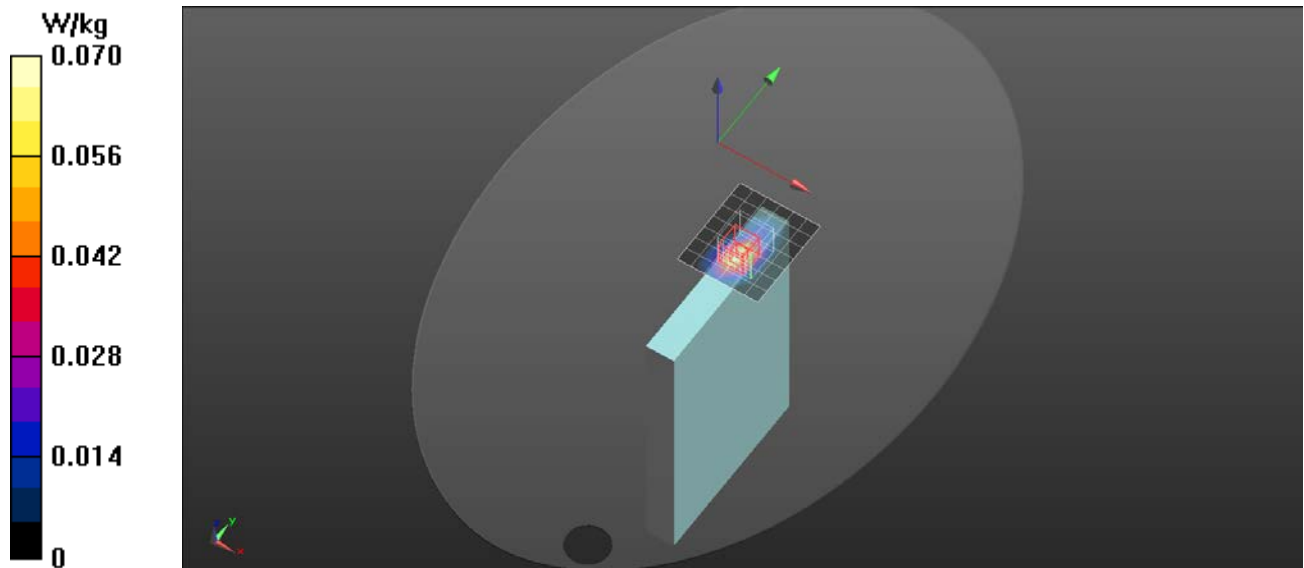

WiFi-2.4GHz

Frequency: 2437 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.746$ S/m; $\epsilon_r = 38.662$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.61, 7.61, 7.61) @ 2437 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 4_0mm/802.11b_Ch6/Area Scan (7x8x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.845 W/kg

Tablet/Main Ant/Edge 4_0mm/802.11b_Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 21.84 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.979 W/kg

SAR(1 g) = 0.522 W/kg; SAR(10 g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 53.6%

Maximum value of SAR (measured) = 0.815 W/kg

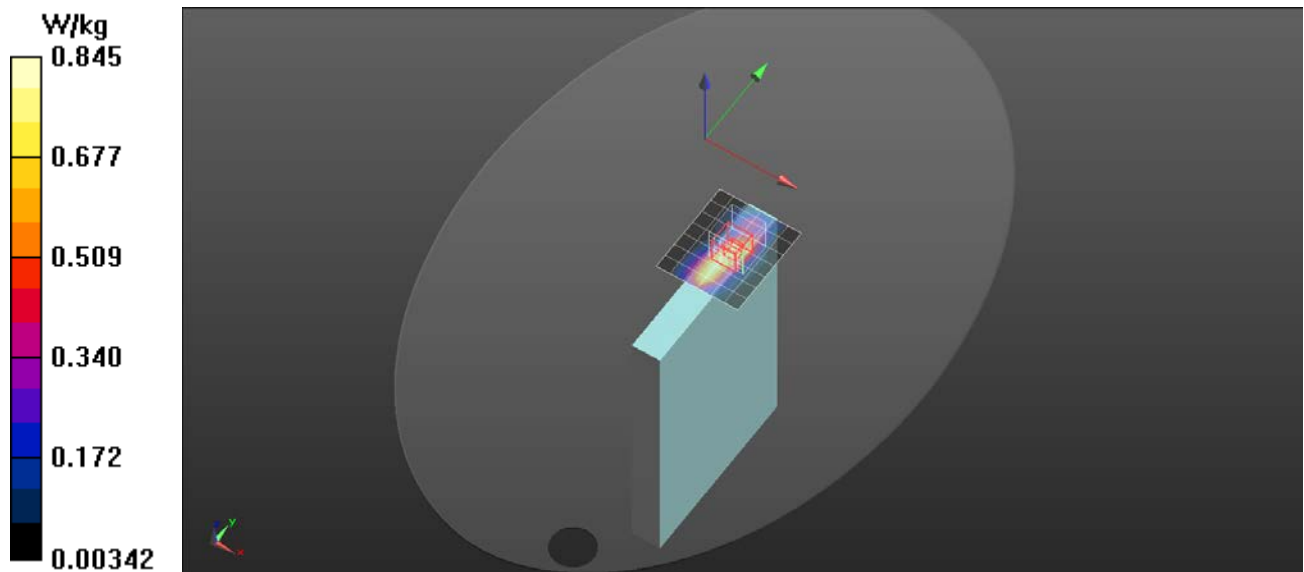

WiFi-2.4GHz

Frequency: 2412 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.736$ S/m; $\epsilon_r = 38.711$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.61, 7.61, 7.61) @ 2412 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 2_0mm/802.11b_Ch1/Area Scan (7x8x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 1.49 W/kg

Tablet/Aux Ant/Edge 2_0mm/802.11b_Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.53 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.540 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 1.61 W/kg

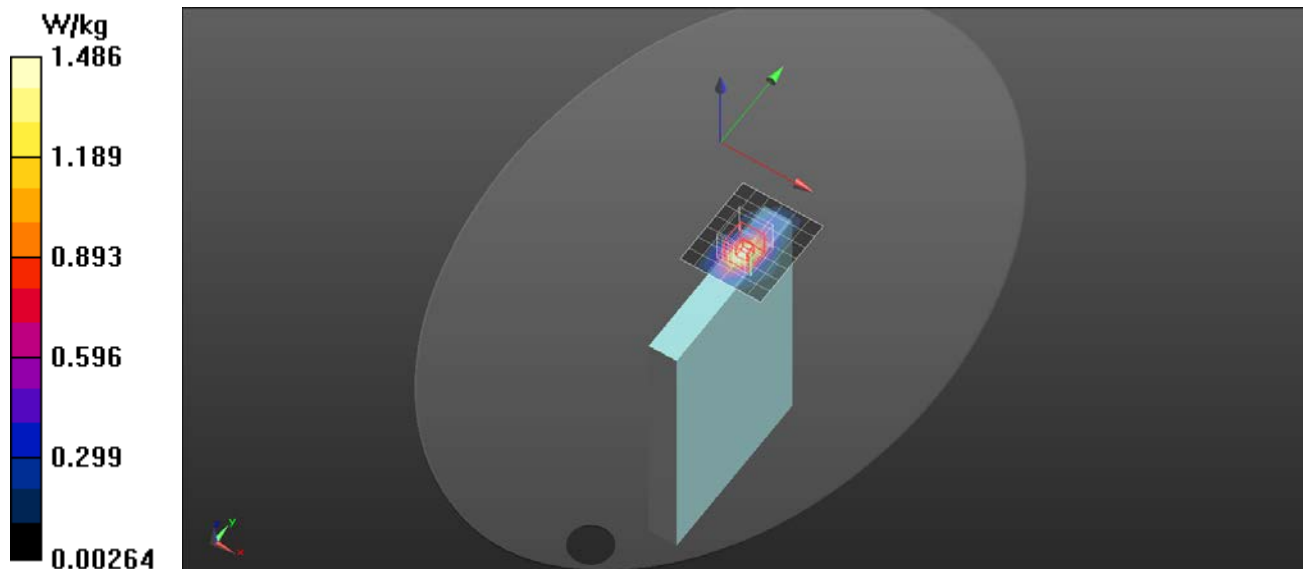

WiFi-5GHz

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
 Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.567$ S/m; $\epsilon_r = 35.873$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(5.04, 5.04, 5.04) @ 5290 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 4_0mm/802.11ac80_Ch58/Area Scan (8x9x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.242 W/kg

Tablet/Main Ant/Edge 4_0mm/802.11ac80_Ch58/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.405 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.542 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.243 W/kg

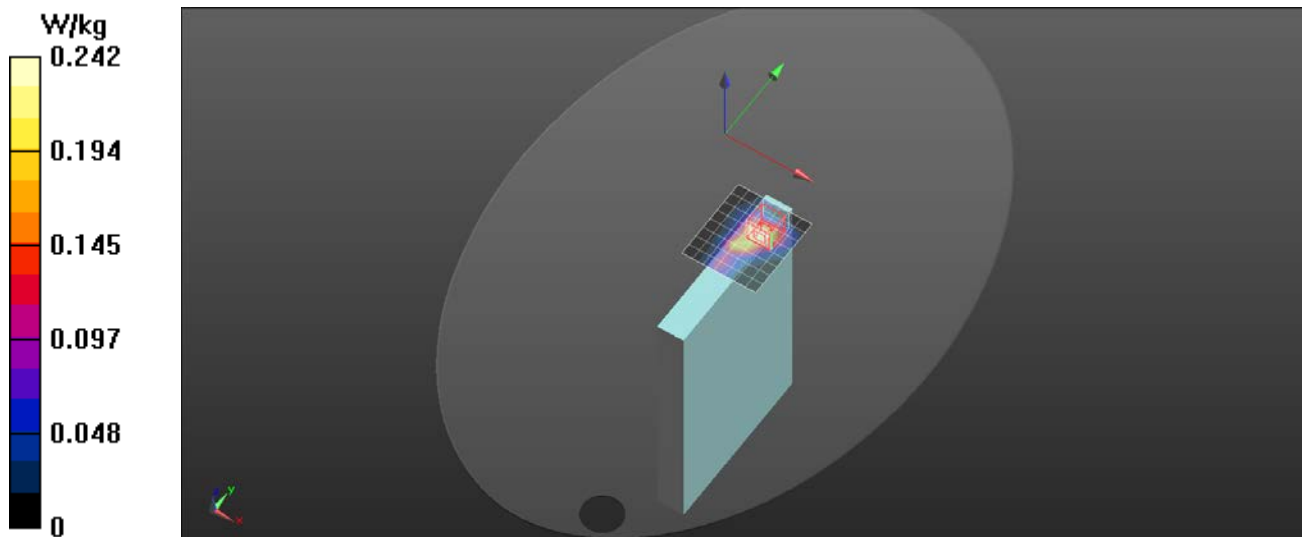

WiFi-5GHz

Frequency: 5290 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5290$ MHz; $\sigma = 4.567$ S/m; $\epsilon_r = 35.873$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(5.04, 5.04, 5.04) @ 5290 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 2_0mm/802.11ac80_Ch58/Area Scan (8x9x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.610 W/kg

Tablet/Aux Ant/Edge 2_0mm/802.11ac80_Ch58/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 8.618 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.441 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 1.02 W/kg

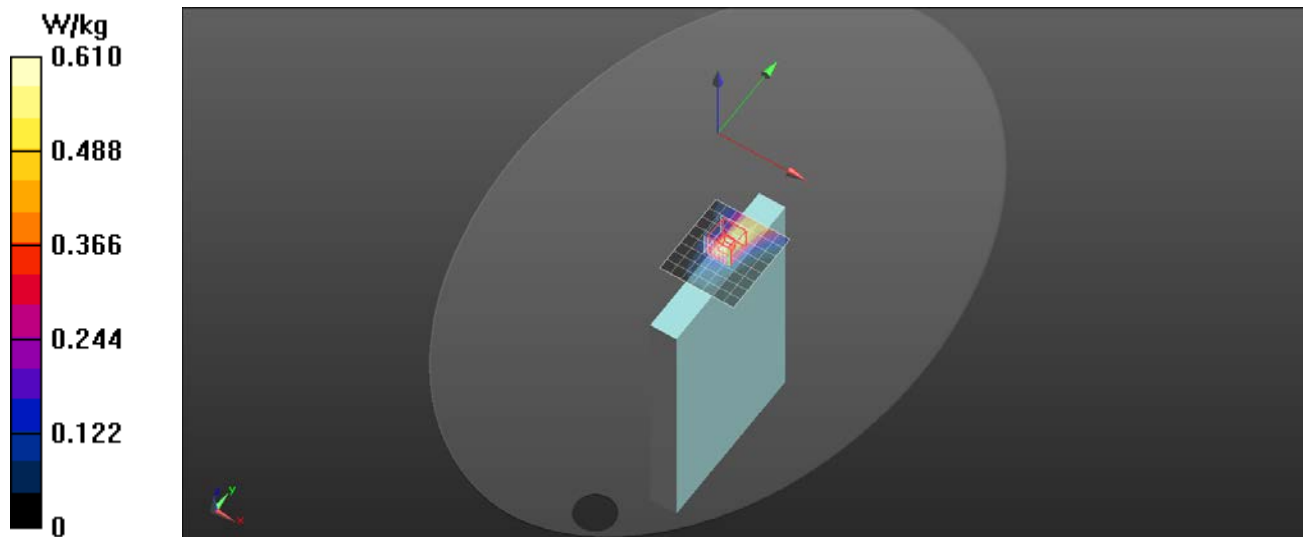

WiFi-5GHz

Frequency: 5530 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 4.819$ S/m; $\epsilon_r = 35.41$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(4.66, 4.66, 4.66) @ 5530 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 4_0mm/802.11ac80_Ch106/Area Scan (8x9x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.224 W/kg

Tablet/Main Ant/Edge 4_0mm/802.11ac80_Ch106/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.123 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.727 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.022 W/kg

Smallest distance from peaks to all points 3 dB below = 1.8 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.233 W/kg

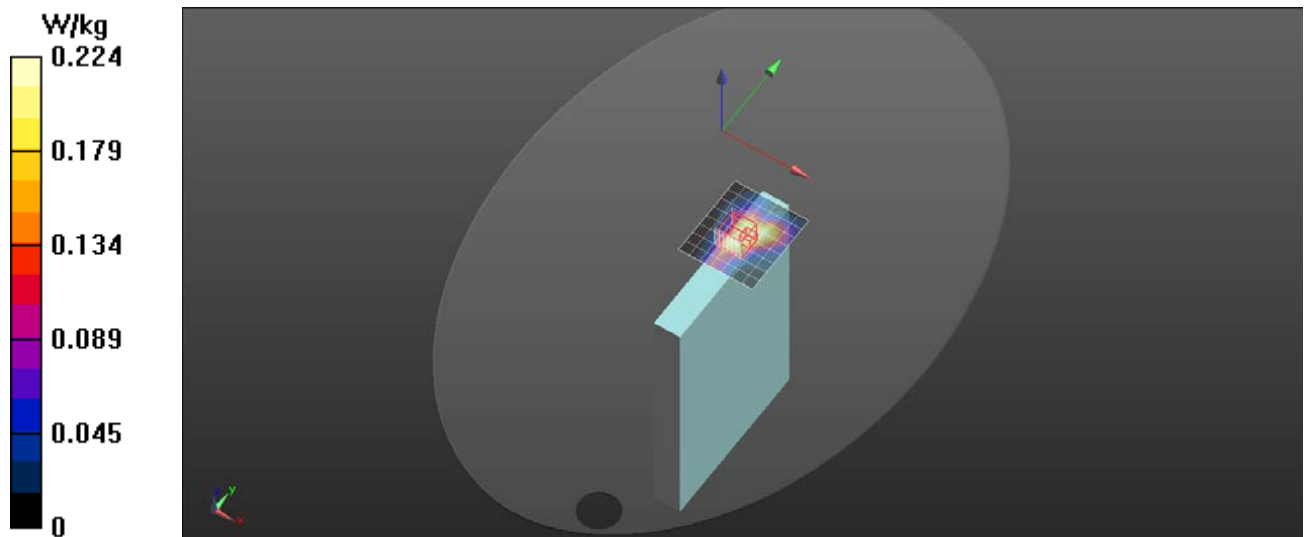

WiFi-5GHz

Frequency: 5530 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5530$ MHz; $\sigma = 4.819$ S/m; $\epsilon_r = 35.41$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(4.66, 4.66, 4.66) @ 5530 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 2_0mm/802.11ac80_Ch106/Area Scan (8x9x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.416 W/kg

Tablet/Aux Ant/Edge 2_0mm/802.11ac80_Ch106/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.144 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 0.748 W/kg

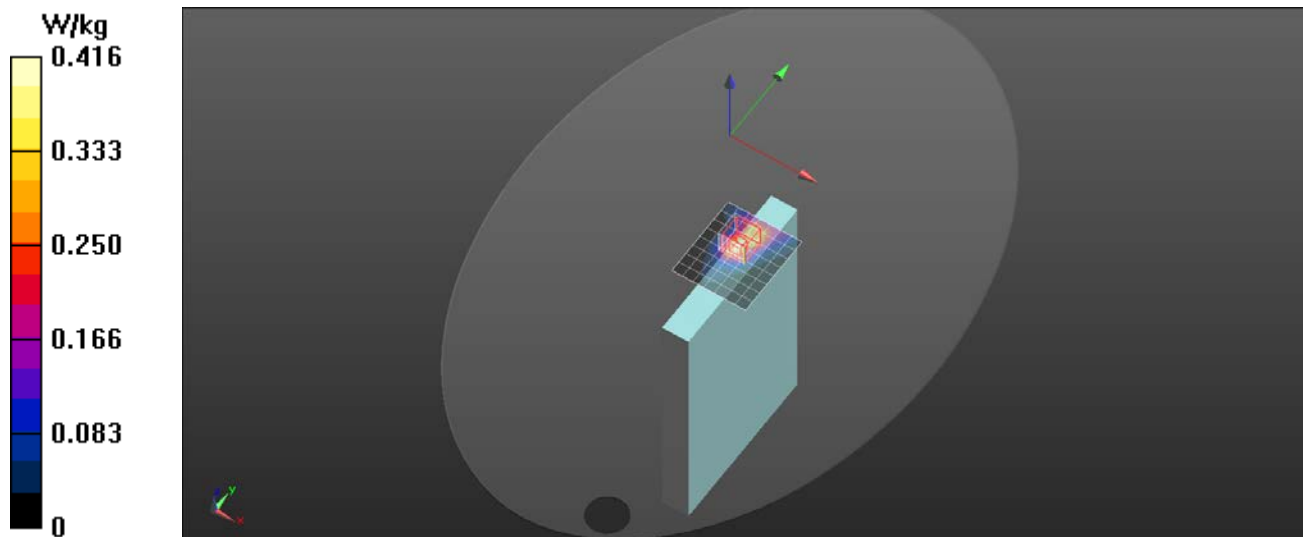

WiFi-5GHz

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.104$ S/m; $\epsilon_r = 34.976$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(4.65, 4.65, 4.65) @ 5775 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Main Ant/Edge 4_0mm/802.11ac80_Ch155/Area Scan (8x9x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.160 W/kg

Tablet/Main Ant/Edge 4_0mm/802.11ac80_Ch155/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 6.193 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 0.170 W/kg

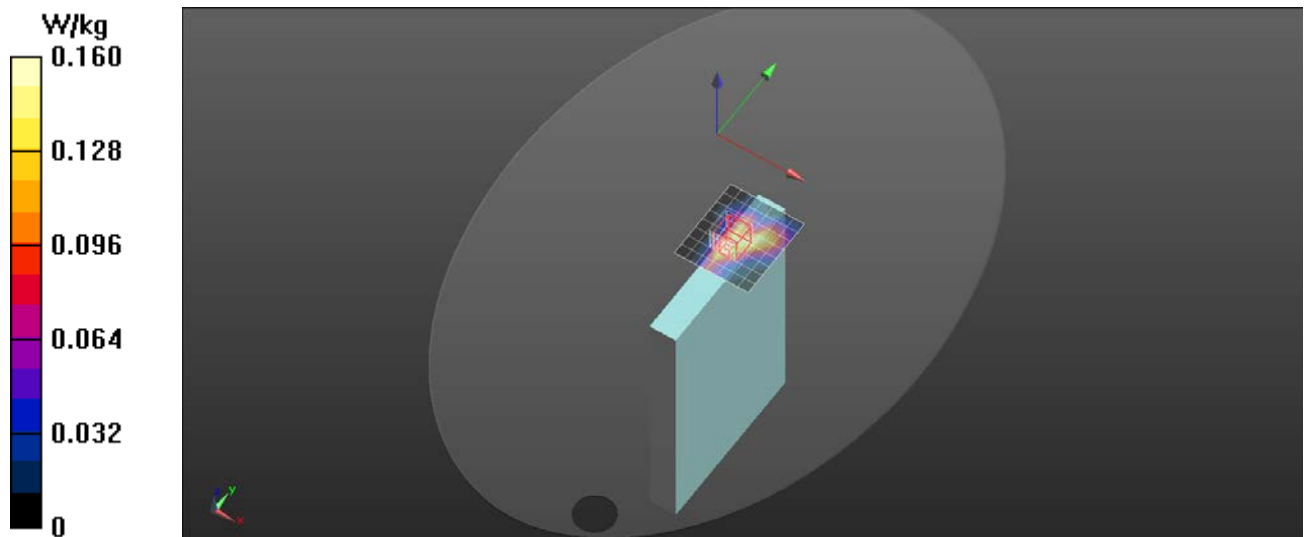

WiFi-5GHz

Frequency: 5775 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C
Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.104$ S/m; $\epsilon_r = 34.976$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(4.65, 4.65, 4.65) @ 5775 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

Tablet/Aux Ant/Edge 2_0mm/802.11ac80_Ch155/Area Scan (8x9x1): Measurement grid:

dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.278 W/kg

Tablet/Aux Ant/Edge 2_0mm/802.11ac80_Ch155/Zoom Scan (7x7x12)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.769 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.674 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 0.292 W/kg

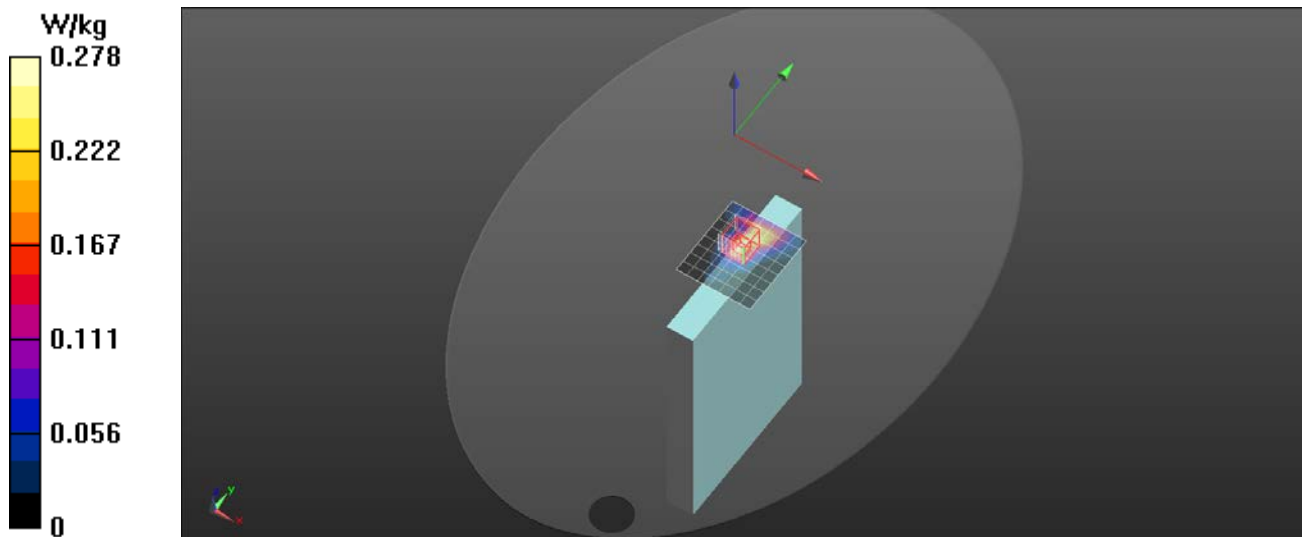

Device Under Test Properties

Model, Manufacturer		Dimensions [mm]			IMEI	DUT Type	
Device,		25.0 x 235.0 x 155.0				Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 4 0.00	U- NII- 5	WLAN, 10755- AAC	6025.0, 15	5.4	5.46	34.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1240	H6.5G_Charge:xxxx , 2022-08-30	EX3DV4 - SN7369, 2022-05-28	DAE4 Sn1486, 2022-05-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-30	2022-08-30
psSAR1g [W/Kg]	0.047	0.048
psSAR10g [W/Kg]	0.017	0.017
Power Drift [dB]	0.01	0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		54.9
Dist 3dB Peak [mm]		6.7

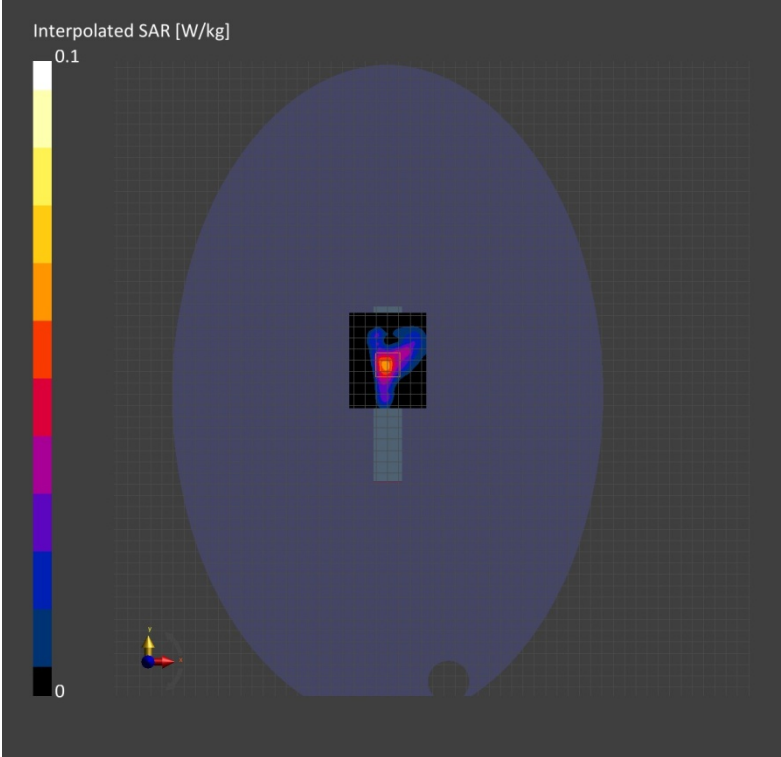

Device Under Test Properties

Model, Manufacturer		Dimensions [mm]			IMEI	DUT Type	
Device,		25.0 x 235.0 x 155.0				Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 2 0.00	U- NII- 5	WLAN, 10755- AAC	6025.0, 15	5.4	5.46	34.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1240	H6.5G_Charge:xxxx , 2022-08-30	EX3DV4 - SN7369, 2022-05-28	DAE4 Sn1486, 2022-05-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-30	2022-08-30
psSAR1g [W/Kg]	0.129	0.148
psSAR10g [W/Kg]	0.049	0.056
Power Drift [dB]	-0.07	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		56.8
Dist 3dB Peak [mm]		9.7

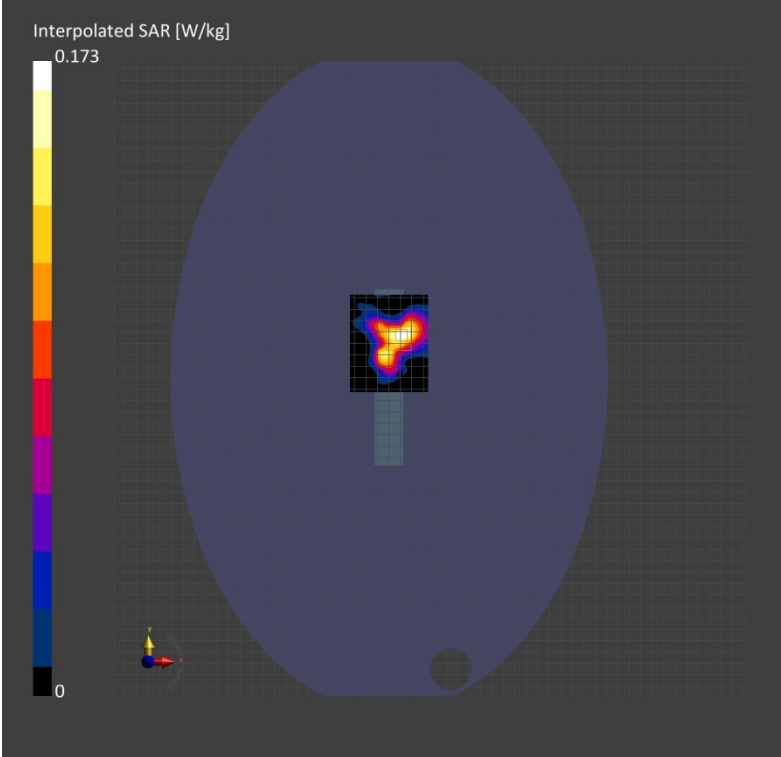

Device Under Test Properties

Model, Manufacturer		Dimensions [mm]			IMEI	DUT Type	
Device,		25.0 x 235.0 x 155.0				Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 4 0.00	U- NII- 6	WLAN, 10755- AAC	6505.0, 111	5.4	6.02	33.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1240	H6.5G_Charge:xxxx , 2022-08-30	EX3DV4 - SN7369, 2022-05-28	DAE4 Sn1486, 2022-05-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-30	2022-08-30
psSAR1g [W/Kg]	0.057	0.064
psSAR10g [W/Kg]	0.021	0.022
Power Drift [dB]	0.04	0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		51.7
Dist 3dB Peak [mm]		6.8

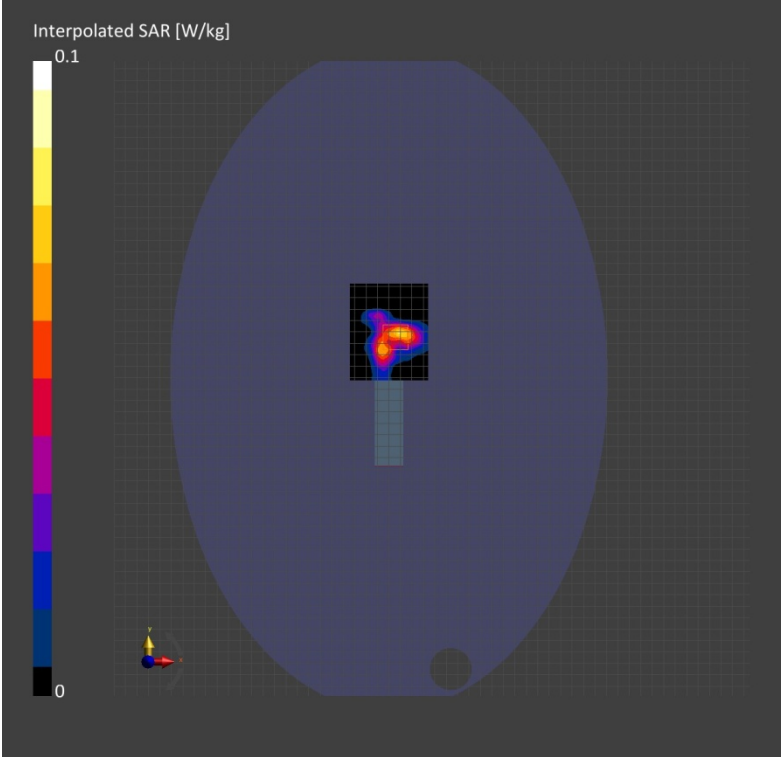

Device Under Test Properties

Model, Manufacturer		Dimensions [mm]			IMEI	DUT Type	
Device,		25.0 x 235.0 x 155.0				Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 2 0.00	U- NII- 6	WLAN, 10755- AAC	6505.0, 111	5.4	6.02	33.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1240	H6.5G_Charge:xxxx , 2022-08-30	EX3DV4 - SN7369, 2022-05-28	DAE4 Sn1486, 2022-05-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-30	2022-08-30
psSAR1g [W/Kg]	0.176	0.183
psSAR10g [W/Kg]	0.065	0.066
Power Drift [dB]	0.07	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		54.2
Dist 3dB Peak [mm]		8.6

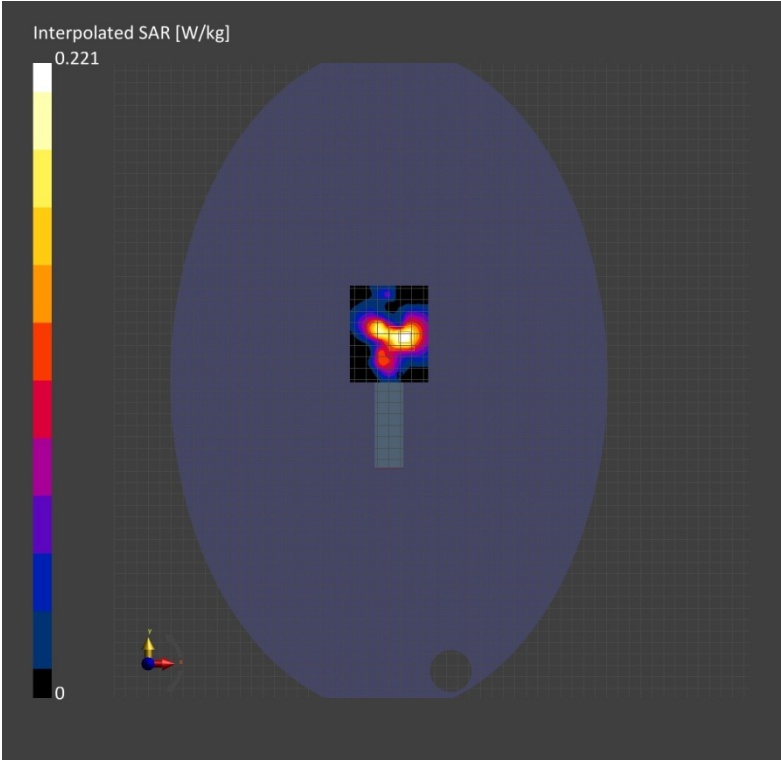

Device Under Test Properties

Model, Manufacturer		Dimensions [mm]			IMEI	DUT Type	
Device,		25.0 x 235.0 x 155.0				Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 4 0.00	U- NII- 7	WLAN, 10755- AAC	6665.0, 143	5.4	6.20	33.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1240	H6.5G_Charge:xxxx , 2022-08-30	EX3DV4 - SN7369, 2022-05-28	DAE4 Sn1486, 2022-05-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-30	2022-08-30
psSAR1g [W/Kg]	0.039	0.045
psSAR10g [W/Kg]	0.013	0.014
Power Drift [dB]	0.04	-0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		50.3
Dist 3dB Peak [mm]		8.2

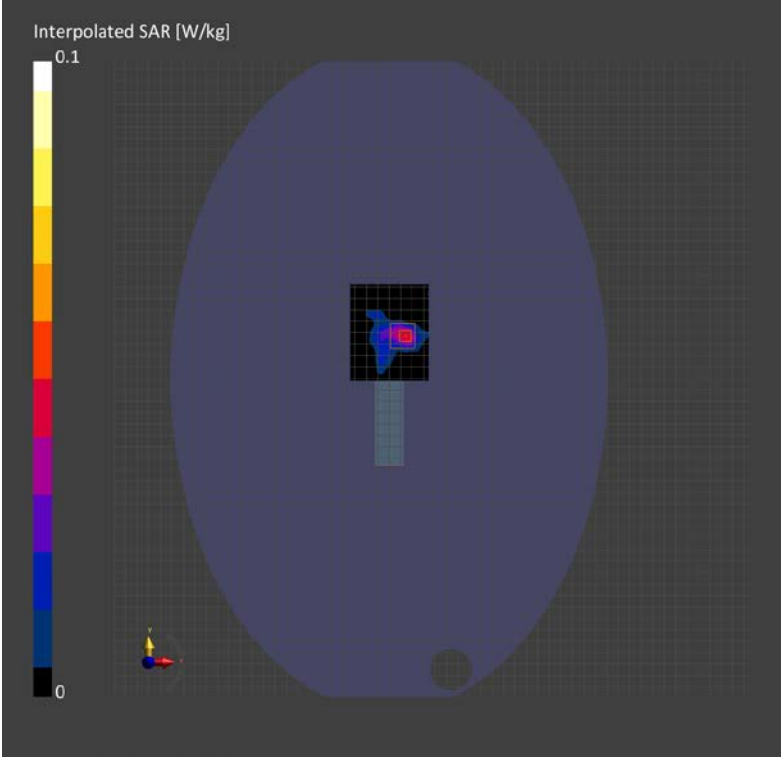

Device Under Test Properties

Model, Manufacturer		Dimensions [mm]			IMEI	DUT Type	
Device,		25.0 x 235.0 x 155.0				Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 2 0.00	U- NII- 7	WLAN, 10755- AAC	6665.0, 143	5.4	6.20	33.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1240	H6.5G_Charge:xxxx , 2022-08-30	EX3DV4 - SN7369, 2022-05-28	DAE4 Sn1486, 2022-05-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-30	2022-08-30
psSAR1g [W/Kg]	0.146	0.160
psSAR10g [W/Kg]	0.050	0.052
Power Drift [dB]	-0.09	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		52.2
Dist 3dB Peak [mm]		7.9

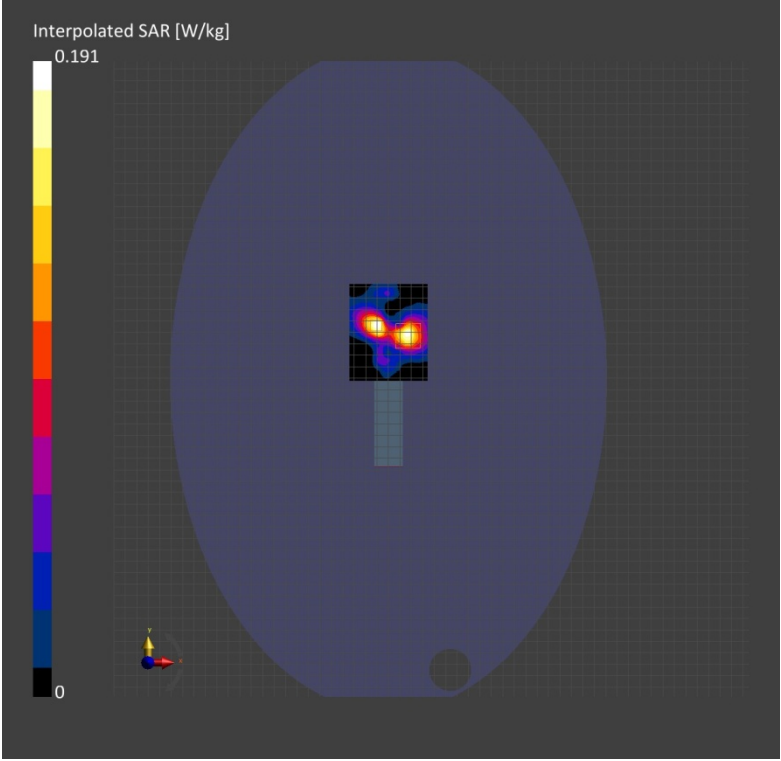

Device Under Test Properties

Model, Manufacturer		Dimensions [mm]			IMEI	DUT Type	
Device,		25.0 x 235.0 x 155.0				Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 4 0.00	U- NII- 8	WLAN, 10755- AAC	6985.0, 207	5.4	6.56	32.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1240	H6.5G_Charge:xxxx , 2022-08-30	EX3DV4 - SN7369, 2022-05-28	DAE4 Sn1486, 2022-05-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-30	2022-08-30
psSAR1g [W/Kg]	0.101	0.107
psSAR10g [W/Kg]	0.035	0.035
Power Drift [dB]	-0.01	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		52.3
Dist 3dB Peak [mm]		6.8

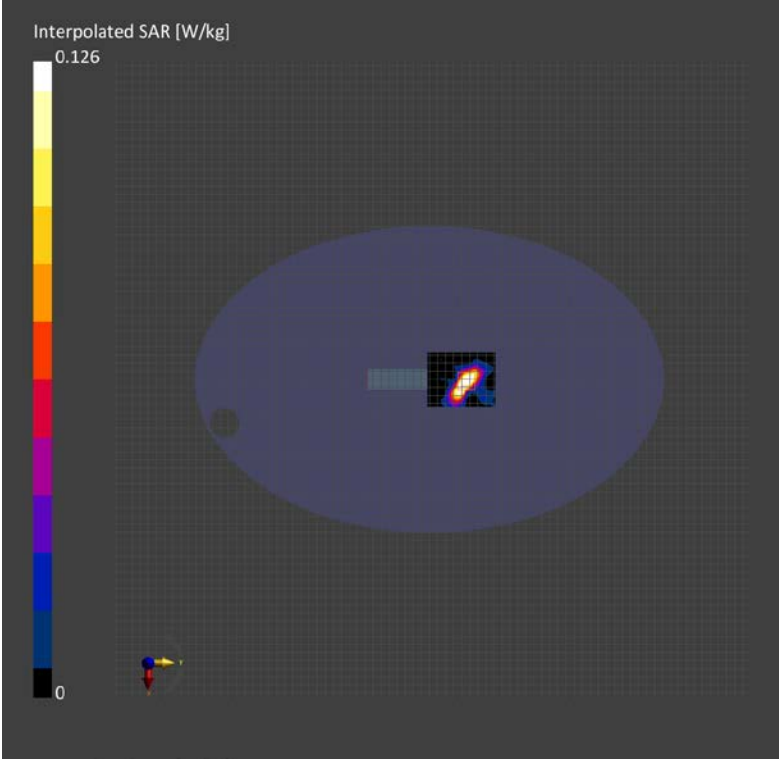

Device Under Test Properties

Model, Manufacturer		Dimensions [mm]			IMEI	DUT Type	
Device,		25.0 x 235.0 x 155.0				Tablet	
Exposure Conditions							
Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE 2 0.00	U- NII- 8	WLAN, 10755- AAC	6985.0, 207	5.4	6.56	32.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V5.0 (20deg probe tilt) - 1240	H6.5G_Charge:xxxx , 2022-08-30	EX3DV4 - SN7369, 2022-05-28	DAE4 Sn1486, 2022-05-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 68.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2022-08-30	2022-08-30
psSAR1g [W/Kg]	0.131	0.131
psSAR10g [W/Kg]	0.040	0.037
Power Drift [dB]	0.07	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	Positive	Positive
M2/M1 [%]		49.0
Dist 3dB Peak [mm]		7.5

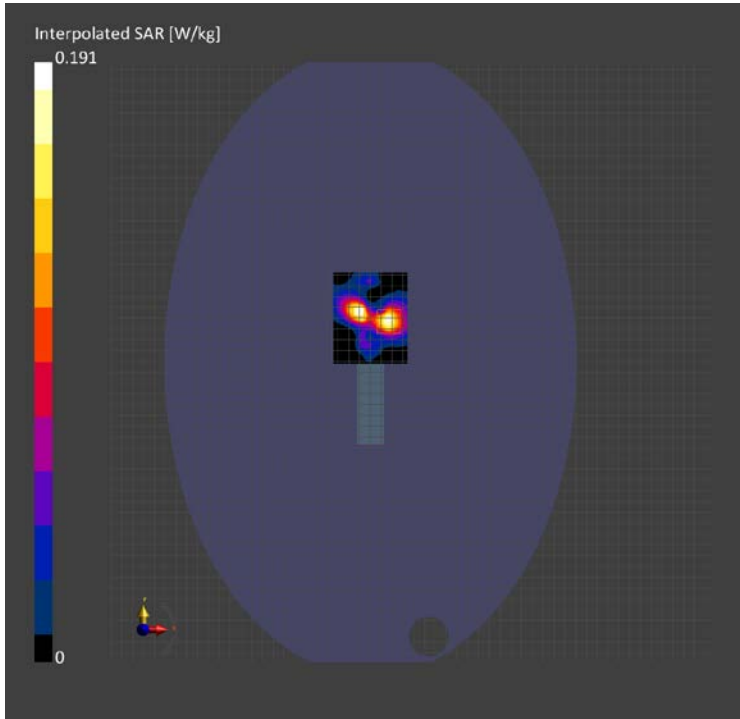

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	155.0 x 235.0 x 25.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 2, 0.00	U-NII-5	WLAN, 10743-AAC	6025.0, 15	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1085	Air -	EUmmWV4 - SN9583_F1-55GHz, 2021-09-03	DAE4 Sn1486, 2022-05-31

Scans Setup


Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022-09-02
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.864
psPDtot+ [W/m ²]	0.991
psPDmod+ [W/m ²]	1.08
E _{max} [V/m]	27.1
Power Drift [dB]	0.03

RMS{EM E(x,y,z,f0)} [V/m]

27.1

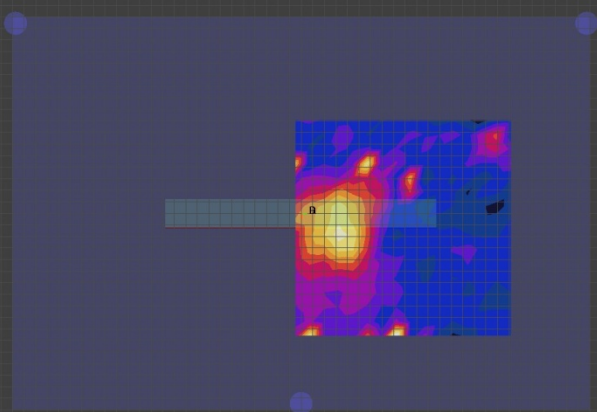

0

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	155.0 x 235.0 x 25.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 2, 0.00	U-NII-6	WLAN, 10743-AAC	6505.0, 111	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1085	Air -	EUmmWV4 - SN9583_F1-55GHz, 2021-09-03	DAE4 Sn1486, 2022-05-31

Scans Setup


Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022-09-02
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.557
psPDtot+ [W/m ²]	0.659
psPDmod+ [W/m ²]	0.709
E _{max} [V/m]	22.3
Power Drift [dB]	0.01

RMS{EM E(x,y,z,f0)} [V/m]

22.3

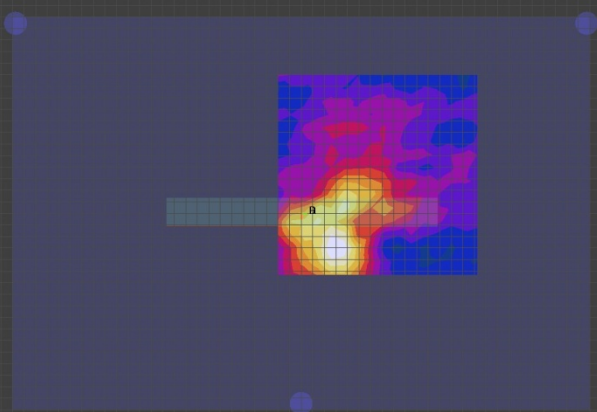

0

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	155.0 x 235.0 x 25.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 2, 0.00	U-NII-7	WLAN, 10743-AAC	6665.0, 143	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1085	Air -	EUmmWV4 - SN9583_F1-55GHz, 2021-09-03	DAE4 Sn1486, 2022-05-31

Scans Setup


Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022-09-02
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.830
psPDtot+ [W/m ²]	0.909
psPDmod+ [W/m ²]	0.971
E _{max} [V/m]	22.2
Power Drift [dB]	0.08

RMS{EM E(x,y,z,f0)} [V/m]

22.2

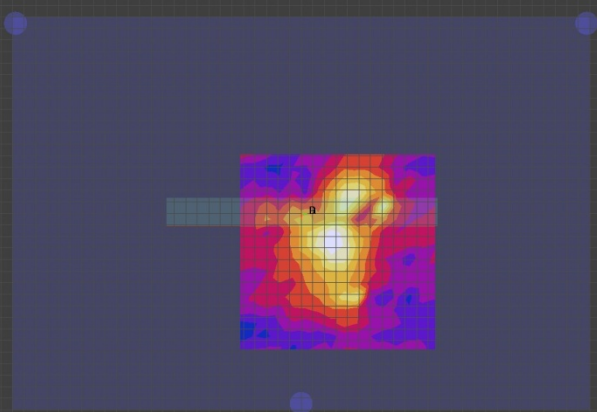

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	155.0 x 235.0 x 25.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 2, 0.00	U-NII-8	WLAN, 10743-AAC	6985.0, 207	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1085	Air -	EUmmWV4 - SN9583_F1-55GHz, 2021-09-03	DAE4 Sn1486, 2022-05-31

Scans Setup


Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022-09-02
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.714
psPDtot+ [W/m ²]	0.769
psPDmod+ [W/m ²]	0.784
E _{max} [V/m]	20.3
Power Drift [dB]	0.04

RMS{EM E(x,y,z,f0)} [V/m]

20.3

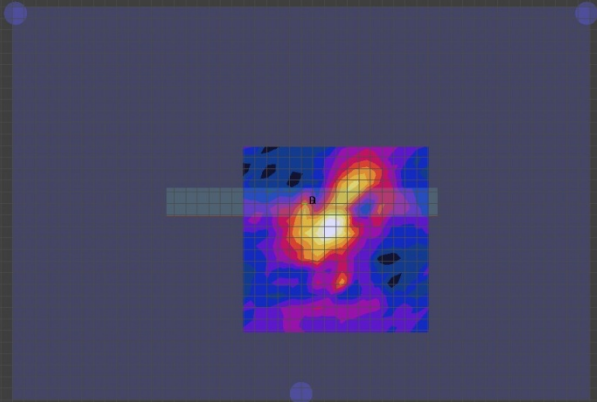

0

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	155.0 x 235.0 x 25.0		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE 4, 0.00	U-NII-8	WLAN, 10743-AAC	6985.0, 207	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1085	Air -	EUmmWV4 - SN9583_F1-55GHz, 2021-09-03	DAE4 Sn1486, 2022-05-31

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	25.0 x 25.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2022-09-02
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.245
psPDtot+ [W/m ²]	0.346
psPDmod+ [W/m ²]	0.405
E _{max} [V/m]	16.2
Power Drift [dB]	0.05

