Declaration of Product differentiation

The different of the each model is shown as below:

Model	xTablet®T7200	Fieldbook A2	
Trademark	MobileDemand	LOGIC INSTRUMENT	
Button	Apendix A	Apendix B	
PC Board	T7QD1-PCB	T7QD1-PCB	
Model	T7Q	a7360X	a7380X
Trademark	DURABOOK	tabletkiosk	tabletkiosk
Button	Apendix C	Apendix C	Apendix C
PC Board	T7QD1-PCB	T7QD1-PCB	T7QD1-PCB

Signature: (

Date: 2012/06/18

James Lai / Manager

10F, No.550, Rueiguang Rd., Neihu Chic Taipei

James Lai

114 Taiwan

James_lai@twinhead.com.tw

Apendix A



No.	Item	Description
1	Light sensor	Use to detect the current level of visible light in the surrounding environment.
2	Status Indicators (Power, Battery, HDD, Wireless)	Indicate the corresponding function status.
3	Speaker	Emit sound.
4	Power	Press to power on and off the tablet PC.
	Yellow Key	Press to trigger the Barcode scan function, or it can be customized for launching specific Win-base program assigned in Quick Menu.
	Blue Key	Press to activate the Camera function.
	Backspace Key	Go back to the previous context
	Numeric Key	Including 0~9
	Enter	Press to emulate the Enter key.


No.	Item	Description
	Tab	Press to emulate the Tab key.
	Arrow (up)	Press to emulate the Up key.
	Arrow (down)	Press to emulate the Down key.
	Arrow (left)	Press to emulate the Left key.
	Arrow (right)	Press to emulate the Right key.
	Fn+Arrow (up)	Press to emulate the volume up
	Fn+Arrow (down)	Press to emulate the volume down
	Fn+Arrow (left)	Press to emulate the brightness up
	Fn+Arrow (right)	Press to emulate the brightness down
	Fn +4	Key Pad backlight on / off switcher
	Fn + 7	Press to rotate the display
	Fn + 8	Press to activate wireless LAN or Bluetooth communication
	Fn + 9	Esc Key
	Fn+0 (Stealth mode)	Press to disable all emitting lights and sound.
	Security	Press to exit Windows and enter SAS (Secure Attention Sequence) mode.
	Fn (Function)	Press to emulate NumLock key. NOTE When the numerical mode is activated, the keypad backlight lights on. If the keypad is left idle for 60 seconds, the backlight will automatically turn off.

Right View



No.	Item	Description
1	Serial port (RS-232)	Connect a peripheral device, such as a printer or other device with serial port.
2	RJ-45	Connect LAN.
3	USB port	Connect USB peripheral devices.

Apendix B

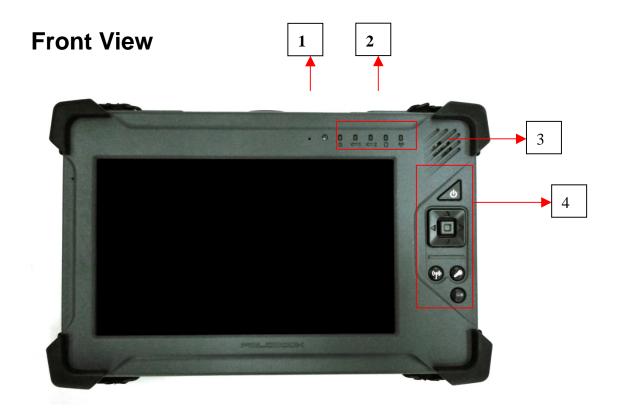

No.	Item	Description
1	Light sensor	Use to detect the current level of visible light in the surrounding environment.
2	Status Indicators (Power, Battery,	Indicate the corresponding function status.

No.	Item	Description
	HDD, Wireless)	
3	Speaker	Emit sound.
4	Power	Press to power on and off the tablet PC.
5	Security	Press to exit Windows and enter SAS (Secure Attention Sequence) mode.
6	Fn	Press to emulate function key.
7	Direction (up)	Press to emulate the Up key.
8	Direction (left)	Press to emulate the Left key.
9	Direction (right)	Press to emulate the Right key.
10	Direction (down)	Press to emulate the Down key.
11	Fn + Direction(up)	volume up
12	Fn + Direction(left)	volume down
13	Fn + Direction(right)	brightness up
14	Fn + Direction(down)	brightness down

Right View



No.	Item	Description
I/O A		
1	Serial port (RS-232)	Connect a peripheral device, such as a printer or other device with serial port.
2	USB ports	Connect USB peripheral devices.

I/O B		
1	Serial port (RS-232)	Connect a peripheral device, such as a printer or other device with serial port.
2	RJ-45	Connect LAN
3	USB port	Connect USB peripheral devices.

Apendix C

Front View



No.	Item	Description
1	Light sensor	Use to detect the current level of visible light in the surrounding environment.
2	Status Indicators (Power, Battery, HDD, Wireless)	Indicate the corresponding function status.
3	Speaker	Emit sound.
4	Power	Press to power on and off the tablet PC.

No.	Item	Description
5	Scanner	Press to trigger the Barcode scan function.
6	Camera	Press to activate the Camera function.
7	Stealth mode	Press to disable all emitting lights and sound.
8	Quick menu	Press to access the Quick menu.
9	Security	Press to exit Windows and enter SAS (Secure Attention Sequence) mode.
10	NumLock	Press to emulate NumLock key. NOTE When the numerical mode is activated, the keypad backlight (blue) lights on. If the keypad is left idle for 60 seconds, the backlight will automatically turn off.
11	Program1	Press to access your favorite programs.
12	Enter	Press to emulate the Enter key.
13	Program2	Press to access your favorite programs.
14	Arrow (up)	Press to emulate the Up key.
15	Arrow (left)	Press to emulate the Left key.
16	Arrow (right)	Press to emulate the Right key.
17	WLAN (Wi-Fi and Bluetooth)	Press to activate wireless LAN or Bluetooth communication.
18	Arrow (down)	Press to emulate the Down key.
19	Rotate	Press to rotate the display.
20	Number (0)	Press to enter 0.



No.	Item	Description	
I/O A			
1	Serial port (RS-232/RS-485)	Connect a peripheral device, such as a printer or other device with serial port.	
2	RJ-45	Connect LAN	
3	USB port	Connect USB peripheral devices.	
I/O E	I/O B		
1	Serial port (RS-232)	Connect a peripheral device, such as a printer or other device with serial port.	
2	USB ports	Connect USB peripheral devices.	