



FCC 47 CFR PART 15 SUBPART E

TEST REPORT

For

Tablet PC

**Trade Name / Model:
Twinhead / T8NXX (X=0~9, A~Z OR BLANK),
MobileDemand / xTablet T8600**

Issued to

**TWINHEAD INTERNATIONAL CORP.
10F, No. 550, Rueiguang Rd., Neihu,
Taipei, Taiwan 114, R.O.C.**

Issued by

**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION..... 3**
- 2. EUT DESCRIPTION 4**
- 3. TEST METHODOLOGY 6**
 - 3.1 EUT CONFIGURATION 6
 - 3.2 EUT EXERCISE 6
 - 3.3 GENERAL TEST PROCEDURES..... 6
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS..... 7
 - 3.5 DESCRIPTION OF TEST MODES..... 8
- 4. INSTRUMENT CALIBRATION..... 9**
 - 4.1 MEASURING INSTRUMENT CALIBRATION..... 9
 - 4.2 MEASUREMENT EQUIPMENT USED 9
- 5. FACILITIES AND ACCREDITATIONS 10**
 - 5.1 FACILITIES 10
 - 5.2 EQUIPMENT 10
 - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS 11
- 6. SETUP OF EQUIPMENT UNDER TEST 12**
 - 6.1 SETUP CONFIGURATION OF EUT 12
 - 6.2 SUPPORT EQUIPMENT 12
- 7. FCC PART 15 REQUIREMENTS..... 13**
 - 7.1 26 DB EMISSION BANDWIDTH..... 13
 - 7.2 PEAK POWER 16
 - 7.3 BAND EDGES MEASUREMENT..... 20
 - 7.4 PEAK POWER SPECTRAL DENSITY 25
 - 7.5 PEAK EXCURSION 28
 - 7.6 RADIATED UNDESIRABLE EMISSION 31
 - 7.7 CONDUCTED UNDESIRABLE EMISSION 38
 - 7.8 POWERLINE CONDUCTED EMISSIONS 41
 - 7.9 TRANSMISSION IN ABSENCE OF DATA 44
 - 7.10 FREQUENCY STABILITY 44
- APPENDIX I RADIO FREQUENCY EXPOSURE 45**
- APPENDIX 2 PHOTOGRAPHS OF TEST SETUP..... 46**



1. TEST RESULT CERTIFICATION

Applicant: TWINHEAD INTERNATIONAL CORP.
10F, No. 550, Rueiguang Rd., Neihu,
Taipei, Taiwan 114, R.O.C.

Equipment Under Test: Tablet PC

Trade Name / Model Number: Twinhead / T8NXX (X=0~9, A~Z OR BLANK),
MobileDemand / xTablet T8600

Date of Test: July 8 ~ 12, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Gavin Lim
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Tablet PC
Trade Name / Model Number	Twinhead / T8NXX (X=0~9, A~Z OR BLANK), MobileDemand / xTablet T8600
Model Discrepancy	All the above models are identical except the model designation.
Power Supply	LI SHIN INTERNATIONAL ENTERPROSE CORP. / 0335A2065 I/P: AC 100-240V, 50-60Hz, 1.7A O/P: DC 20V, 3.25A Battery: Lithium – Ion / T8N-E 11.1V, 7000 mAh
Frequency Range	5.15 ~ 5.35 GHz
Transmit Power	13.92 dBm
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	54, 48, 36, 24, 18, 12, 9, 6 Mbps
Number of Channels	8 Channels
Antenna Specification	PIFA Antenna / Antenna Gain: -0.16dBi



Operation Frequency:

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
40	5200
44	5220
48	5240
52	5260
56	5280
60	5300
64	5320

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*
- 2. This submittal(s) (test report) is intended for FCC ID: **FKGT8N** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.*



3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4. Radiated testing was performed at an antenna to EUT distance 3 meters.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

Radiated Emissions

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: T8N) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Channel Low (5180MHz), Channel Mid (5260MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (Y axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/18/2007

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	07/25/2006
Test Receiver	Rohde&Schwarz	ESCI	100064	06/28/2007
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2007
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2007
Horn-Antenna	TRC	HA-0502	06	06/02/2007
Horn-Antenna	TRC	HA-0801	04	05/05/2007
Horn-Antenna	TRC	HA-1201A	01	07/04/2007
Horn-Antenna	TRC	HA-1301A	01	07/04/2007
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/09/2007
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/26/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/-2.0065dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER 9kHz-30MHz	ROHDE & SCHWARZ	ESHS30	828144/003	09/27/2006
TWO-LINE V-NETWORK 9kHz-30MHz	SCHAFFNER	NNB41	03/10013	06/12/2007
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	03/20/2007
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No. 11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT








Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, EIC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 0824-01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 3991-3, IC 3991-4) / 3M Semi Anechoic Chamber (IC 6106) to perform RSS 212 Issue 1	 IC 3991-3 IC 3991-4 IC 6106

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	USB Multimedia Keyboard	Chang yang	KB-MED-U	N/A	FCC DoC	Unshielded, 1.8m	N/A
2.	Mouse	DELL	MO56UC	FOA0094M	FCC DoC	Unshielded, 1.8m	N/A

Remark:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


7. FCC PART 15 REQUIREMENTS

7.1 26 DB EMISSION BANDWIDTH

LIMIT

According to §15.303(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

Test Configuration

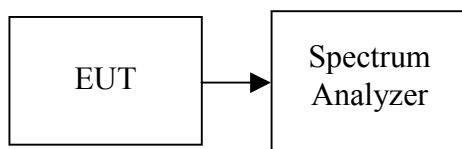

TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 1%EBW, VBW = RBW, Span = 50MHz, and Sweep = auto.
Or Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, and Sweep = auto.
4. Mark the peak frequency and -26dB (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
Low	5180	22.479
Mid	5260	22.201
High	5320	22.130



Test Plot

CH Low


Agilent 19:53:42 Jul 10, 2006

R L

26 dB BW, a Mode Low Ch.

Ref 30 dBm

Atten 30 dB

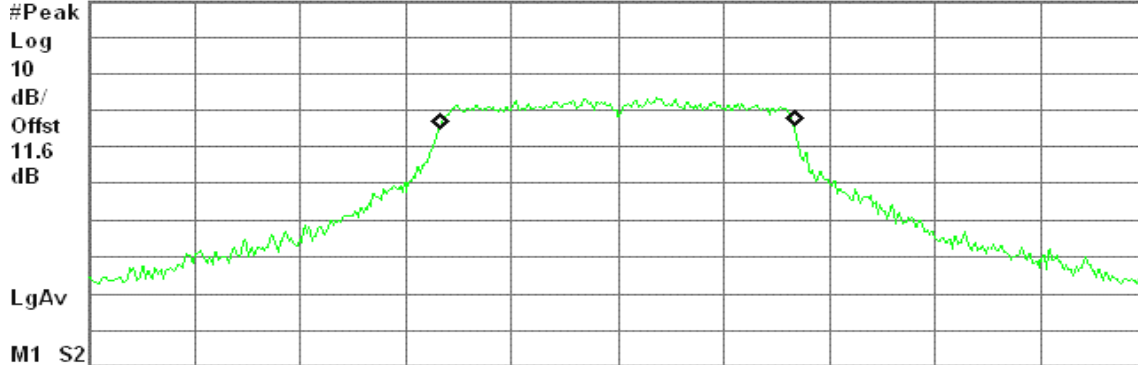

Center 5.180 00 GHz

Span 50 MHz

#Res BW 220 kHz

#VBW 680 kHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
16.6594 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -36.449 kHz
x dB Bandwidth 22.479 MHz

CH Mid


Agilent 19:45:09 Jul 10, 2006

R L

26 dB BW, a Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

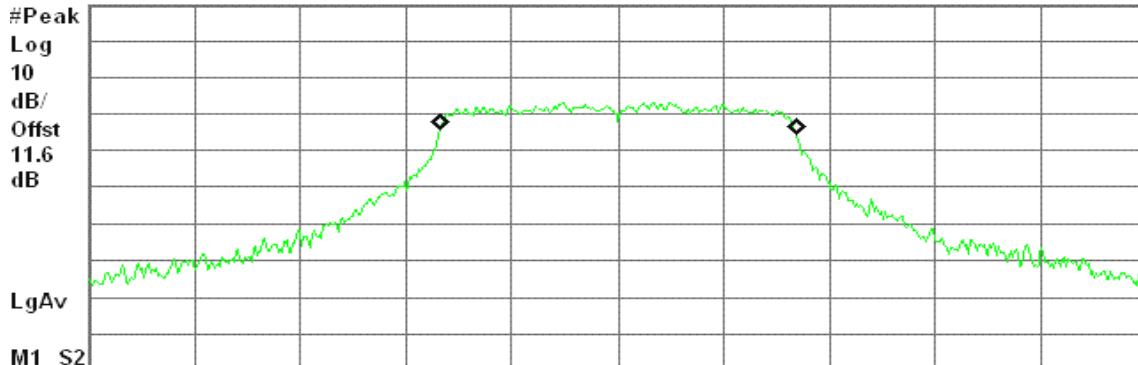

Center 5.260 00 GHz

Span 50 MHz

#Res BW 240 kHz

#VBW 680 kHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
16.7381 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 34.343 kHz
x dB Bandwidth 22.201 MHz



CH High


Agilent 19:49:28 Jul 10, 2006

R L

26 dB BW, a Mode High Ch.

Ref 30 dBm

Atten 30 dB

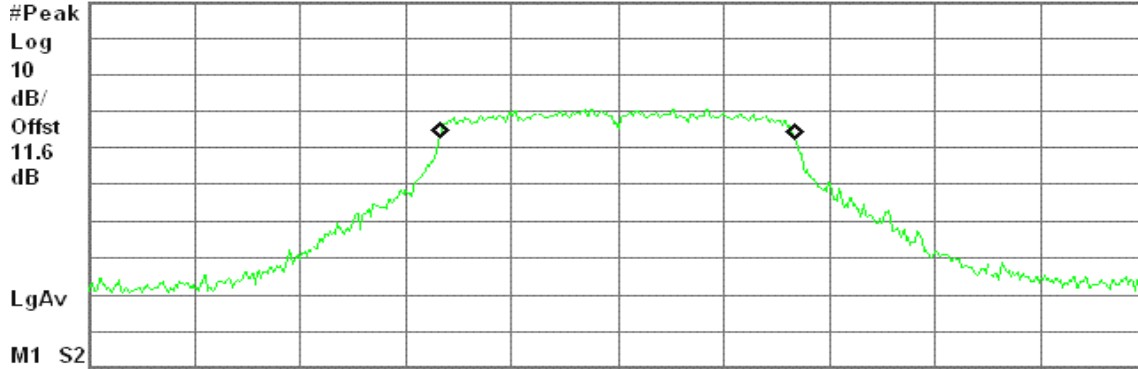

Center 5.320 00 GHz

Span 50 MHz

#Res BW 240 kHz

#VBW 750 kHz

Sweep 1 ms (601 pts)

Occupied Bandwidth
16.6958 MHz

Occ BW % Pwr	99.00 %
x dB	-26.00 dB

Transmit Freq Error	3.150 kHz
x dB Bandwidth	22.130 MHz



7.2 PEAK POWER

LIMIT

According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

The peak power shall not exceed the limit as follow:


Specified Limit of the Peak Power

Channel	Frequency (MHz)	26 dB Bandwidth (B) (MHz)	10 Log B (dB)	4 + 10 Log B or 11 + 10 Log B (dBm)	Power Limit (dBm)
Low	5180	22.48	13.52	17.52	17.00
Mid	5260	22.20	13.46	24.46	24.00
High	5320	22.13	13.45	24.45	24.00

(Remark: Maximum antenna gain = -0.16dBi, therefore there is no reduction due to antenna gain.)

Test Configuration

The EUT was connected to a spectrum analyzer through a 50 Ω RF cable.

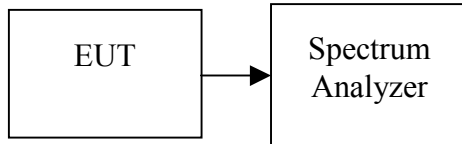

TEST PROCEDURE

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)
Low	5180	10.42	0.01102	17.00
Mid	5260	13.92	0.02466	24.00
High	5320	13.79	0.02393	24.00



Test Plot

CH Low


Agilent 13:22:39 Jul 10, 2006

R L

Peak Transmit Power, a Mode Low Ch.

Ref 30 dBm

Atten 30 dB

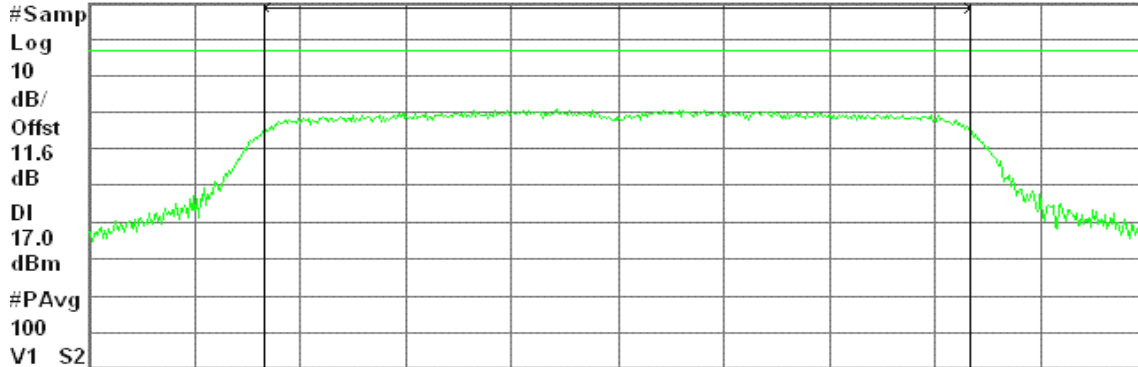

Center 5.180 00 GHz

Span 24.9 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

10.42 dBm / 16.6014 MHz

-61.78 dBm/Hz

CH Mid


Agilent 13:26:09 Jul 10, 2006

R L

Peak Transmit Power, a Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

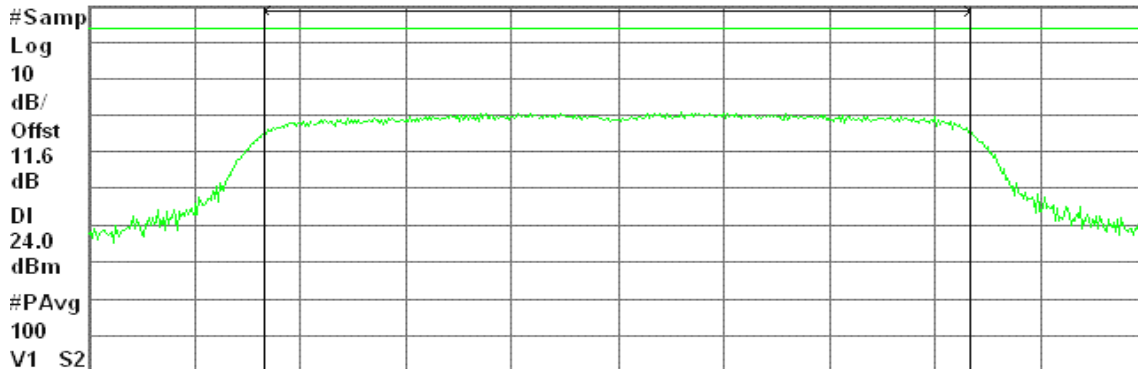

Center 5.260 00 GHz

Span 24.88 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.92 dBm / 16.5873 MHz

-58.28 dBm/Hz



CH High


Agilent 13:27:57 Jul 10, 2006

R L

Peak Transmit Power, a Mode High Ch.

Ref 30 dBm

Atten 30 dB

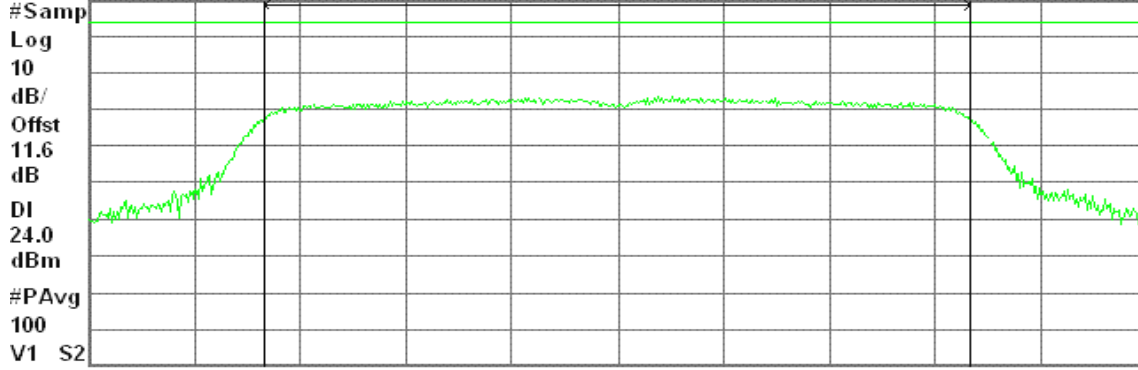

Center 5.320 00 GHz

Span 24.94 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.79 dBm / 16.6277 MHz

-58.42 dBm/Hz


7.3 BAND EDGES MEASUREMENT

LIMIT

According to §15.407(b),

- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

Test Configuration

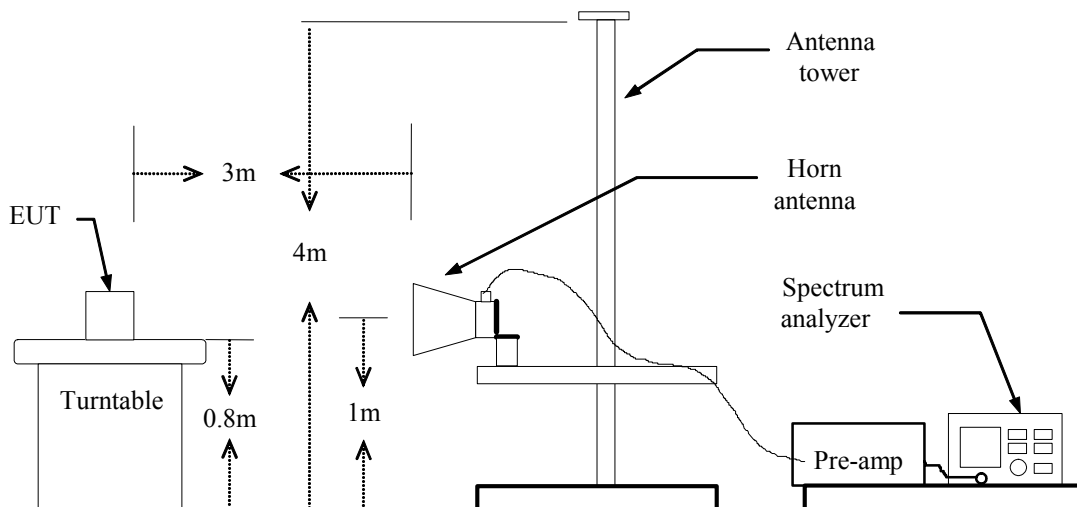

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.




Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 14:31:01 Jul 8, 2006

R T

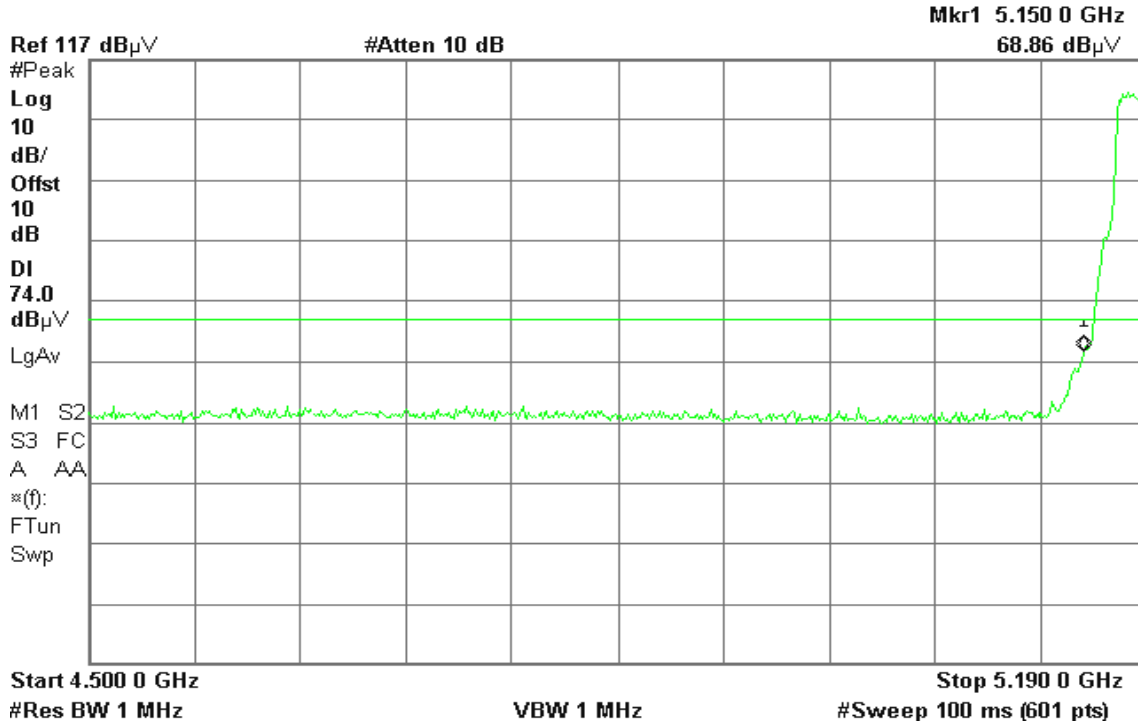

Detector mode: Average

Polarity: Vertical

Agilent 14:30:41 Jul 8, 2006

R T






Detector mode: Peak

Polarity: Horizontal

Agilent 14:37:55 Jul 8, 2006

R T

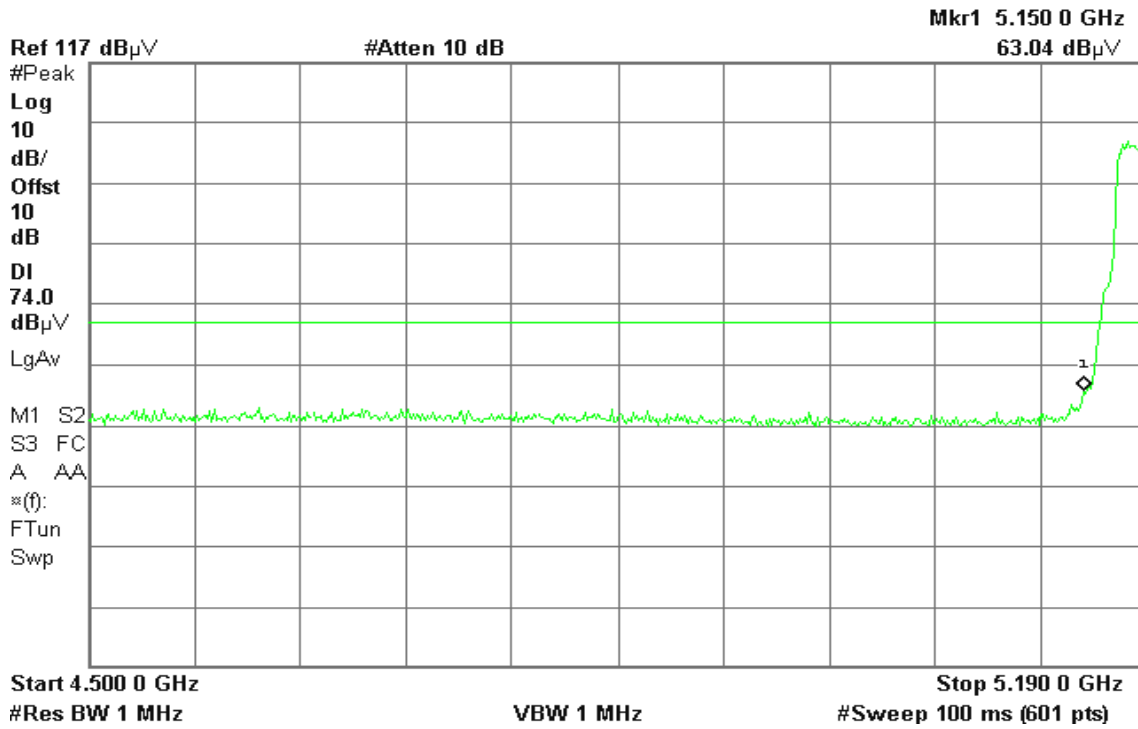


Detector mode: Average

Polarity: Horizontal

Agilent 14:37:32 Jul 8, 2006

R T

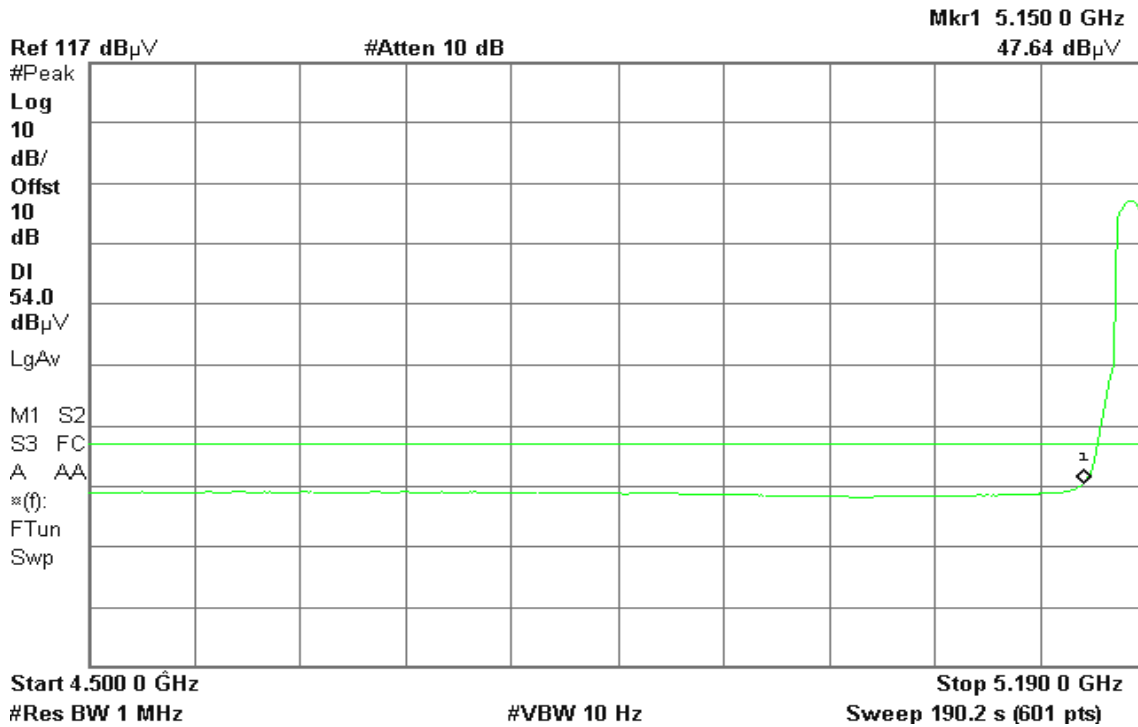




Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 14:59:33 Jul 8, 2006

R T

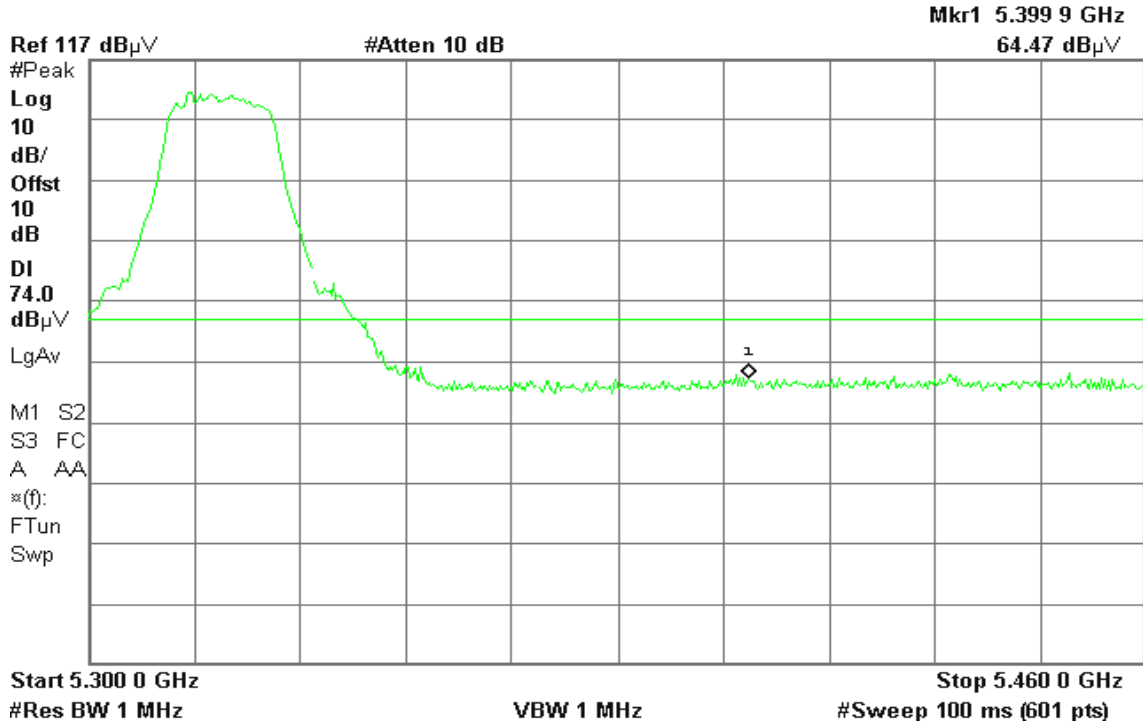


Detector mode: Average

Polarity: Vertical

Agilent 14:59:04 Jul 8, 2006

R T

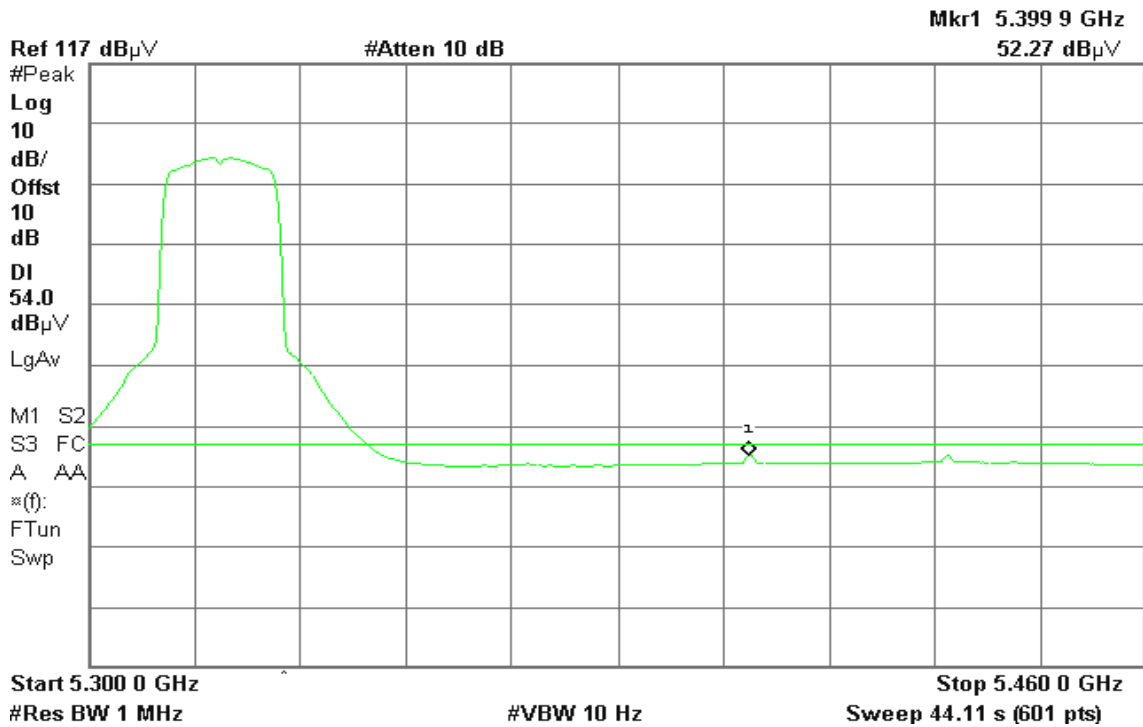




Detector mode: Peak

Polarity: Horizontal

Agilent 15:05:19 Jul 8, 2006

R T

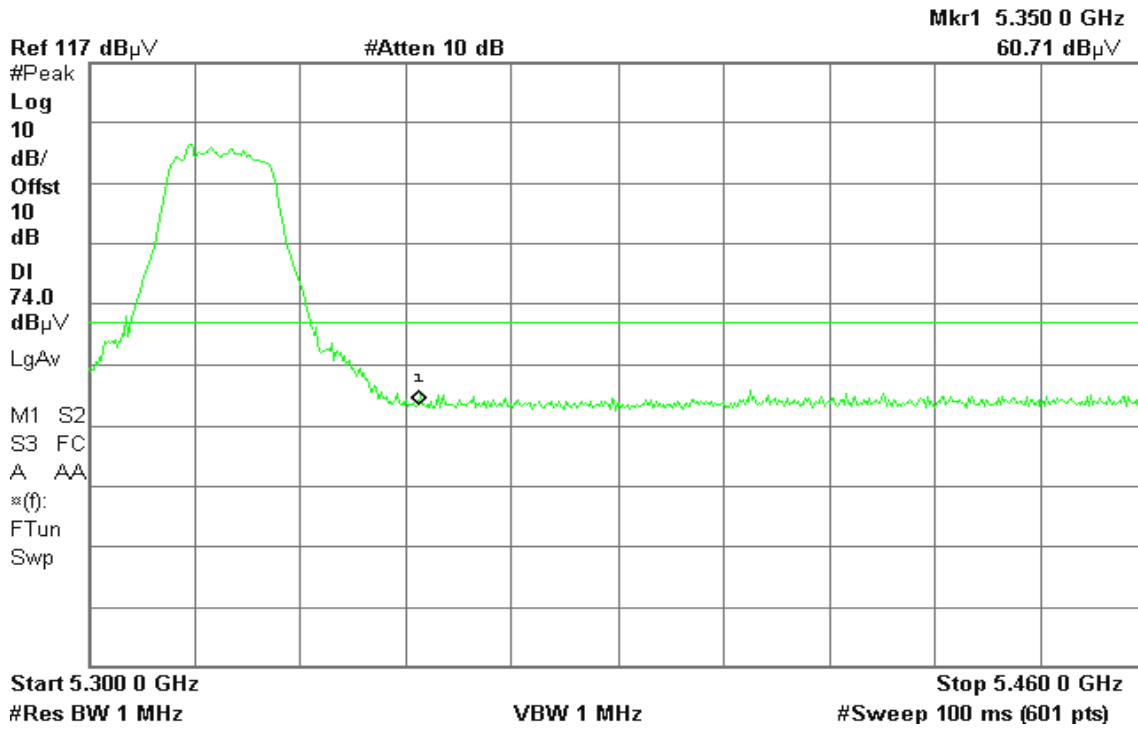


Detector mode: Average

Polarity: Horizontal

Agilent 15:04:56 Jul 8, 2006

R T

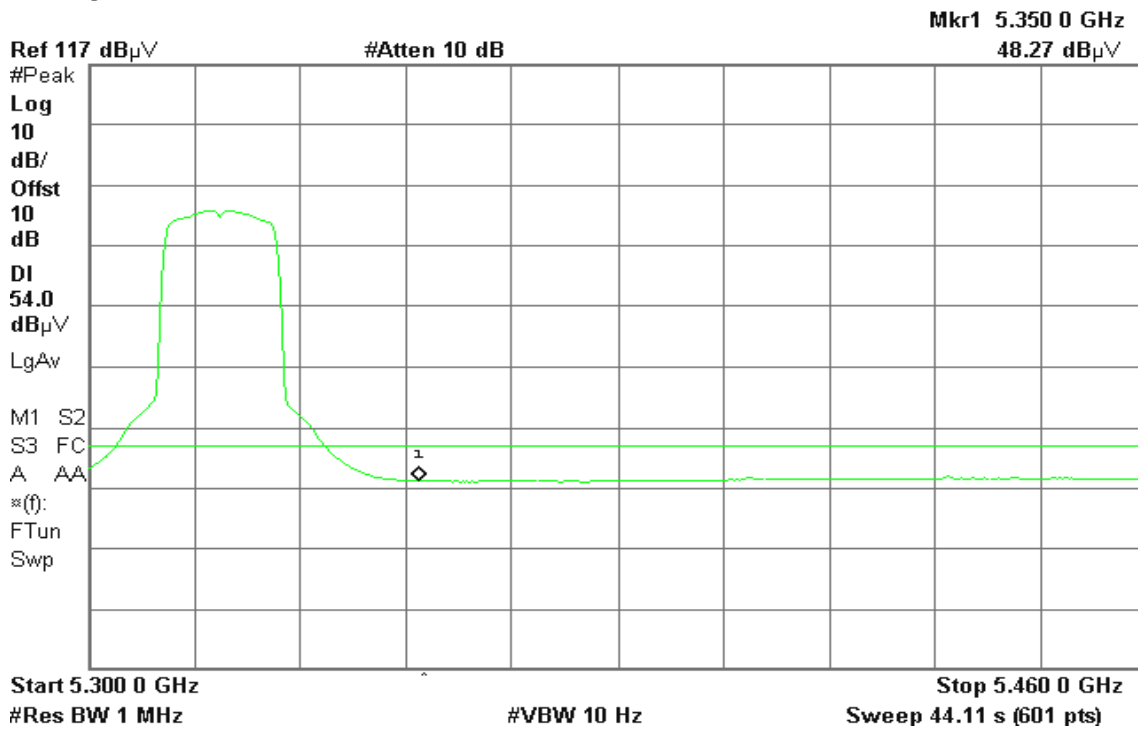

7.4 PEAK POWER SPECTRAL DENSITY


LIMIT

According to §15.407(a),

- (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4dBm in any 1MHz band.
- (2) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11dBm in any 1MHz band.

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Test Configuration

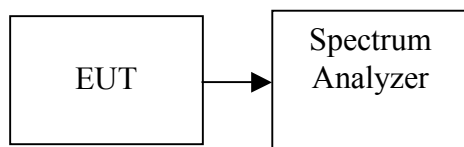

TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = 50MHz, Sweep=1ms
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed

TEST RESULTS

No non-compliance noted

Test Data


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)	Result
Low	5180	0.897	4.00	-3.103	PASS
Mid	5260	0.932	11.00	-10.068	PASS
High	5320	3.713	11.00	-7.287	PASS

(Remark: Maximum antenna gain = -0.16dBi, therefore there is no reduction due to antenna gain.)




Test Plot

CH Low

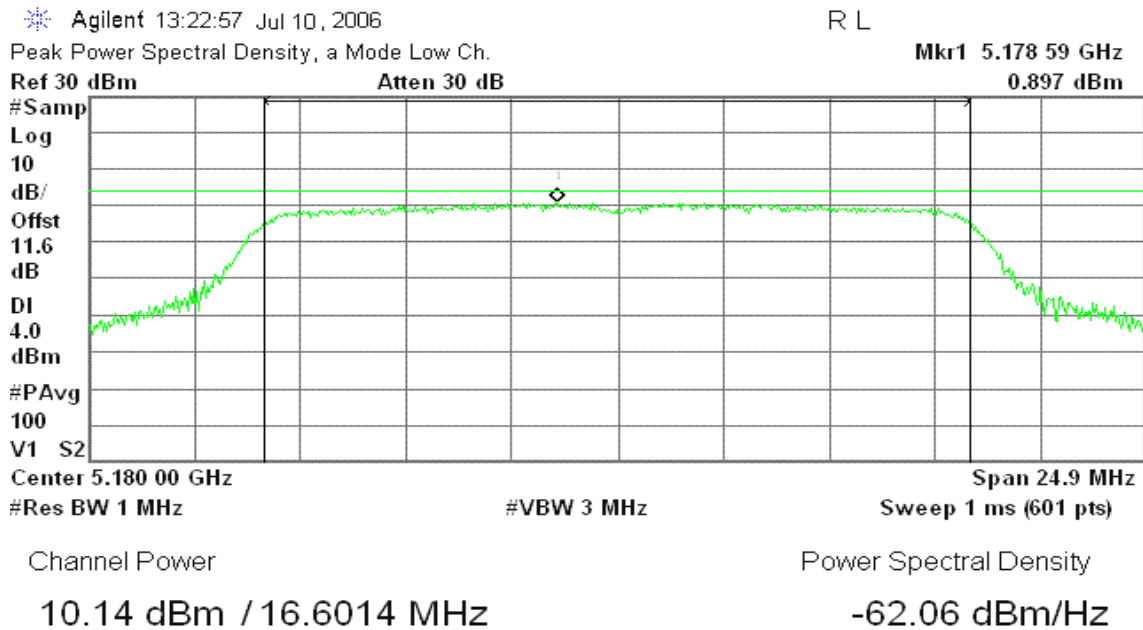

CH Mid

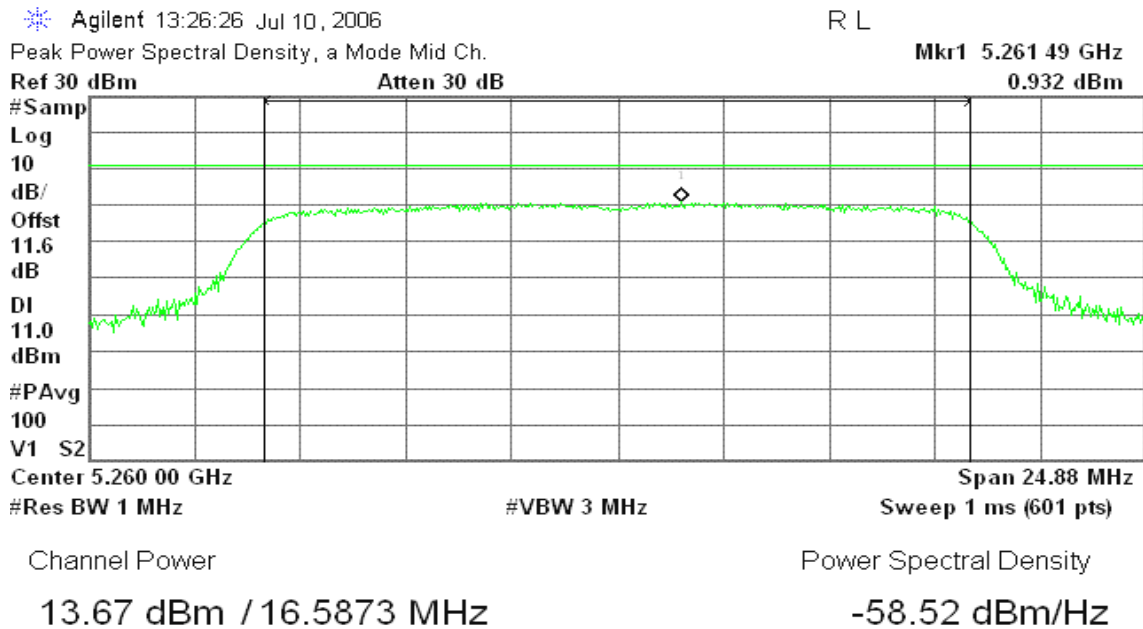



CH High

Agilent 13:28:10 Jul 10, 2006

R L


Peak Power Spectral Density, a Mode High Ch.

Mkr1 5.321 29 GHz

Ref 30 dBm

Atten 30 dB

3.713 dBm

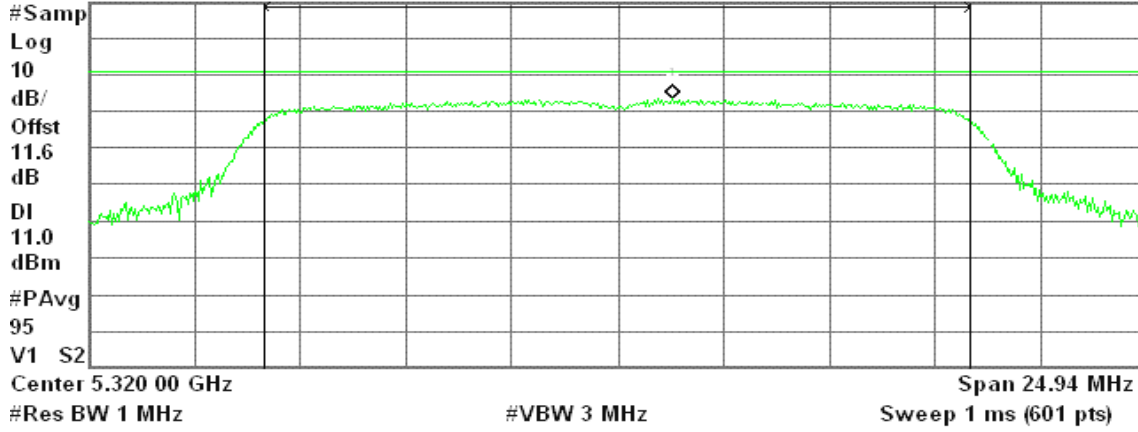

Channel Power

Power Spectral Density

13.65 dBm / 16.6277 MHz


-58.56 dBm/Hz

7.5 PEAK EXCURSION

LIMIT

According to §15.407(a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Configuration

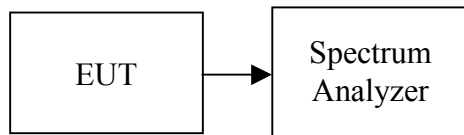

TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
4. Trace B, Set RBW = 1MHz, VBW = 30kHz, Span >26dB bandwidth, Max. hold.
5. Delta Mark trace A Maximum frequency and trace B same frequency.
6. Repeat the above procedure until measurements for all frequencies were complete.

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5180	9.68	13.00	-3.32	PASS
Mid	5260	12.64	13.00	-0.36	PASS
High	5320	8.82	13.00	-4.18	PASS



Test Plot

CH Low

Agilent 13:23:44 Jul 10, 2006

R L

Peak Excursion, a Mode Low Ch.

Δ Mkr1 0 Hz

Ref 30 dBm

Atten 30 dB

9.68 dB

#Peak

Log

10

dB/

Offst

11.6

dB

#PAvg

V1 V2

Center 5.180 00 GHz

Span 24.9 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

16.75 dBm / 16.6014 MHz

-55.45 dBm/Hz

CH Mid

Agilent 13:26:51 Jul 10, 2006

R L

Peak Excursion, a Mode Mid Ch.

Δ Mkr1 0 Hz

Ref 30 dBm

Atten 30 dB

12.64 dB

#Peak

Log

10

dB/

Offst

11.6

dB

#PAvg

V1 V2

Center 5.260 00 GHz

Span 24.88 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

19.89 dBm / 16.5873 MHz

-52.31 dBm/Hz



CH High

Agilent 13:28:35 Jul 10, 2006

R L

Peak Excursion, a Mode High Ch.

Δ Mkr1 0 Hz

Ref 30 dBm

Atten 30 dB

8.82 dB

#Peak

Log

10

dB/

Offst

11.6

dB

#PAvg

V1 V2

Center 5.320 00 GHz

Span 24.94 MHz

#Res BW 1 MHz

#VBW 3 MHz


Sweep 20 ms (601 pts)

Channel Power

Power Spectral Density

20.13 dBm / 16.6277 MHz

-52.08 dBm/Hz

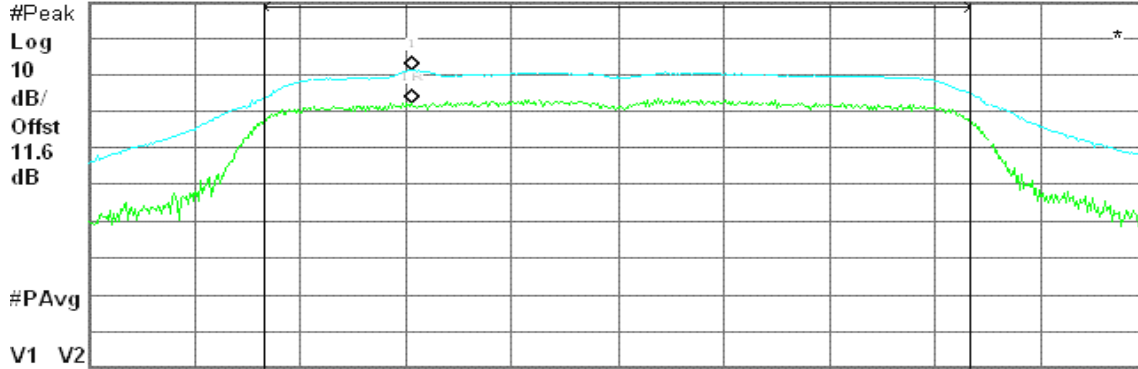



7.6 RADIATED UNDESIRABLE EMISSION

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

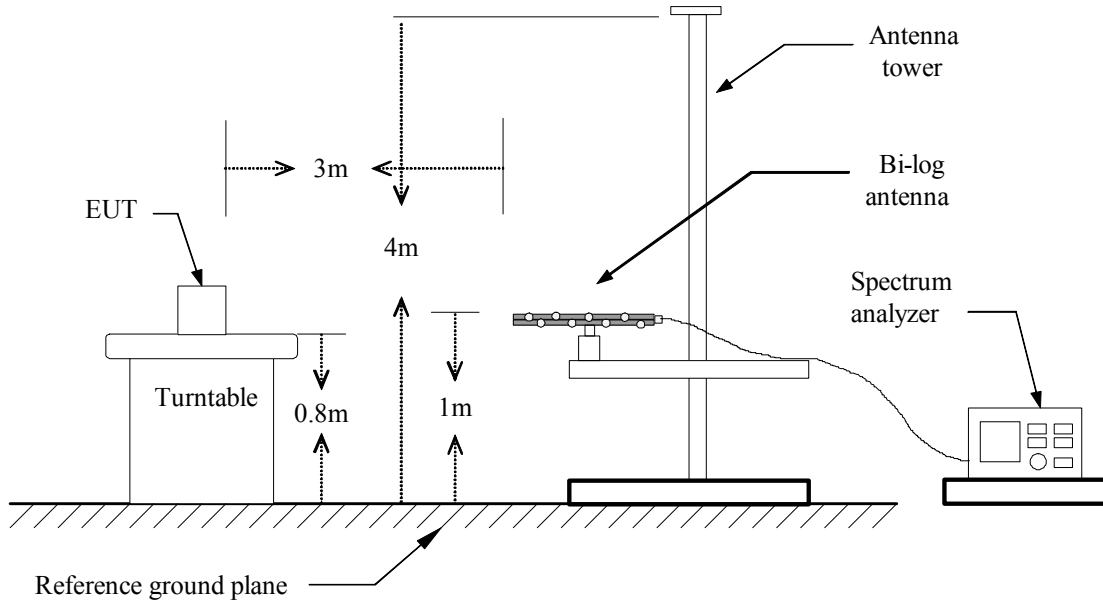

Above 1 GHz

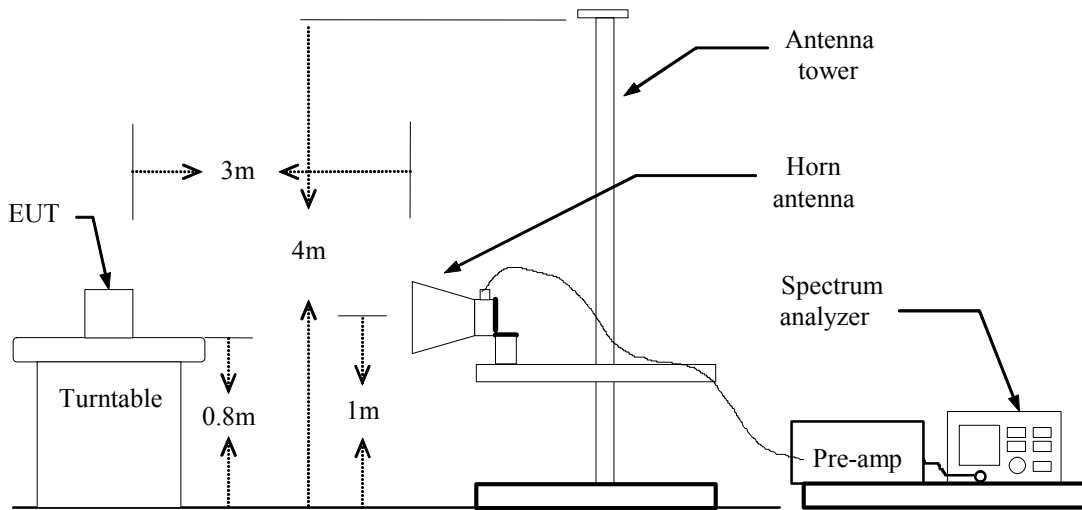



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Link**Test Date:** July 10, 2006**Temperature:** 23°C**Tested by:** Skyman Tsai**Humidity:** 46 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
34.85	V	35.30	-8.38	26.91	40.00	-13.09	Peak
59.10	V	39.21	-19.13	20.08	40.00	-19.92	Peak
275.73	V	32.28	-11.89	20.39	46.00	-25.61	Peak
324.23	V	34.58	-11.03	23.55	46.00	-22.45	Peak
354.95	V	32.44	-10.27	22.17	46.00	-23.83	Peak
398.60	V	31.12	-9.27	21.85	46.00	-24.15	Peak
172.27	H	31.64	-14.46	17.18	43.50	-26.32	Peak
296.75	H	38.77	-11.72	27.04	46.00	-18.96	Peak
443.87	H	32.54	-8.51	24.03	46.00	-21.97	Peak
532.78	H	30.11	-6.34	23.77	46.00	-22.23	Peak
599.07	H	32.16	-5.41	26.74	46.00	-19.26	Peak
799.53	H	29.77	-2.23	27.54	46.00	-18.46	Peak

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Above 1 GHz

Operation Mode: Tx / IEEE 802.11a mode / CH Low

Test Date: July 8, 2006

Temperature: 23°C

Tested by: Skyman Tsai

Humidity: 51% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2435.00	V	44.84	---	8.33	53.17	---	74.00	54.00	-0.83	Peak
5456.67	V	54.93	41.94	9.98	64.91	51.92	74.00	54.00	-2.08	Average
N/A										
2493.33	H	45.55	33.01	8.05	53.60	41.06	74.00	54.00	-0.40	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / CH Mid

Test Date: July 8, 2006

Temperature: 25°C

Tested by: Skyman Tsai

Humidity: 55% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2621.67	V	45.89	---	7.67	53.56	---	74.00	54.00	-0.44	Peak
5468.33	V	55.91	42.92	10.03	65.94	52.95	74.00	54.00	-1.05	Average
N/A										
2365.00	H	45.01	---	8.67	53.68	---	74.00	54.00	-0.32	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / CH High

Test Date: July 8, 2006

Temperature: 25°C

Tested by: Skyman Tsai

Humidity: 55% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2936.67	V	47.63	33.92	6.76	54.39	40.68	74.00	54.00	-13.32	Average
5538.33	V	55.52	42.70	10.21	65.73	52.91	74.00	54.00	-1.09	Average
N/A										
3111.67	H	48.79	35.23	6.39	55.18	41.62	74.00	54.00	-12.38	Average
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

7.7 CONDUCTED UNDESIRABLE EMISSION


LIMIT

According to 15.407(b),

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

The provisions of §15.205 apply to intentional radiators operating under this section.

Test Configuration

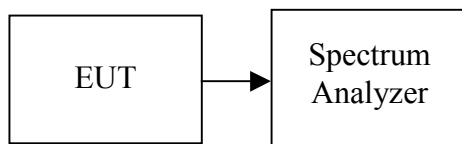

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot

CH Low

30MHz ~ 40GHz

Agilent 19:55:36 Jul 10, 2006

L


Conducted Spur., a Mode Low Ch.

Mkr1 20.02 GHz

Ref 13.6 dBm

#Atten 12 dB

-53.53 dBm

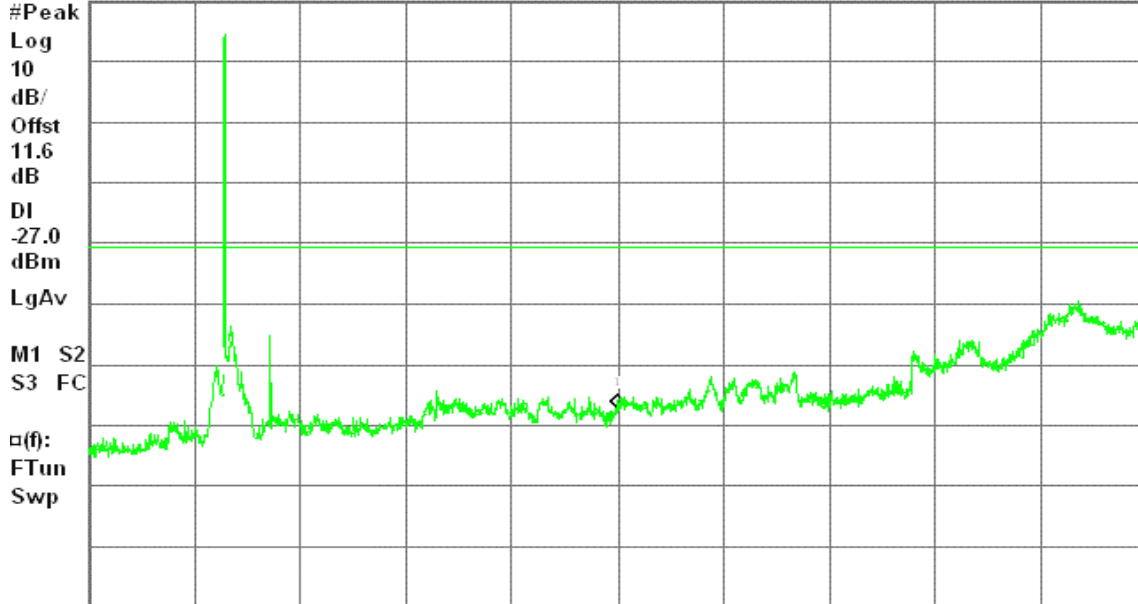

Center 20.02 GHz

Span 39.97 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 100 ms (2001 pts)

CH Mid

30MHz ~ 40GHz

Agilent 19:55:36 Jul 10, 2006

L


Conducted Spur., a Mode Low Ch.

Mkr1 20.02 GHz

Ref 13.6 dBm

#Atten 12 dB

-53.53 dBm

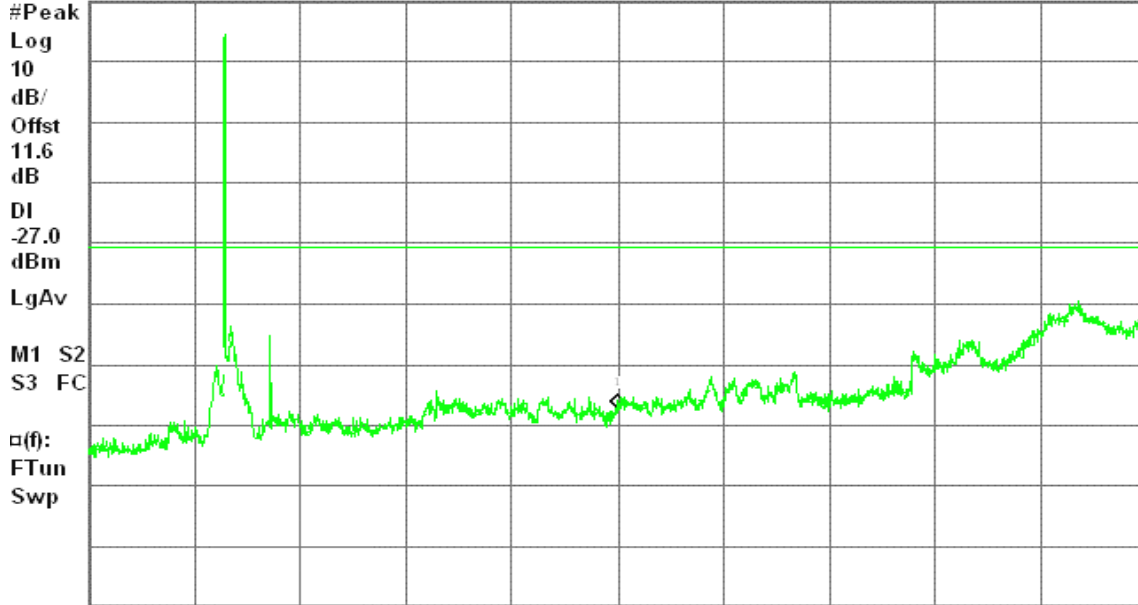

Center 20.02 GHz

Span 39.97 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 100 ms (2001 pts)



CH High 30MHz ~ 40GHz

Agilent 19:51:28 Jul 10, 2006

L


Conducted Spur., a Mode High Ch.

Mkr1 5.33 GHz

Ref 13.6 dBm

#Atten 12 dB

6.25 dBm

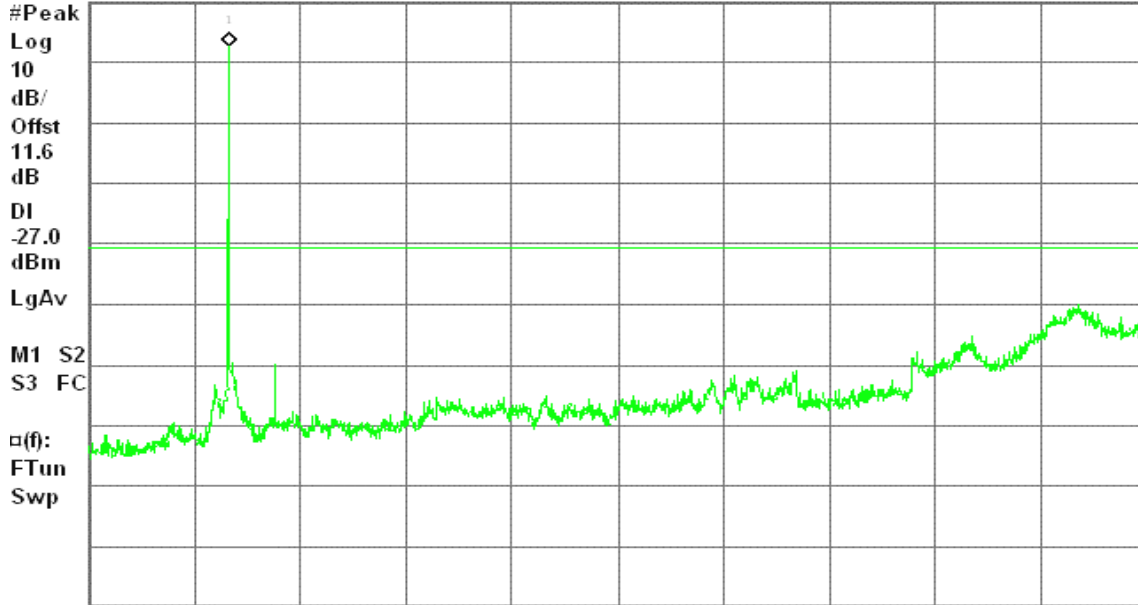

Center 20.02 GHz

Span 39.97 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 100 ms (2001 pts)



7.8 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

**TEST RESULTS**

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** July 12, 2006
Temperature: 25°C **Tested by:** Skyman Tsai
Humidity: 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.177	34.580	26.000	0.146	34.726	26.146	64.625	54.625	-29.899	-28.479	L1
0.201	45.980	33.100	0.100	46.080	33.200	63.569	53.569	-17.489	-20.369	L1
0.266	35.570	23.800	0.100	35.670	23.900	61.242	51.242	-25.572	-27.342	L1
0.400	26.050	18.740	0.100	26.150	18.840	57.853	47.853	-31.703	-29.013	L1
12.277	33.780	29.160	0.746	34.526	29.906	60.000	50.000	-25.474	-20.094	L1
24.555	40.840	40.150	1.200	42.040	41.350	60.000	50.000	-17.960	-8.650	L1
0.177	34.940	25.370	0.146	35.086	25.516	64.625	54.625	-29.539	-29.109	L2
0.200	45.520	29.660	0.100	45.620	29.760	63.611	53.611	-17.991	-23.851	L2
0.262	35.220	21.730	0.100	35.320	21.830	61.368	51.368	-26.048	-29.538	L2
4.764	21.650	12.700	0.176	21.826	12.876	56.000	46.000	-34.174	-33.124	L2
12.279	32.570	28.850	0.746	33.316	29.596	60.000	50.000	-26.684	-20.404	L2
24.555	40.900	40.260	1.200	42.100	41.460	60.000	50.000	-17.900	-8.540	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

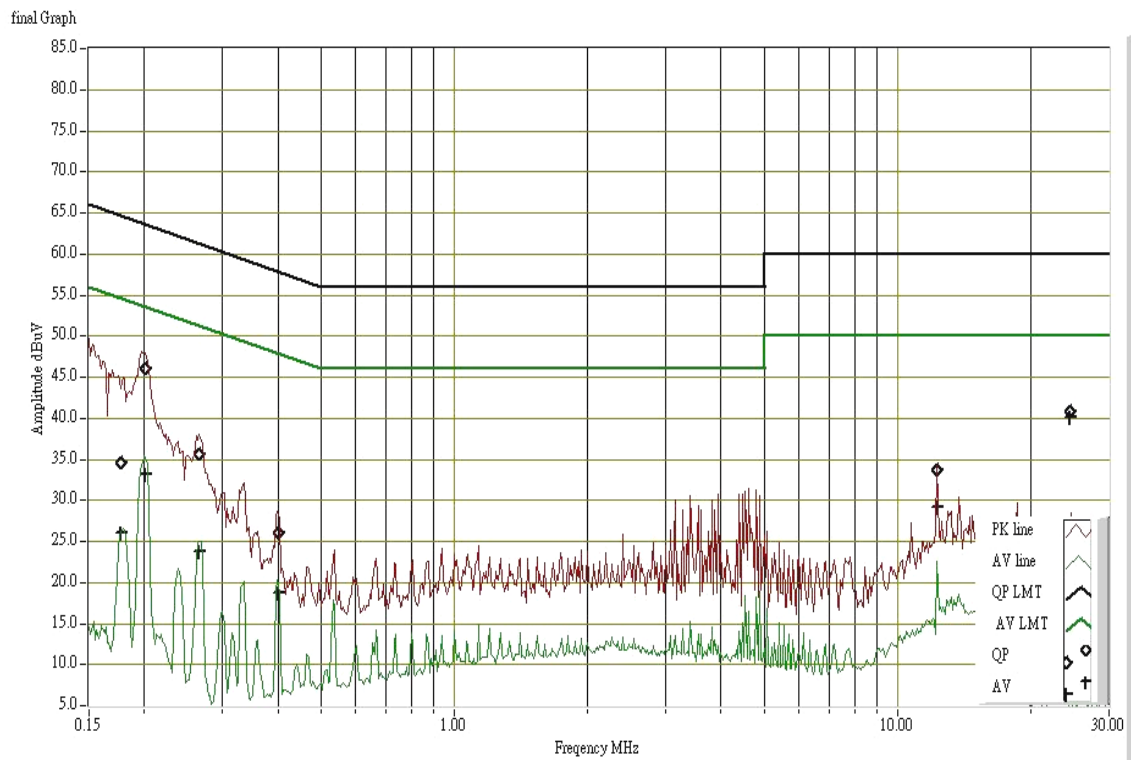

Conducted emissions (Line 2)

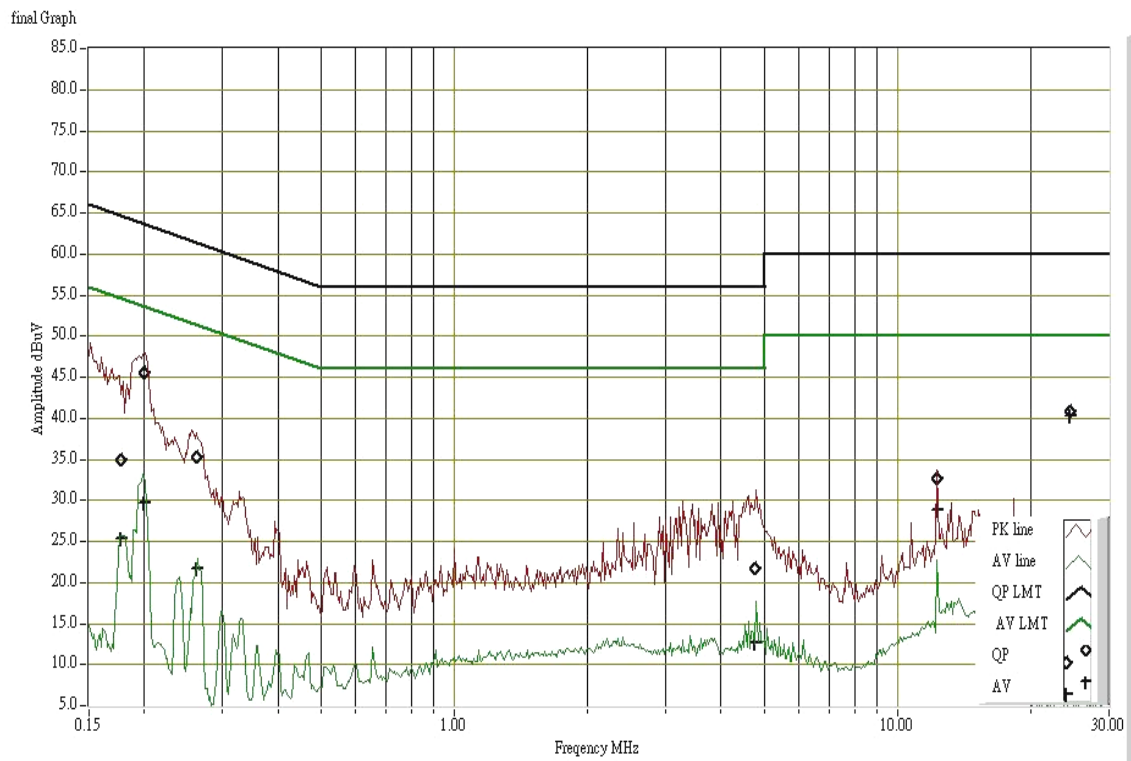



7.9 TRANSMISSION IN ABSENCE OF DATA

LIMIT

According to §15.319(f), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

TEST RESULTS

Please refer to the operational description for details.

Remark: For the details, please refer to the operational description.

7.10 FREQUENCY STABILITY

LIMIT

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the operational description.

TEST RESULTS

Please refer to the user's operational description for further details.

Remark: An examination of the band-edge plots shows that the emission will stay within the authorized band over the entire temperature range.