

7. Channel Number


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2010
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2010
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2010

Note: 1. All equipments are calibrated every one year.

2. The test instruments marked by "X" are used to measure the final test results.

7.2. Test Setup



7.3. Limit

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.

7.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

7.5. Uncertainty

N/A




7.6. Test Result of Channel Number

Product : Notebook PC
Test Item : Channel Number
Test Site : No.3 OATS


Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Frequency Range	Measurement	Required Limit	Result	
(MHz)	(Hopping Channel)	(Hopping Channel)		
2402 ~ 2480	79	>75	Pass	

2402-2441MHz

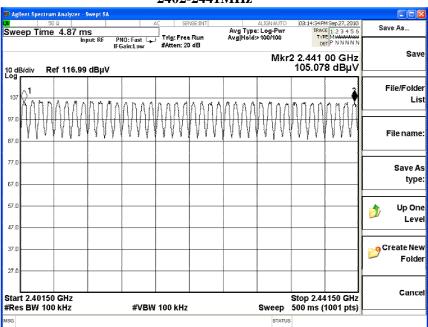

2442-2480MHz

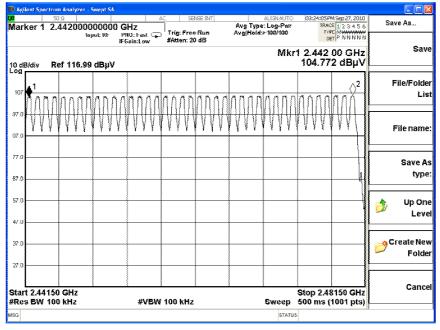

Page: 48 of 69




Product : Notebook PC
Test Item : Channel Number
Test Site : No.3 OATS


Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Frequency Range	Measurement	Required Limit	Result	
(MHz)	(Hopping Channel)	(Hopping Channel)		
2402 ~ 2480	79	>75	Pass	

2402-2441MHz

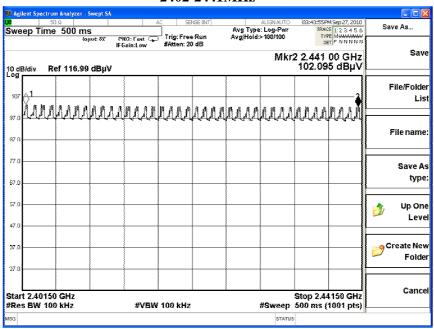

2442-2480MHz

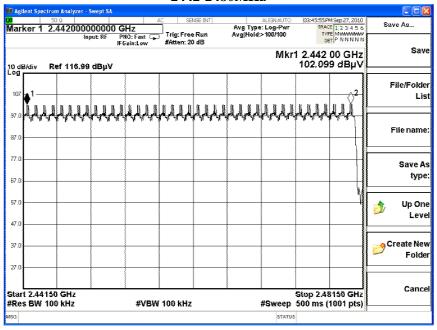



8. Channel Separation


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2010
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2010
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2010

Note: 1. All equipments are calibrated every one year.

2. The test instruments mark by "X" are used to measure the final test results.

8.2. Test Setup



8.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

8.5. Uncertainty

± 150Hz

Cancel



8.6. Test Result of Channel Separation

Product : Notebook PC

Test Item : Channel Separation

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)

Channel No.	Fraguanay	Measurement	Limit	Limit of (2/3)*20dB	
	Frequency (MHz)	Level	(kHz)	Bandwidth (kHz)	Result
		(kHz)	(KIIZ)	Dandwidin (K112)	
00	2402	1000	>25 kHz	746.7	Pass
39	2441	1000	>25 kHz	746.7	Pass
78	2480	1000	>25 kHz	746.7	Pass

Channel 00 2402MHz


NOTE: The 20dB Bandwidth is refer to section 10.

Save As... Marker 2 2.403000000000 GHz Avg Type: Log-Pwr Avg|Hold:>100/100 Trig: Free Run Atten: 20 dB PNO: >30k IFGain:Low Save Mkr2 2.403 00 GHz -1.094 dBm Ref 10.00 dBm 10 dB/div Log 0.00 File/Folder -10.0 List -20.0 -30.0 File name: -40.0 -50.0 -60.0 Save As -70.C type Center 2.402000 GHz Span 10.00 MHz **#VBW 100 kHz** #Res BW 100 kHz #Sweep 500 ms (1001 pts) Up One Level 1 N 1 f 2 N 1 f 2.402 00 GHz 2.403 00 GHz -1.086 dBm -1.094 dBm ᇯ Create New Folder


Page: 51 of 69



Channel 39 2441MHz

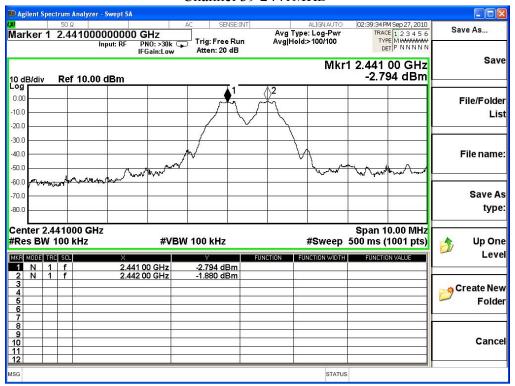

Channel 78 2480 MHz

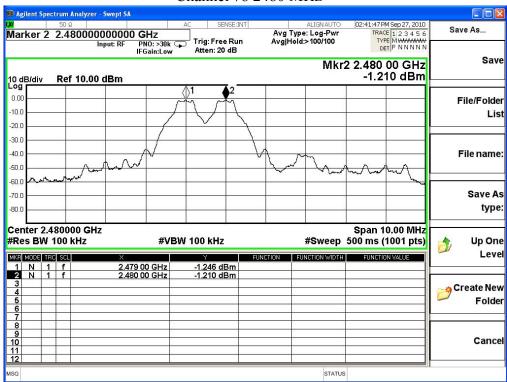



Product : Notebook PC
Test Item : Channel Separation


Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)

Channel No.	Frequency	Measurement	Limit	Limit of (2/3)*20dB	
	(MHz)	Level	(kHz)	Bandwidth (kHz)	Result
		(kHz)	(KIIZ)	Dandwidth (KHZ)	
00	2402	1000	>25 kHz	913.3	Pass
39	2441	1000	>25 kHz	913.3	Pass
78	2480	1000	>25 kHz	920.0	Pass


NOTE: The 20dB Bandwidth is refer to section 10.

Channel 00 2402MHz

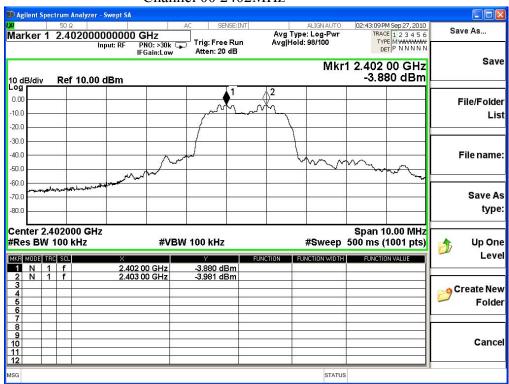




Channel 39 2441MHz

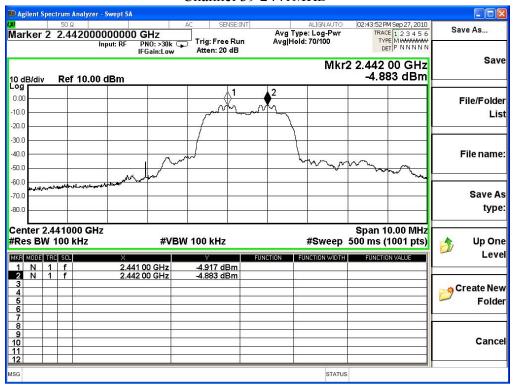

Channel 78 2480 MHz

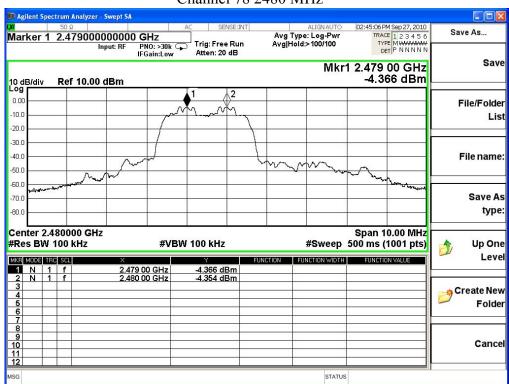



9. Dwell Time


9.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2010
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2010
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2010

Note: 1. All equipments are calibrated every one year.

2. The test instruments marked by "X" are used to measure the final test results.

9.2. Test Setup



9.3. Limit

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

9.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

9.5. Uncertainty

± 25msec



9.6. Test Result of Dwell Time

Product : Notebook PC
Test Item : Dwell Time
Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK) (Channel 00,39,78 –DH5)


Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.904	8	50	0.46	0.186	0.4	Pass
2441	2.904	8	50	0.46	0.186	0.4	Pass
2480	2.904	8	50	0.46	0.186	0.4	Pass

Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

CH 00 Transmission Time

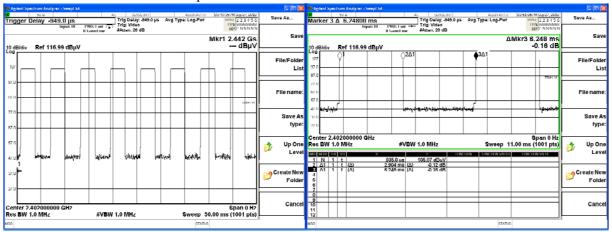

CH39 Time Interval between hops

CH 39Transmission Time

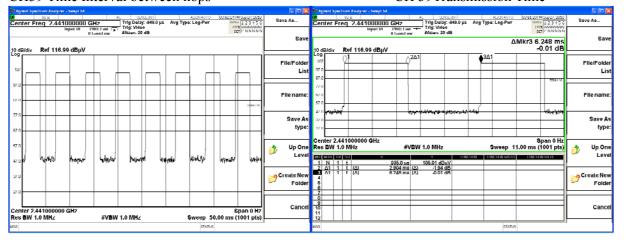


Page: 56 of 69



CH 78 Time Interval between hops

CH 78 Transmission Time

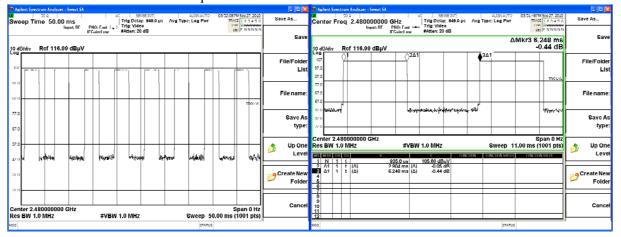

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.



Product : Notebook PC
Test Item : Dwell Time
Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (Channel 00,39,78 –DH5)


Frequency (MHz)	Time slot length (ms)	Hopping of Number	Sweep time (ms)	Duty cycle	Dwell Time (Sec)	Limit (Sec)	Result
2402	2.910	8	50	0.47	0.186	0.4	Pass
2441	2.910	8	50	0.47	0.186	0.4	Pass
2480	2.910	8	50	0.47	0.186	0.4	Pass

Duty cycle =((Time slot length(ms)*Hopping of Number) / Sweep time (ms)

Dwell time = (Duty cycle /79) * (79*0.4)


CH 00 Time Interval between hops

CH 00 Transmission Time

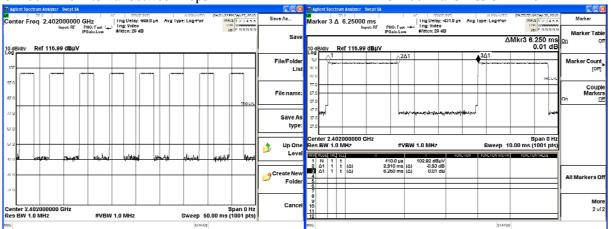

CH39 Time Interval between hops


CH 39Transmission Time

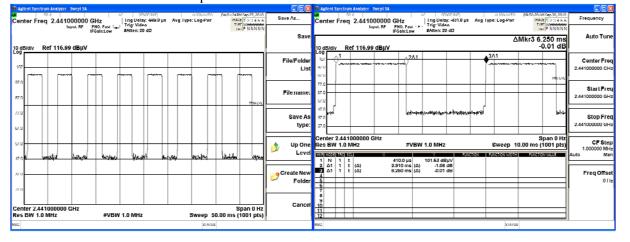



CH 78 Time Interval between hops

CH 78 Transmission Time

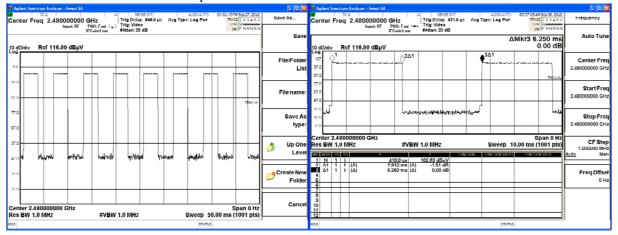

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.



10. Occupied Bandwidth


10.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2010
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2010
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2010

Note: 1. All equipments are calibrated every one year.

2. The test instruments marked by "X" are used to measure the final test results.

10.2. Test Setup



10.3. Limits

N/A

10.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

10.5. Uncertainty

± 150Hz



10.6. Test Result of Occupied Bandwidth

Product : Notebook PC


Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1120		NA

Figure Channel 00:

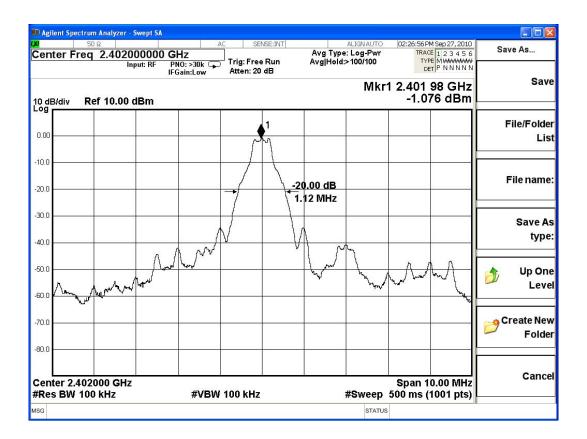




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1120		NA

Figure Channel 39:

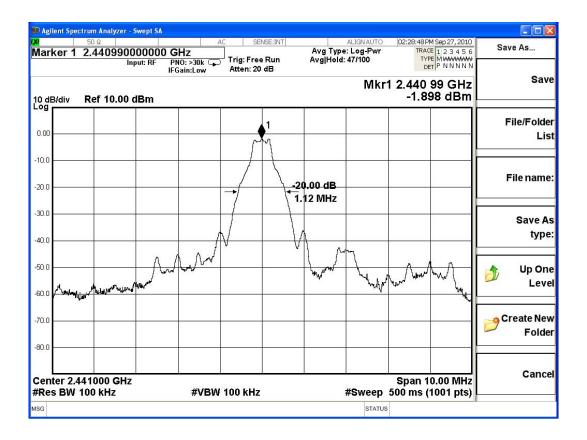




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 1: Transmit - 1Mbps (GFSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1120		NA

Figure Channel 78:

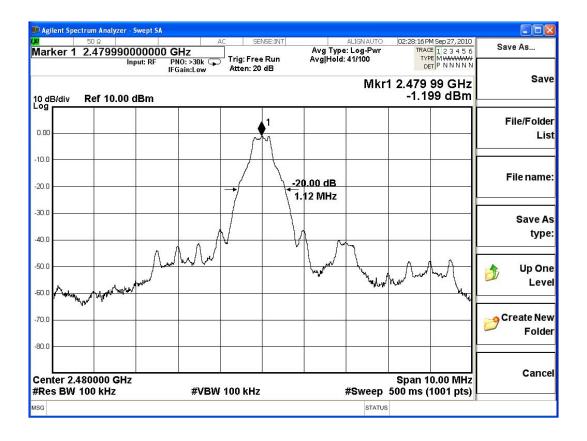




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1370		NA

Figure Channel 00:

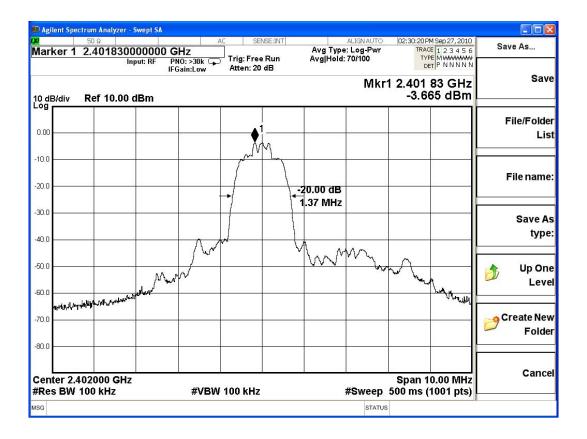




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK) (2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1370		NA

Figure Channel 39:

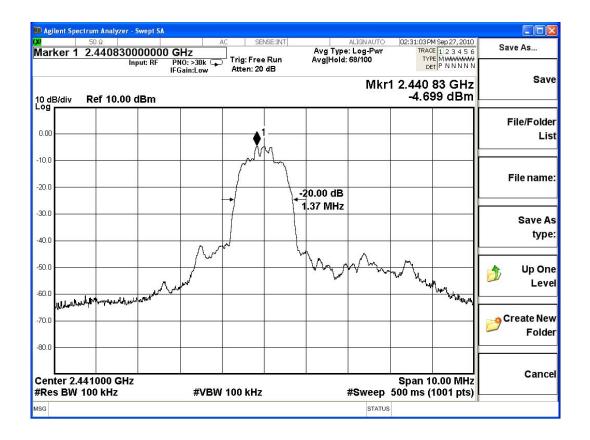




Test Item : Occupied Bandwidth Data

Test Site : No.3 OATS

Test Mode : Mode 2: Transmit - 3Mbps (8DPSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1380		NA

Figure Channel 78:

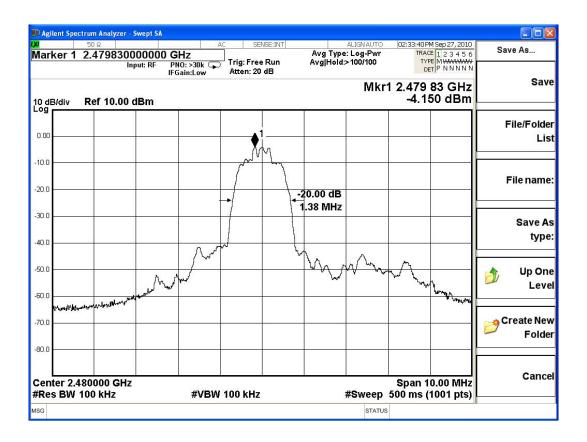



11. EMI Reduction Method During Compliance Testing

No modification was made during testing.



Attachment 1: EUT Test Photographs



Attachment 2: EUT Detailed Photographs