

## WCDMA Band 2

Frequency: 1852.4 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.369$  S/m;  $\epsilon_r = 41.332$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:


- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(8.3, 8.3, 8.3) @ 1852.4 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/WCDMA Band 2/Main Ant/Edge 1/Ch: 9262/0mm/Area Scan (6x8x1):

Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.985 W/kg

### P-Sensor on/Tablet/WCDMA Band 2/Main Ant/Edge 1/Ch: 9262/0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 6.088 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 1.98 W/kg  
**SAR(1 g) = 0.983 W/kg; SAR(10 g) = 0.443 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8 mm  
Ratio of SAR at M2 to SAR at M1 = 50.5%  
Maximum value of SAR (measured) = 1.64 W/kg

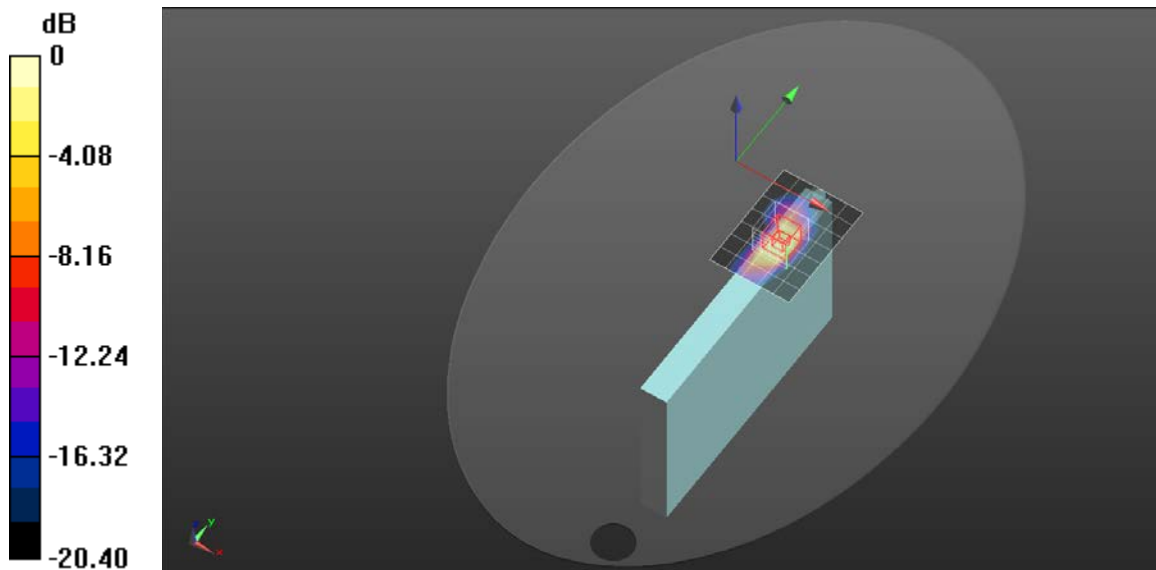

0 dB = 1.64 W/kg = 2.15 dBW/kg

## WCDMA Band 4

Frequency: 1732.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 1733 \text{ MHz}$ ;  $\sigma = 1.316 \text{ S/m}$ ;  $\epsilon_r = 41.868$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(8.67, 8.67, 8.67) @ 1732.6 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/WCDMA Band 4/Main Ant/Edge 1/Ch1413/0mm/Area Scan (6x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.43 W/kg

### P-Sensor on/Tablet/WCDMA Band 4/Main Ant/Edge 1/Ch1413/0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.817 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 2.15 W/kg

**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.453 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 1.77 W/kg

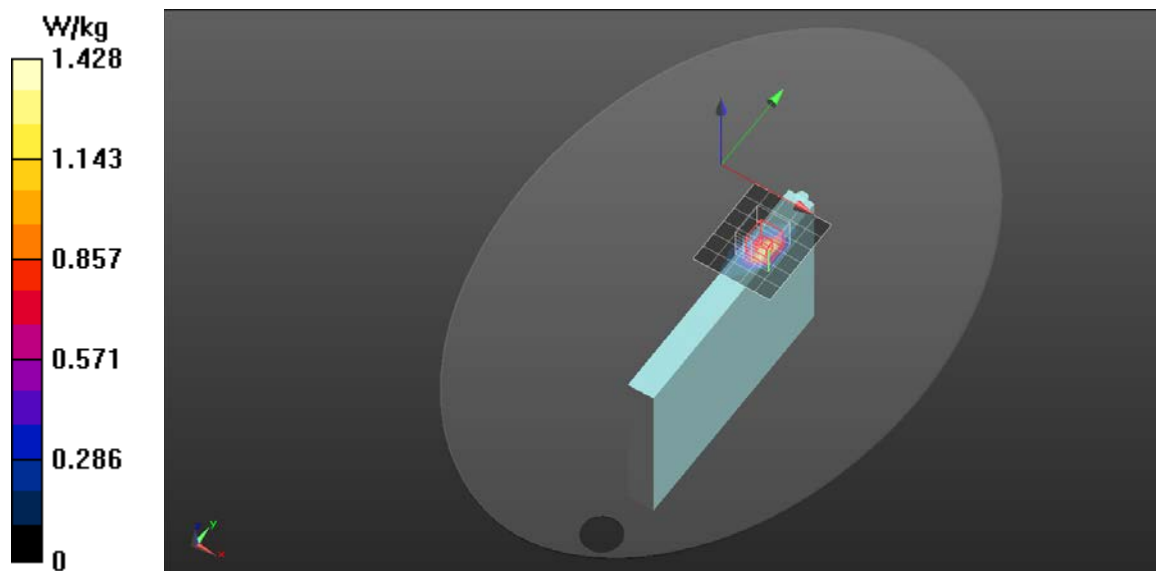

## WCDMA Band 5

Frequency: 836.6 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.908$  S/m;  $\epsilon_r = 42.719$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(10.02, 10.02, 10.02) @ 836.6 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/WCDMA Band 5/Main Ant/Edge 1/Ch4183/0mm/Area Scan (6x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.421 W/kg

### P-Sensor on/Tablet/WCDMA Band 5/Main Ant/Edge 1/Ch4183/0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.44 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.699 W/kg

**SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.160 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 46.6%

Maximum value of SAR (measured) = 0.544 W/kg

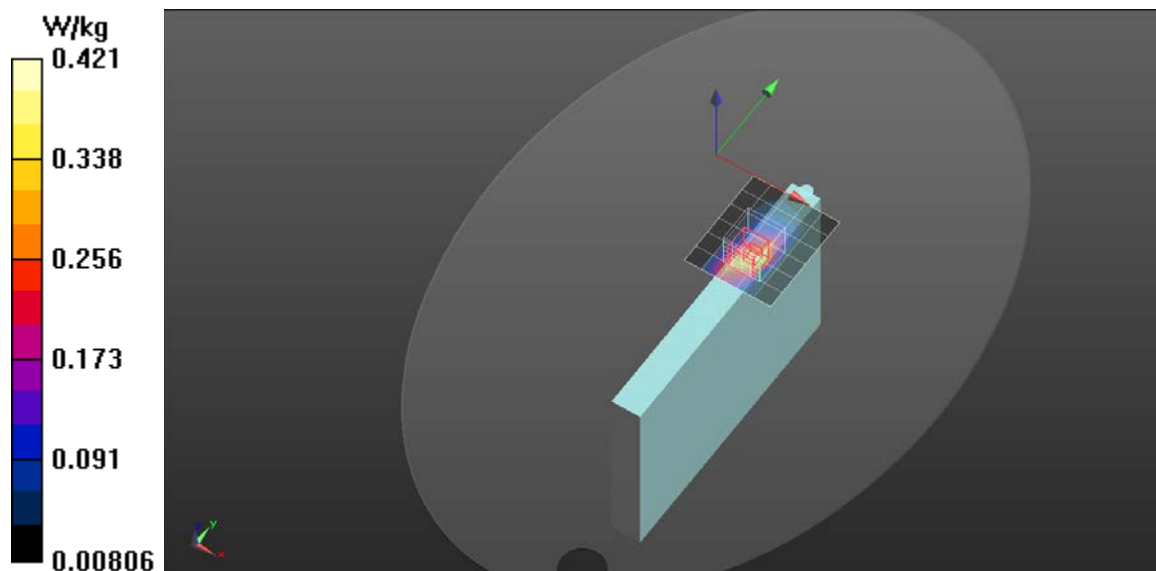

## LTE\_Band 2

Frequency: 1860 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.376$  S/m;  $\epsilon_r = 41.298$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(8.3, 8.3, 8.3) @ 1860 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor On/Tablet/LTE Band 2/Main Ant/Edge 1/Ch18700/RB

**1,0\_0mm/Area Scan (7x9x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.25 W/kg

### P-Sensor On/Tablet/LTE Band 2/Main Ant/Edge 1/Ch18700/RB

**1,0\_0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.258 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.860 W/kg; SAR(10 g) = 0.394 W/kg**

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 50.9%

Maximum value of SAR (measured) = 1.44 W/kg

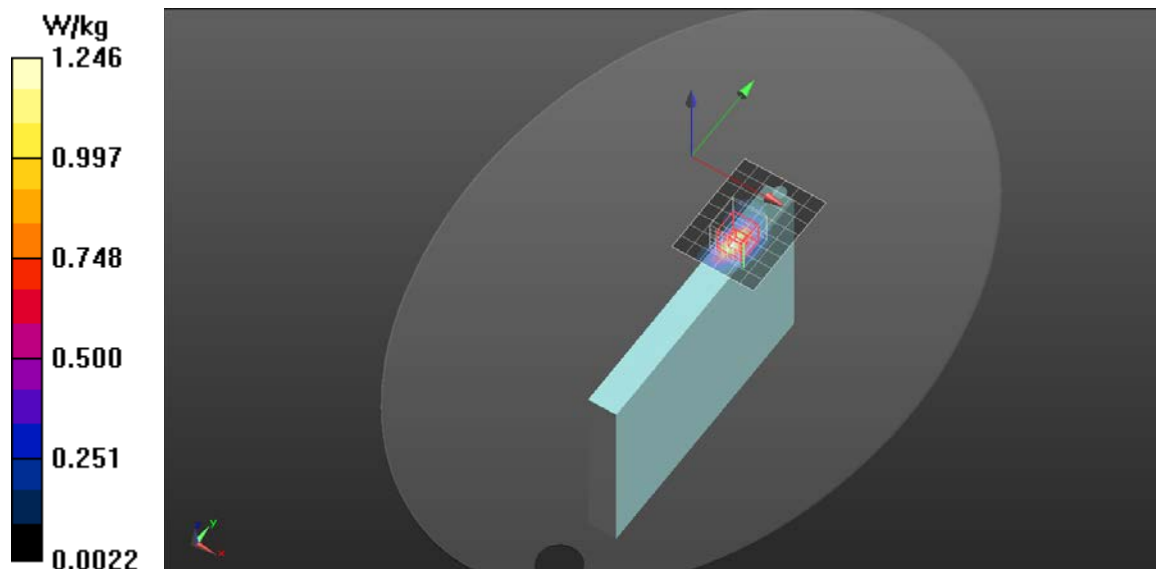

## LTE\_Band 4

Frequency: 1732.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 1733$  MHz;  $\sigma = 1.316$  S/m;  $\epsilon_r = 41.868$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(8.67, 8.67, 8.67) @ 1732.5 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 4/Main Ant/Edge 1/Ch20175/RB1

**99\_0mm/Area Scan (6x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.45 W/kg

### P-Sensor on/Tablet/LTE Band 4/Main Ant/Edge 1/Ch20175/RB1

**99\_0mm/Zoom Scan (5x5x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.780 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.99 W/kg

**SAR(1 g) = 0.976 W/kg; SAR(10 g) = 0.435 W/kg**

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.5%

Maximum value of SAR (measured) = 1.61 W/kg

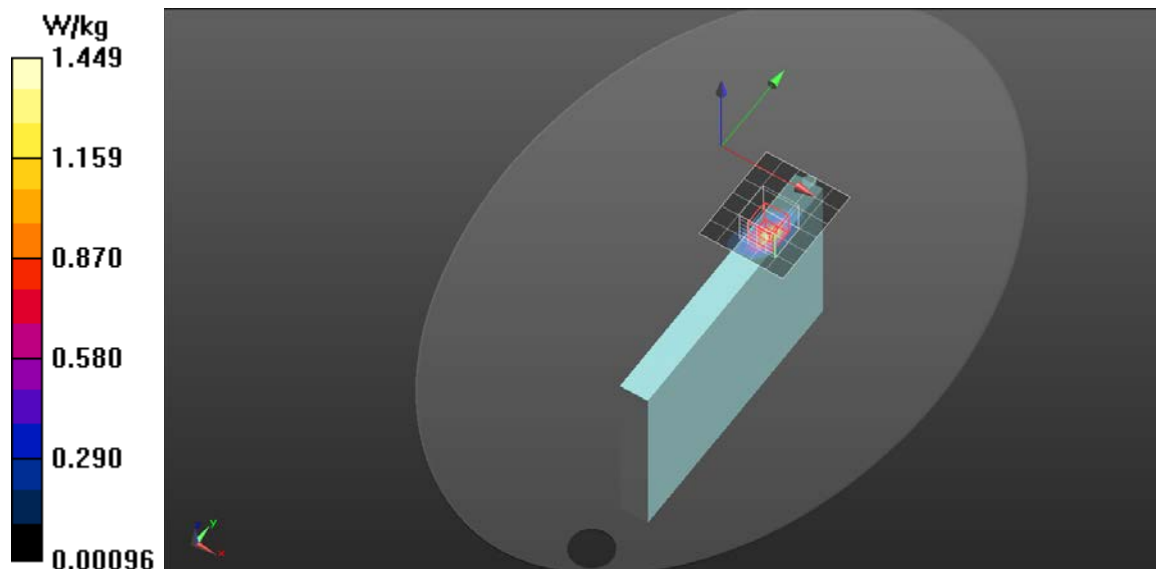

## LTE\_Band 5

Frequency: 836.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
Medium parameters used (interpolated):  $f = 836.5$  MHz;  $\sigma = 0.907$  S/m;  $\epsilon_r = 42.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:


- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(10.02, 10.02, 10.02) @ 836.5 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 5/Main Ant/Edge 1/Ch20525/RB 1 0\_0mm/Area Scan (7x9x1):

Measurement grid:  $dx=15$ mm,  $dy=15$ mm  
Maximum value of SAR (measured) = 0.496 W/kg

### P-Sensor on/Tablet/LTE Band 5/Main Ant/Edge 1/Ch20525/RB 1 0\_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 11.12 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.637 W/kg  
**SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.142 W/kg**  
Smallest distance from peaks to all points 3 dB below = 8 mm  
Ratio of SAR at M2 to SAR at M1 = 46.2%  
Maximum value of SAR (measured) = 0.501 W/kg

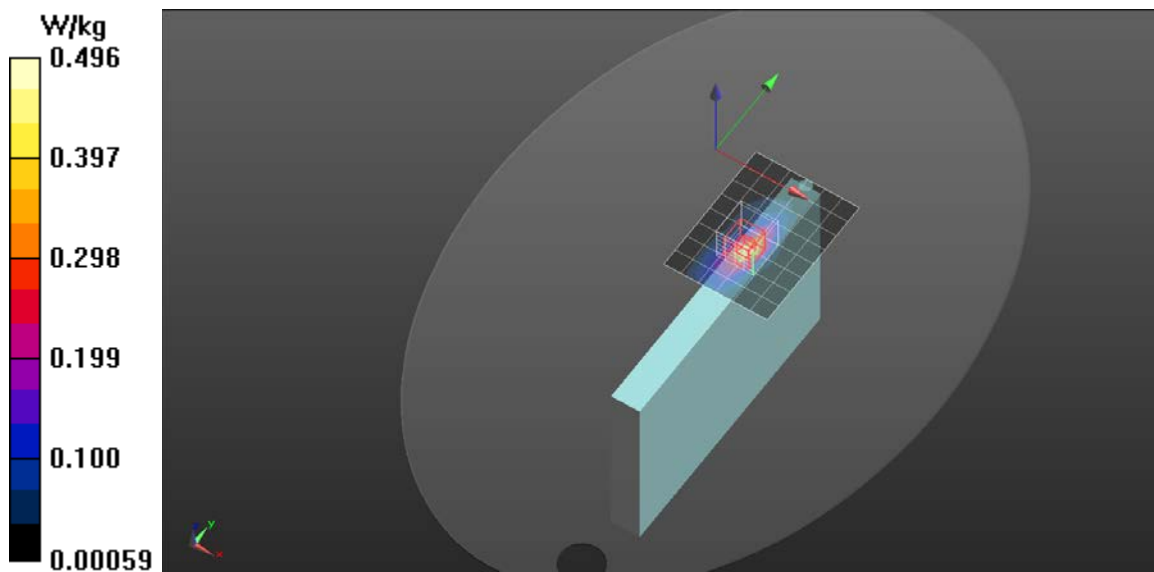

## LTE\_Band 7

Frequency: 2510 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.918$  S/m;  $\epsilon_r = 37.41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.49, 7.49, 7.49) @ 2510 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 7/Main Ant/Edge 1/Ch20850/RB1

**0\_0mm/Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.01 W/kg

### P-Sensor on/Tablet/LTE Band 7/Main Ant/Edge 1/Ch20850/RB1

**0\_0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.8160 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.97 W/kg

**SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.360 W/kg**

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 1.54 W/kg

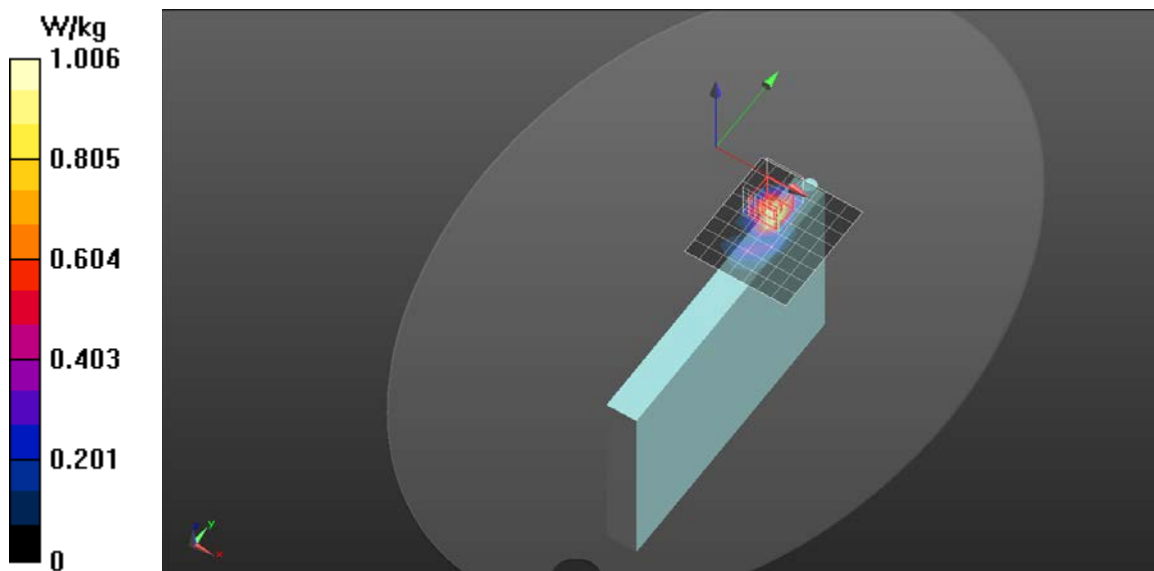

## LTE\_Band 12

Frequency: 707.5 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.852$  S/m;  $\epsilon_r = 42.986$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39) @ 707.5 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 12/Main Ant/Edge 1/Ch23095/RB

**1,0\_0mm/Area Scan (6x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 W/kg

### P-Sensor on/Tablet/LTE Band 12/Main Ant/Edge 1/Ch23095/RB

**1,0\_0mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.127 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.206 W/kg

**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.049 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.159 W/kg

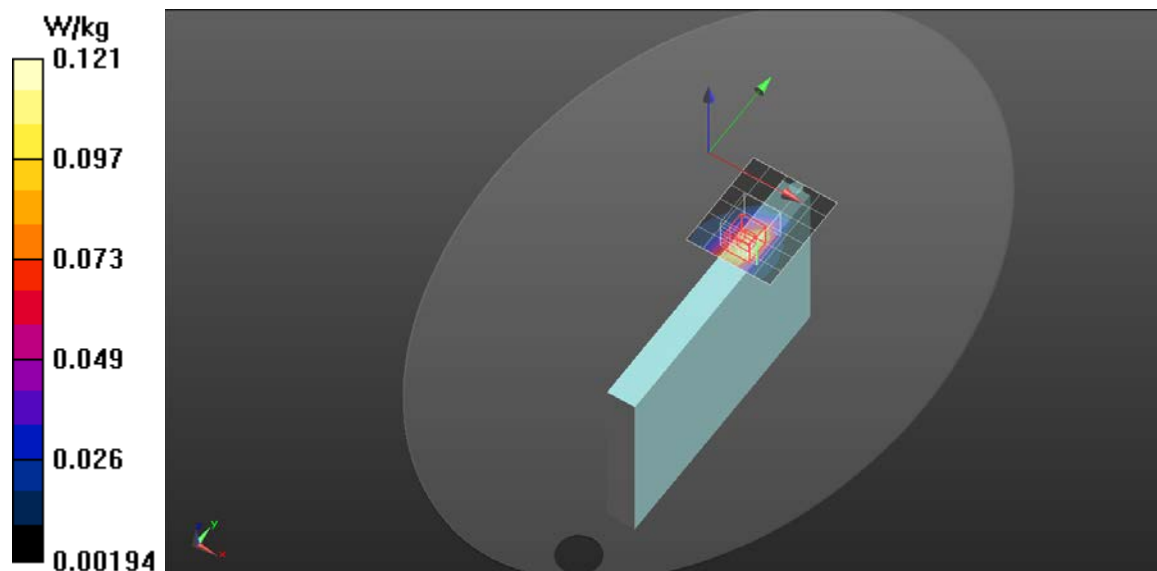



## LTE\_Band 13

Frequency: 782 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.929 \text{ S/m}$ ;  $\epsilon_r = 41.983$ ;  $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39) @ 782 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 13/Main Ant/Edge 1/Ch23230/RB 1,0\_0mm/Area Scan (6x7x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.431 W/kg

### P-Sensor on/Tablet/LTE Band 13/Main Ant/Edge 1/Ch23230/RB 1,0\_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.98 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.771 W/kg

**SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.201 W/kg**

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 0.607 W/kg

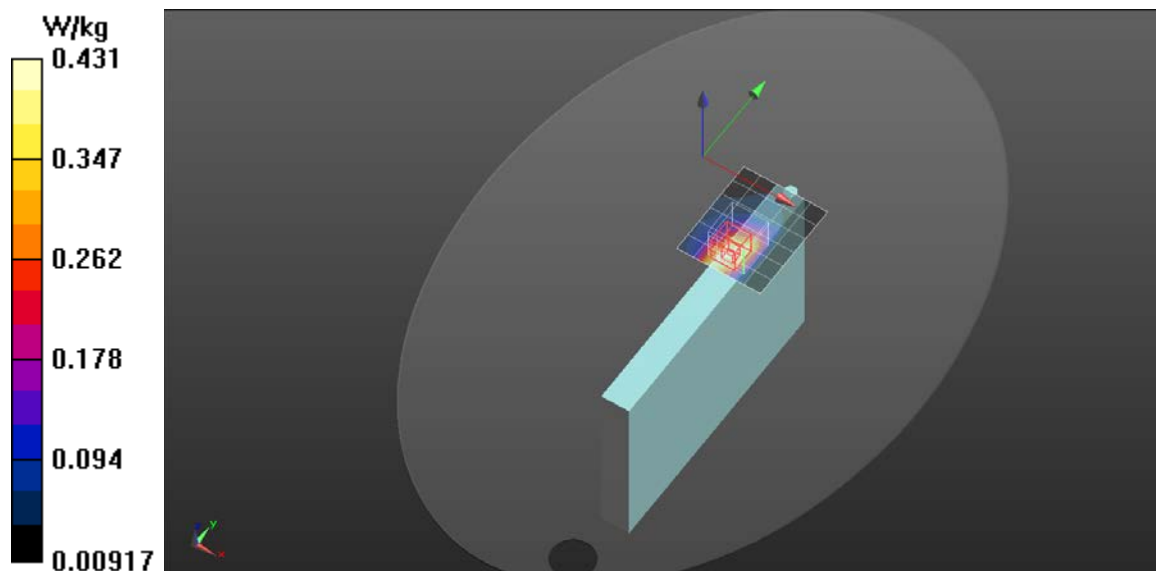

## LTE\_Band 14

Frequency: 793 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 793$  MHz;  $\sigma = 0.938$  S/m;  $\epsilon_r = 41.782$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(10.39, 10.39, 10.39) @ 793 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 14/Main Ant/Edge 1/Ch23330/RB

**1,0\_0mm/Area Scan (6x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.497 W/kg

### P-Sensor on/Tablet/LTE Band 14/Main Ant/Edge 1/Ch23330/RB

**1,0\_0mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.46 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.859 W/kg

**SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.197 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 0.642 W/kg

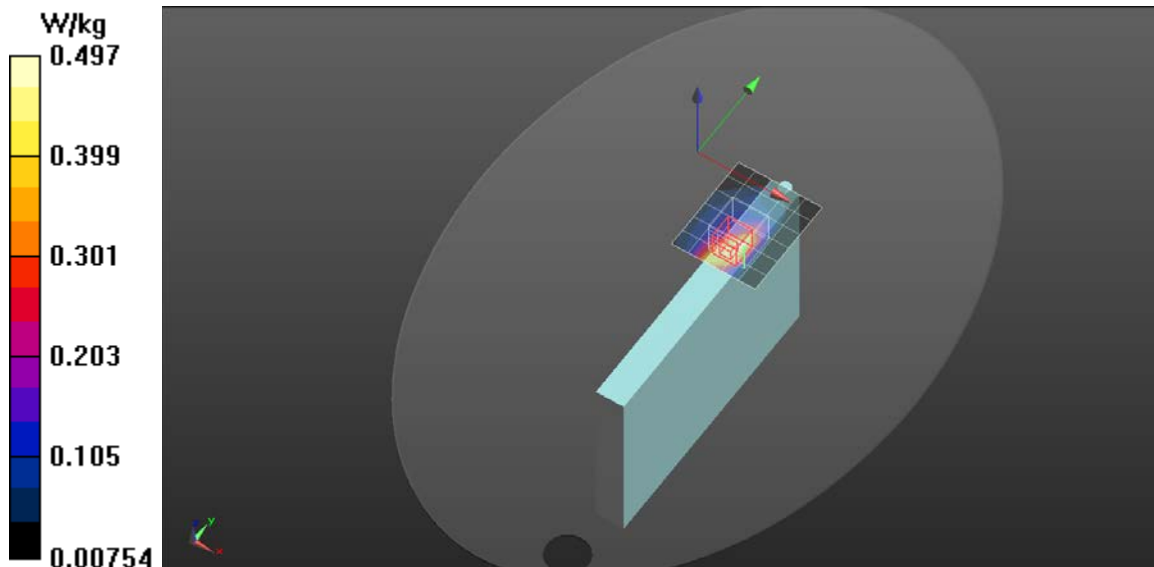

## LTE\_Band 26

Frequency: 831 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 831$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 42.778$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(10.02, 10.02, 10.02) @ 831 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 26/Main Ant/Edge 1/Ch26865/RB1

**0\_0mm/Area Scan (6x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.358 W/kg

### P-Sensor on/Tablet/LTE Band 26/Main Ant/Edge 1/Ch26865/RB1

**0\_0mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.36 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.757 W/kg

**SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.166 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 45.2%

Maximum value of SAR (measured) = 0.590 W/kg

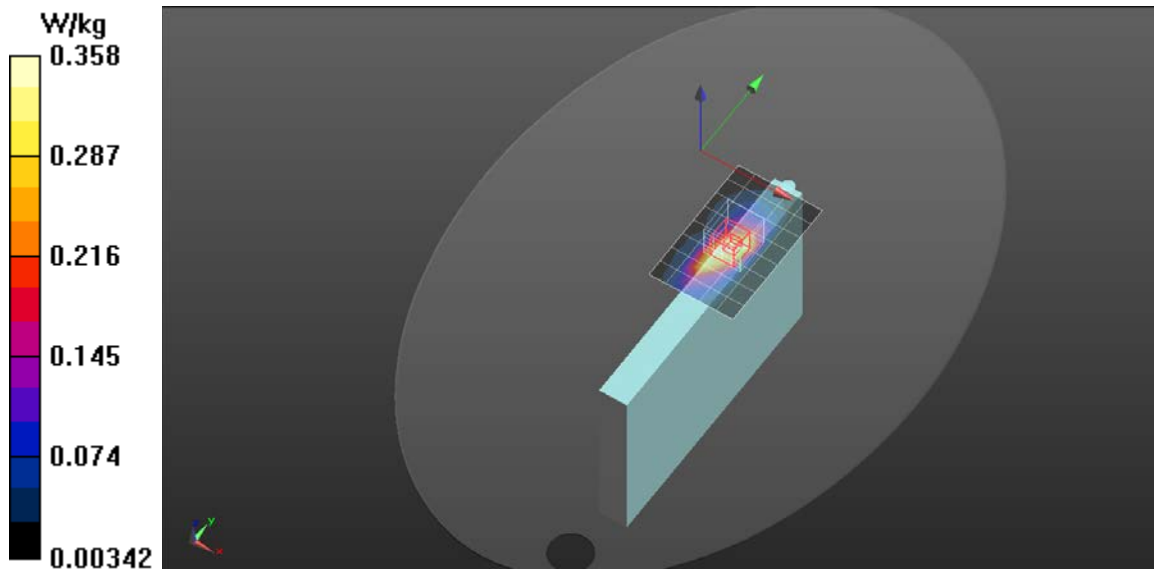

## LTE\_Band 30

Frequency: 2310 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 2310$  MHz;  $\sigma = 1.691$  S/m;  $\epsilon_r = 40.74$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.93, 7.93, 7.93) @ 2310 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 30/Main Ant/Edge 1/Ch27710/RB1 0\_0mm 2/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.19 W/kg

### P-Sensor on/Tablet/LTE Band 30/Main Ant/Edge 1/Ch27710/RB1 0\_0mm 2/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.16 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 1.66 W/kg

**SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.345 W/kg**

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 1.25 W/kg

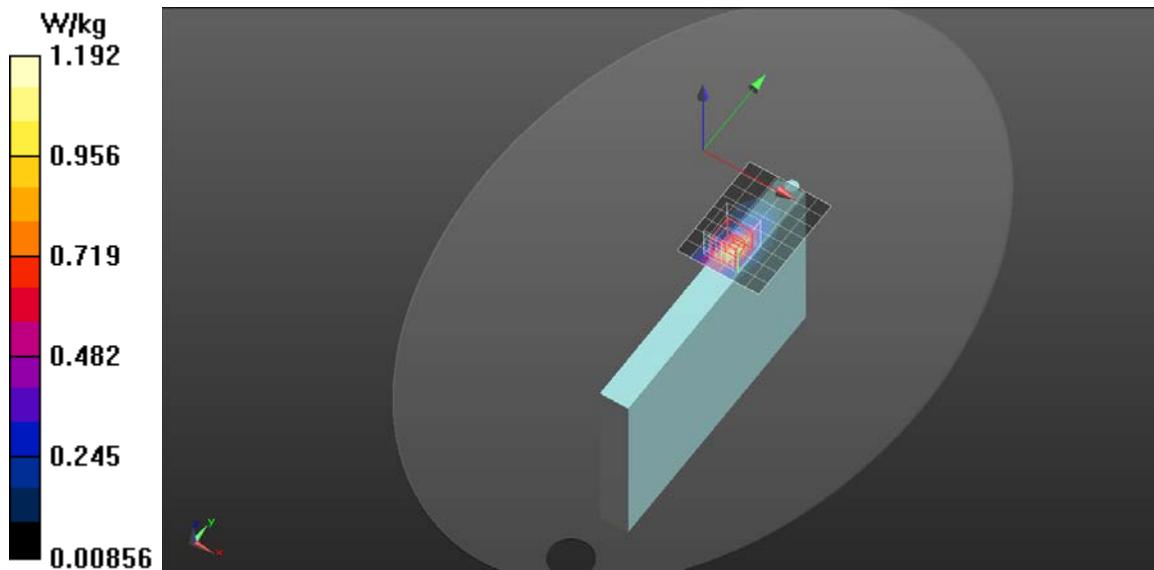

## LTE\_Band 41

Frequency: 2593 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 2.006$  S/m;  $\epsilon_r = 37.084$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(7.49, 7.49, 7.49) @ 2593 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 41/Main Ant/Edge 1/Ch40620/RB1

**0\_0mm/Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.215 W/kg

### P-Sensor on/Tablet/LTE Band 41/Main Ant/Edge 1/Ch40620/RB1

**0\_0mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.550 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.526 W/kg

**SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.084 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 41.4%

Maximum value of SAR (measured) = 0.286 W/kg

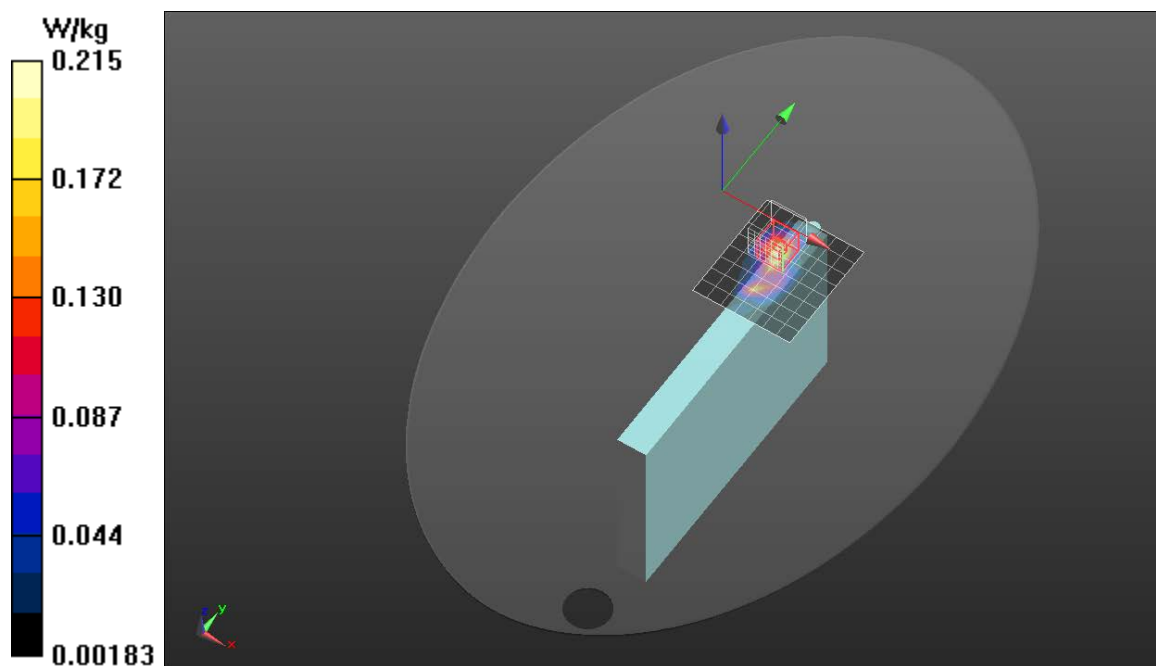

## LTE\_Band 66

Frequency: 1770 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C

Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 41.605$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE4 Sn1486; Calibrated: 2022/5/31
- Probe: EX3DV4 - SN7369; ConvF(8.67, 8.67, 8.67) @ 1770 MHz; Calibrated: 2022/5/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 AA; Serial: 1240

### P-Sensor on/Tablet/LTE Band 66/Main Ant/Edge 1/Ch132572/RB1 0\_0mm/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.46 W/kg

### P-Sensor on/Tablet/LTE Band 66/Main Ant/Edge 1/Ch132572/RB1 0\_0mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.335 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.403 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 1.48 W/kg

