



EMI TEST REPORT
(Class B Digital Device)

JQA APPLICATION NO. : 400-40296
Model No. : CMP-10BT
Type of Equipment : Mobile Thermal Printer
Regulations Applied : CFR 47 FCC Rules and Regulations Part 15
FCC ID : FNECMP-10BT
Applicant : Japan CBM Corporation
Address : 5-68-10, Nakano, Nakano-ku, Tokyo, 164-0001 Japan
Manufacturer : COSTECH Inc
Address : FL1 702-1, Ih-dong, Sangrog-gu, Ansan-city,
Gyunggi-do, Korea
Received date of EUT : July 9, 2004
Final Judgment : Passed

Test results in this report are obtained in use of equipment that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.

This test results only respond to the tested sample.
This report should not be reproduced except in full, without the written approval of JQA EMC Engineering Dept. Testing Div.

This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



TABLE OF CONTENTS

	Page
1 Documentation	
1.1 Test Regulation	<u>3</u>
1.2 General Information	<u>3 - 4</u>
1.3 Test Condition	<u>4 - 6</u>
1.4 EUT Modifications / Deviation from Standard	<u>7</u>
1.5 Test results / Uncertainty	<u>8</u>
1.6 Summary	<u>9</u>
1.7 Responsible Party	<u>10</u>
1.8 Test Configuration / Operation of EUT	<u>11</u>
1.9 EUT Arrangement (Drawings)	<u>12</u>
1.10 Preliminary Test and Test-setup (Drawings)	<u>13 - 15</u>
1.11 EUT Arrangement (Photographs)	<u>16 - 19</u>
2 Test Data	
2.1 Section 15.107 (a) AC Powerline Conducted Emissions Measurements	<u>20 - 21</u>
2.2 Section 15.109 (a) Radiated Emissions Measurements(30 MHz - 1000 MHz)	<u>22 - 25</u>
2.3 Section 15.109 (a) Radiated Emissions Measurements(Above 1 GHz)	<u>26 - 29</u>
Appendix	
Test Instruments List	<u>30 - 33</u>

1. DOCUMENTATION

1.1 TEST REGULATION

FCC Rules and Regulations Part 15 Subpart A and B "Class B Digital Device".

Test procedure :

All measurements were performed according to the procedures in ANSI C63.4-2001.

1.2 GENERAL INFORMATION

1.2.1 Test Facility

- 1) Test Facility located at EMC Engineering Dept. Testing Div. :
No.2 and 3 Anechoic Chambers(3 meters Site).
FCC filing No. : 31040/SIT 1300F2
- 2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.
NVLAP Lab Code : 200189-0 (Effective through : June 30, 2005)

1.2.2 Description of the Equipment Under Test (EUT) :

- | | |
|--------------------------------------|--|
| 1) Type of Equipment | : Mobile Thermal Printer |
| 2) Product Type | : Prototype |
| 3) Category | : Class B Digital Device |
| 4) EUT Authorization | : Declaration of Conformity |
| 5) FCC ID | : FNECMP-10BT |
| 6) Trade Name | : - |
| 7) Model No. | : CMP-10BT |
| 8) Fundamental Frequency Generated | : 40.0MHz, 3.6864MHz |
| | /Operated In the EUT 2402-2480MHz (Bluetooth Mode) |
| 9) Highest Frequency Used in the EUT | : 2480MHz (Bluetooth receive frequency) |
| 10) Serial No. | : - |
| 11) Date of Manufacture | : - |
| 12) Power Rating | : 7.4VDC (Li-ion Battery) |
| 13) EUT Grounding | : None |

1.2.3 Definitions for Symbols used in this Test Report :

- x - indicates that the listed condition, standard or equipment is applicable for this report
 - indicates that the listed condition, standard or equipment is not applicable for this report.

1.3 TEST CONDITION**1.3.1 Section 15.107(a) AC Powerline Conducted Emissions Measurements(0.15 MHz - 30 MHz) :**

- x - was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- x - Shielded Enclosure
 - Anechoic Chamber No. 2 (portable Type)

Used test instruments :

Type	Number of test instruments (Refer to Appendix)
Test Receiver	TR01
Spectrum Analyzer	N/A
Cable	CA04
AMN(for EUT)	NE02
AMN(for Peripheral)	N/A
Termination	N/A

1.3.2 Section 15.109(a) Radiated Emissions Measurements(30 MHz - 1000 MHz) :

 x - was performed in the following test site.

 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

 - Anechoic Chamber No. 2 (3 meters)

 x - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : March, 2004

2) Interval : 1 year

Used test instruments :

Type	Number of test instruments (Refer to Appendix)
Test Receiver	TR05
Antenna	AN06, AN08
Cable	CA01
RF Amplifier	N/A

1.3.3 Section 15.109(a) Radiated Emissions Measurements(Above 1000 MHz) :

 x - was performed in the following test site.

 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

 x - Anechoic Chamber No. 2 (3 meters)

 - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : March, 2004

2) Interval : 1 year

Used test instruments :

Type	Number of test instruments (Refer to Appendix)
Test Receiver	TR07
Spectrum Analyzer	N/A
RF Pre-selector	N/A
Cable	CA07, CA08
Antenna	AN10
RF Amplifier	AM09

1.5 TEST RESULTS / UNCERTAINTY**Section 15.107(a) AC Powerline Conducted Emissions Measurements****x - Applicable ___ - NOT Applicable****The requirements are****x - PASSED ___ - NOT PASSED**

Min. Limit Margin 14.0 dB at 0.21 MHz

Max. Limit Excess dB at MHz

Uncertainty of Measurement Results +/- 2.4 dB (level of confidence:95%)

Remarks : -**Section 15.109(a) Radiated Emissions Measurements x - Applicable ___ - NOT Applicable****The requirements are****x - PASSED ___ - NOT PASSED****Print Mode**

Min. Limit Margin 4.9 dB at 195.7 MHz

Antenna Height Position 1.7 m

EUT Position (CW) 207 degree

Battery Charge Mode

Min. Limit Margin 9.7 dB at 32.7 MHz

Antenna Height Position 1.0 m

EUT Position (CW) 20 degree

Max. Limit Excess dB at MHz

Antenna Height Position m

EUT Position (CW) degree

Uncertainty of Measurement Results

Biconical Antenna +/- 3.8 dB (level of confidence:95%)

Log-Periodic Antenna +/- 4.7 dB (level of confidence:95%)

Remarks : -

1.6 SUMMARY**General Remarks :**

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart A and B under the test configuration, as shown in clause 1.7 to 1.10.

The conclusion for the test items of which are required by the applied regulation is indicated under the final judgment.

Final Judgment :

The "as received" sample ;

 x - fulfill the test requirements of the regulation mentioned on clause 1.1.

 — - fulfill the test requirements of the regulation mentioned on clause 1.1. but with certain qualifications.

 — - doesn't fulfill the test regulation mentioned on clause 1.1.

Begin of testing : July 10, 2004

End of testing : July 10, 2004

- JAPAN QUALITY ASSURANCE ORGANIZATION -

Tested by:



Masanori Takahashi
Deputy Manager
JQA EMC Engineering Dept.

Approved by:



Masaaki Takahashi
Senior Manager
JQA EMC Engineering Dept.

Issued by:



Masanori Takahashi
Deputy Manager
JQA EMC Engineering Dept.



1.7 RESPONSIBLE PARTY

RESPONSIBLE PARTY (FCC Part 2 §2.909)

Responsible Party of Test Item(Product) _____

Responsible Party : _____

Contact Person : _____

() Signatory

Date : _____

1.8 TEST CONFIGURATION / OPERATION OF EUT

1.8.1 Test Configuration

The equipment under test (EUT) consists of :

Symbol	Item	Manufacturer	Model No.	FCC ID	Serial No.
A	Mobile Thermal Printer	COSTECH Inc	CMP-10BT	FNECMP-10BT	-

The measurement was carried out with the following support equipment connected :

Symbol	Item	Manufacturer	Model No.	FCC ID	Serial No.
B(*1)	Personal Computer	IBM	TYPE 2626	N/A(DoC)	AA FL3FP
C(*1)	AC Adaptor	IBM	02K6547	N/A	1Z17W952/VT
D(*1)	Printer	Hewlett Packard	C6410A	N/A(DoC)	SG8B01X0FC
E(*1)	AC Adaptor	Hewlett Packard	C4557	N/A	C8K26B
G(*1)	Mouse	ELECOM	M-N2URGY	N/A	40101714
F(*2)	AC Adaptor	Japan CBM Corporation	10AD-JU	N/A	-

Note : 1. These equipment were used test configuration 1.
 2. This equipment was used test configuration 2.

Type of Cable :

Symbol	Description	Identification (Manufacturer etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	CRT Cable	-	YES	YES	YES	1.5
2	RS-232C Cable	-	YES	YES	NO	1.8
3	Mouse Cable	-	YES	YES	NO	1.8
4	Printer Cable	-	YES	YES	NO	1.5
5	DC Power Cable(for PC)	-	NO	NO	YES	1.8
6	AC Power Cable(for PC)	-	NO	NO	NO	1.0
7	DC Power Cable(for Printer)	-	NO	NO	YES	2.0
8	AC Power Cable(for Printer)	-	NO	NO	NO	1.8
9	AC Power Cable(for EUT)	-	NO	NO	NO	2.0

1.8.2 Operating Condition

Power supply Voltage :

Test configuration 1 : 7.4VDC (Li-ion Battery)

Test configuration 2 : 120VAC, 60Hz the AC adapter(model:10AD-JU) prepared by applicant


The tests have been carried out the

Test configuration 1 : Print Mode (continuously "H" pattern printing)


Test configuration 2 : Battery charge Mode

1.9 EUT ARRANGEMENT (DRAWINGS)

Test configuration 1

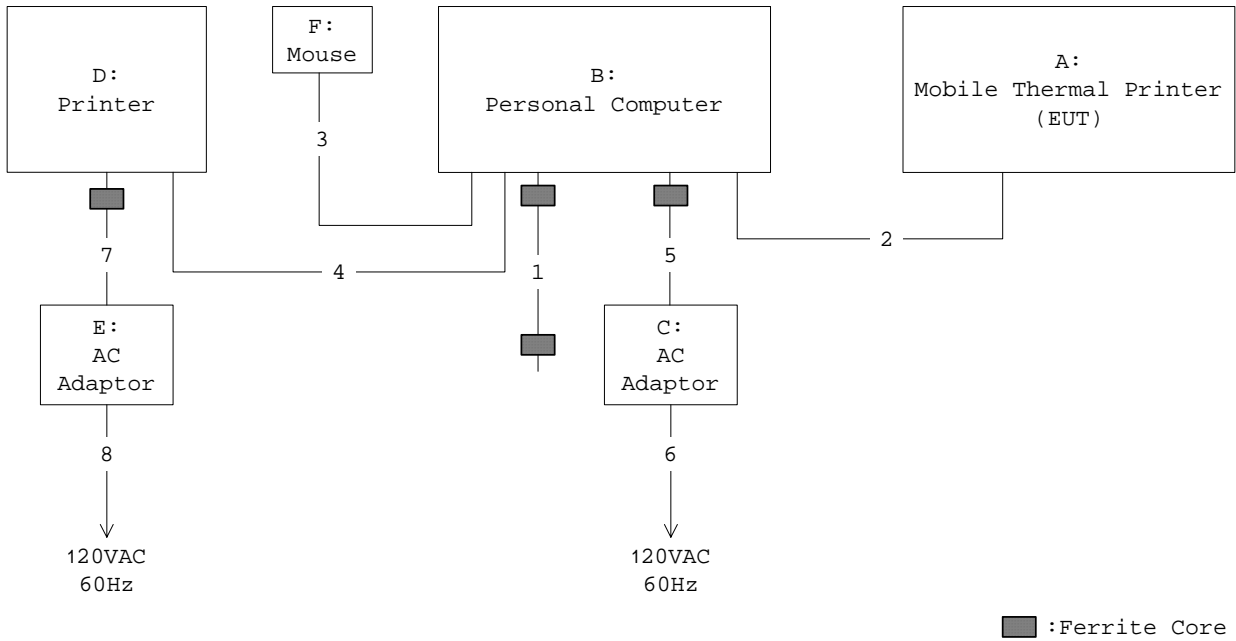

Test configuration 2

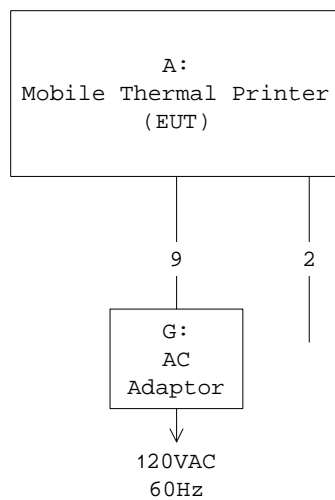

1.10 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)

1.10.1 AC Powerline Conducted Emissions Measurements (150 kHz - 30 MHz)

According to description of ANSI C63.4-2001 sec.7.2.3, the AC power line preliminary conducted emissions measurement were carried out.


The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

These configurations were used for final AC power line conducted emissions measurements.

Shielded Enclosure

- Side View -

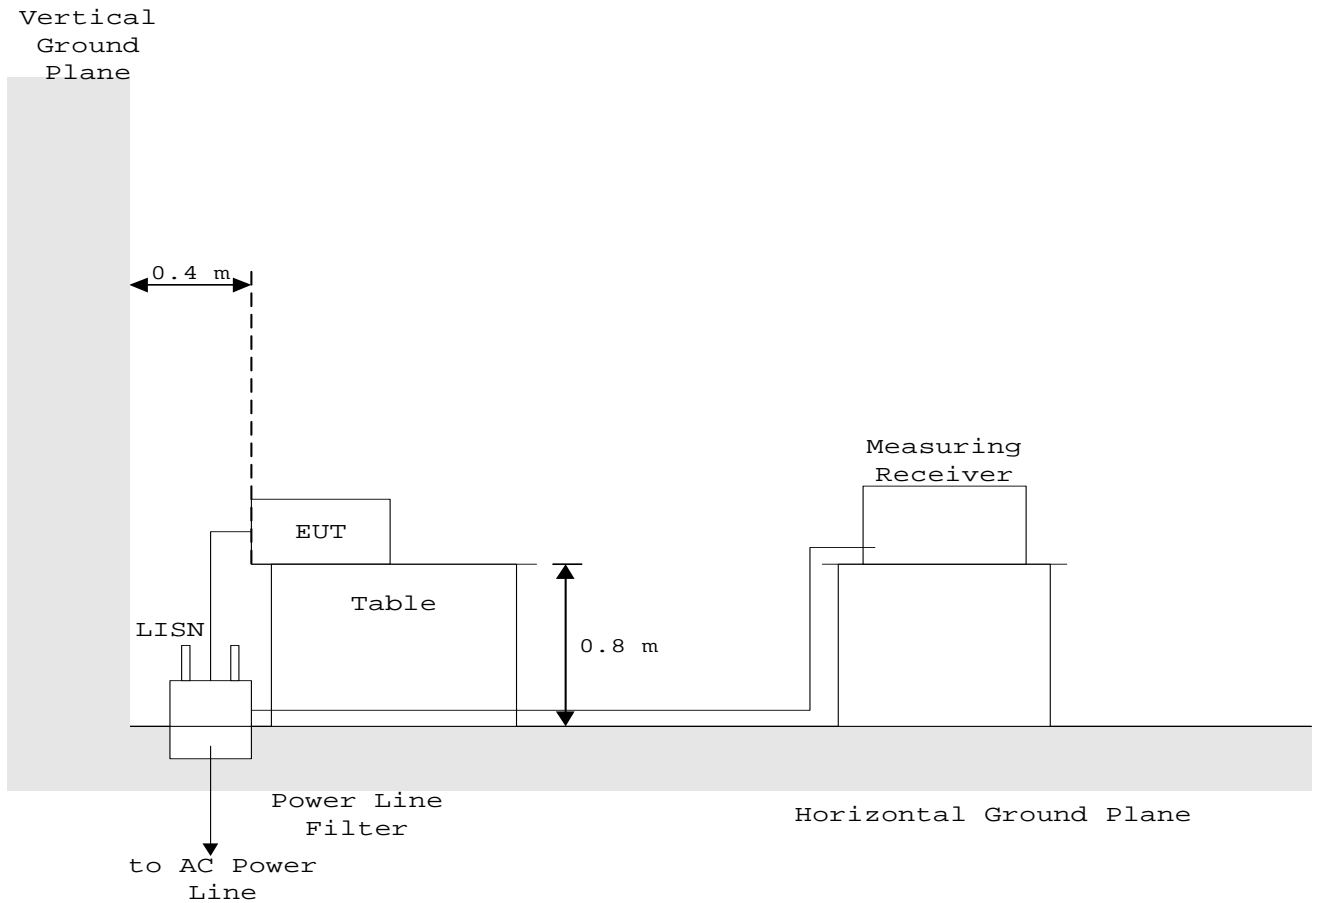


1.10.2 Radiated Emissions Measurements (30 MHz - 1000 MHz)

According to description of ANSI C63.4-2001 sec.8.3.1.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT. The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

Anechoic Chamber

- Side View -

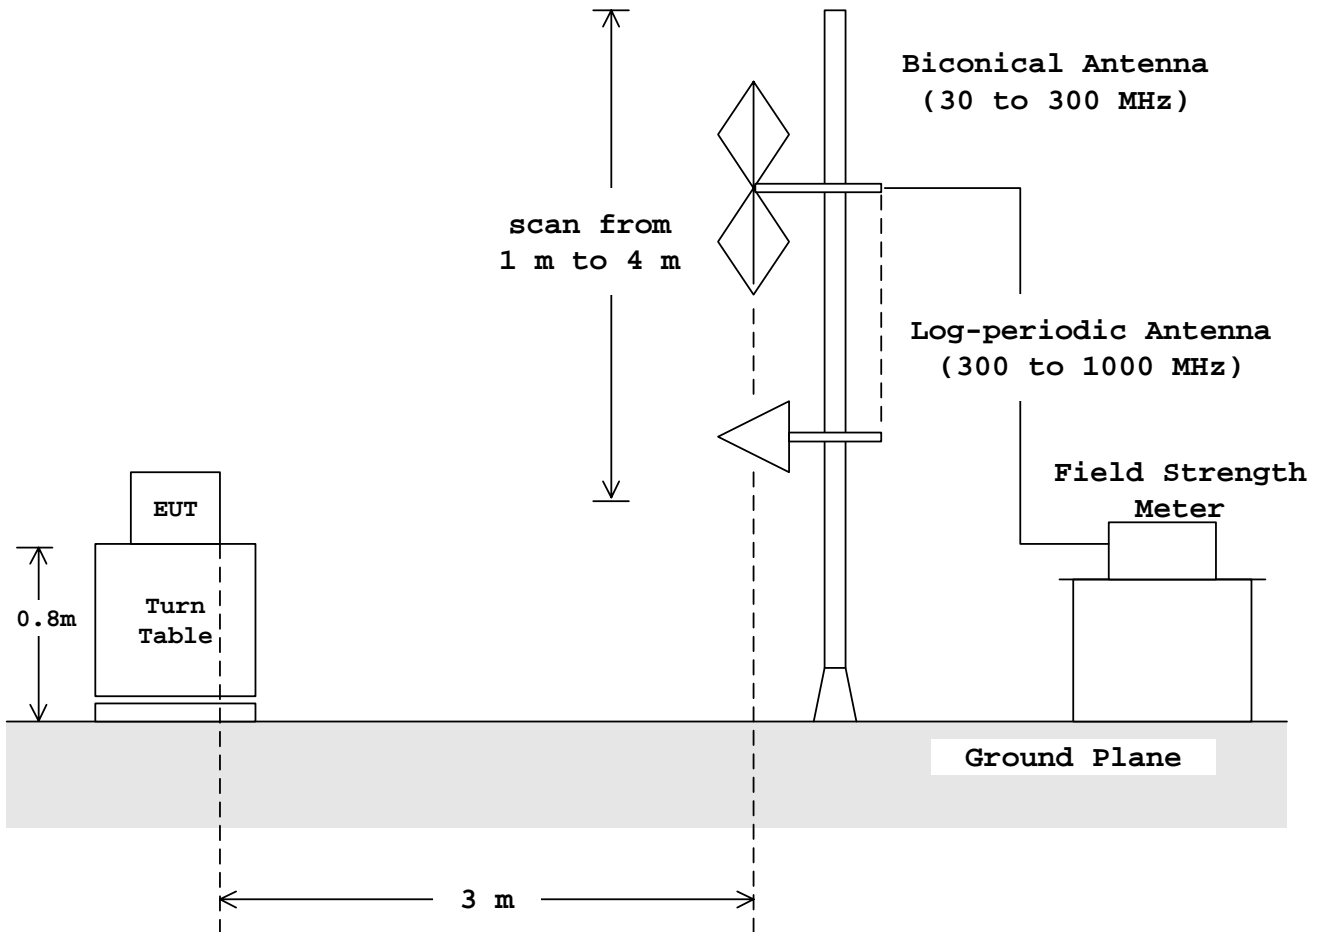


1.10.3 Radiated Emissions Measurements (Above 1 GHz)

According to description of ANSI C63.4-2001 sec.8.3.1.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT. The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

Anechoic Chamber

- Side View -

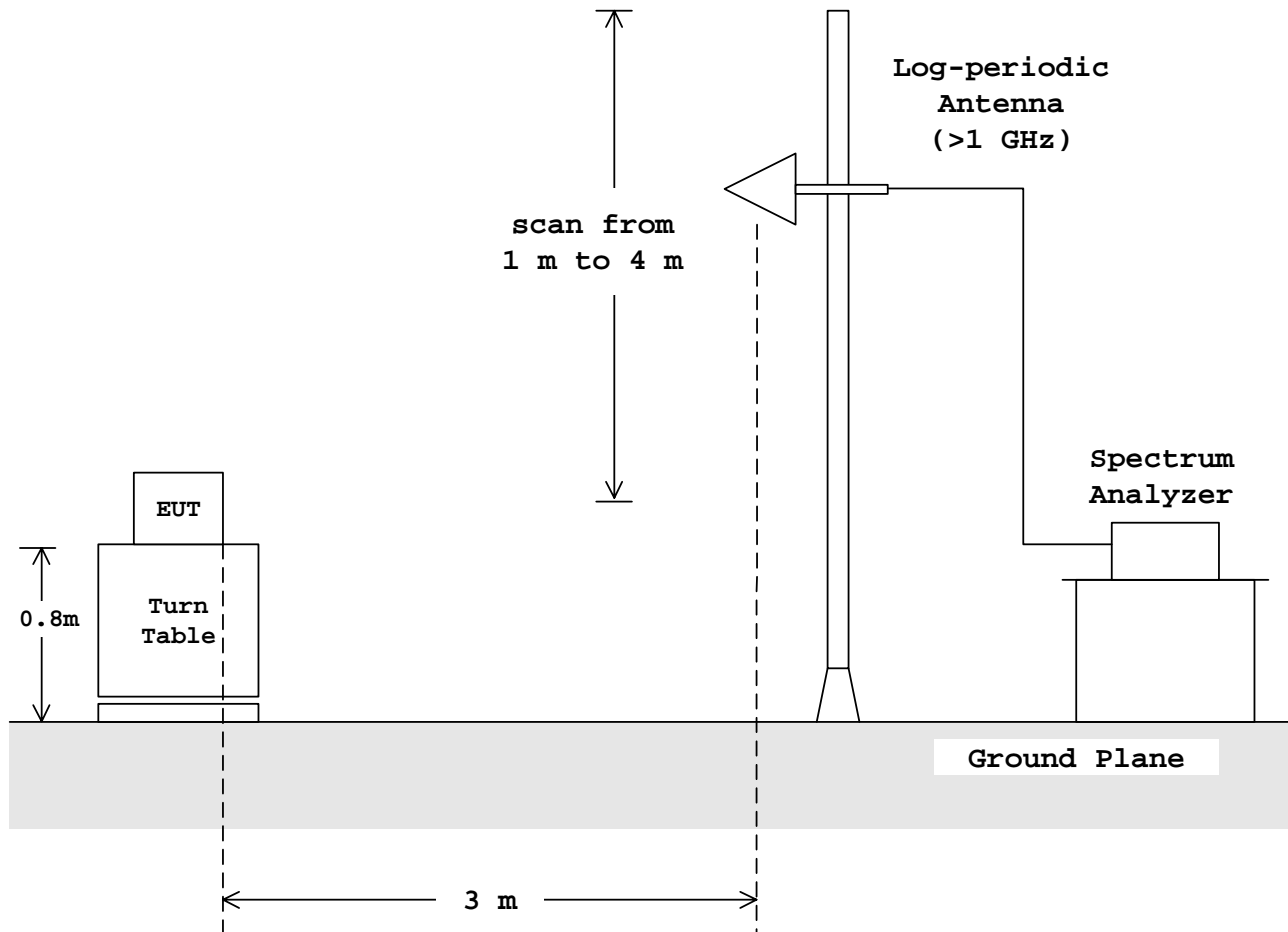

1.11 TEST ARRANGEMENT (PHOTOGRAPHS)**PHOTOGRAPHS OF EUT CONFIGURATION FOR AC POWERLINE CONDUCTED EMISSIONS MEASUREMENTS**

Photograph present configuration with maximum emission

Battery Charge Mode**- Front View -****- Front View for EUT -**

PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENTS

Photograph present configuration with maximum emission

Battery Charge Mode

- Front View -



- Rear View -



PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENTS

Photograph present configuration with maximum emission

Print Mode
- Front View -



PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENTS

Photograph present configuration with maximum emission

Print Mode
- Rear View -



2. TEST DATA

2.1 AC Power-line Conducted Emissions Measurements

Battery Charge Mode

Date July 10, 2004

Temp. 22 °C Humi. 50 %

Frequency (MHz)	LISN Factor (dB)	Meter Reading (dBuV)				Limits (dBuV)		Emission Level (dBuV)		Margins (dB)	
		V-A		V-B		Q.P	AVE	Q.P	AVE	Q.P	AVE
0.15	0.2	43.4	-	43.0	-	66.0	56.0	43.6	-	22.4	-
0.21	0.2	49.0	-	43.0	-	63.2	53.2	49.2	-	14.0	-
0.31	0.2	39.6	-	37.3	-	60.0	50.0	39.8	-	20.2	-
0.52	0.2	21.6	-	27.3	-	56.0	46.0	27.5	-	28.5	-
0.73	0.2	32.9	-	32.6	-	56.0	46.0	33.1	-	22.9	-
1.88	0.2	32.9	-	32.9	-	56.0	46.0	33.1	-	22.9	-
2.93	0.2	38.4	-	38.1	-	56.0	46.0	38.6	-	17.4	-
5.02	0.2	29.0	-	27.9	-	60.0	50.0	29.2	-	30.8	-
7.01	0.2	28.2	-	27.0	-	60.0	50.0	28.4	-	31.6	-
11.07	0.2	24.7	-	23.0	-	60.0	50.0	24.9	-	35.1	-
13.07	0.3	23.2	-	21.6	-	60.0	50.0	23.5	-	36.5	-
15.16	0.3	21.5	-	20.0	-	60.0	50.0	21.8	-	38.2	-
19.42	0.4	26.1	-	24.4	-	60.0	50.0	26.5	-	33.5	-
22.23	0.4	23.1	-	22.6	-	60.0	50.0	23.5	-	36.5	-
25.24	0.5	22.9	-	22.3	-	60.0	50.0	23.4	-	36.6	-
30.00	0.6	< 10.0	-	< 10.0	-	60.0	50.0	< 10.6	-	> 49.4	-

Notes : 1) The spectrum was checked from 0.15 MHz to 30 MHz.

2) The cable loss is included in the LISN factor.

3) The symbol of "<" means "or less".

4) The symbol of ">" means "or greater".

5) The symbol of "-" means "Not applicable".

6) V-A : One end & Ground V-B : The other end & Ground

7) Q.P : Quasi-peak AVE : Average

8) A sample calculation was made at 0.15 (MHz).

$$L_f + M_r = 0.2 + 43.4 = 43.6(\text{dBuV})$$

Lf = LISN Factor


Mr = Meter Reading

Battery Charge Mode

AC Powerline Conducted Emissions Measurements

Model No. : CMP-10BT

Standard	: CFR 47 FCC Rules Part 15	o	Quasi-peak
Category	: Class B	x	Average

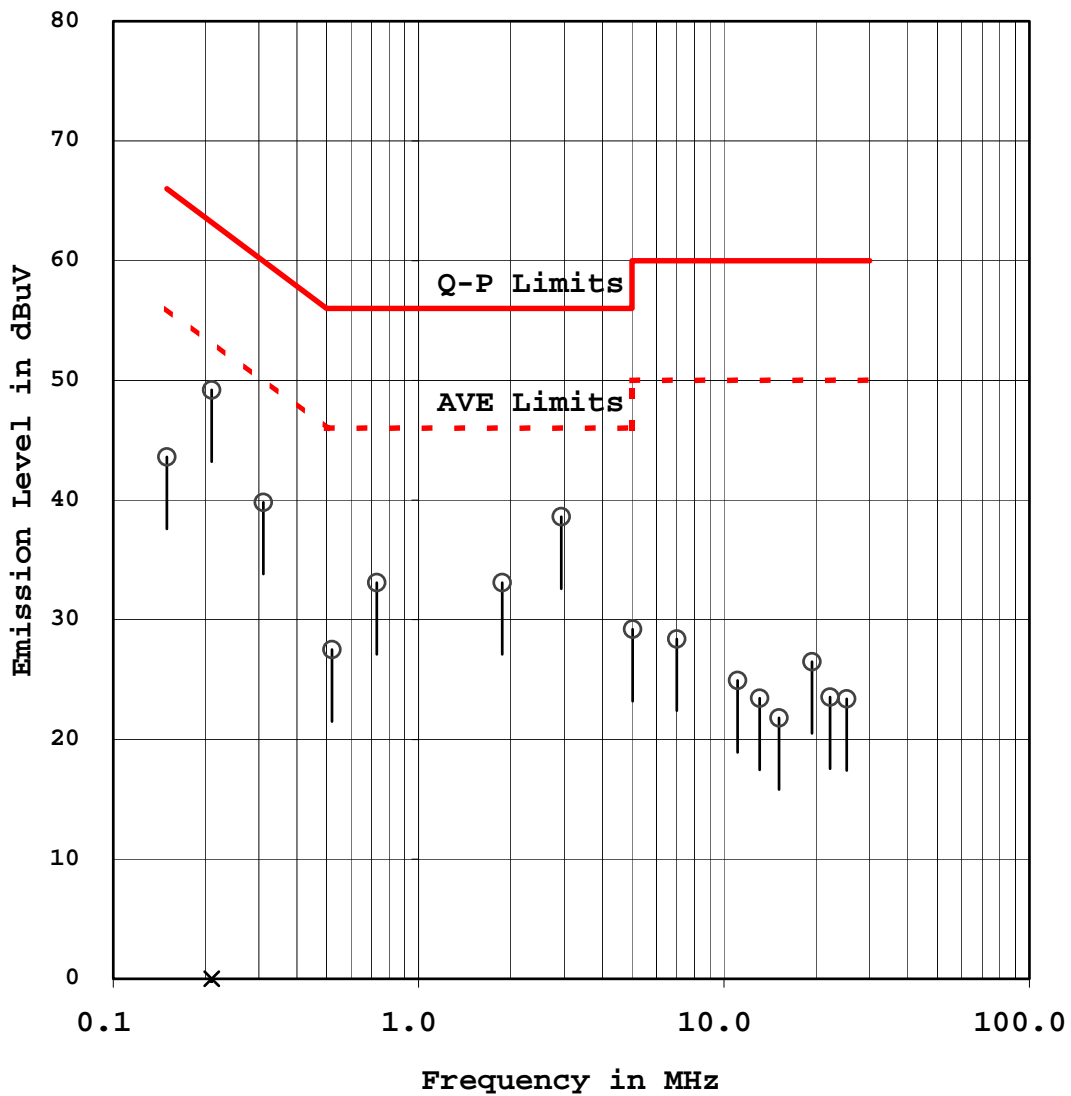

2.2 Radiated Emissions Measurements (30 - 1000MHz)

2.2.1 Print Mode

Date : July 10, 2004

Temp. : 22 °C Humi. : 50 %

Frequency (MHz)	Antenna Factor (dB)	Meter Reading (dBuV)		Limits (dBuV/m)	Emission Levels (dBuV/m)		Margins (dB)	
		Horiz.	Vert.		Horiz.	Vert.	Horiz.	Vert.
32.0	15.2 <	0.0	15.6	40.0	< 15.2	30.8	> 24.8	9.2
48.0	12.3	19.1	21.2	40.0	31.4	33.5	8.6	6.5
66.2	6.7	13.8	19.2	40.0	20.5	25.9	19.5	14.1
96.0	10.5	22.7	22.7	43.5	33.2	33.2	10.4	10.4
120.0	13.6	12.4	18.8	43.5	26.0	32.4	17.5	11.1
195.7	17.8	20.8	16.2	43.5	38.6	34.0	4.9	9.5
198.5	17.9	9.9	12.8	43.5	27.8	30.7	15.7	12.8
231.5	19.0	9.9	5.1	46.0	28.9	24.1	17.1	21.9
297.6	21.6	8.3	6.2	46.0	29.9	27.8	16.1	18.2
391.3	18.9	17.2	21.2	46.0	36.1	40.1	9.9	5.9
456.6	20.4	13.0	21.6	46.0	33.4	42.0	12.6	4.0
639.1	23.8	11.6	12.7	46.0	35.4	36.5	10.6	9.5
896.9	26.8	10.4	7.9	46.0	37.2	34.7	8.8	11.3
992.4	27.9	6.8	10.1	54.0	34.7	38.0	19.4	16.1


- Notes :
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
 - 2) The cable loss is included in the antenna factor.
 - 3) The symbol of "<" means "or less".
 - 4) The symbol of ">" means "or greater".
 - 5) A sample calculation was made at .
 - Af + Mr = 12.3 + 21.2 = 33.5 (dBuV/m)
 - Af = Antenna Factor
 - Mr = Meter Reading

Print Mode

Radiated Emissions Measurements

Model No. : CMP-10BT

Standard : CFR 47 FCC Rules Part 15	O	Horizontal
Category : Class B	X	Vertical

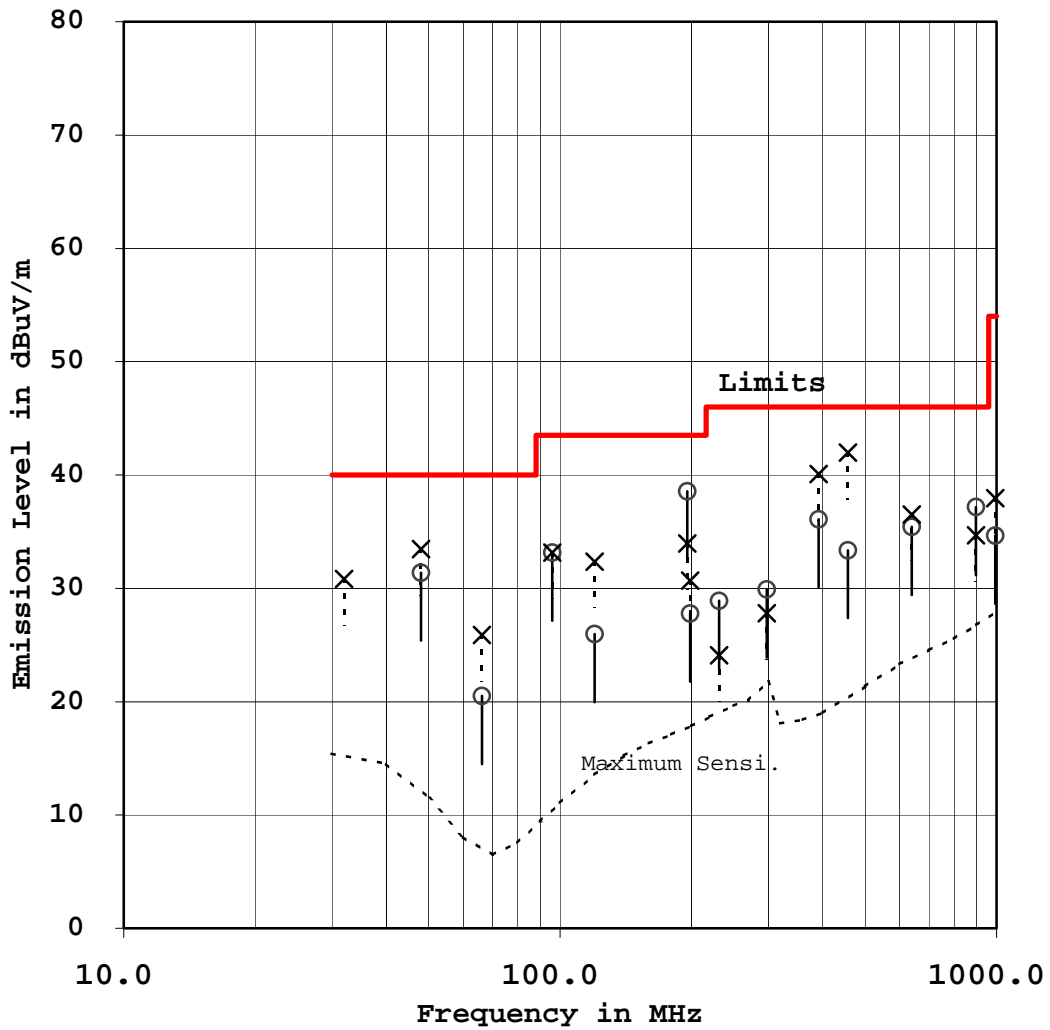

2.2.2 Battery Charge Mode

Date : July 10, 2004

Temp. : 22 °C Humi. : 50 %

Frequency (MHz)	Antenna Factor (dB)	Meter Reading (dBuV)		Limits (dBuV/m)	Emission Levels (dBuV/m)		Margins (dB)	
		Horiz.	Vert.		Horiz.	Vert.	Horiz.	Vert.
32.7	15.2	< 0.0	15.2	40.0	< 15.2	30.4	> 24.9	9.7
42.4	14.0	0.9	11.3	40.0	14.9	25.3	25.1	14.7
64.0	7.1	7.8	12.9	40.0	14.9	20.0	25.1	20.0
87.3	9.0	12.0	17.2	40.0	21.0	26.2	19.0	13.8
112.6	12.8	20.9	20.0	43.5	33.7	32.8	9.8	10.7
146.6	15.7	13.6	11.3	43.5	29.3	27.0	14.2	16.5
282.1	20.6	8.1	5.3	46.0	28.7	25.9	17.3	20.1
300.5	18.2	6.5	4.7	46.0	24.7	22.9	21.3	23.1
364.4	18.4	8.4	7.3	46.0	26.8	25.7	19.2	20.3
400.0	19.0	< 0.0	< 0.0	46.0	< 19.0	< 19.0	> 27.0	> 27.0
600.0	23.3	< 0.0	< 0.0	46.0	< 23.3	< 23.3	> 22.7	> 22.7
800.0	25.6	< 0.0	< 0.0	46.0	< 25.6	< 25.6	> 20.4	> 20.4
1000.0	28.0	< 0.0	< 0.0	54.0	< 28.0	< 28.0	> 26.0	> 26.0


- Notes :
- 1) The spectrum was checked from 30 MHz to 1000 MHz.
 - 2) The cable loss is included in the antenna factor.
 - 3) The symbol of "<" means "or less".
 - 4) The symbol of ">" means "or greater".
 - 5) A sample calculation was made at .
 - Af + Mr = 14 + 11.3 = 25.3 (dBuV/m)
 - Af = Antenna Factor
 - Mr = Meter Reading

Battery Charge Mode

Radiated Emissions Measurements

Model No. : CMP-10BT

Standard	: CFR 47 FCC Rules Part 15	O	Horizontal
Category	: Class B	X	Vertical

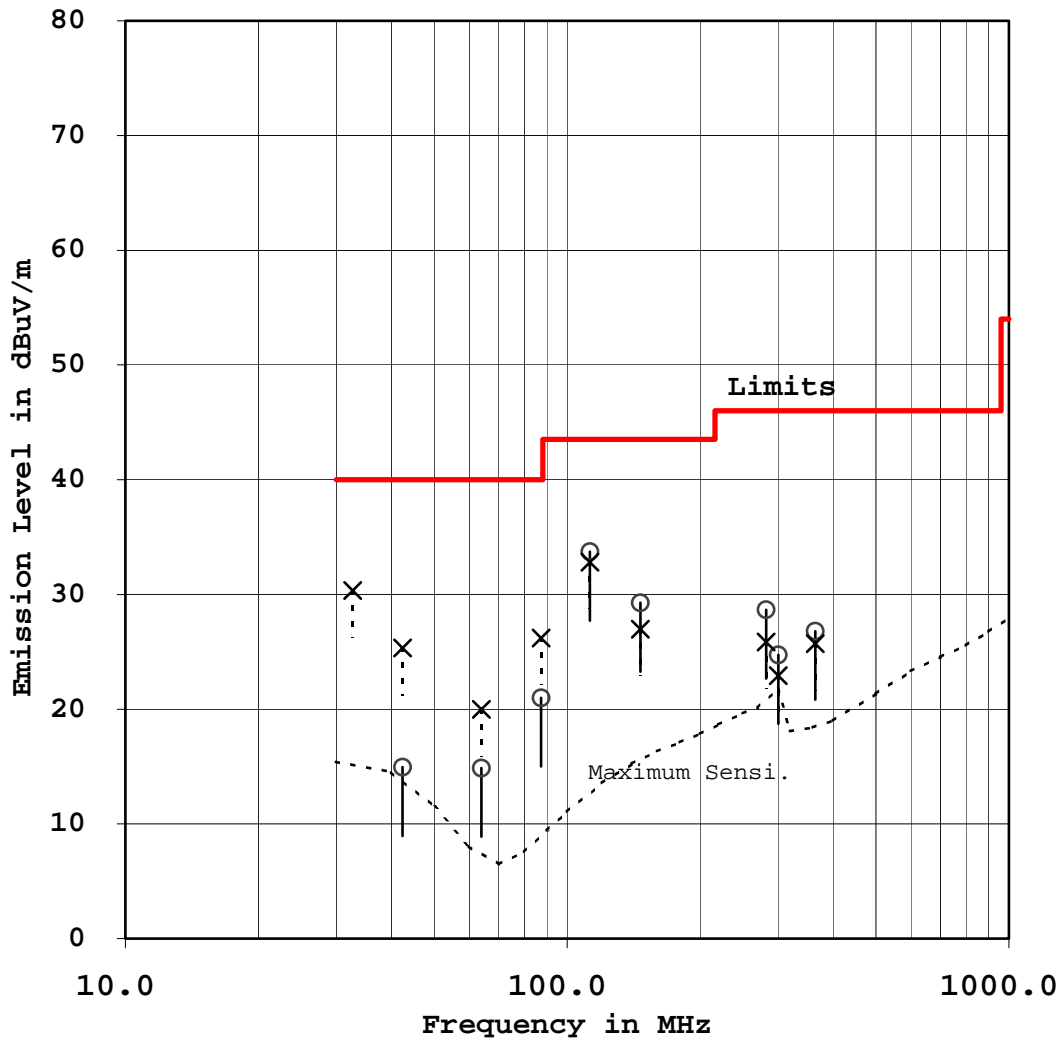

2.3 Radiated Emissions Measurements (above 1 GHz)

2.3.1 Print Mode

Date : July 10, 2004

Temp. : 22 °C Humi. 50 %

Frequency (GHz)	Amp. Gain (dB)	Antenna Factor (dB)	Meter Reading (dBuV)		Limits (dBuV/m)	Emission Levels (dBuV/m)		Margins (dB)	
			Horiz.	Vert.		Horiz.	Vert.	Horiz.	Vert.
1.0944	29.8	23.9	38.5	39.1	54.0	32.6	33.2	21.4	20.8
1.1935	29.8	24.9	31.7	35.8	54.0	26.8	30.9	27.2	23.1
1.4929	29.7	27.4	35.5	38.0	54.0	33.2	35.7	20.8	18.3
5.0000	30.4	39.5	< 28.0	< 28.0	54.0	< 37.1	< 37.1	> 16.9	> 16.9
10.0000	30.0	46.7	< 28.0	< 28.0	54.0	< 44.7	< 44.7	> 9.3	> 9.3
12.5000	30.6	49.2	< 28.0	< 28.0	54.0	< 46.6	< 46.6	> 7.4	> 7.4

- Notes :
- 1) The spectrum was checked from 1.0 GHz to 12.5 GHz.
 - 2) The cable loss is included in the antenna factor.
 - 3) The symbol of "<" means "or less".
 - 4) The symbol of ">" means "or greater".
 - 5) A sample calculation was made at 1.0944 (GHz).

$$A_f + M_r - A_g = 23.9 + 39.1 - 29.8 = 33.2 \text{ (dBuV/m)}$$

A_g = Amp. Gain
 A_f = Antenna Factor
 M_r = Meter Reading
 - 6) Measuring Instrument Setting :


Detector function	: Peak
Resolution Bandwidth	: 1 MHz
Video Bandwidth	: 1 MHz

Print Mode

Radiatrd Emissions Measurements

Model No. : CMP-10BT

Standard	: CFR 47 FCC Rules Part 15	○	Horizontal
Category	: Class B	×	Vertical

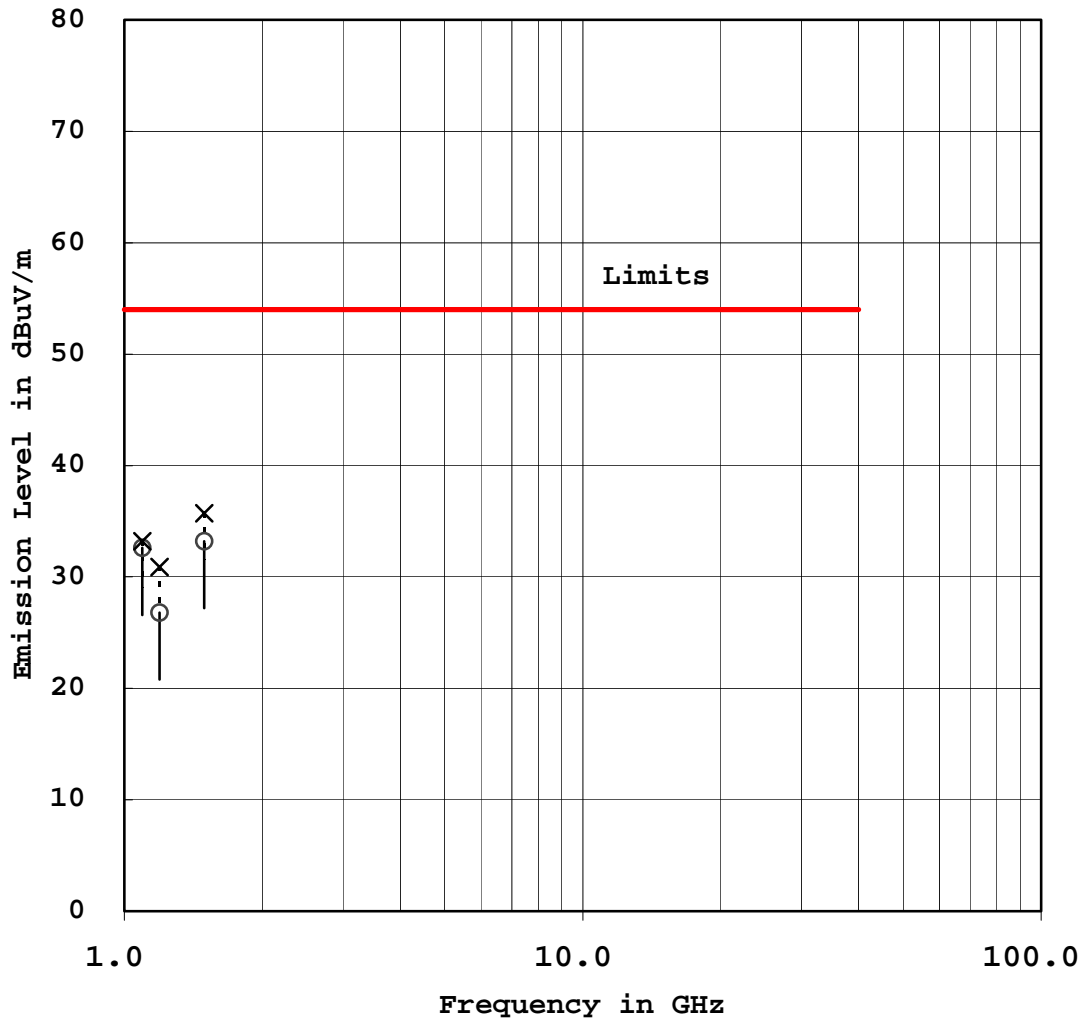

2.3.2 Battery Charge Mode

Date : July 10, 2004

Temp. : 22 °C Humi. 50 %

Frequency (GHz)	Amp. Gain (dB)	Antenna Factor (dB)	Meter Reading (dBuV)		Limits (dBuV/m)	Emission Levels (dBuV/m)		Margins (dB)	
			Horiz.	Vert.		Horiz.	Vert.	Horiz.	Vert.
1.0000	30.0	22.8	< 28.0	< 28.0	54.0	< 20.8	< 20.8	> 33.2	> 33.2
2.0000	29.8	30.2	< 28.0	< 28.0	54.0	< 28.4	< 28.4	> 25.6	> 25.6
3.0000	29.9	34.2	< 28.0	< 28.0	54.0	< 32.3	< 32.3	> 21.7	> 21.7
5.0000	30.4	39.5	< 28.0	< 28.0	54.0	< 37.1	< 37.1	> 16.9	> 16.9
10.0000	30.0	46.7	< 28.0	< 28.0	54.0	< 44.7	< 44.7	> 9.3	> 9.3
12.5000	30.6	49.2	< 28.0	< 28.0	54.0	< 46.6	< 46.6	> 7.4	> 7.4

Notes : 1) The spectrum was checked from 1.0 GHz to 12.5 GHz.

2) The cable loss is included in the antenna factor.

3) The symbol of "<" means "or less".

4) The symbol of ">" means "or greater".

5) A sample calculation was made at 1 (GHz).

$$Af + Mr - Ag = 22.8 + 28 - 30 = 20.8 \text{ (dBuV/m)}$$

Ag = Amp. Gain

Af = Antenna Factor

Mr = Meter Reading

6) Measuring Instrument Setting :

Detector function : Peak

Resolution Bandwidth : 1 MHz


Video Bandwidth : 1 MHz

Battery Charge Mode

Radiatrd Emissions Measurements

Model No. : CMP-10BT

Standard : CFR 47 FCC Rules Part 15	○	Horizontal
Category : Class B	×	Vertical

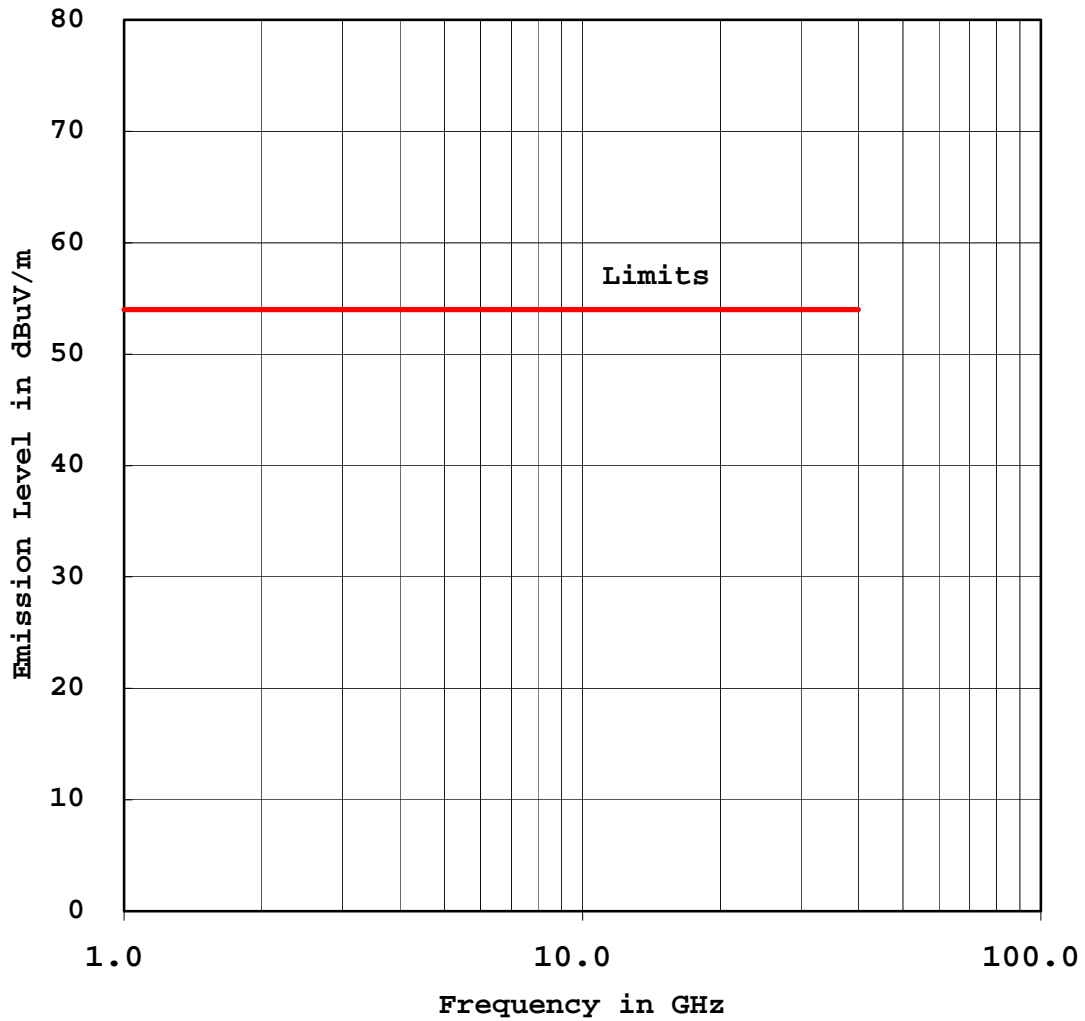



JQA Application No. :400-40296

Model No. :CMP-10BT

Standard :CFR 47 FCC Rules Part 15

FCC ID :FNECMP-10BT

Issue Date :August 3, 2004

Page 30 of 33

Appendix

Test Instruments List

June 25, 2004

Test Receivers

No.	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
TR01	Test Receiver	ESH2	Rohde & Schwarz	880370/016	119-01-503E0	May 2004	1 Year
TR02	Test Receiver	ESH3	Rohde & Schwarz	881460/030	119-01-023E0	May 2004	1 Year
TR03	Test Receiver	ESHS10	Rohde & Schwarz	835871/004	119-01-505E0	May 2004	1 Year
TR04	Test Receiver	ESV	Rohde & Schwarz	872148/039	119-03-008E0	May 2004	1 Year
TR05	Test Receiver	ESVS10	Rohde & Schwarz	826148/002	119-03-504E0	May 2004	1 Year
TR06	Test Receiver	ESVS10	Rohde & Schwarz	832699/001	119-03-506E0	May 2004	1 Year
TR07	Test Receiver	ESI26	Rohde & Schwarz	100043	119-04-511E0	Aug. 2003	1 Year

Spectrum Analyzers

No.	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
SA01	Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	122-02-504E0	Oct. 2003	1 Year
SA02	Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	122-02-501E0	Oct. 2003	1 Year
SA03	RF Pre-selector	85685A	Hewlett Packard	2648A00522	122-02-503E0	Oct. 2003	1 Year
SA04	Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	122-02-517E0	Apr. 2004	1 Year
SA05	RF Pre-selector	85685A	Hewlett Packard	2901A00933	122-02-519E0	Apr. 2004	1 Year
SA06	Spectrum Analyzer	R3132	ADVANTEST	120500072	122-02-520E0	Sep. 2003	1 Year
SA07	Spectrum Analyzer	R3182	ADVANTEST	120600581	122-02-521E0	Mar. 2004	1 Year

Antennas

No.	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
AN01	Loop Antenna	HFH2-Z2	Rohde & Schwarz	881058/61	119-05-036E0	May. 2004	1 Year
AN02	Dipole Antenna	KBA-511	Kyoritsu	0-170-1	119-05-506E0	Nov. 2003	1 Year
AN03	Dipole Antenna	KBA-511A	Kyoritsu	0-201-13	119-05-504E0	Nov. 2003	1 Year
AN04	Dipole Antenna	KBA-611	Kyoritsu	0-147-14	119-05-507E0	Nov. 2003	1 Year
AN05	Dipole Antenna	KBA-611	Kyoritsu	0-210-5	119-05-505E0	Nov. 2003	1 Year
AN06	Biconical Antenna	BBA9106	Schwarzbeck	VHA91031150	119-05-111E0	Nov. 2003	1 Year
AN07	Biconical Antenna	BBA9106	Schwarzbeck	-	119-05-078E0	Nov. 2003	1 Year
AN08	Log-peri. Antenna	UHALP9107	Schwarzbeck	-	119-05-079E0	Nov. 2003	1 Year
AN09	Log-peri. Antenna	UHALP9107	Schwarzbeck	-	119-05-110E0	Nov. 2003	1 Year
AN10	Log-peri. Antenna	HL025	Rohde & Schwarz	340182/015	119-05-100E0	Jan. 2004	1 Year
AN11	Horn Antenna	3115	EMC Test Systems	6442	119-05-514E0	Jan. 2004	1 Year
AN12	Horn Antenna	3116	EMC Test Systems	2547	119-05-515E0	May 2003	2 Year

Networks

No.	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
NE01	LISN	KNW-407	Kyoritsu	8-833-6	149-04-052E0	Apr. 2004	1 Year
NE02	LISN	KNW-407	Kyoritsu	8-855-2	149-04-055E0	Apr. 2004	1 Year
NE03	LISN	KNW-407	Kyoritsu	8-1130-6	149-04-062E0	Apr. 2004	1 Year
NE04	LISN	KNW-242C	Kyoritsu	8-837-13	149-04-054E0	Apr. 2004	1 Year
NE05	Absorbing Clamp	MDS21	Luthi	03293	119-06-506E0	Sep. 2003	1 Year

Cables

No.	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
CA01	RF Cable	5D-2W	Fujikura	-	155-21-001E0	Feb. 2004	1 Year
CA02	RF Cable	5D-2W	Fujikura	-	155-21-002E0	Feb. 2004	1 Year
CA03	RF Cable	3D-2W	Fujikura	-	155-21-005E0	Apr. 2004	1 Year
CA04	RF Cable	3D-2W	Fujikura	-	155-21-006E0	Apr. 2004	1 Year
CA05	RF Cable	3D-2W	Fujikura	-	155-21-007E0	Apr. 2004	1 Year
CA06	RF Cable	RG213/U	Rohde & Schwarz	-	155-21-010E0	Apr. 2004	1 Year
CA07	RF Cable(10m)	S 04272B	Suhner	-	155-21-011E0	May 2004	1 Year
CA08	RF Cable(2m 18GHz)	SUCOFLEX 104	Suhner	-	155-21-012E0	May 2004	1 Year
CA09	RF Cable(1m 18GHz)	SUCOFLEX 104	Suhner	-	155-21-013E0	May 2004	1 Year
CA10	RF Cable(1m N)	S 04272B	Suhner	-	155-21-015E0	May 2004	1 Year
CA11	RF Cable(1m 26GHz)	SUCOFLEX 104	Suhner	182811/4	155-21-016E0	Dec. 2003	1 Year
CA12	RF Cable(4m 26GHz)	SUCOFLEX 104	Suhner	190630	155-21-017E0	Dec. 2003	1 Year
CA13	RF Cable(10m)	F130-S1S1-394	MEGA PHASE	10510	155-21-018E0	Dec. 2003	1 Year
CA14	RF Cable(7m)	3D-2W	Fujikura	-	155-21-009E0	Apr. 2004	1 Year
CA15	RF Cable(7m)	RG223/U	Suhner	-	155-21-021E0	May 2004	1 Year

Amplifiers

No.	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
AM01	AF Amplifier	P-500L	Accuphase	BOY806	127-01-501E0	Feb. 2004	1 Year
AM02	RF Amplifier	8447D	Hewlett Packard	1937A02168	127-01-065E0	May 2004	1 Year
AM03	RF Amplifier	8447D	Hewlett Packard	2944A07289	127-01-509E0	May 2004	1 Year
AM05	RF Amplifier	DBP-0102N533	DBS Microwave	012	127-02-504E0	Jun. 2004	1 Year
AM06	RF Amplifier	WJ-6882-814	Watkins-Johnson	0414	127-04-017E0	Jun. 2004	1 Year
AM07	RF Amplifier	WJ-5315-556	Watkins-Johnson	106	127-04-006E0	Jun. 2004	1 Year
AM08	RF Amplifier	WJ-5320-307	Watkins-Johnson	645	127-04-005E0	Jun. 2004	1 Year
AM09	RF Amplifier	JS4-00102600 -28-5A	MITEQ	669167	127-04-502E0	Apr. 2004	1 Year

Signal Generators

No.	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
SG01	Function Generator	3325B	Hewlett Packard	2847A03284	118-08-124E0	Jul. 2003	1 Year
SG02	Function Generator	VP-7422A	Matsushita Communication	050351E122	118-08-503E0	Jul. 2003	1 Year
SG03	Signal Generator	8664A	Hewlett Packard	3035A00140	118-03-014E0	Jun. 2004	1 Year
SG04	Signal Generator	8664A	Hewlett Packard	3438A00756	118-04-502E0	Jun. 2004	1 Year
SG05	Signal Generator	6061A	Gigatronics	5130593	118-04-024E0	Mar. 2004	1 Year

Auxiliary Equipment

No.	Type	Model	Manufacturer	Serial	ID	Last Cal.	Interval
AU01	Termination(50)	-	Suhner	-	154-06-501E0	Jan. 2004	1 Year
AU02	Termination(50)	-	Suhner	-	154-06-502E0	Jan. 2004	1 Year
AU03	Power Meter	436A	Hewlett Packard	1725A01930	100-02-501E0	Apr. 2004	1 Year
AU04	Power Sensor	8482A	Hewlett Packard	1551A01013	100-02-501E0	Apr. 2004	1 Year
AU05	Power Sensor	8485A	Hewlett Packard	2942A08969	100-04-021E0	Apr. 2004	1 Year
AU06	FM Linear Detector	MS61A	Anritsu	M77486	123-02-008E0	Oct. 2003	1 Year
AU07	Level Meter	ML422C	Anritsu	M87571	114-02-501E0	Jun. 2003	1 Year
AU08	Measuring Amplifier	2636	B & K	1614851	082-01-502E0	Jul. 2003	1 Year
AU09	Microphone	4134	B & K	1269477	147-01-503E0	May 2004	1 Year
AU10	Preamplifier	2639	B & K	1268763	127-01-504E0	May 2004	1 Year
AU11	Pistonphone	4220	B & K	1165008	147-02-501E0	Mar. 2004	1 Year
AU12	Artificial Mouth	4227	B & K	1274869	-	N/A	N/A
AU13	Frequency Counter	53131A	Hewlett Packard	3546A11807	102-02-075E0	May 2004	1 Year
AU14	Oven	-	Ohnishi	-	023-02-018E0	May 2004	1 Year
AU15	DC Power Supply	6628A	Hewlett Packard	3224A00284	072-05-503E0	Jun. 2004	1 Year
AU16	Band Reject Filter	BRM12294	Micro-tronics	003	149-01-501E0	Jan. 2004	1 Year
AU17	High Pass Filter	F-100-4000-5-R	RLC Electronics	0149	149-01-502E0	Feb. 2004	1 Year
AU18	Attenuator	43KC-10	Anritsu	-	148-03-506E0	Feb. 2004	1 Year
AU19	Attenuator	43KC-20	Anritsu	-	148-03-507E0	Feb. 2004	1 Year
AU20	Attenuator	355D	Hewlett Packard	219-10782	148-03-065E0	Apr. 2004	1 Year
AU21	FFT Analyzer	R9211C	Advantest	02020253	122-02-506E0	Jun. 2003	1 Year
AU22	Noise Meter	MN-446	Meguro	53030478	082-01-144E0	Apr. 2004	1 Year