

APPLICANT: CHERISH TELECOM CO., LTD.

FCC ID: FNXCT-101

TABLE OF CONTENTS

TEST REPORT CONTAINING:

PAGE 1.....	TEST PROCEDURE & EQUIPMENT LIST
PAGE 2.....	PRODUCT DESCRIPTION
PAGE 3.....	SECURITY CODING INFORMATION
PAGE 4.....	POWER LINE CONDUCTED EMISSIONS
PAGE 5.....	6dB BANDWIDTH
PAGE 6.....	POWER OUTPUT
PAGE 7.....	METHOD OF MEASURING RF CONDUCTED EMISSIONS AND SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 8.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 9.....	METHOD OF MEASURING RADIATED SPURIOUS
PAGE 10.....	POWER SPECTRAL DENSITY

EXHIBIT ATTACHMENTS:

EXHIBIT 1.....	FRONT VIEW EXTERNAL PHOTOS -BASE & HANDSET
EXHIBIT 2.....	REAR VIEW EXTERNAL PHOTOS -BASE & HANDSET
EXHIBIT 3.....	COMPONENT SIDE INTERNAL PHOTOS
EXHIBIT 4.....	COPPER SIDE INTERNAL PHOTOS
EXHIBIT 5A-5C.....	BLOCK DIAGRAMS- BASE & HANDSET
EXHIBIT 6A.....	SCHEMATIC - BASE MAIN
EXHIBIT 6B.....	SCHEMATIC - HANDSET MAIN
EXHIBIT 6C.....	SCHEMATIC - AMPLIFIER
EXHIBIT 6D.....	SCHEMATIC - TRANSCEIVER
EXHIBIT 7A-7G.....	USERS MANUAL
EXHIBIT 8A-8C.....	CIRCUIT DESCRIPTIONS
EXHIBIT 9.....	FCC ID LABEL SAMPLES
EXHIBIT 10A-10B.....	SKETCH OF LABEL LOCATIONS
EXHIBIT 11A-11B.....	TEST SET UP PHOTOS - RADIATED EMISSIONS
EXHIBIT 12.....	TEST SET UP PHOTO - POWERLINE CONDUCTED
EXHIBIT 13A-13b.....	POWERLINE CONDUCTED EMISSIONS PLOTS
EXHIBIT 14A.....	OCCUPIED B/W PLOT- CH 1 BASE - 6 dB B/W
EXHIBIT 14B.....	OCCUPIED B/W PLOT- CH 40 BASE - 6 dB B/W
EXHIBIT 14C.....	OCCUPIED B/W PLOT- CH 1 HANDSET - 6 dB B/W
EXHIBIT 14D.....	OCCUPIED B/W PLOT- CH 40 HANDSET - 6 dB B/W
EXHIBIT 14E.....	OCCUPIED B/W PLOT- CH 40 BASE - BANDEDGE
EXHIBIT 14F.....	OCCUPIED B/W PLOT- CH 40 HANDSET - BANDEDGE
EXHIBIT 15A.....	SPECTRAL DENSITY- CH 1 BASE - 20 dB ATT
EXHIBIT 15B.....	SPECTRAL DENSITY- CH 10 BASE - 20 dB ATT
EXHIBIT 15C.....	SPECTRAL DENSITY- CH 40 BASE - 20 dB ATT
EXHIBIT 15D.....	SPECTRAL DENSITY- CH 40 BASE - 42 dB ATT
EXHIBIT 15E.....	SPECTRAL DENSITY- CH 1 HANDSET - 42 dB ATT
EXHIBIT 15F.....	SPECTRAL DENSITY- CH 10 HANDSET - 42 dB ATT
EXHIBIT 15G.....	SPECTRAL DENSITY- CH 40 HANDSET - 42 dB ATT

REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT

TABLE OF CONTENTS

APPLICANT: CHERISH TELECOM CO., LTD.

FCCID : FNXCT-101

TEST EQUIPMENT LIST

1. X Spectrum Analyzer: HP 8566B-Opt 462, S/N 3138A07786, w/
preselector HP 85685A, S/N 3221A01400, Quasi-Peak Adapter
HP 85650A, S/N 3303A01690 & Preamplifier HP 8449B-OPT H02,
S/N 3008A00372 Cal. 10/17/99
2. X Biconnical Antenna: Eaton Model 94455-1, S/N 1057
3. Biconnical Antenna: Electro-Metrics Model BIA-25, S/N 1171
4. X Log-Periodic Antenna: Electro-Metrics Model EM-6950, S/N 632
5. X Log-Periodic Antenna: Electro-Metrics Model LPA-30, S/N 409
6. X Double-Ridged Horn Antenna: Electro-Metrics Model RGA-180,
1-18 GHz, S/N 2319
7. X 18-26.3GHz Systron Donner Standard Gain Horn #DBE-520-20
8. Horn 40-60GHz: ATM Part #19-443-6R
9. Line Impedance Stabilization Network: Electro-Metrics Model
ANS-25/2, S/N 2604 Cal. 2/9/00
10. Temperature Chamber: Tenney Engineering Model TTRC, S/N 11717-7
11. Frequency Counter: HP Model 5385A, S/N 3242A07460 Cal 10/6/99
12. Peak Power Meter: HP Model 8900C, S/N 2131A00545
13. X Open Area Test Site #1-3meters Cal. 12/22/99
14. Signal Generator: HP 8640B, S/N 2308A21464 Cal. 9/23/99
15. Signal Generator: HP 8614A, S/N 2015A07428
16. Passive Loop Antenna: EMCO Model 6512, 9KHz to 30MHz, S/N
9706-1211 Cal. 6/10/00
17. Dipole Antenna Kit: Electro-Metrics Model TDA-30/1-4, S/N 153
Cal. 11/24/99
18. AC Voltmeter: HP Model 400FL, S/N 2213A14499 Cal. 9/21/99
19. Digital Multimeter: Fluke Model 8012A, S/N 4810047 Cal 9/21/99
20. Digital Multimeter: Fluke Model 77, S/N 43850817 Cal 9/21/99
21. Oscilloscope: Tektronix Model 2230, S/N 300572 Cal 9/23/99

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC. Shielded interface cables were used in all cases except for cables connecting to the telephone line and the power cords. A test program was run which simulated a normal data transmission on a network.

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.4-1992 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The ambient temperature of the UUT was 95oF with a humidity of 45%.

FCC ID: FNXCT-101

DATE: 28 JULY 2000

REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT

PAGE #: 1

TEST PROCEDURE CONTINUED

BANDWIDTH 6.0dB: The measurements were made with the spectrum analyzer's resolution bandwidth(RBW)=1.0MHz and the video bandwidth(VBW)=3.0MHz and the span set as shown on plot.

POWER OUTPUT: The RF power output was measured at the antenna feed point using a peak power meter.

ANTENNA CONDUCTED EMISSIONS: The RBW=100KHz, VBW=300KHz and the span set to 10.0MHz and the spectrum was scanned from 30MHz to the 10th Harmonic of the fundamental. Above 1.0GHz the resolution bandwidth was 1.0MHz and the VBW = 3.0MHz and the span to 50MHz.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth(RBW) of the spectrum analyzer was 100kHz up to 1GHz and 1.0MHz above 1GHz with an appropriate sweep speed. The VBW above 1.0GHz was = 3.0MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 95oF with a humidity of 45%.

PRODUCT DESCRIPTION:

The FNXCT-101 is a direct sequence spread spectrum cordless telephone radio that operates in the 2400-2483.5MHz band. The antenna used for the base and the handset is permanently attached to the UUT. In normal use the handset antenna is more than 2.5cm from the body(head), it is approximately 4.0cm. This UUT does not have a belt clip or connection for a headset. Its actual frequency range is;

Channel #1	2404.8MHz Lowest
Channel #40	2474.90MHz Highest

APPLICANT: CHERISH TELECOM CO., LTD.

FCC ID: FNXCT-101

DATE: 28 JULY 2000

REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT

PAGE #: 2

APPLICANT: CHERISH TELECOM CO., LTD.

FCC ID: FNXCT-101

SECURITY CODING INFORMATION

15.214(d) - THIS DEVICE COMPLIES WITH THE SECURITY CODE REQUIREMENTS OF 15.214(d)(1)(2) AND (3) BY MEANS OF THE FOLLOWING:

The scrambler/descrambler is a 16-bit maximum length PN sequence generator. Its output is XOR'ed with TX data for scrambling and XOR'ed with RX data for descrambling. The voice and supervisory bits are scrambled. The PN sequence generator's starting location is programmable using one memory mapped register along with the two ID registers. This starting location is used to initialize the PN generator at the start of each link. The MSB of the PN generator is used to scramble/descramble. The first frame bit scrambled/descrambled uses the initialized value of the MSB. A 32 bit ID word (16-bit programmable) is used during acquisition to verify the RF link and initialize frame timing.

When the System Manager determines that a link needs to be established, it calls the routine "user Establish Link. The proprietary code will perform all actions necessary to set up a link. This includes link access protocol (finding the correct channel to contact the far unit and authenticating the far unit via the security ID code, channel hopping due to interference and fading, and power control), and data flow control. If a link is not available, audio data is discarded until the link becomes available. For control data and FACCH data, the data will be preserved until the link is re-established. The formatting of the audio and data is performed automatically. To release a link, the programmer uses a call to the route Release Link.

APPLICANT: CHERISH TELECOM CO., LTD.

FCC ID: FNXCT-101

DATE: 28 JULY 2000

REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT

PAGE #: 3

APPLICANT: CHERISH TELECOM CO., LTD.
FCC ID: FNXCT-101
NAME OF TEST: POWER LINE CONDUCTED INTERFERENCE
RULES PART NUMBER: 15.107(a)
REQUIREMENTS: .45 - 30 MHz 250 uV OR 47.96 dBuV
TEST PROCEDURE: ANSI STANDARD C63.4-1992. The spectrum
was scanned from .45 to 30 MHz.
TEST DATA:

THE HIGHEST EMISSION READ FOR LINE 1 WAS 207.0 uV @ 25.09 MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 200.0 uV @ 28.88 MHz.

THE GRAPHS IN EXHIBITS 13a-13B REPRESENT THE EMISSIONS TAKEN FOR THIS
DEVICE.

TEST RESULTS: Both lines were observed. The measurements indicate that the unit DOES appear to meet the FCC requirements for this class of equipment.

APPLICANT: CHERISH TELECOM CO., LTD.
FCC ID: FNXCT-101
DATE: 28 JULY 2000
REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT
PAGE #: 4

NAME OF TEST: 6.0dB BANDWIDTH

RULES PART NUMBER: 15.247(a)(2)

REQUIREMENTS: The 6.0dB bandwidth must be greater than 500KHz.

MEASUREMENT: The 6.0dB bandwidth measured @ 2404.80MHz
was 1.61MHz for the base.

The 6.0dB bandwidth measured @ 2404.30MHz
was 1.59MHz for the handset.

MEASUREMENT DATA: The 6dB bandwidth was measured at the Low end of
band, middle of band, and the high end of the band for both the hand-
set & the base unit. See Plots in Exhibits #14A-14D.

APPLICANT: CHERISH TELECOM CO., LTD.

FCC ID: FNXCT-101

DATE: 28 JULY 2000

REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT

PAGE #: 5

NAME OF TEST: POWER OUTPUT


RULES PART NUMBER: 15.247(b) 1.0Watt or +30dBm

MEASUREMENT:

Channel No.	Power Output milliwatts	Unit
1	12.0	Base
20	14.0	Base
40	19.0	Base
1	11.00	Handset
20	13.0	Handset
40	19.0	Handset

15.247(c) Method of Measuring RF Power output:

The antenna was disconnected and a Peak power Sensor was connected in place of the antenna. The Power output was measured at the Low end of band, middle of band, and the high end of the band for both the handset & the base unit.

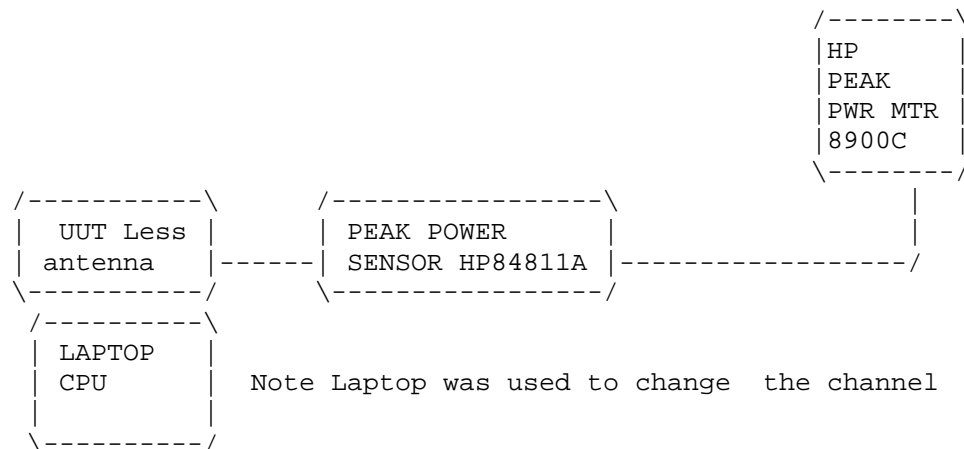


APPLICANT: CHERISH TELECOM CO., LTD.

FCC ID: FNXCT-101

REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT

PAGE #: 6

15.247(c) Method of Measuring RF Conducted Spurious Emissions

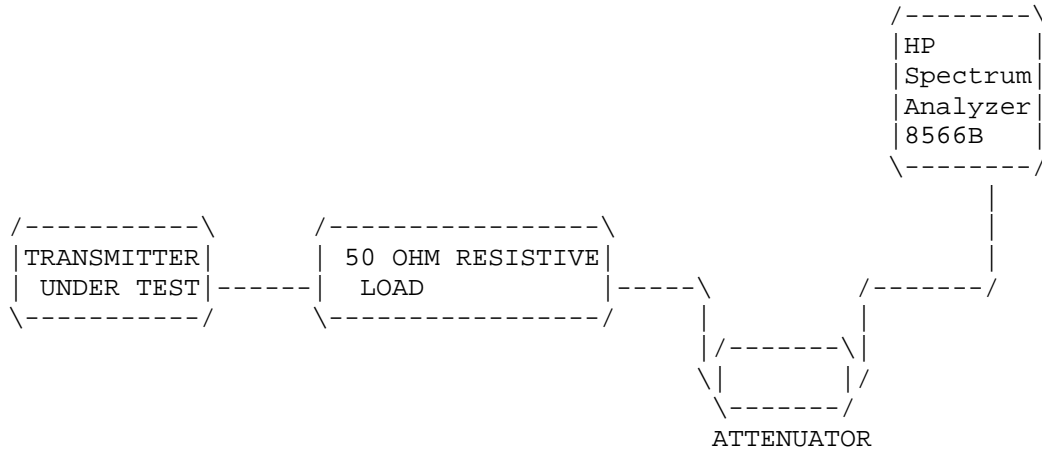

NAME OF TEST: SPURIOUS EMISSIONS AT ANTENNA TERMINALS

REQUIREMENTS: Emissions must be at least 20dB down from the highest emission level within the authorized band as measured with a 100KHz RBW.

	EMISSION FREQUENCY ____MHz____	dB BELOW CARRIER _____
BASE		
Channel 1	2404.0	00.0
base	4808.0	-39.3
	7212.0	-59.9
channel 20	2439.0	0.00
	4876.0	-40.9
	7314.0	-59.4
Channel 40	2474.8	0.0
	4949.6	-37.8
	7424.4	-62.3
HANDSET		
Channel 1	2404.0	0.0
	4809.0	-42.8
	7215.0	-59.8
Channel 21	2438.80	0.0
	4878.08	-43.9
	7317.34	-60.2
Channel 40	2475.0	0.0
	4950.00	-44.7
	7425.00	-60.1

NOTE: THE SPECTRUM WAS SCANNED TO THE TENTH HARMONIC.

FCC ID: FNXCT-101
 DATE: 28 JULY 2000
 REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT
 PAGE #: 7

15.247(c),15.205 &15.209(b) Field strength of spurious emissions:
REQUIREMENTS:

FIELD STRENGTH of Fundamental: 902-928MHz 2.4-2.4835GHz 127.38dBuV/m @3m	FIELD STRENGTH of Harmonics 54 dBuV/m @3m	S15.209 30- 88 MHz 40 dBuV/m @3M 88 -216 MHz 43.5 216 -960 MHz 46 ABOVE 960 MHz 54dBuV/m
--	---	--

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS,
EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 dB BELOW
THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION
LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REQUIREMENTS: Emissions that fall in the restricted bands
(15.205) must be less than 54dBuV/m otherwise
the spurious and harmonics must be attenuated
by at least 20dB.

TEST DATA:

EMISSION FREQUENCY MHz	METER READING @ 3m dBuV	COAX LOSS dB	ACF dB	FIELD STRENGTH dBuV/m	FCC. LIMIT dB	MARGIN dB	ANT.
------------------------------	-------------------------------	--------------------	-----------	-----------------------------	---------------------	--------------	------

BASE

2405.00	59.40	1.09	29.01	89.50	127.38	37.88	H
4809.70	7.20	1.45	33.91	42.56	54.00	11.44	V
2421.10	63.70	1.09	29.05	93.85	127.38	33.53	V
4842.10	8.10	1.46	33.95	43.50	54.00	10.50	V
2439.10	64.10	1.10	29.10	94.29	127.38	33.09	V
4878.10	8.20	1.46	33.99	43.65	54.00	10.35	H

HANDSET

2404.80	64.80	1.09	29.01	94.90	127.38	32.48	V
4809.60	12.50	1.45	33.91	47.86	54.00	6.14	H
2421.10	64.50	1.09	29.05	94.65	127.38	32.73	V
4842.00	11.80	1.46	33.95	47.20	54.00	6.80	H
2439.00	65.20	1.10	29.10	95.39	127.38	31.99	V
4878.00	13.10	1.46	33.99	48.55	54.00	5.45	H

The plots of the Delta attenuation from the channel to the edge of the
restricted band of 2483.5MHz are attached as Exhibits 14E-14F.


APPLICANT: CHERISH TELECOM CO., LTD.
FCC ID: FNXCT-101
DATE: 28 JULY 2000
REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT
PAGE #: 8

2.993(a)(b)

2.993(a)(b) Continued Field strength of spurious emissions:

METHOD OF MEASUREMENT: The procedure used was ANSI STANDARD C63.4-1992 & the Guidance on Measurements for Direct Sequence Spread Spectrum Systems. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 849 N.W. State Road 45, NEWBERRY, FL 32669.

Method of Measuring Radiated Spurious Emissions

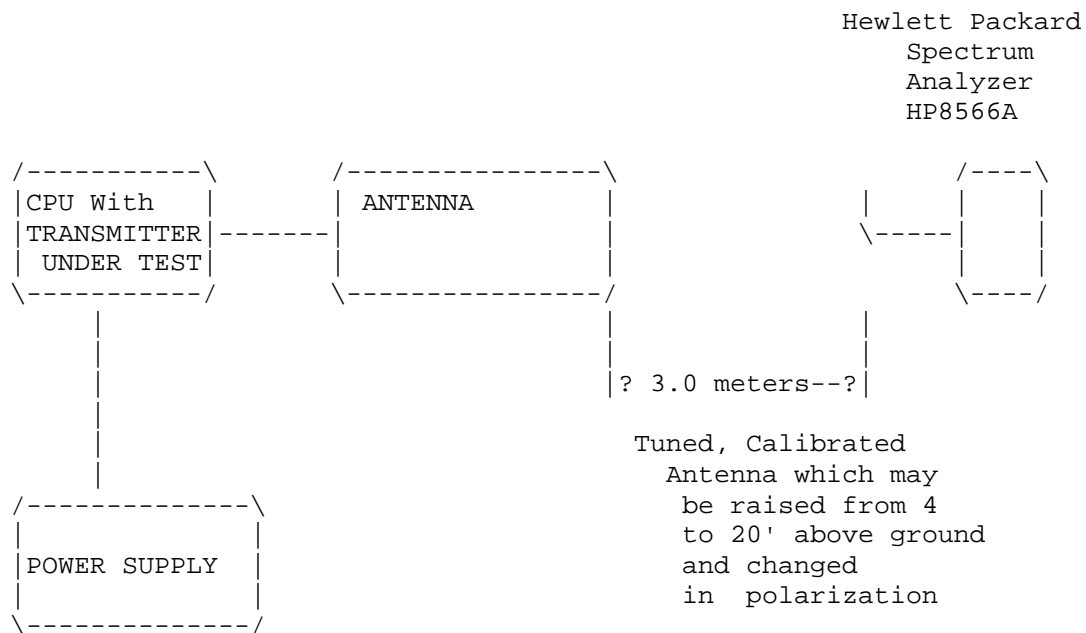

Equipment placed 4' above ground
on a rotatable platform.

APPLICANT: CHERISH TELECOM CO., LTD.

FCC ID: FNXCT-101

DATE: 28 JULY 2000

REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT

PAGE #: 9

APPLICANT: CHERISH TELECOM CO., LTD.
FCC ID: FNXCT-101
NAME OF TEST: POWER SPECTRAL DENSITY
RULES PART NUMBER: 15.247(d)
REQUIREMENTS: The peak level measured must be no greater than
+8.0dBm.
DATA: THE PLOTS ARE SHOWN IN EXHIBITS 15A-15G.
BASE UNIT The HIGHEST level was at 2475.47MHz
-57.3+42.0 = -15.3dVm
HANDSET The HIGHEST level was at 2475.23MHz
-57.1+42.0 = -15.1dVm

The antenna was disconnected and the output was connected to a coaxial attenuator and to the Spectrum analyzer and the power spectral density was measured at the Low end of band, middle of band, and the high end of the band for both the handset & the base unit. The plots of the power spectral power density for the low end of the band, middle of the band, and the high end of the band for both the handset & the base are attached as Exhibits 15A-15G.

RULES PART NUMBER: 15.247(e)

REQUIREMENTS:

DATA: The processing gain information supplied by the manufacturer is 10.0dB.

APPLICANT: CHERISH TELECOM CO., LTD.
FCC ID: FNXCT-101
DATE: 28 JULY 2000
REPORT #: T:\CUS\C\CHERISH\285K0\285K0.RPT
PAGE #: 10