


FRW2000-UHF2A FCC Labels

ID Label:

NOTES:

1. MATERIAL: 156-040975 DIE CUT SPECIFICATION FOR CLUSTER 1 TAMPER
PROOF PERMANENT LABELS
OR
156-040963 STANDARD CUT TAMPER PROOF PERMANENT LABEL
2. LETTERS: BLACK THERMAL TRANSFER
3. BACKGROUND: SILVER (MATTE FINISH)
4. BORDER: BLACK
5. CORNER: ROUNDED .06 R Max
6. ARTWORK: USE DATAFILE LABEL IMAGE 156-049087-0Y.X.LBL
(Y = DASH NUMBER VARIATION)
(X = CURRENT REV OF THIS DOCUMENT)
7. THERMAL RIBBON: RHD TT BLK 80MM X 300M REVERSE
8. FILL IN FIELDS (e.g. UNIT DASH NUMBERS, SERIAL NUMBERS) TO BE MARKED
PER 150-341005 "WORK INSTRUCTIONS FOR THERMAL LABELS"

<u>TAG NO.</u>	<u>SIZE</u>
-07	.70" X 1.80"

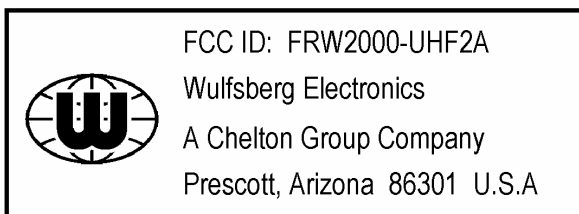

Compliance Label:

NOTES:

1. MATERIAL: AL STOCK $0.008 \pm .002$ THICK WITH ADHESIVE BACK 3M 467 OR EQUIVALENT.


2. LETTERS: ☐ BLACK ☒ NATURAL ALUMINUM (MATTE FINISH)

3. BACKGROUND: ☒ BLACK ☐ NATURAL ALUMINUM (MATTE FINISH)

4. BORDER: ☐ BLACK ☒ NONE

5. CORNER: ☒ .062 RAD ☐ SQUARE

6. ARTWORK: SUITABLE FOR DECAL ARTWORK.

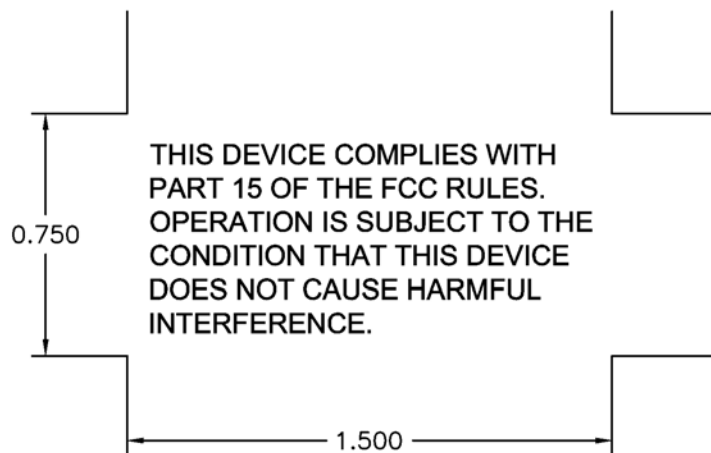

-01 SHOWN

RF Exposure Warning Label:

NOTES:

1. MATERIAL: AL STOCK 0.008±.002 THICK WITH ADHESIVE BACK 3M 467 OR EQUIVALENT.
2. LETTERS: ☐ BLACK ☒ NATURAL ALUMINUM (MATTE FINISH)
3. BACKGROUND: ☒ BLACK ☐ NATURAL ALUMINUM (MATTE FINISH)
4. BORDER: ☐ BLACK ☒ NONE
5. CORNER: ☒ .062 RAD ☐ SQUARE
6. ARTWORK: SUITABLE FOR DECAL ARTWORK.



**Restricted to occupational use to
satisfy FCC RF exposure limits.
See Operator's Manual for specific
instructions.**

Label size is 1.06 x 1.56 with no border.

FCC/Canada Label Location Information (Top View Of Unit):

