

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart C § 15.247

**Equipment** : **Stylish Touch Wireless Headset**  
**Model No.** : **BT-03i**  
**Brand Name** : **GENIUS**  
**Filing Type** : **New Application**  
**Applicant** : **KYE SYSTEMS CORP.**  
No. 492, Sec5, Chung Hsin Rd., San Chung, Taipei Hsien,  
Taiwan, R.O.C.  
**FCC ID** : **FSUGG000H**  
**Manufacturer** : **He-Guang Electronic Co., Ltd.**  
Shan Xia Industrial District, HenLi Town DongGuan City,  
Guang Dong Province, China  
**Received Date** : Apr. 03, 2008  
**Final Test Date** : Aug. 22, 2008

## Statement

**Test result included is only for the Bluetooth part of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON International Inc.**

6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

**Table of Contents**

**1. SUMMARY OF THE TEST RESULT ..... 2**

**2. GENERAL INFORMATION..... 3**

2.1. Product Details ..... 3

2.2. Accessories ..... 3

2.3. Table for Filed Antenna ..... 3

2.4. Table for Carrier Frequencies ..... 3

2.5. Table for Test Modes ..... 4

2.6. Table for Testing Locations ..... 4

2.7. Table for Supporting Units..... 4

2.8. Table for Parameters of Test Software Setting ..... 4

2.9. EUT Operation during Test ..... 5

2.10. Test Configurations ..... 5

**3. TEST RESULT ..... 7**

3.1. AC Power Line Conducted Emissions Measurement..... 7

3.2. Maximum Peak Output Power Measurement..... 11

3.3. Hopping Channel Separation Measurement ..... 13

3.4. Number of Hopping Frequency Measurement ..... 18

3.5. Dwell Time Measurement..... 20

3.6. Radiated Emissions Measurement..... 27

3.7. Band Edge and Fundamental Emissions Measurement ..... 39

3.8. Antenna Requirements..... 42

**4. LIST OF MEASURING EQUIPMENTS ..... 43**

**5. TEST LOCATION..... 45**

**6. TAF CERTIFICATE OF ACCREDITATION ..... 46**

**APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE..... A1 ~ A3**

**APPENDIX B. TEST PHOTOS ..... B1 ~ B7**

**APPENDIX C. PHOTOGRAPHS OF EUT ..... C1 ~ C11**




# **CERTIFICATE OF COMPLIANCE**

according to

47 CFR FCC Part 15 Subpart C § 15.247

Equipment : Stylish Touch Wireless Headset  
Model No. : BT-03i  
Brand Name : GENIUS  
Applicant : KYE SYSTEMS CORP.  
No. 492, Sec5, Chung Hsin Rd., San Chung,  
Taipei Hsien, Taiwan, R.O.C.

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 03, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

***SPORTON International Inc.***

*6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.*

**1. SUMMARY OF THE TEST RESULT**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart C</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	12.24 dB
3.2	15.247(b)(1)	Maximum Peak Conducted Output Power	Complies	23.23 dB
3.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
3.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
3.5	15.247(a)(1)	Dwell Time	Complies	-
3.6	15.247(d)	Radiated Emissions	Complies	3.60 dB
3.7	15.247(d)	Band Edge Emissions	Complies	2.53 dB
3.8	15.203	Antenna Requirements	Complies	-

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Peak Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

**2. GENERAL INFORMATION**

**2.1. Product Details**

Only the radio detail of Bluetooth is shown in the table below. For more detailed features description, please refer to the manufacturer’s specifications or user’s manual.

Items	Description
Power Type	5V from adapter or host
Modulation	FHSS (8DPSK)
Data Rate (Mbps)	8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	1.236 MHz
Conducted Output Power	6.77 dBm

**2.2. Accessories**

Power	Brand	Model	Rating
AC/DC ADAPTER	ShenZher CONO Technology Co., LTD.	CN-01C5-300	INPUT: 100-240V 50/60Hz 0.1A OUTPUT: 5V 300mA
Others			
USB cable			

**2.3. Table for Filed Antenna**

Ant.	Antenna Type	Connector	Gain (dBi)
1	PIFA Antenna	Fixed (On Board)	2.15

**2.4. Table for Carrier Frequencies**

Frequency Band	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz
	1	2403 MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

**2.5. Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emissions	Charger Mode	Auto	Hopping 0~78	1
Max. Conducted Output Power	GFSK: 1 / π/4-QPSK: 2 / 8DPSK: 3	1Mbps / 2 Mbps / 3 Mbps	0/39/78	NA
Hopping Channel Separation	8DPSK	3 Mbps	0~1/39~40/77~78	NA
Number of Hopping Frequency	8DPSK	3 Mbps	0~78	NA
Dwell Time	DH1/DH3/DH5	1 Mbps	0/39/78	NA
Radiated Emissions Below 1GHz	Charger Mode	Auto	-	-
Radiated Emissions Above 1GHz	GFSK	1 Mbps	0/39/78	1
Band Edge Emissions	8DPSK	3 Mbps	0/78	1

**2.6. Table for Testing Locations**

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH02-HY	SAC	Hwa Ya	101377	IC 4086B-1	-
CO01-HY	Conduction	Hwa Ya	101377	IC 4086B-1	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

**2.7. Table for Supporting Units**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	D505	DoC
Modem	ACEEX	DM-1414	IFAXDM1414
Mouse	Microsoft	1004	DoC

**2.8. Table for Parameters of Test Software Setting**

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**Power Parameters of Bluetooth**

Test Software Version	Bluetest		
Frequency	2402 MHz	2441 MHz	2480 MHz

Test Software Version	Bluetest		
Power Parameters	63	63	63


**2.9. EUT Operation during Test**

EUT operate with cell phone.

**2.10. Test Configurations**


**2.10.1. Radiation Emissions Test Configuration**

**For radiated emissions 9kHz~1GHz**

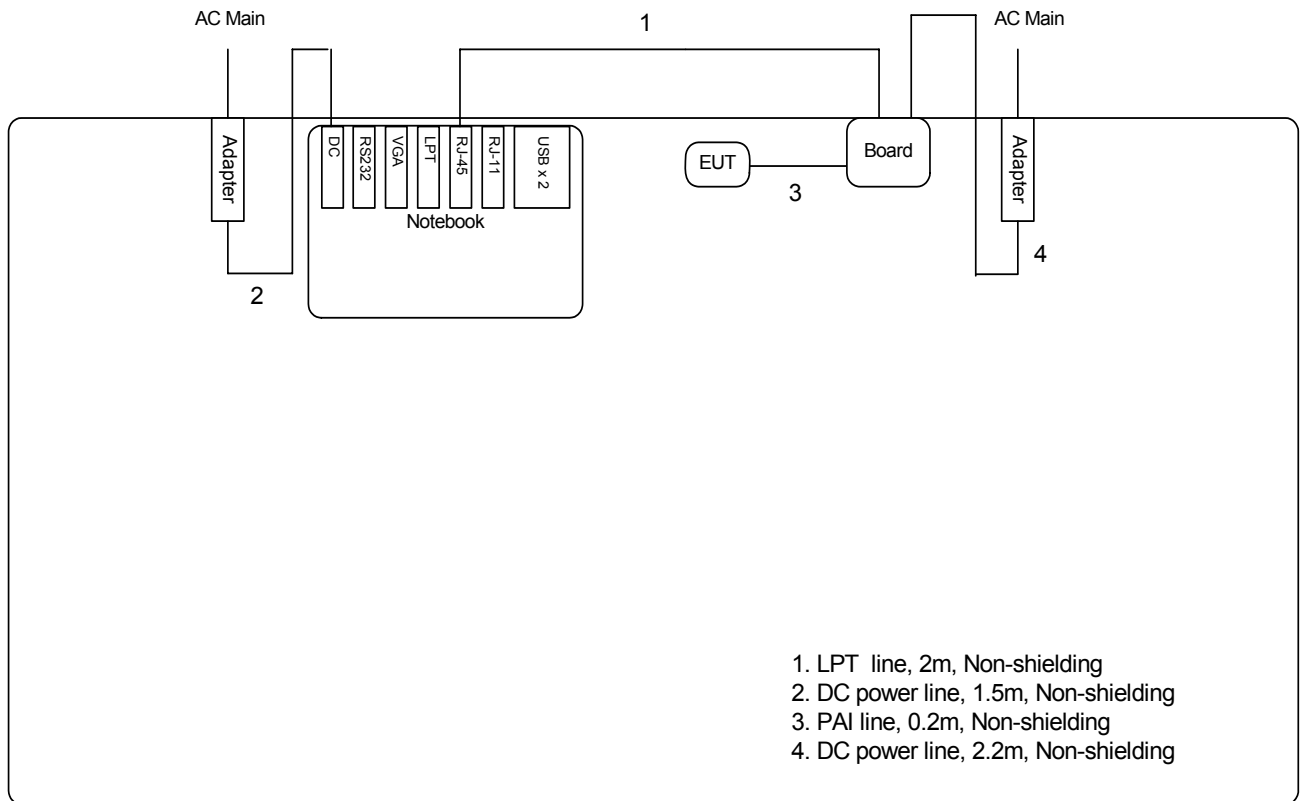



**For radiated emissions above 1GHz**

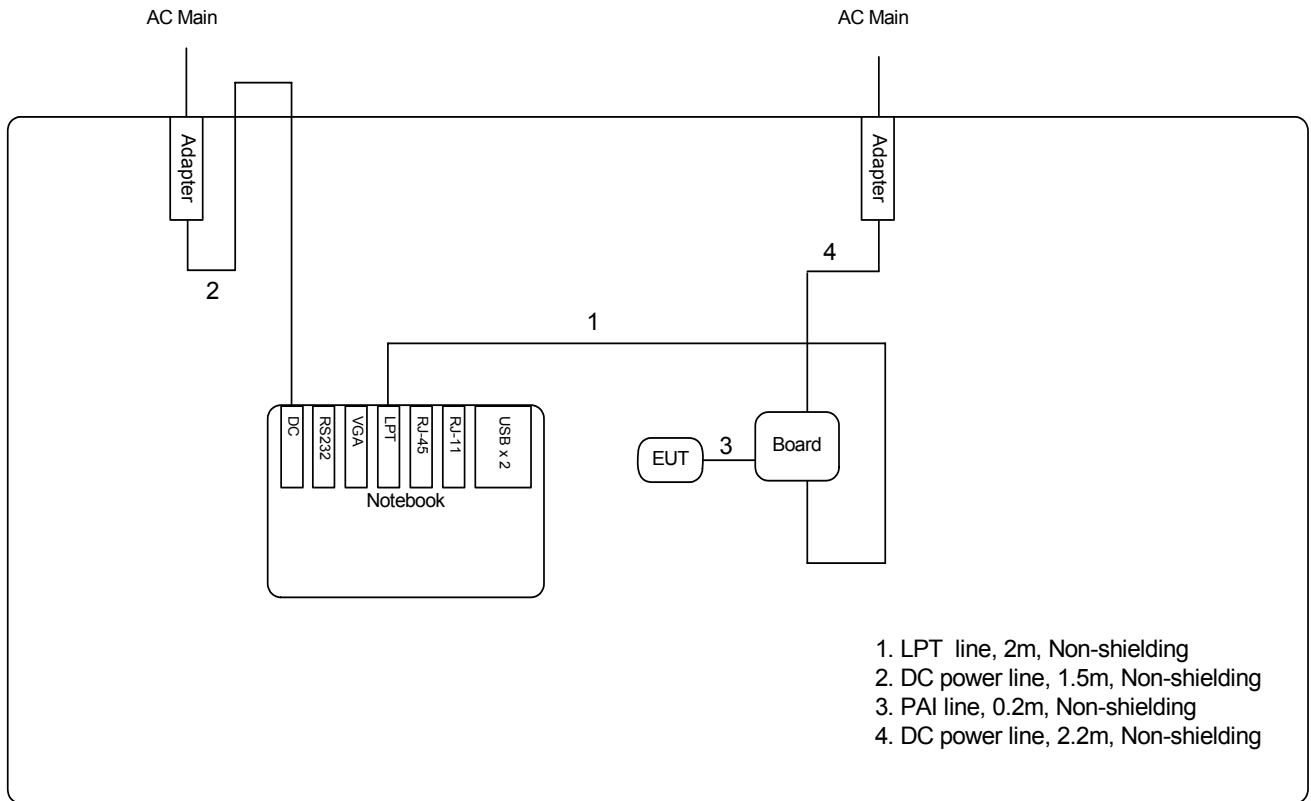

**3. TEST RESULT**

**3.1. AC Power Line Conducted Emissions Measurement**

**3.1.1. Limit**

For a Low-power Radio-frequency device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Class B

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

**3.1.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

**3.1.3. Test Procedures**

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

3.1.4. Test Setup Layout

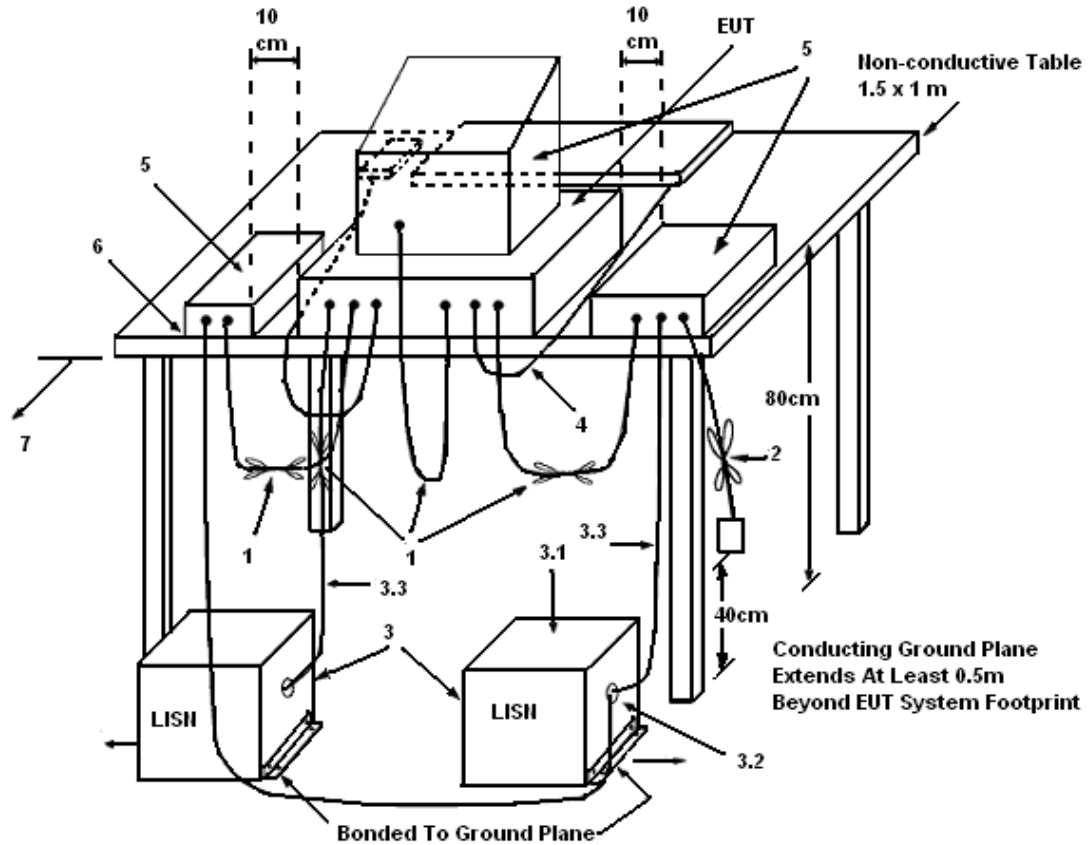

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

**3.1.5. Test Deviation**


There is no deviation with the original standard.

**3.1.6. EUT Operation during Test**

The EUT was placed on the test table and programmed in normal function.


**3.1.7. Results of AC Power Line Conducted Emissions Measurement**

<b>Test date</b>	May 14, 2008	<b>Test Site No.</b>	CO01-HY
<b>Temperature</b>	22	<b>Humidity</b>	62%
<b>Test Engineer</b>	Steven	<b>Phase</b>	Line
<b>Configurations</b>	Charger Mode		

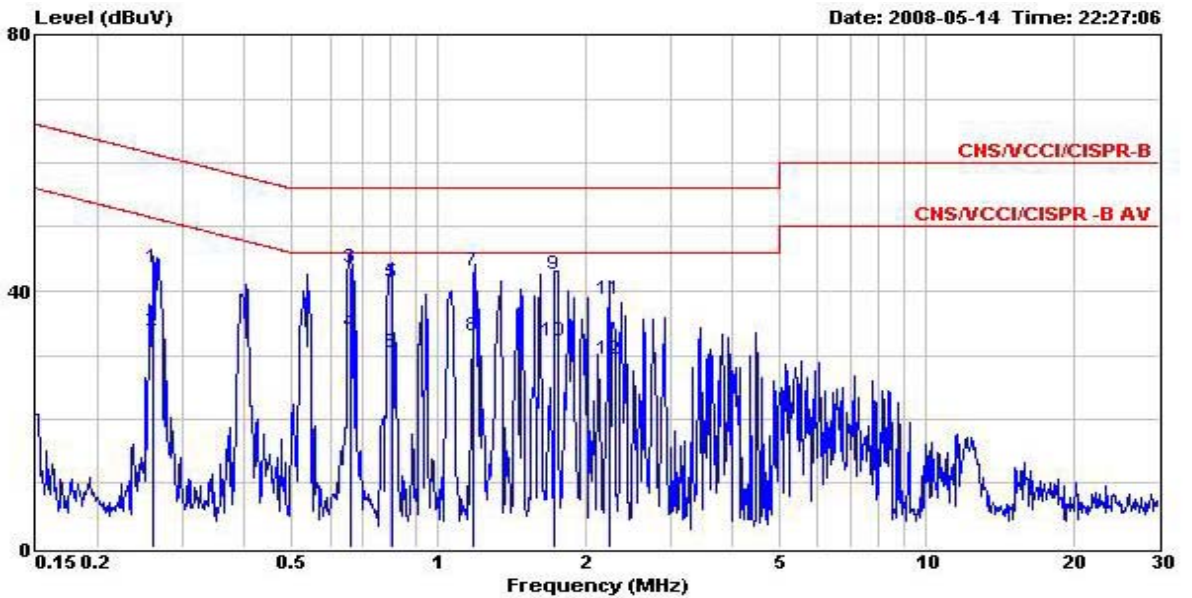

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.260	43.75	-17.68	61.43	43.60	0.08	0.07	QP
2	0.260	33.81	-17.62	51.43	33.66	0.08	0.07	Average
3	0.661	43.76	-12.24	56.00	43.59	0.11	0.06	QP
4	0.661	33.39	-12.61	46.00	33.22	0.11	0.06	Average
5	0.804	41.17	-14.83	56.00	40.98	0.11	0.08	QP
6	0.804	30.29	-15.71	46.00	30.10	0.11	0.08	Average
7	1.180	43.05	-12.95	56.00	42.84	0.12	0.09	QP
8	1.180	32.93	-13.07	46.00	32.72	0.12	0.09	Average
9	1.730	42.64	-13.36	56.00	42.43	0.14	0.07	QP
10	1.730	32.20	-13.80	46.00	31.99	0.14	0.07	Average
11	2.240	38.77	-17.23	56.00	38.57	0.14	0.06	QP
12	2.240	29.39	-16.61	46.00	29.19	0.14	0.06	Average

Test date	May 14, 2008	Test Site No.	CO01-HY
Temperature	22	Humidity	62%
Test Engineer	Steven	Phase	Neutral
Configurations	Charger Mode		

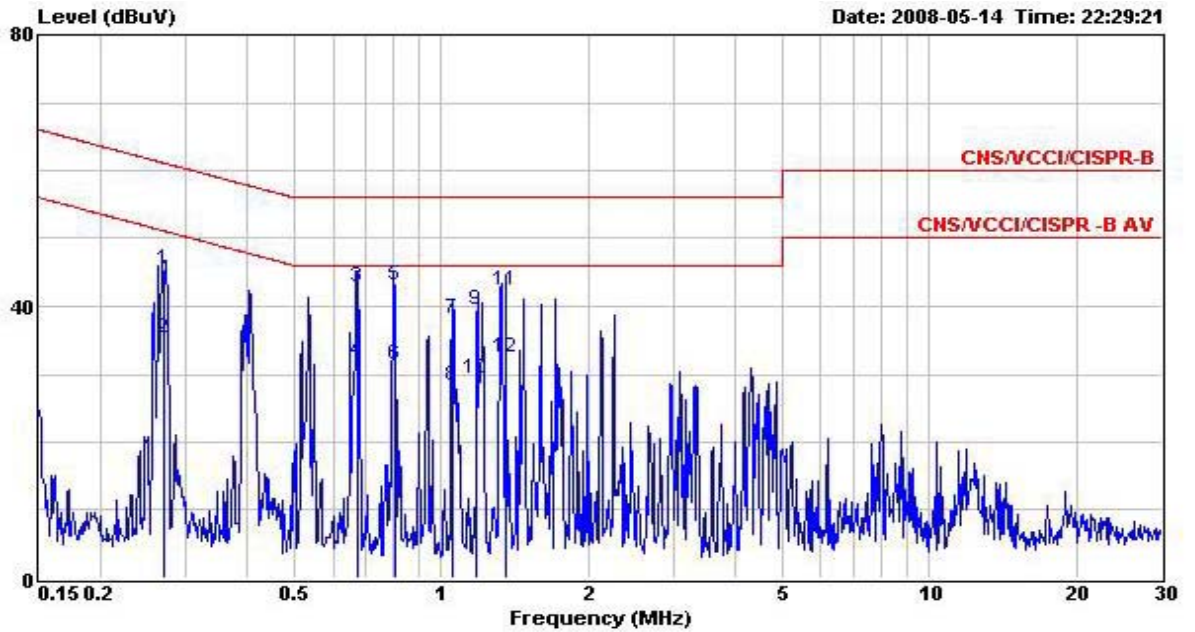

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.269	45.53	-15.62	61.15	45.39	0.07	0.07	QP
2	0.269	35.45	-15.70	51.15	35.31	0.07	0.07	Average
3	0.671	42.83	-13.17	56.00	42.68	0.08	0.07	QP
4	0.671	32.00	-14.00	46.00	31.85	0.08	0.07	Average
5	0.805	43.05	-12.95	56.00	42.88	0.09	0.08	QP
6	0.805	31.34	-14.66	46.00	31.17	0.09	0.08	Average
7	1.054	38.22	-17.78	56.00	38.03	0.09	0.10	QP
8	1.054	28.44	-17.56	46.00	28.25	0.09	0.10	Average
9	1.180	39.50	-16.50	56.00	39.32	0.09	0.09	QP
10	1.180	29.23	-16.77	46.00	29.05	0.09	0.09	Average
11	1.350	42.45	-13.55	56.00	42.27	0.10	0.08	QP
12	1.350	32.59	-13.41	46.00	32.41	0.10	0.08	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.

**3.2. Maximum Peak Output Power Measurement**

**3.2.1. Limit**

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

**3.2.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Peak Sensor	NRV-Z32 (model 04)

**3.2.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the peak power value.
3. Repeat above procedures on all channels needed to be tested.

**3.2.4. Test Setup Layout**

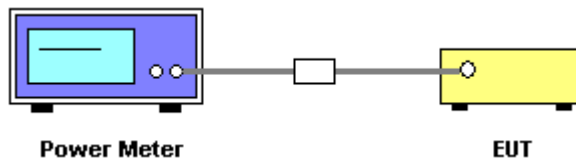

**3.2.5. Test Deviation**

There is no deviation with the original standard.

**3.2.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.2.7. Test Result of Maximum Peak Output Power**

<b>Test date</b>	Aug. 22, 2008	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	28	<b>Humidity</b>	58%
<b>Test Engineer</b>	Tom	<b>Configurations</b>	8DPSK

**1Mbps**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	6.60	30.00	<b>Complies</b>
39	2441 MHz	5.93	30.00	<b>Complies</b>
78	2480 MHz	4.71	30.00	<b>Complies</b>

**2Mbps**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	4.71	30.00	<b>Complies</b>
39	2441 MHz	4.87	30.00	<b>Complies</b>
78	2480 MHz	5.00	30.00	<b>Complies</b>

**3Mbps**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	5.91	30.00	<b>Complies</b>
39	2441 MHz	6.09	30.00	<b>Complies</b>
78	2480 MHz	6.77	30.00	<b>Complies</b>

**3.3. Hopping Channel Separation Measurement**

**3.3.1. Limit**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

**3.3.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.3.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurements.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

**3.3.4. Test Setup Layout**

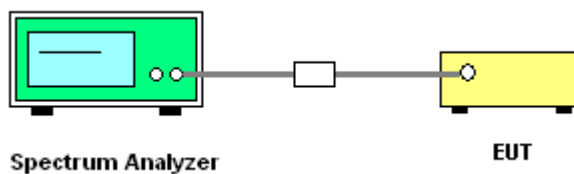

**3.3.5. Test Deviation**

There is no deviation with the original standard.



**3.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.


**3.3.7. Test Result of Hopping Channel Separation**

<b>Test date</b>	Aug. 22, 2008	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	28	<b>Humidity</b>	58%
<b>Test Engineer</b>	Tom	<b>Configurations</b>	8DPSK

<b>Frequency</b>	<b>Ch. Separation (MHz)</b>	<b>20dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>	<b>Result</b>
2402 MHz	1.000	1.398	1.266	<b>Complies</b>
2441 MHz	1.000	1.386	1.236	<b>Complies</b>
2480 MHz	1.000	1.386	1.212	<b>Complies</b>


**Ch. Separation Limits: >2/3 of 20dB bandwidth**

20 dB Bandwidth Plot on Channel 0 / 2402 MHz

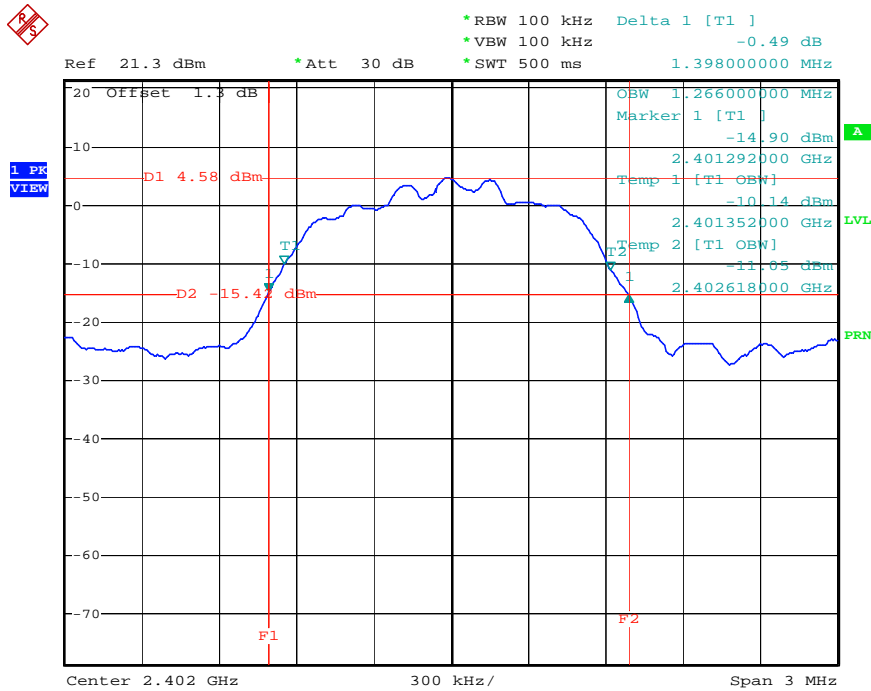


Date: 22.AUG.2008 10:17:44

20 dB Bandwidth Plot on Channel 39 / 2441 MHz

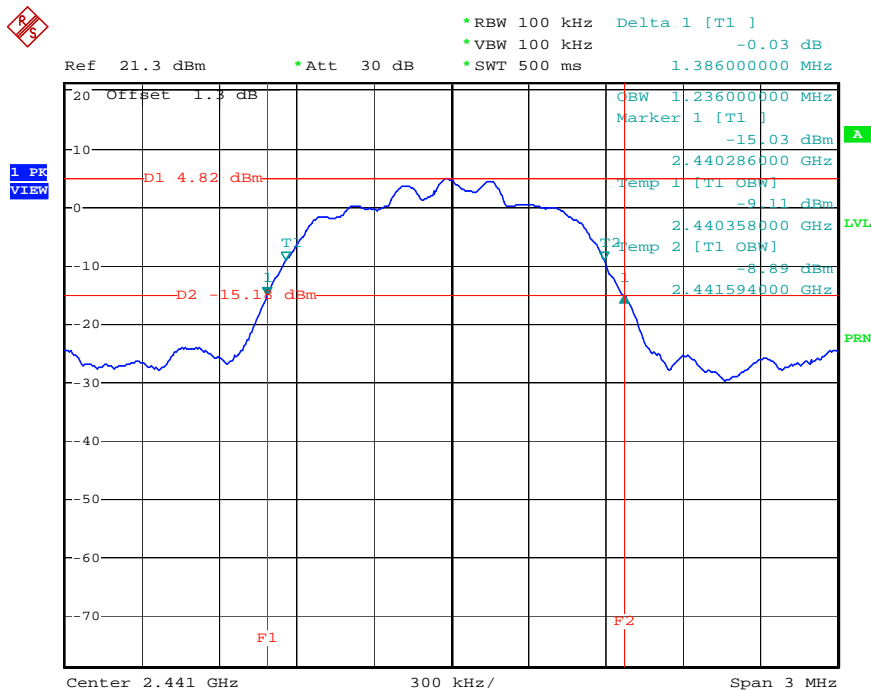


Date: 22.AUG.2008 10:26:12

20 dB Bandwidth Plot on Channel 78 / 2480 MHz

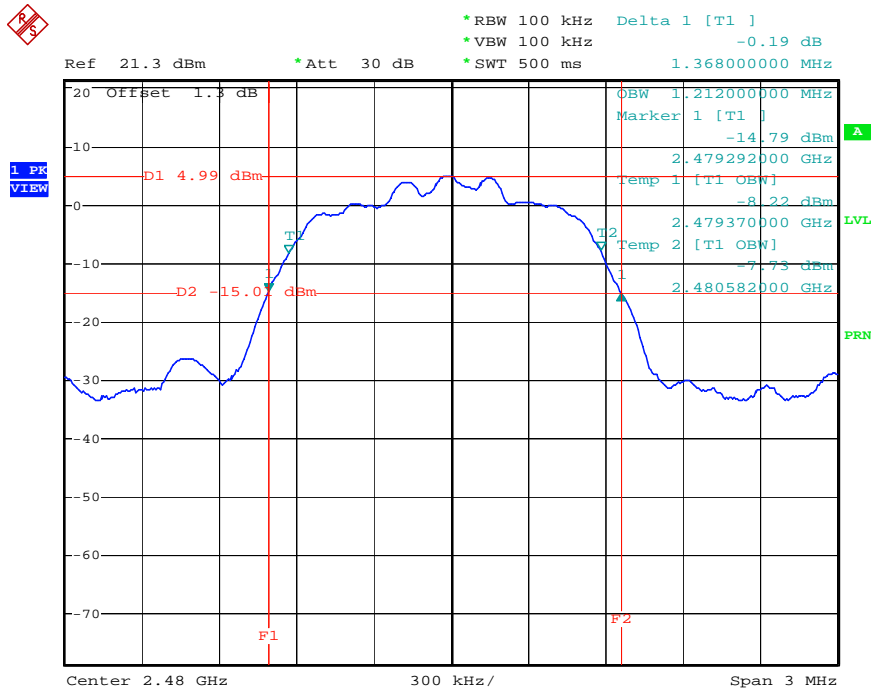


Date: 22.AUG.2008 10:33:17

Channel Separation Plot on Channel 0~1 / 2402 MHz ~ 2403 MHz

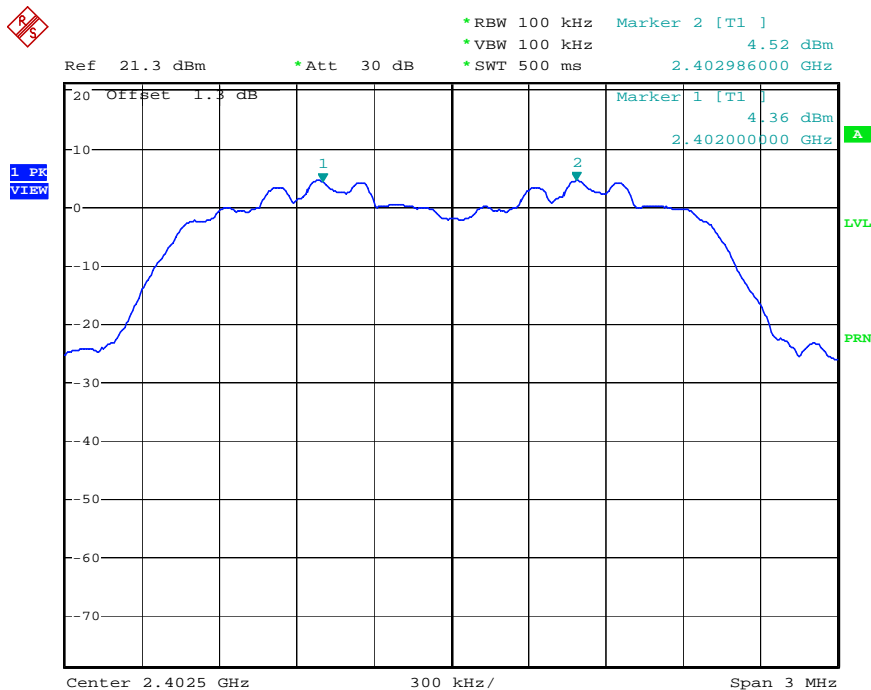


Date: 22.AUG.2008 10:21:27

Channel Separation Plot on Channel 39~40 / 2441 MHz ~ 2442 MHz

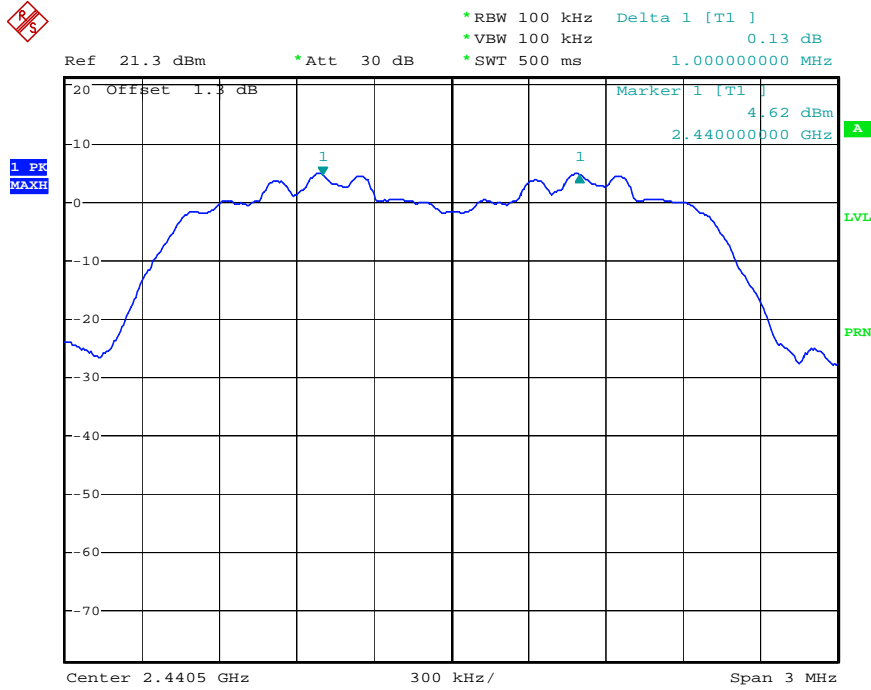

Date: 22.AUG.2008 10:27:59

Channel Separation Plot on Channel 77~78 / 2479 MHz ~ 2480 MHz

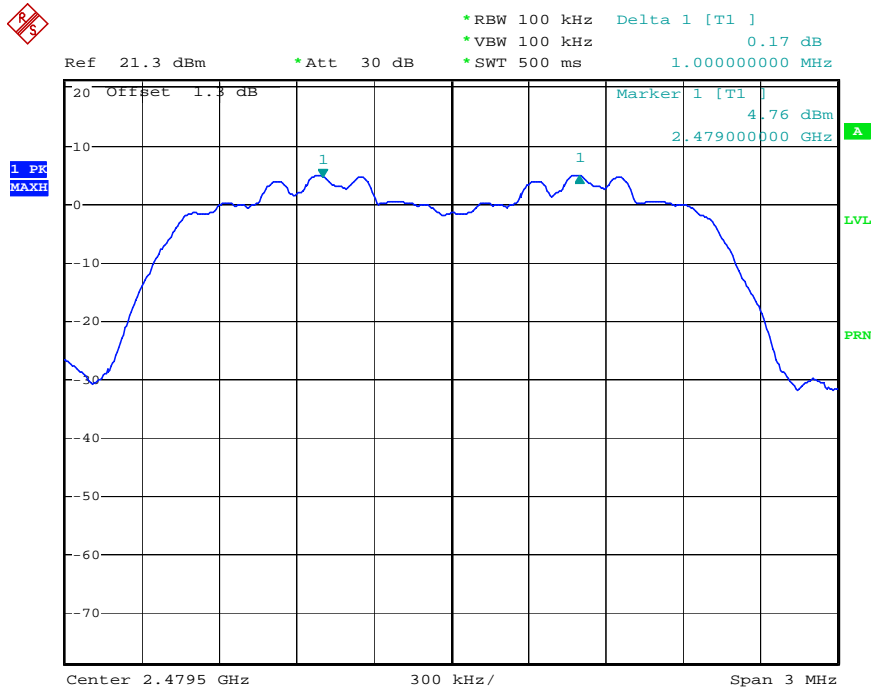

Date: 22.AUG.2008 10:29:08

**3.4. Number of Hopping Frequency Measurement**

**3.4.1. Limit**

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

**3.4.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.4.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilised.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

**3.4.4. Test Setup Layout**

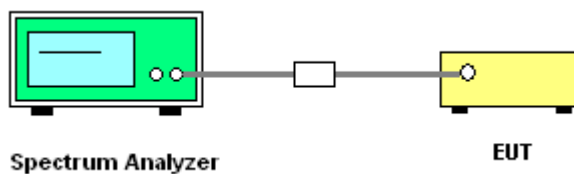

**3.4.5. Test Deviation**

There is no deviation with the original standard.

**3.4.6. EUT Operation during Test**


The EUT was programmed to be in continuously transmitting mode.

**3.4.7. Test Result of Number of Hopping Frequency**

<b>Test date</b>	Apr. 03, 2008	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	28	<b>Humidity</b>	58%
<b>Test Engineer</b>	Tom	<b>Configurations</b>	8DPSK

<b>Modulation Type</b>	<b>Channel No.</b>	<b>Frequency (MHz)</b>	<b>Hopping Ch. (Channels)</b>	<b>Min. Limit (Channels)</b>	<b>Test Result</b>
8DPSK	0 ~ 78	2402 ~ 2480	79	75	<b>Complies</b>

**Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz**

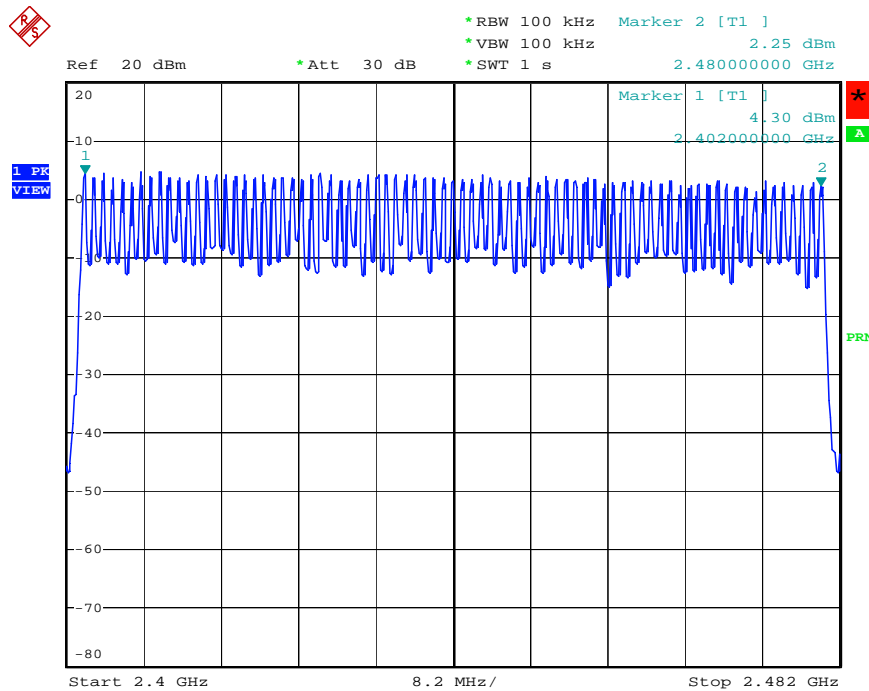

Date: 3.APR.2008 17:47:04

**3.5. Dwell Time Measurement**

**3.5.1. Limit**

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**3.5.2. Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

**3.5.3. Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyser
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for DH5, DH3 and DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.
9. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds
10. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
11. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

**3.5.4. Test Setup Layout**

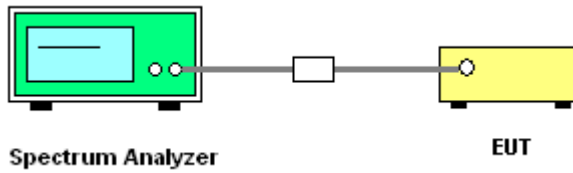

**3.5.5. Test Deviation**

There is no deviation with the original standard.

**3.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.


**3.5.7. Test Result of Dwell Time**

<b>Test date</b>	Apr. 03, 2008	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	28	<b>Humidity</b>	58%
<b>Test Engineer</b>	Tom	<b>Configurations</b>	GFSK

<b>Data Packet</b>	<b>Frequency</b>	<b>Pulse Duration (ms)</b>	<b>Dwell Time (s)</b>	<b>Limits (s)</b>	<b>Test Result</b>
DH5	2402 MHz	3.0800	0.3285	0.4000	<b>Complies</b>
DH3	2402 MHz	1.8400	0.2944	0.4000	<b>Complies</b>
DH1	2402 MHz	0.5600	0.1792	0.4000	<b>Complies</b>
DH5	2441 MHz	3.0800	0.3285	0.4000	<b>Complies</b>
DH3	2441 MHz	1.8400	0.2944	0.4000	<b>Complies</b>
DH1	2441 MHz	0.6000	0.1920	0.4000	<b>Complies</b>
DH5	2480 MHz	3.0800	0.3285	0.4000	<b>Complies</b>
DH3	2480 MHz	1.8200	0.2912	0.4000	<b>Complies</b>
DH1	2480 MHz	0.6000	0.1920	0.4000	<b>Complies</b>




DH5 Dwell Time Plot on Channel 0 / 2402 MHz

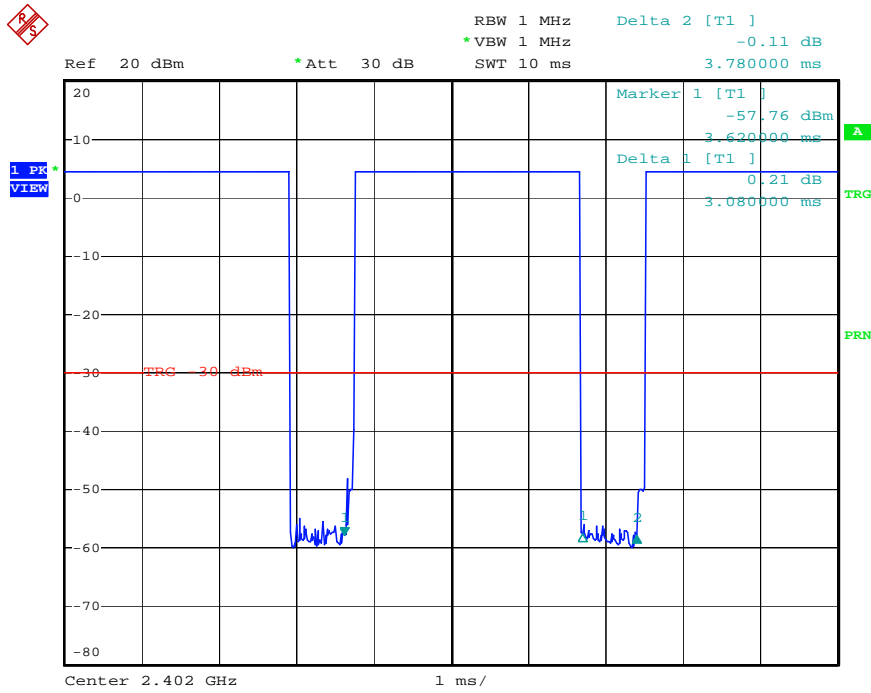


Date: 3.APR.2008 17:32:52

DH3 Dwell Time Plot on Channel 0 / 2402 MHz

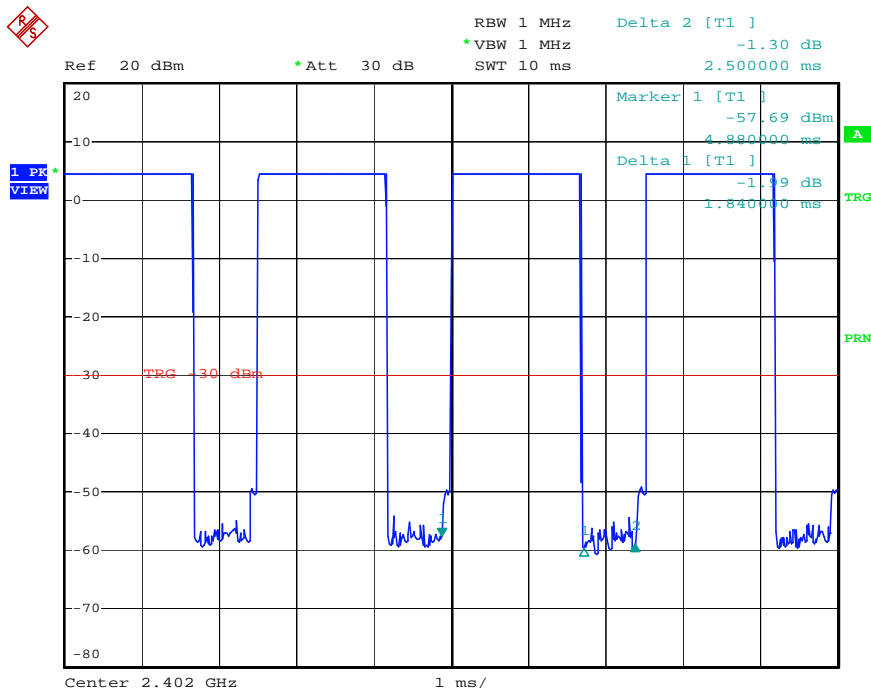


Date: 3.APR.2008 17:32:16

DH1 Dwell Time Plot on Channel 0 / 2402 MHz

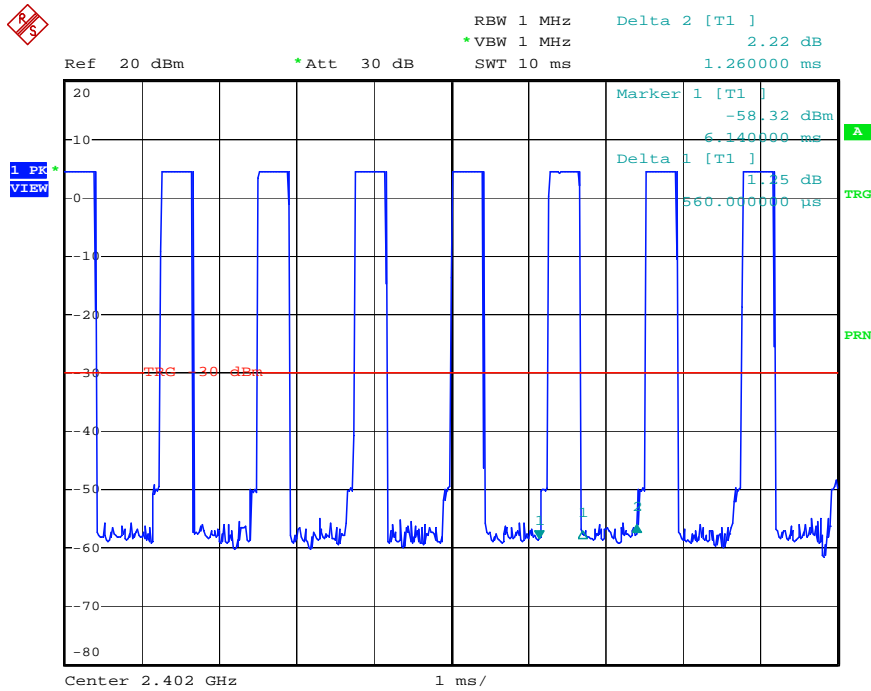


Date: 3.APR.2008 17:31:33

DH5 Dwell Time Plot on Channel 39 / 2441 MHz

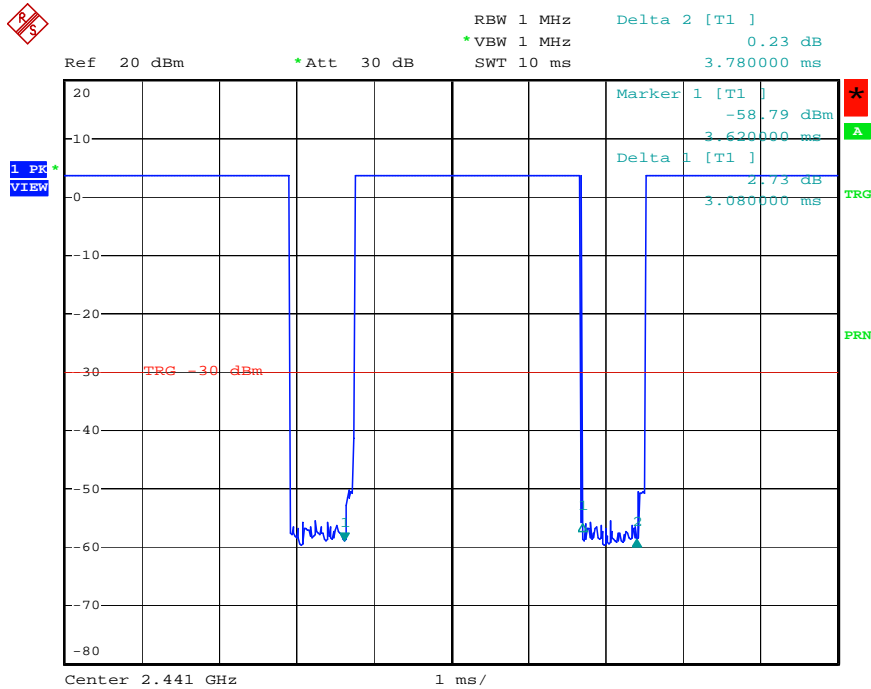


Date: 3.APR.2008 17:34:43

DH3 Dwell Time Plot on Channel 39 / 2441 MHz

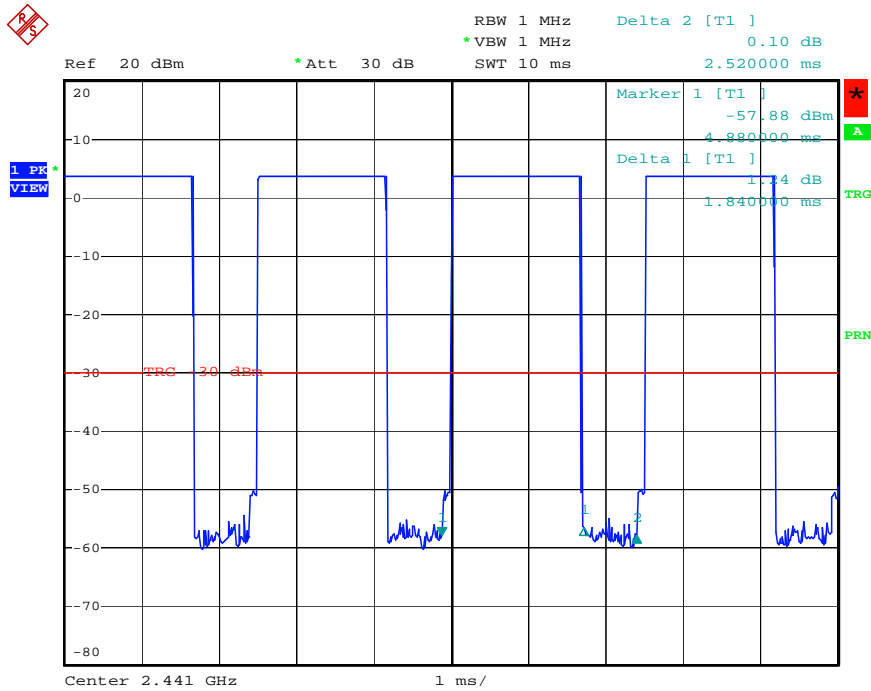


Date: 3.APR.2008 17:34:13

DH1 Dwell Time Plot on Channel 39 / 2441 MHz

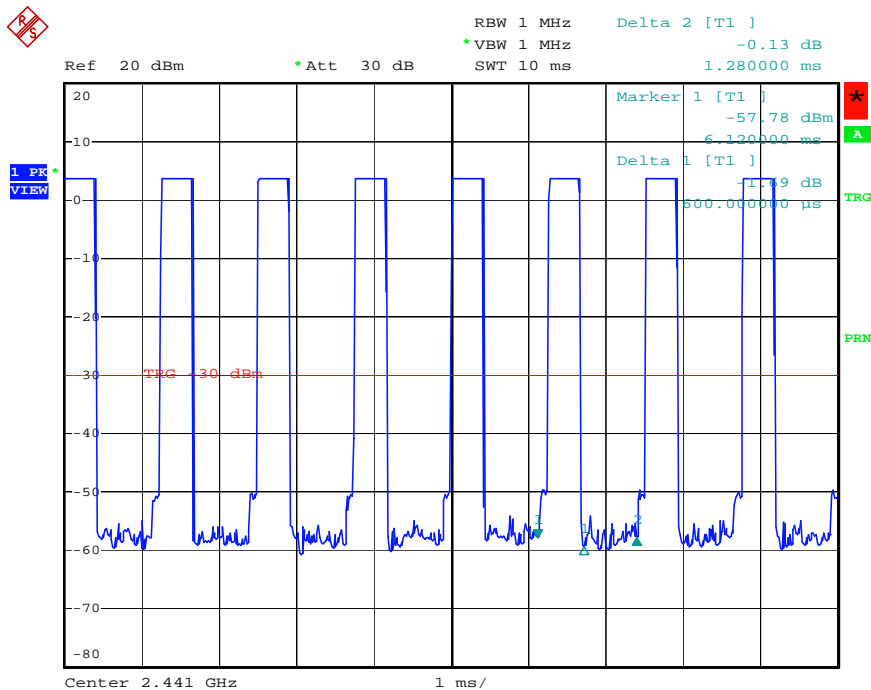


Date: 3.APR.2008 17:33:41

DH5 Dwell Time Plot on Channel 78 / 2480 MHz

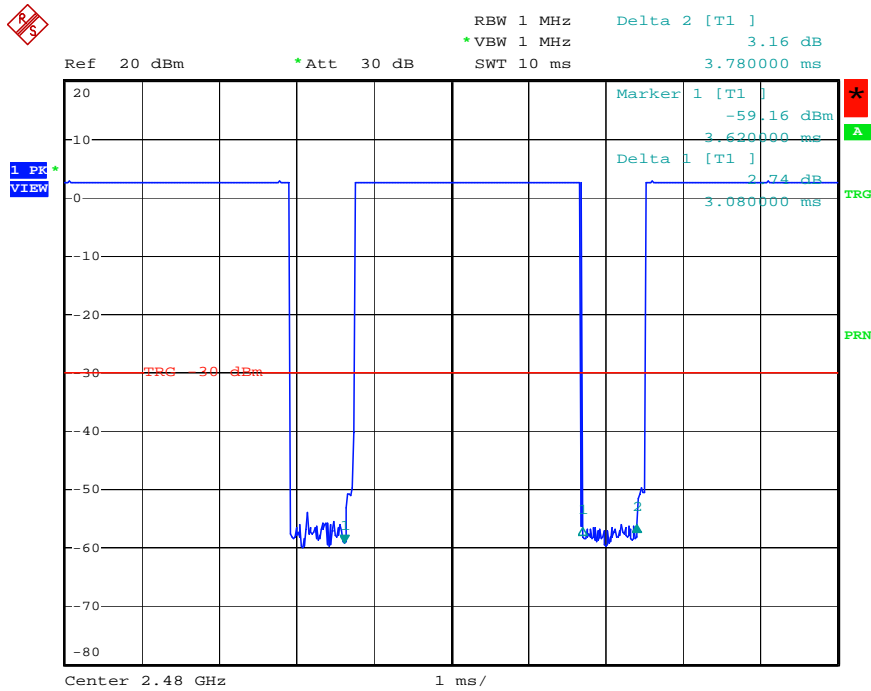


Date: 3.APR.2008 17:36:22

DH3 Dwell Time Plot on Channel 78 / 2480 MHz

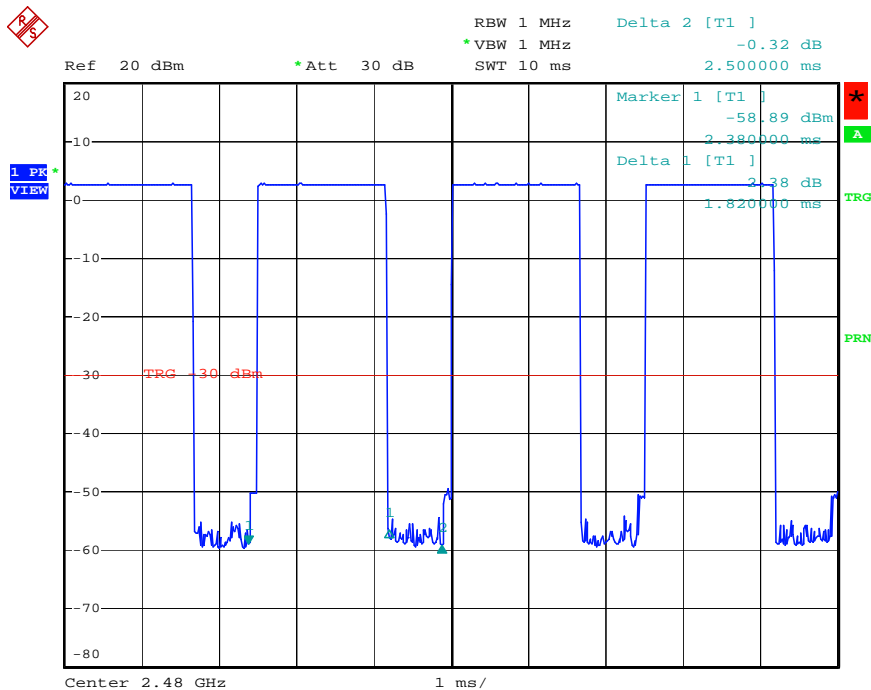

Date: 3.APR.2008 17:35:51

DH1 Dwell Time Plot on Channel 78 / 2480 MHz

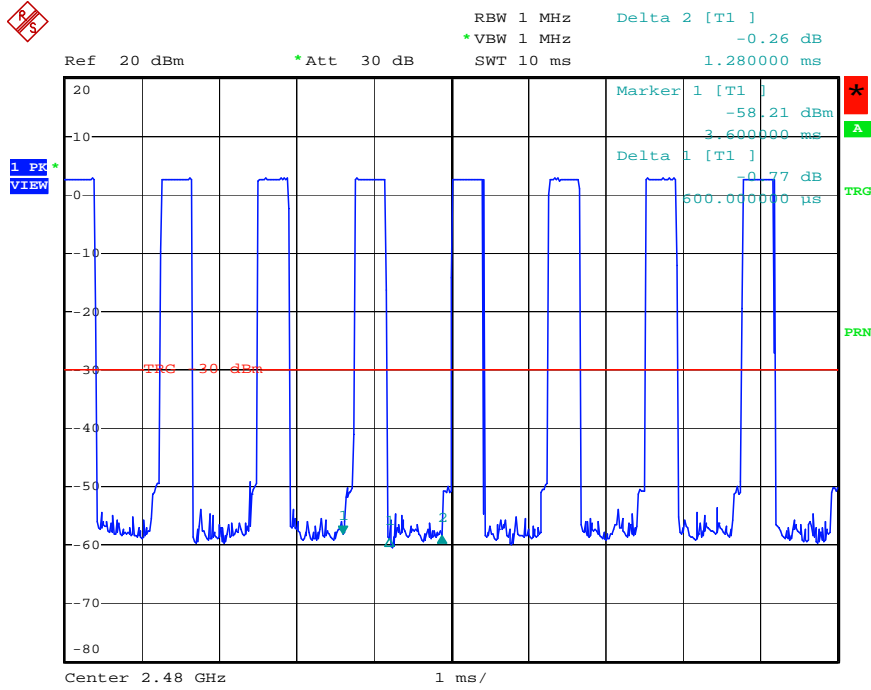

Date: 3.APR.2008 17:35:21

**3.6. Radiated Emissions Measurement**

**3.6.1. Limit**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.6.2. Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.6.3. Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

3.6.4. Test Setup Layout

For radiated emissions below 30MHz

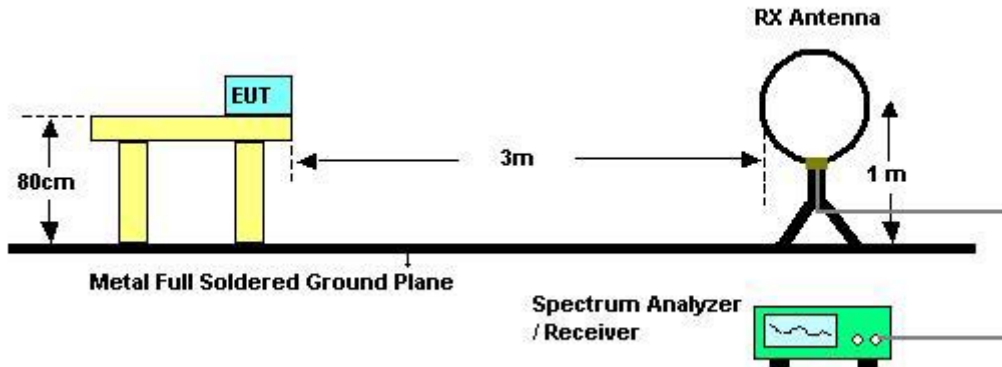

For radiated emissions above 30MHz

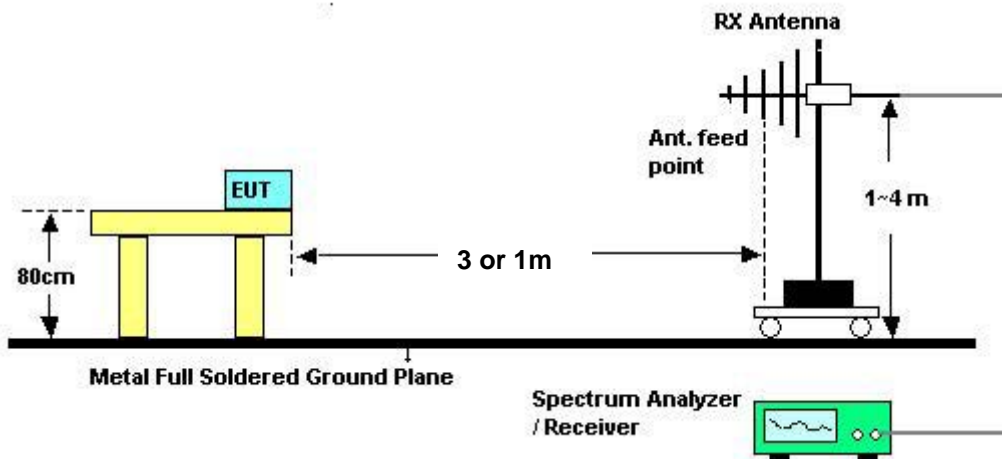

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

3.6.5. Test Deviation

There is no deviation with the original standard.

3.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



**3.6.7. Results of Radiated Emissions (9kHz~30MHz)**

<b>Test date</b>	May 02, 2008	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	28	<b>Humidity</b>	59%
<b>Test Engineer</b>	Murphy		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.6.8. Results of Radiated Emissions (30MHz~1GHz)


Test date	May 02, 2008	Test Site No.	03CH02-HY
Temperature	28	Humidity	59%
Test Engineer	Murphy	Configurations	Normal mode

Horizontal

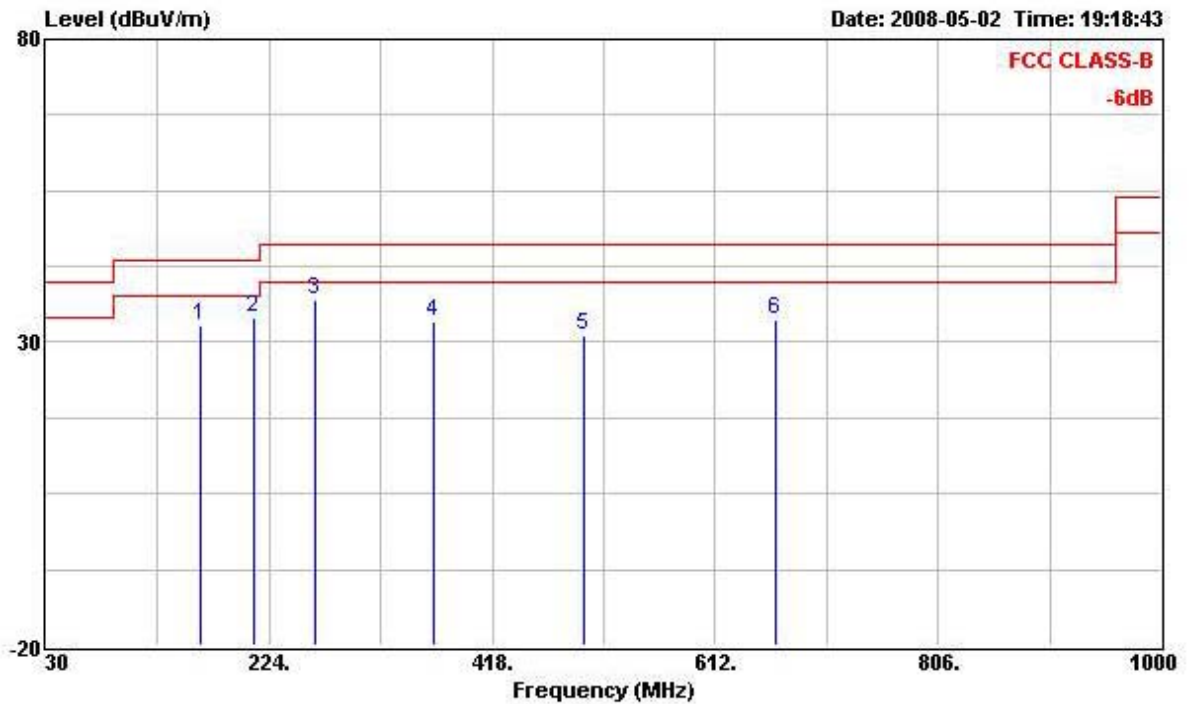

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	163.860	32.83	-10.67	43.50	50.56	10.38	2.56	30.67	Peak	---	---
2	210.420	34.22	-9.28	43.50	50.20	11.70	2.90	30.58	Peak	---	---
3	264.740	37.09	-8.91	46.00	51.13	13.21	3.22	30.47	Peak	---	---
4	366.590	33.41	-12.59	46.00	45.21	14.74	3.73	30.27	Peak	---	---
5	498.510	31.10	-14.90	46.00	39.48	17.26	4.26	29.90	Peak	---	---
6	665.350	33.88	-12.12	46.00	38.77	19.31	5.14	29.34	Peak	---	---

Vertical

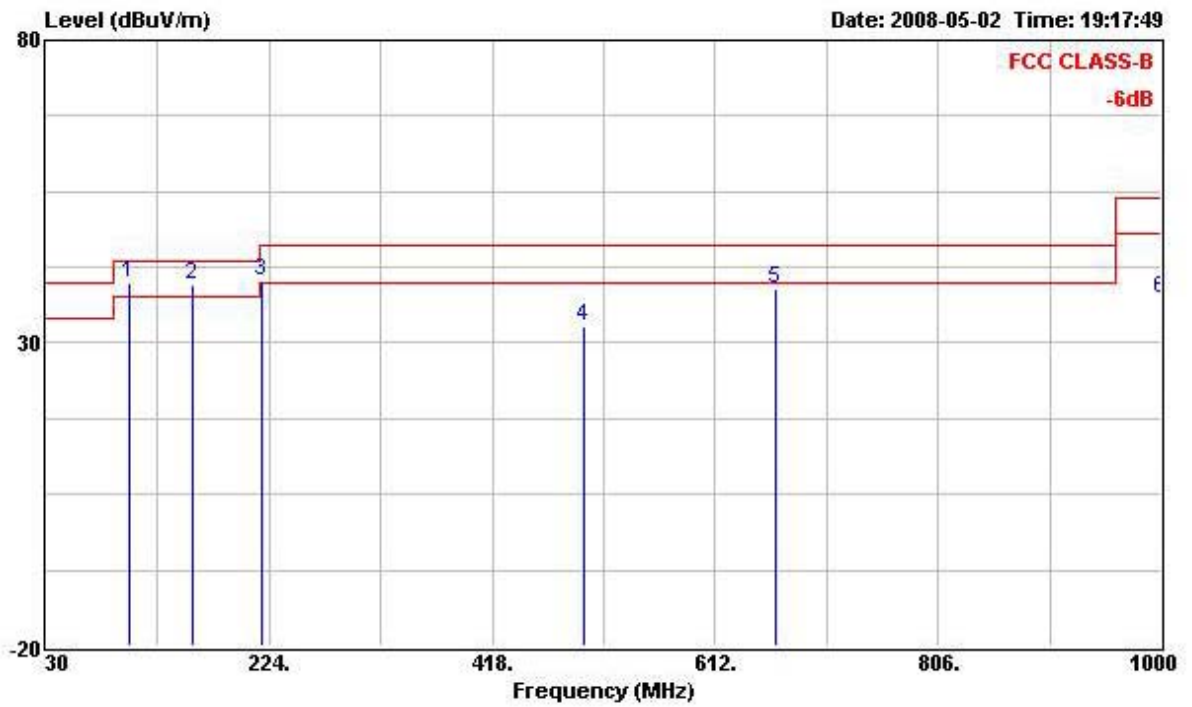

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1 !	102.750	39.90	-3.60	43.50	57.09	11.53	2.07	30.79	Peak	---	---
2 !	157.070	39.47	-4.03	43.50	57.01	10.62	2.53	30.69	Peak	---	---
3 !	218.180	40.37	-5.63	46.00	56.04	11.95	2.94	30.56	Peak	---	---
4	498.510	32.89	-13.11	46.00	41.27	17.26	4.26	29.90	Peak	---	---
5	665.350	38.90	-7.10	46.00	43.79	19.31	5.14	29.34	Peak	---	---
6	1000.000	37.36	-36.64	74.00	37.07	22.50	6.09	28.30	Peak	---	---

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Test date	Apr. 25, 2008	Test Site No.	03CH02-HY
Temperature	28	Humidity	59%
Test Engineer	Murphy	Configurations	Channel 0


Horizontal

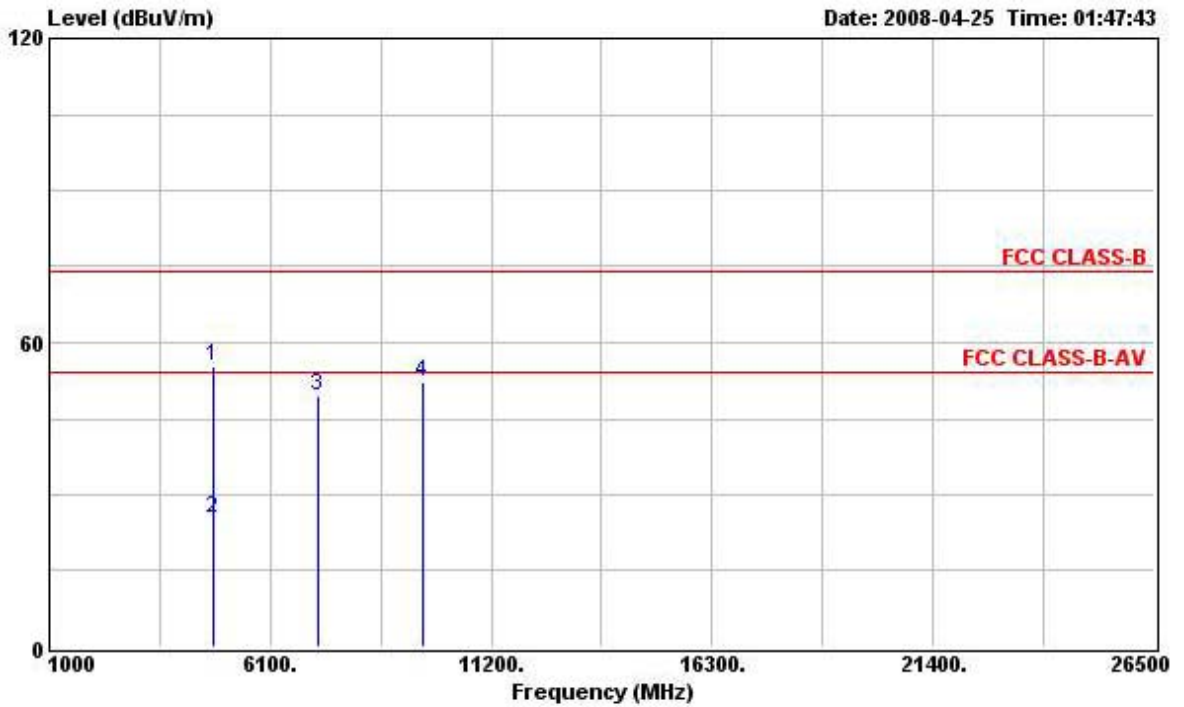

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB	dB		cm	deg
1	4803.000	55.51	-18.49	74.00	52.88	33.00	4.57	34.94	Peak	---	---
2	4803.000	25.40	-28.60	54.00	22.77	33.00	4.57	34.94	Average	---	---
3	7202.000	49.36	-4.64	54.00	43.04	35.94	5.62	35.24	Peak	---	---
4	9604.000	52.12			43.54	37.94	6.34	35.70	Peak	---	---

Note: An item 4 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.7.7).

Vertical

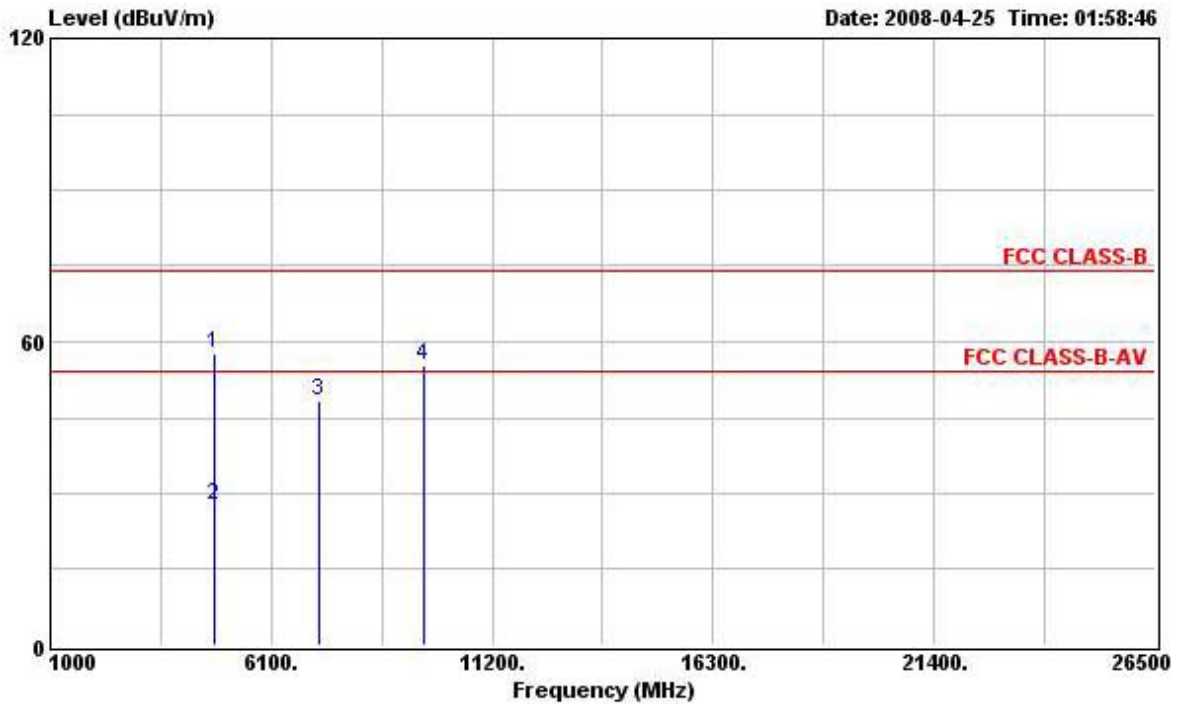


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4804.000	57.80	-16.20	74.00	55.17	33.00	4.57	34.94	Peak	---	---
2	4804.000	27.69	-26.31	54.00	25.06	33.00	4.57	34.94	Average	---	---
3	7202.000	48.48	-5.52	54.00	42.16	35.94	5.62	35.24	Peak	---	---
4	9608.000	55.44			46.86	37.94	6.34	35.70	Peak	---	---

Note: An item 4 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.7.7).

<b>Test date</b>	Apr. 25, 2008	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	28	<b>Humidity</b>	59%
<b>Test Engineer</b>	Murphy	<b>Configurations</b>	Channel 39


**Horizontal**

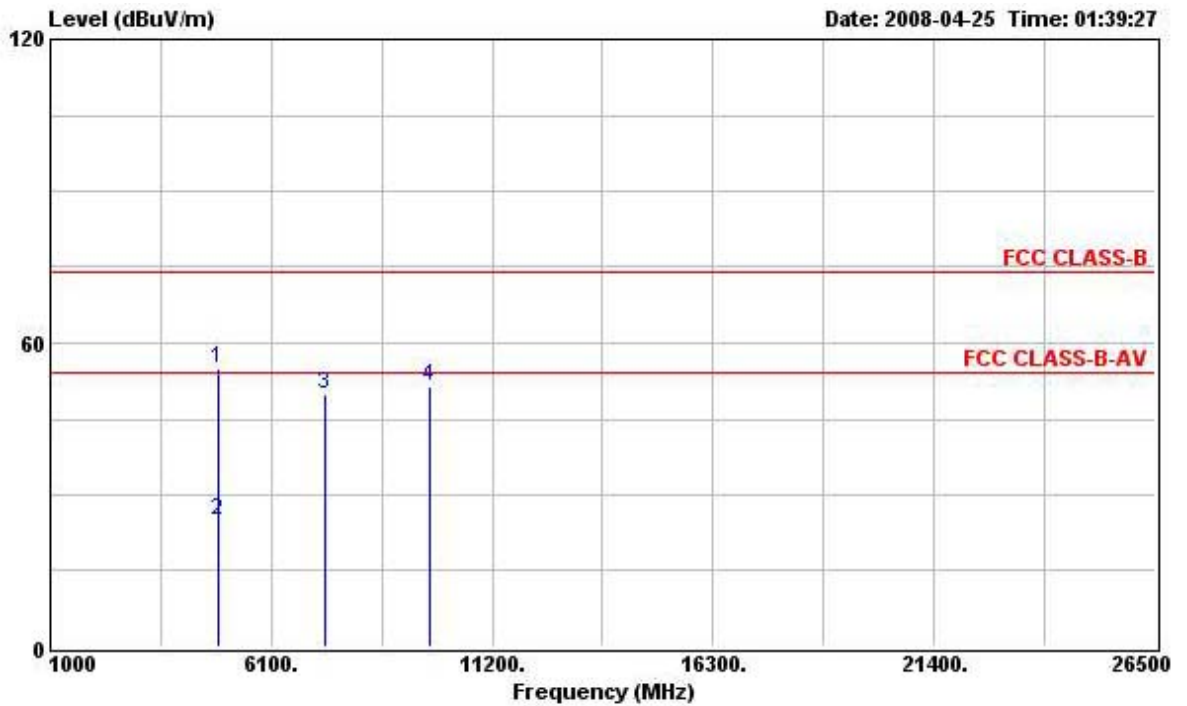

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Probe Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>	<b>Ant Pos</b>	<b>Table Pos</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4881.000	54.92	-19.08	74.00	52.10	33.11	4.64	34.93	Peak	---	---
2	4881.000	24.81	-29.19	54.00	21.99	33.11	4.64	34.93	Average	---	---
3	7319.000	49.94	-4.06	54.00	43.31	36.25	5.64	35.26	Peak	---	---
4	9764.000	51.47			42.80	38.01	6.36	35.70	Peak	---	---

Note: An item 4 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.7.7).

Vertical

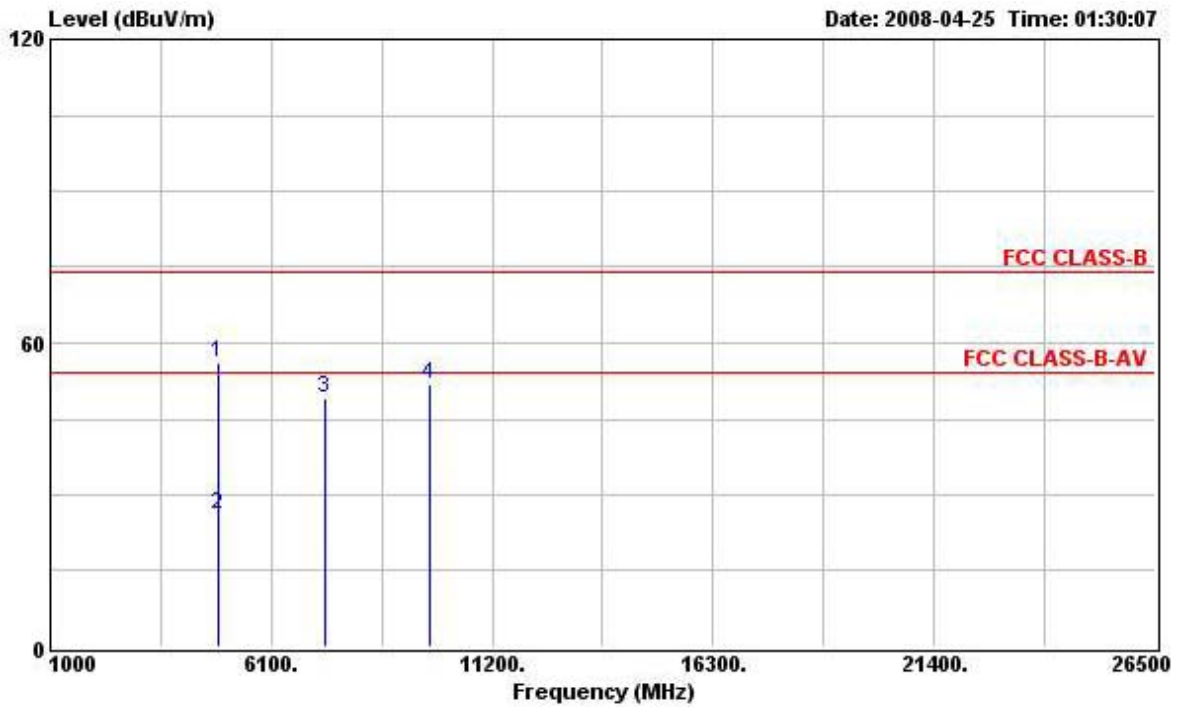


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4881.000	56.05	-17.95	74.00	53.23	33.11	4.64	34.93	Peak	---	---
2	4881.000	25.94	-28.06	54.00	23.12	33.11	4.64	34.93	Average	---	---
3	7323.000	48.90	-5.10	54.00	42.27	36.25	5.64	35.26	Peak	---	---
4	9764.000	51.94			43.27	38.01	6.36	35.70	Peak	---	---

Note: An item 4 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.7.7).

Test date	Apr. 25, 2008	Test Site No.	03CH02-HY
Temperature	28	Humidity	59%
Test Engineer	Murphy	Configurations	Channel 78

Horizontal

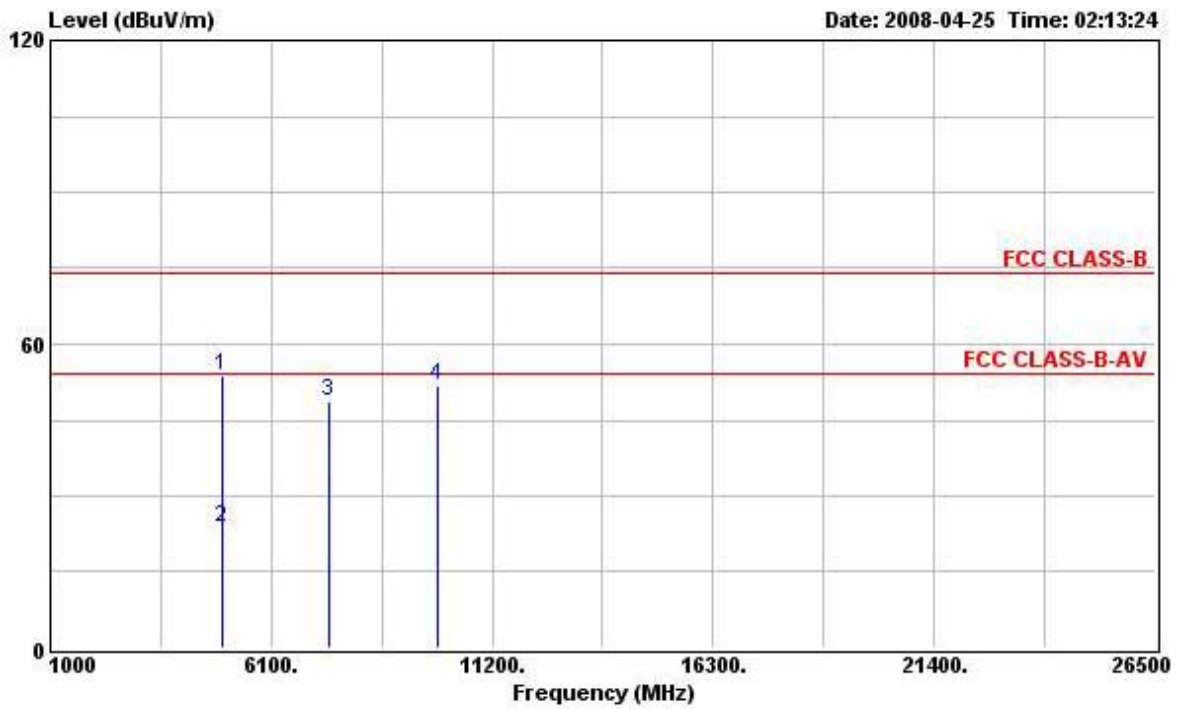


	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB	dB	dB		cm	deg
1	4959.000	53.75	-20.25	74.00	50.70	33.24	4.72	34.91	Peak	---	---
2	4959.000	23.64	-30.36	54.00	20.59	33.24	4.72	34.91	Average	---	---
3	7440.000	48.62	-5.38	54.00	41.69	36.57	5.65	35.29	Peak	---	---
4	9920.000	51.80			43.04	38.07	6.39	35.70	Peak	---	---

Note: An item 4 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.7.7).



Vertical

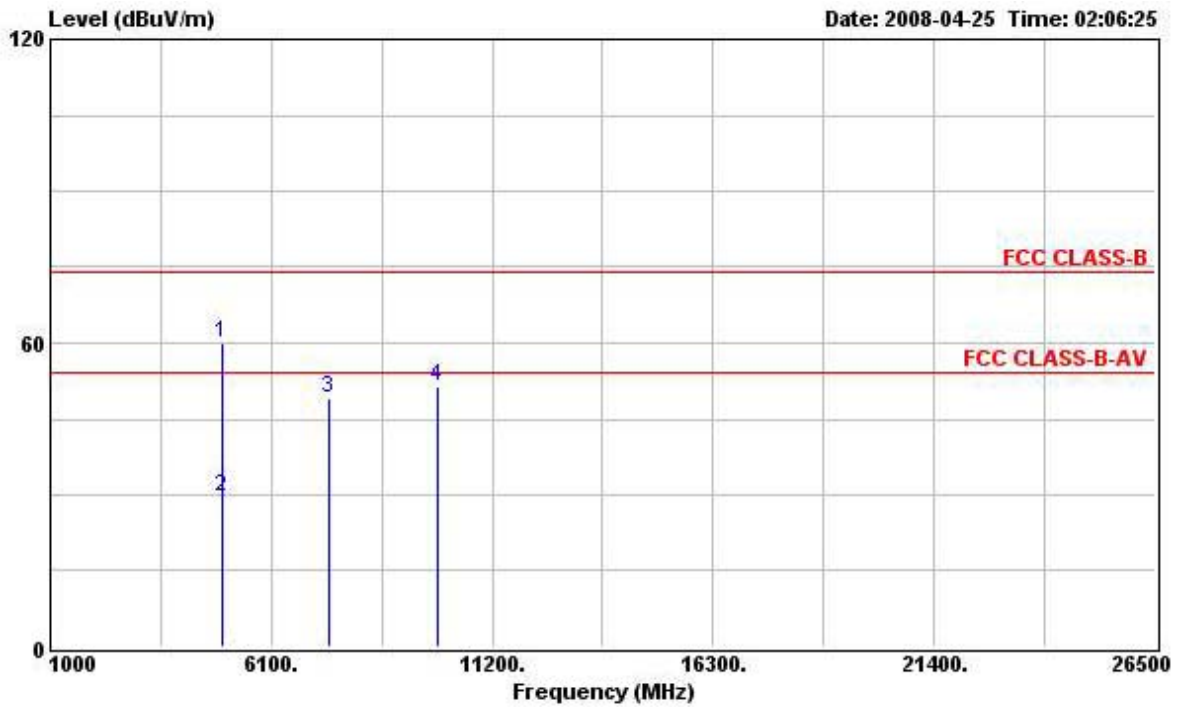

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	4959.000	59.82	-14.18	74.00	56.77	33.24	4.72	34.91	Peak	---	---
2	4959.000	29.71	-24.29	54.00	26.66	33.24	4.72	34.91	Average	---	---
3	7444.000	48.98	-5.02	54.00	42.05	36.57	5.65	35.29	Peak	---	---
4	9920.000	51.34			42.58	38.07	6.39	35.70	Peak	---	---

Note: An item 4 is on un-restricted band, so the limit is -20dBc for the field strength of the fundamental emissions (see section 3.7.7).

The amplitude of spurious emissions, which are attenuated by more than 20dB below, the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**3.7. Band Edge and Fundamental Emissions Measurement**

**3.7.1. Limit**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (micorvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.7.2. Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

**3.7.3. Test Procedures**

1. The test procedure is the same as section 3.5.3; only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

**3.7.4. Test Setup Layout**

This test setup layout is the same as that shown in section 3.6.4.

**3.7.5. Test Deviation**

There is no deviation with the original standard.

**3.7.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.7.7. Test Result of Band Edge and Fundamental Emissions**

<b>Test date</b>	Apr. 25, 2008	<b>Test Site No.</b>	03CH02-HY
<b>Temperature</b>	28	<b>Humidity</b>	59%
<b>Test Engineer</b>	Murphy	<b>Configurations</b>	Channel 0, 78

**Channel 0**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Probe Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>	<b>Ant Pos</b>	<b>Table Pos</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB</b>	<b>dB</b>	<b>dB</b>		<b>cm</b>	<b>deg</b>
1	2311.330	55.98	-18.02	74.00	25.07	27.97	2.94	0.00	Peak	---	---
2 X	2401.770	104.19			72.98	28.21	3.00	0.00	Peak	---	---
1	2381.060	50.10	-3.90	54.00	18.94	28.16	3.00	0.00	Average	---	---
2 X	2401.770	104.19			72.98	28.21	3.00	0.00	Average	---	---

An item 2 is Fundamental Emissions.

**Channel 78**

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>Read Level</b>	<b>Probe Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>	<b>Ant Pos</b>	<b>Table Pos</b>
	<b>MHz</b>	<b>dBuV/m</b>	<b>dB</b>	<b>dBuV/m</b>	<b>dBuV</b>	<b>dB</b>	<b>dB</b>	<b>dB</b>		<b>cm</b>	<b>deg</b>
1 X	2480.050	102.18			70.67	28.45	3.06	0.00	Peak	---	---
2	2483.500	66.69	-7.31	74.00	35.18	28.45	3.06	0.00	Peak	---	---
1 X	2480.050	98.78			67.27	28.45	3.06	0.00	Average	---	---
2	2483.500	51.47	-2.53	54.00	19.96	28.45	3.06	0.00	Average	---	---

An item 1 is Fundamental Emissions.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Channel 0 / 2402 MHz

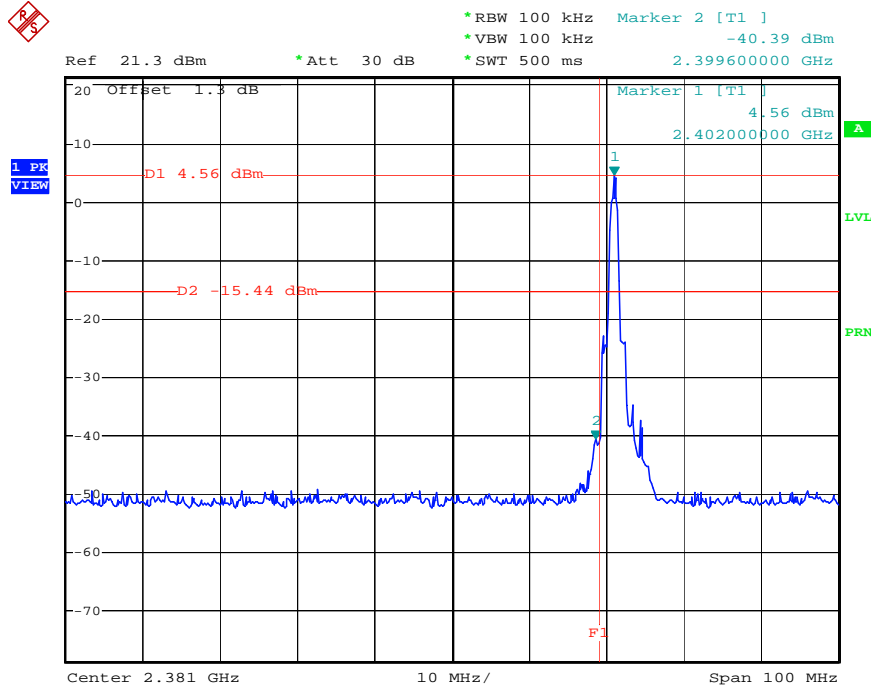

Date: 22.AUG.2008 10:20:06

High Band Edge Plot on Channel 78 / 2480 MHz

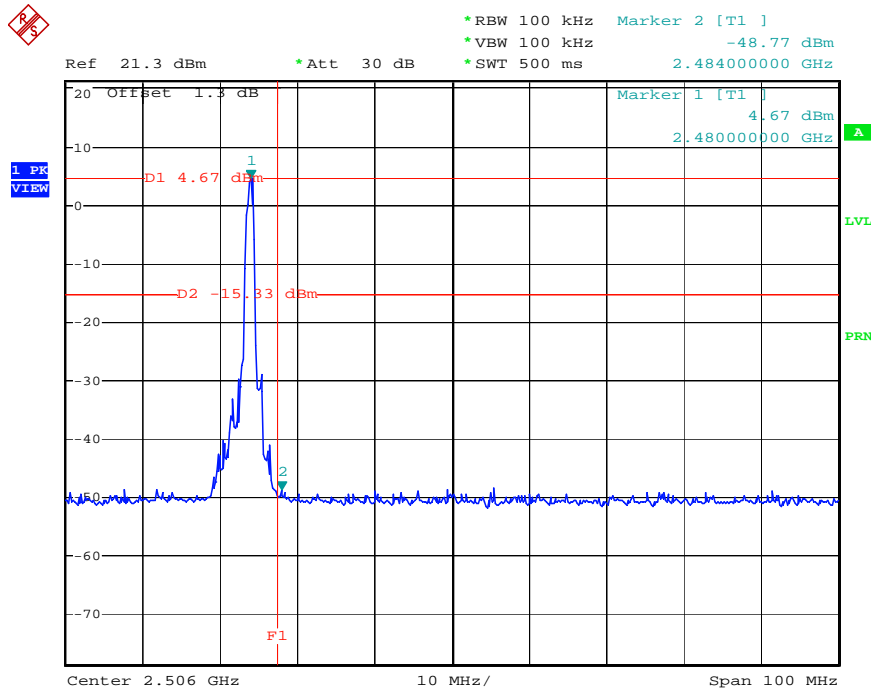

Date: 22.AUG.2008 10:31:12

### **3.8. Antenna Requirements**

#### **3.8.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

#### **3.8.2. Antenna Connector Construction**

Please refer to section 2.3 in this test report; antenna connector complied with the requirements.

**4. LIST OF MEASURING EQUIPMENTS**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9kHz – 2.75GHz	Jul. 13, 2007	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Mar. 24, 2008	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Mar. 13, 2008	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832010001	9kHz – 30MHz	May. 07, 2008	Conduction (CO01-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO01-HY)
Impedance Stabilization Network	SCHAFFNER	ST08	22589	150kHz – 230MHz	Mar. 03, 2008	Conduction (CO01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 10, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 11, 2008	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2008	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2007	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 30, 2008*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30 MHz - 1 GHz 3m	May 12, 2008	Radiation (03CH02-HY)
Amplifier	ADVANTEST	BB525C	CH300001	9 kHz - 2 GHz	Dec. 05, 2007	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100305/040	9 kHz - 40GHz	Jan. 10, 2008	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30 MHz - 2 GHz	Dec. 22, 2007	Radiation (03CH02-HY)
Turn Table	HD	DS 420	420/649/00	0 - 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	HD	MA 240	240/559/00	1 m - 4 m	N/A	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB020	30 MHz - 1 GHz	Dec. 08, 2007	Radiation (03CH02-HY)
Amplifier	Agilent	8449B	3008A02373	1GHz – 26.5 GHz	Jul. 09, 2007	Radiation (03CH02-HY)
Horn Antenna	EMCO	3115	6903	1GHz~18GHz	Apr. 21, 2008	Radiation (03CH02-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX106	03CH02-HY	1GHz~40GHz	Dec. 12, 2007	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year. NCR: Non-Calibration required.

## 5. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085



6. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會  
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

**Sporton International Inc.**

**EMC & Wireless Communications Laboratory**

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

- Accreditation Criteria : ISO/IEC 17025:2005
- Accreditation Number : 1190
- Originally Accredited : December 15, 2003
- Effective Period : January 10, 2007 to January 09, 2010
- Accredited Scope : Testing Field, see described in the Appendix
- Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory for Commodities Inspection  
: Accreditation Program for Telecommunication Equipment Testing Laboratory

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.