



**FCC CFR 47 PART 15 SUBPART C**

**TEST REPORT**

**For**

**KYE SYSTEMS CORP.**

**Wireless Keyboard**

**Model: GK-050012/K; KB 600/K**

**Trade Name: Genius**

*Issued to*

**KYE SYSTEMS CORP.**

**No. 492, Sec. 5, Chung Hsin Rd., San Chung,  
Taipei Hsien, 241, Taiwan, R.O.C.**

*Issued by*



**Compliance Certification Services Inc.  
Hsintien Lab.**

**No. 165, Chunghsen Road, Hsintien City  
Taipei Hsien, Taiwan**

**TEL: (02) 2217-0894**

**FAX: (02) 2217-1029**

---

***Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



## TABLE OF CONTENTS

|                                                                |           |
|----------------------------------------------------------------|-----------|
| <b>1. TEST RESULT CERTIFICATION.....</b>                       | <b>3</b>  |
| <b>2. EUT DESCRIPTION.....</b>                                 | <b>4</b>  |
| <b>3. TEST METHODOLOGY .....</b>                               | <b>5</b>  |
| <b>3.1 EUT CONFIGURATION.....</b>                              | <b>5</b>  |
| <b>3.2 EUT EXERCISE .....</b>                                  | <b>5</b>  |
| <b>3.3 GENERAL TEST PROCEDURES .....</b>                       | <b>5</b>  |
| <b>3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....</b> | <b>6</b>  |
| <b>3.5 DESCRIPTION OF TEST MODES .....</b>                     | <b>6</b>  |
| <b>4. INSTRUMENT CALIBRATION.....</b>                          | <b>7</b>  |
| <b>5. FACILITIES AND ACCREDITATIONS .....</b>                  | <b>7</b>  |
| <b>5.1 FACILITIES .....</b>                                    | <b>7</b>  |
| <b>5.2 EQUIPMENT .....</b>                                     | <b>7</b>  |
| <b>5.3 LABORATORY ACCREDITATIONS AND LISTINGS.....</b>         | <b>7</b>  |
| <b>5.4 TABLE PF ACCREDITATIONS AND LISTINGS.....</b>           | <b>8</b>  |
| <b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>                  | <b>9</b>  |
| <b>6.1 SETUP CONFIGURATION OF EUT .....</b>                    | <b>9</b>  |
| <b>6.2 SUPPORT EQUIPMENT .....</b>                             | <b>9</b>  |
| <b>7. FCC PART 15.227 REQUIREMENTS.....</b>                    | <b>10</b> |
| <b>7.1 26 dB BANDWIDTH .....</b>                               | <b>10</b> |
| <b>7.2 RADIATED EMISSIONS .....</b>                            | <b>12</b> |
| <b>7.3 POWERLINE CONDUCTED EMISSIONS .....</b>                 | <b>17</b> |
| <b>8. APPENDIX I - PHOTOGRAPHS OF TEST SETUP .....</b>         | <b>18</b> |



## 1. TEST RESULT CERTIFICATION

**Applicant:** KYE SYSTEMS CORP.  
No. 492, Sec. 5, Chung Hsin Rd., San Chung,  
Taipei Hsien, 241, Taiwan, R.O.C.

**Equipment Under Test:** Wireless Keyboard

**Trade Name:** Genius

**Model:** GK-050012/K; KB 600/K

**Model Difference:** See Item 2 of this report

**Report Number:** 60103211-RP1

**Date of Test:** December 16, 2005 & December 18, 2005

| APPLICABLE STANDARDS  |                         |
|-----------------------|-------------------------|
| STANDARD              | TEST RESULT             |
| FCC Part 15 Subpart C | No non-compliance noted |

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.227.

The test results of this report relate only to the tested sample identified in this report.

*Approved by:*

David Wang  
Manager of Hsintien Laboratory  
Compliance Certification Services Inc.

*Reviewed by:*

Vince Chiang  
Assistant Manager of Hsintien Laboratory  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

|                             |                                      |
|-----------------------------|--------------------------------------|
| <b>Product</b>              | Wireless Keyboard                    |
| <b>Trade Name</b>           | Genius                               |
| <b>Model</b>                | GK-050012/K; KB 600/K                |
| <b>Power Supply</b>         | 3VDC From Battery AAA size X 2 pcs.  |
| <b>Operate Frequency</b>    | 27.145MHz                            |
| <b>Transmit Power</b>       | N/A                                  |
| <b>Modulation Technique</b> | Frequency Shift Keying (FSK)         |
| <b>Number of Channels</b>   | 1 Channels                           |
| <b>Operating Mode</b>       | Point-to-Point                       |
| <b>Antenna Designation</b>  | Internal loop, which is built in EUT |

**Note:** The product is a composite system which includes Transmitter and Receiver.

This submittal(s) (test report) is intended for FCC ID: FSUGKZGV filing to comply with Section 15.227 of the FCC Part 15 Subpart C Rules. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

### MODEL DIFFERENCE

|                   | Model Number | Difference                                            | Test (check)                        |
|-------------------|--------------|-------------------------------------------------------|-------------------------------------|
| <b>Original</b>   | GK-050012/K  | For the market needs,<br>we provide different models. | <input checked="" type="checkbox"/> |
| <b>Additional</b> | KB 600/K     |                                                       | <input type="checkbox"/>            |

**Note:** Client consigns only one model sample (Model Number is GK-050012/K) to test.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 15 Subpart C.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                 | MHz             | GHz              |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423      | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475 | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67        | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25        | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6           | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2         | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94        | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138           | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05      | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 -         | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.52525           | 2655 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 156.7 - 156.9       | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 162.0125 - 167.17   | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 167.72 - 173.2      | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 240 - 285           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              | 322 - 335.4         |                 |                  |

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition test.

1. The following test mode(s) were scanned during the preliminary test:

1. Set in continuous transmitting mode.

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

- Mode 1

Then, the EUT configuration and cable configuration of the above highest emission mode was recorded for all final test items.

There is one channel (27.145MHz) on EUT for final test.



## **4. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards

## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

☐ No. 81-1, Lane 210, Pa-de 2nd Road, Luchu Hsiang, Taoyuan Hsien, Taiwan

☒ No. 165, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS AND LISTINGS**

The test facilities used to perform Electromagnetic compatibility tests are registered or accredited by the organizations listed in the following table which includes the recognized scope specifically.

## 5.4 TABLE PF ACCREDITATIONS AND LISTINGS

| Country | Agency          | Scope of Accreditation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Logo                                                                                                                                                      |
|---------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| USA     | A2LA            | CFR 47, FCC Part 15/18 using ANSI 63.4; AS/NZS 3548; VCCI V3; CNS 13438; CNS 13439; CNS 13783; CNS 14115; CISPR 11/EN 55011; CISPR 14-1/EN 55014-1; CISPR 15/EN 55015; CISPR 22/EN 55022; EN 50081-1/EN 61000-6-3; EN 50082-1/EN 61000-6-4; IEC/EN 61000-4-2, IEC/EN 61000-4-3, IEC/EN 61000-4-4, IEC/EN 61000-4-5, IEC/EN 61000-4-6, IEC/EN 61000-4-8, IEC/EN 61000-4-11, IEC/EN 61000-3-2, IEC/EN 61000-3-3; CISPR 24/EN 55024; CISPR 14-2/EN 55014-2; EN 50081-2/EN 61000-6-1; EN 50082-2/EN 61000-6-2. | <br>824.01                                                             |
| USA     | FCC             | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements                                                                                                                                                                                                                                                                                                                                                                                                                                     | <br>250366                                                             |
| Japan   | VCCI            | 3/10 meter Open Area Test Sites and Line Conducted Test Room to perform conducted/radiated measurements                                                                                                                                                                                                                                                                                                                                                                                                    | <br>R-1434/1630~4<br>C-1511/1882                                       |
| Norway  | NEMKO           | EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2/3/4, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, Cisp 16-1/2/3/4                                                                                                                                                                                                                                                                                           | <br>ELA 103                                                           |
| Taiwan  | CNLA            | 47 CFR FCC Part 15 Subpart B, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 13438, AS/NZS 3548, VCCI, CNS 13022-1/2/3, EN 55022, EN 55013, EN 55014-1, EN 61000-4-2/3/4/5/6/8/11, ENV 50204, ENV 50141, ENV 50142                                                                                                                                                                                                                                                                                | <br>1108<br>ILAC MRA                                                 |
| Taiwan  | BSMI            | CNS 13438, CNS 13783-1, CNS 13439                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <br>SL2-IN-E-0005<br>SL2-A1-E-0005<br>SL2-R1-E-0005<br>SL2-R2-E-0005 |
| Canada  | Industry Canada | RSS212, Issue 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <br>IC 5742                                                          |

**Note:** No part of this report may be used to claim or imply product endorsement by CNLA, A2LA or other government agency.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

EUT

### 6.2 SUPPORT EQUIPMENT

| No | Equipment | Model | Serial No. | FCC ID<br>/ BSMI ID | Trade Name | Data<br>Cable | Power<br>Cord |
|----|-----------|-------|------------|---------------------|------------|---------------|---------------|
|    |           |       |            |                     |            |               |               |

**Notes:**

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



## 7. FCC PART 15.227 REQUIREMENTS

### 7.1 26 dB BANDWIDTH

#### LIMIT

N/A

#### MEASUREMENT EQUIPMENT USED


Open Area Test Site: # E

| EQUIPMENT TYPE     | MFR               | MODEL NUMBER     | SERIAL NUMBER           | CAL. DUE   |
|--------------------|-------------------|------------------|-------------------------|------------|
| SITE NSA           | CCS               | E Site           | N/A                     | 10/07/2006 |
| EMI TEST RECEIVER  | R&S               | DSAI-D / ESBI-RF | 827832/001<br>82706/003 | 03/08/2006 |
| ANTENNA            | SCHAFFNER         | CBL 6112B        | 2802                    | 09/24/2006 |
| AMPLIFIER          | MCL               | ZKL-1R5          | D100704                 | 12/15/2006 |
| CABLE              | SUHNER            | RG 214           | N-TYPE#E4               | 11/16/2006 |
| THERMO-HYGRO METER | TFA               | N/A              | NO.6                    | 11/02/2006 |
| ATTENUATOR         | Midwest Microwave | MOD 219          | AT10-2                  | 12/15/2006 |
| LOOP ANTENNA       | ARA               | PLA-1030/B       | 1027                    | 06/23/2006 |

***Note:** Each piece of equipment is scheduled for calibration once a year.*

***\*\*** According to the CCS quality manual, the test equipment is valid and can be used based on the no longer 30 days after the calibration due day.*

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=10kHz, VBW = RBW, Span = 200kHz, Sweep = auto.
4. Mark the peak frequency and 26dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.




## TEST RESULTS

*No non-compliance noted*

### Test Data

| Channel | Frequency (MHz) | Bandwidth (kHz) |
|---------|-----------------|-----------------|
| 1       | 27.1437         | 54.0            |

### Test Date Plot

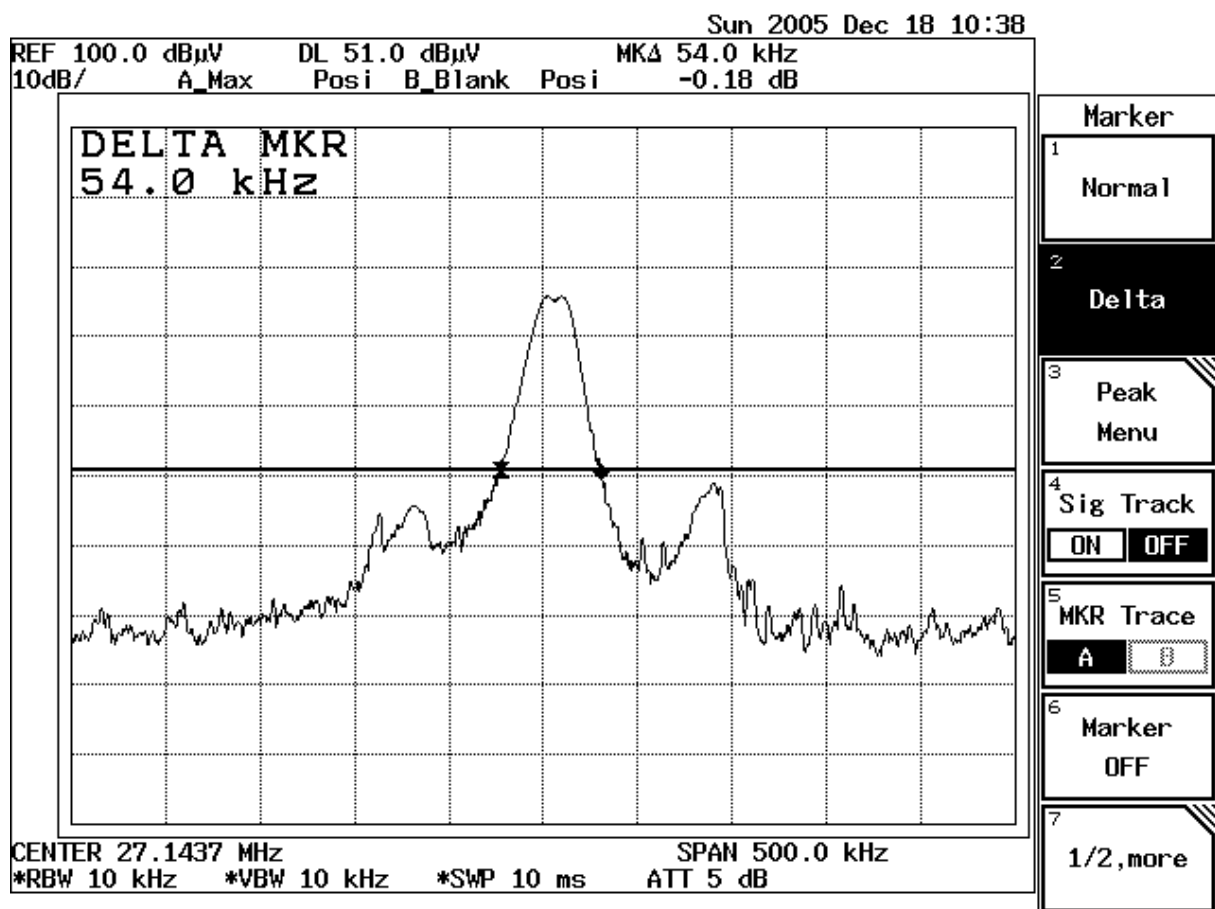



## 7.2 RADIATED EMISSIONS

### LIMIT

1. The field strength of any emission within this band (section 15.227 frequency between 26.96MHz -27.28MHz) shall not exceed 10000 micro volts/meter at 3 meters. (80dB $\mu$ V/m at 3m) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209(Intentional Radiators general limit).as below.

| Frequency (MHz) | Field Strength (mV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 1.705-30        | 30                    | 30                       |
| 30-88           | 100*                  | 3                        |
| 88-216          | 150*                  | 3                        |
| 216-960         | 200*                  | 3                        |
| Above 960       | 500                   | 3                        |

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

| Frequency (Hz) | Field Strength ( $\mu$ V/m at 3-meter) | Field Strength (dB $\mu$ V/m at 3-meter) |
|----------------|----------------------------------------|------------------------------------------|
| 1.705-30       | 30* (at 30-meter)                      | 78.2                                     |
| 30-88          | 100                                    | 40                                       |
| 88-216         | 150                                    | 43.5                                     |
| 216-960        | 200                                    | 46                                       |
| Above 960      | 500                                    | 54                                       |



## MEASUREMENT EQUIPMENT USED

Open Area Test Site: # E


| EQUIPMENT TYPE     | MFR               | MODEL NUMBER     | SERIAL NUMBER           | CAL. DUE   |
|--------------------|-------------------|------------------|-------------------------|------------|
| SITE NSA           | CCS               | E Site           | N/A                     | 10/07/2006 |
| EMI TEST RECEIVER  | R&S               | DSAI-D / ESBI-RF | 827832/001<br>82706/003 | 03/08/2006 |
| ANTENNA            | SCHAFFNER         | CBL 6112B        | 2802                    | 09/24/2006 |
| AMPLIFIER          | MCL               | ZKL-1R5          | D100704                 | 12/15/2006 |
| CABLE              | SUHNER            | RG 214           | N-TYPE#E4               | 11/16/2006 |
| THERMO-HYGRO METER | TFA               | N/A              | NO.6                    | 11/02/2006 |
| ATTENUATOR         | Midwest Microwave | MOD 219          | AT10-2                  | 12/15/2006 |
| LOOP ANTENNA       | ARA               | PLA-1030/B       | 1027                    | 06/23/2006 |


**Note:** The measurement uncertainty is less than  $\pm 3.36\text{dB}$ , which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CD.

**\*\* According to the CCS quality manual, the test equipment is valid and can be used based on the no longer 30 days after the calibration due day.**

## Test Configuration

For Frequencies below 30 MHz

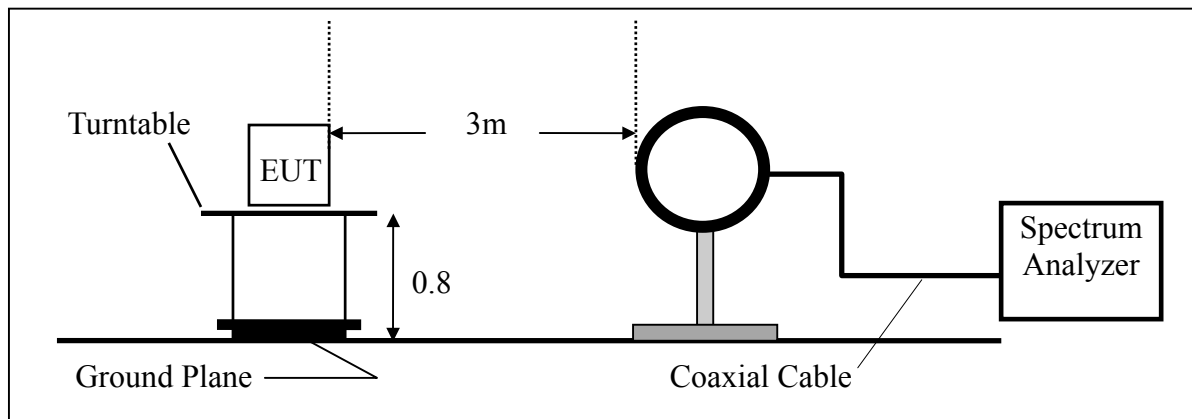

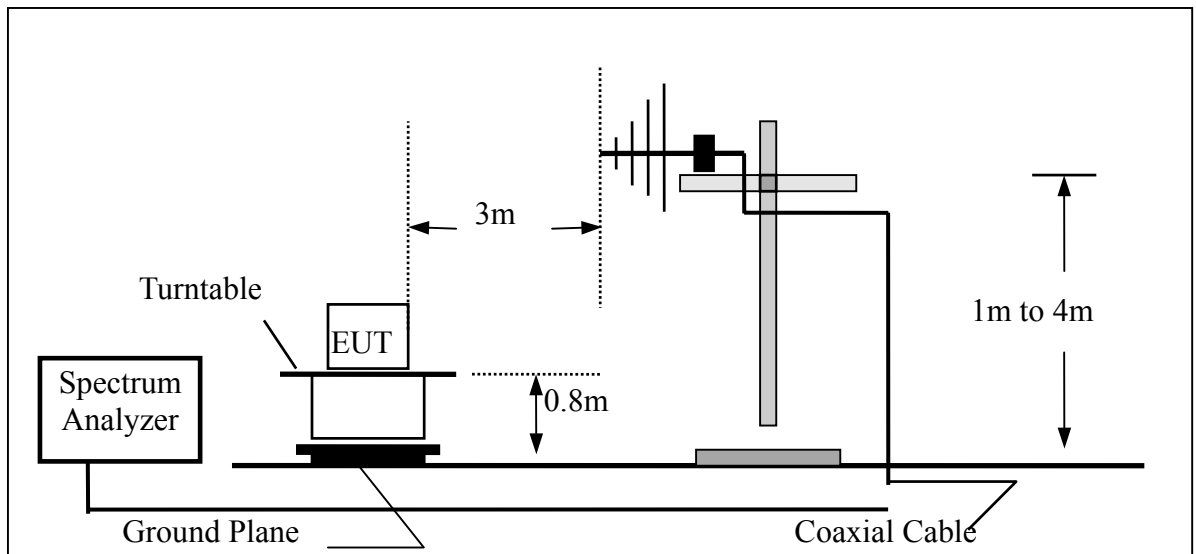**For Frequencies below 1 GHz****TEST PROCEDURE**

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.



## **TEST RESULTS**

### **Test Data**

#### **Frequencies below 30MHz:**

| Frequency<br>(MHz) | Reading<br>(dBuV) | Correction Factor<br>(dBuV/m) | FS<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Mode<br>(P/A) | Ant.Pol.<br>H/V |
|--------------------|-------------------|-------------------------------|----------------|-------------------|----------------|---------------------------|-----------------|
| 27.152             | 48.7              | -3.10                         | 45.60          | 80.00             | -34.40         | P                         | V               |
|                    |                   |                               |                |                   |                |                           |                 |
| 27.152             | 59.6              | -3.10                         | 56.50          | 80.00             | -23.50         | P                         | H               |

#### ***Remark:***

- 1. Measuring frequencies from 25MHz to the 30MHz °*
- 2. Datas of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
- 3. The IF bandwidth of SPA between 25MHz to 30MHz was 10kHz.*
- 4. Ant. Pol = Antenna Polarization / FS = Field strength*

**Frequencies for 30MHz-1GHz:**

| Frequency<br>(MHz) | Reading<br>(dBuV) | Correction Factor<br>(dBuV/m) | FS<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Detector<br>Mode<br>(P/Q/A) | Ant.Pol.<br>H/V |
|--------------------|-------------------|-------------------------------|----------------|-------------------|----------------|-----------------------------|-----------------|
| 53.89              | 50.95             | -20.66                        | 30.29          | 40.00             | -9.71          | P                           | V               |
| 80.68              | 46.28             | -21.26                        | 25.02          | 40.00             | -14.98         | P                           | V               |
| 132.36             | 37.52             | -15.99                        | 21.53          | 43.50             | -21.97         | P                           | V               |
| 160.04             | 39.38             | -17.11                        | 22.27          | 43.50             | -21.23         | P                           | V               |
| 189.67             | 40.64             | -17.86                        | 22.78          | 43.50             | -20.72         | P                           | V               |
| 216.79             | 41.48             | -16.61                        | 24.87          | 46.00             | -21.13         | P                           | V               |
|                    |                   |                               |                |                   |                |                             |                 |
| 53.89              | 54.41             | -20.66                        | 33.75          | 40.00             | -6.25          | P                           | H               |
| 81.04              | 44.23             | -21.26                        | 22.97          | 40.00             | -17.03         | P                           | H               |
| 134.68             | 37.32             | -16.17                        | 21.15          | 43.50             | -22.35         | P                           | H               |
| 160.04             | 40.70             | -17.11                        | 23.59          | 43.50             | -19.91         | P                           | H               |
| 188.96             | 45.22             | -17.79                        | 27.43          | 43.50             | -16.07         | P                           | H               |
| 217.32             | 44.35             | -16.78                        | 27.57          | 46.00             | -18.43         | P                           | H               |

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz °
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/AV detector mode.
3. Datas of measurement within this frequency range shown “--” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured..
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
5. Ant. Pol = Antenna Polarization / FS = Field strength



### **7.3 POWERLINE CONDUCTED EMISSIONS**

Not applicable, as it's power was supplied from battery.



## 8. APPENDIX I - PHOTOGRAPHS OF TEST SETUP

