

# FCC TEST REPORT

for

CISPR PUB. 22 Class B

Equipment : Tablet

Model No. : PowerMate Wireless

FCC ID : FSUGMPAD

Filing Type : Original Grant

Applicant : **KYE SYSTEMS CORP.**  
No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei  
Hsien, 241, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## Table of Contents

**CERTIFICATE OF COMPLIANCE ..... 3**

**1. General Description of Equipment under Test ..... 4**

    1.1. Applicant ..... 4

    1.2. Manufacturer ..... 4

    1.3. Basic Description of Equipment under Test ..... 4

    1.4. Feature of Equipment under Test ..... 4

**2. Test Configuration of Equipment under Test ..... 5**

    2.1. Test Manner ..... 5

    2.2. Description of Test System ..... 5

    2.3. Connection Diagram of Test System ..... 7

**3. Test Software ..... 8**

**4. General Information of Test ..... 9**

    4.1. Test Facility ..... 9

    4.2. Standard for Methods of Measurement ..... 9

    4.3. Test in Compliance with ..... 9

    4.4. Frequency Range Investigated ..... 9

    4.5. Test Distance ..... 9

**5. Test of Conducted Powerline ..... 10**

    5.1. Major Measuring Instruments ..... 10

    5.2. Test Procedures ..... 11

    5.3. Typical Test Setup Layout of Conducted Powerline ..... 12

    5.4. Test Result of AC Powerline Conducted Emission ..... 13

    5.5. Photographs of Conducted Powerline Test Configuration ..... 15

**6. Test of Radiated Emission ..... 19**

    6.1. Major Measuring Instruments ..... 19

    6.2. Test Procedures ..... 20

    6.3. Typical Test Setup Layout of Radiated Emission ..... 21

    6.4. Test Result of Radiated Emission ..... 22

    6.5. Photographs of Radiated Emission Test Configuration ..... 24

**7. Antenna Factor & Cable Loss ..... 26**

**8. List of Measuring Equipments Used ..... 27**

# **CERTIFICATE OF COMPLIANCE**

**for**

## **CISPR PUB. 22 Class B**

Equipment : Tablet

Model No. : PowerMate Wireless

FCC ID : FSUGMPAD

Applicant : **KYE SYSTEMS CORP.**  
No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei  
Hsien, 241, Taiwan, R.O.C.

**I HEREBY CERTIFY THAT :**

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed CISPR PUB. 22** both radiated and conducted emission class B limits. Testing was carried out on Apr. 8, 1999 at **SPORTON International Inc.** LAB. in Lin Kou.

---

W. L. Huang  
General Manager

***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## 1. General Description of Equipment under Test

### 1.1. Applicant

KYE SYSTEMS CORP.

No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei Hsien, 241, Taiwan, R.O.C.

### 1.2. Manufacturer

Same as 1.1.

### 1.3. Basic Description of Equipment under Test

Equipment : Tablet  
Model No. : PowerMate Wireless  
FCC ID : FSUGMPAD  
Trade Name : KYE SYSTEMS CORP.  
Data cable : Shielded, 1.55 m  
Power Supply Type : N/A  
Power Cord : N/A

### 1.4. Feature of Equipment under Test

- Platform Support: PC
- Hardware Interface: PS/2
- Software Driver: GeniTab III for Windows 95, 98, NT
- Resolution: Up to 2,540LPI
- Accuracy: 0.0 Inch
- Proximity: 8 mm from surface of tablet
- Working Area: Horizontal: 120 mm , Vertical : 90 mm
- Baud Rate: PS2 synchronous transmission
- Report Rate: Up to 200 RPS
- Protocol: Standard PS2, Intelli and Net Mouse plus KYE Pen Mode
- Power Source: PS2
- Operation mode: Steam mode
- Technology: Electromagnetic with cordless transaction
- Cursor Support: S-09W Cordless pen P08 5 button mouse

## 2. Test Configuration of Equipment under Test

### 2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The SONY Monitor, DELL PS/2 Keyboard, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test.
- c. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 1000MHz.

### 2.2. Description of Test System

#### Support Unit 1. -- Personal Computer (FIC)

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded, 360 degree via metal backshells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

#### Support Unit 2. -- Monitor (SONY)

FCC ID	: AK8GDM17SE2T
Model No.	: GDM-17SE2T
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0063
Data Cable	: Double-Shielded, 360 degree via metal backshells, 1.7m

#### Support Unit 3. -- PS/2 Keyboard (DELL)

FCC ID	: GYUM92SK
Model No.	: AT101(DE8M)
Serial No.	: SP0054
Data Cable	: Shielded, 360 degree via metal backshells, 1.9m


## Support Unit 4. -- Modem (ACEEX)

FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0015  
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

## Support Unit 5. -- Printer (HP)

FCC ID : B94C2642X  
Model No. : DeskJet 400  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0048  
Data Cable : Braided-Shielded, 1.35m

**2.3. Connection Diagram of Test System**

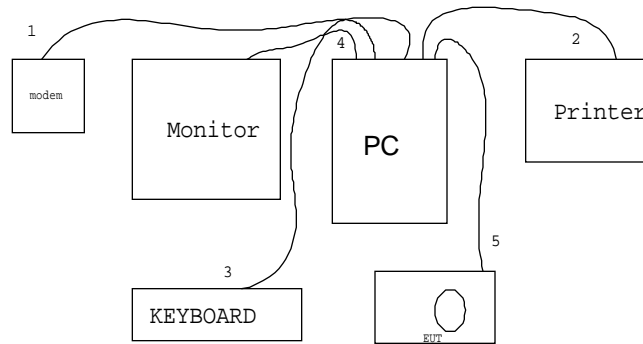

1. The I/O cable is connected from PC to the support unit 4.
2. The I/O cable is connected from PC to the support unit 5.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 2.
5. The I/O cable is connected from PC to the EUT.

### **3. Test Software**

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the modem.
- f. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

At the same time, "WordPad" of Accessories under Win 98 was used as the test software.



## **4. General Information of Test**

### **4.1. Test Facility**

This test was carried out by SPORTON International Inc. in an openarea test site.  
Openarea Test Site Location: No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.  
TEL : 886-2-2601-1640  
FAX : 886-2-2601-1695

### **4.2. Standard for Methods of Measurement**

ANSI C63.4-1992

### **4.3. Test in Compliance with**

CISPR PUB. 22 Class B

### **4.4. Frequency Range Investigated**

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation : from 30 MHz to 1,000 MHz

### **4.5. Test Distance**

The test distance of radiated emission from antenna to EUT is 10 M.

## 5. Test of Conducted Powerline

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 5.3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


### 5.1. Major Measuring Instruments

Test Receiver	HP 8591EM
Attenuation	0 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 kHz

**5.2. Test Procedures**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be retested one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Conducted Powerline

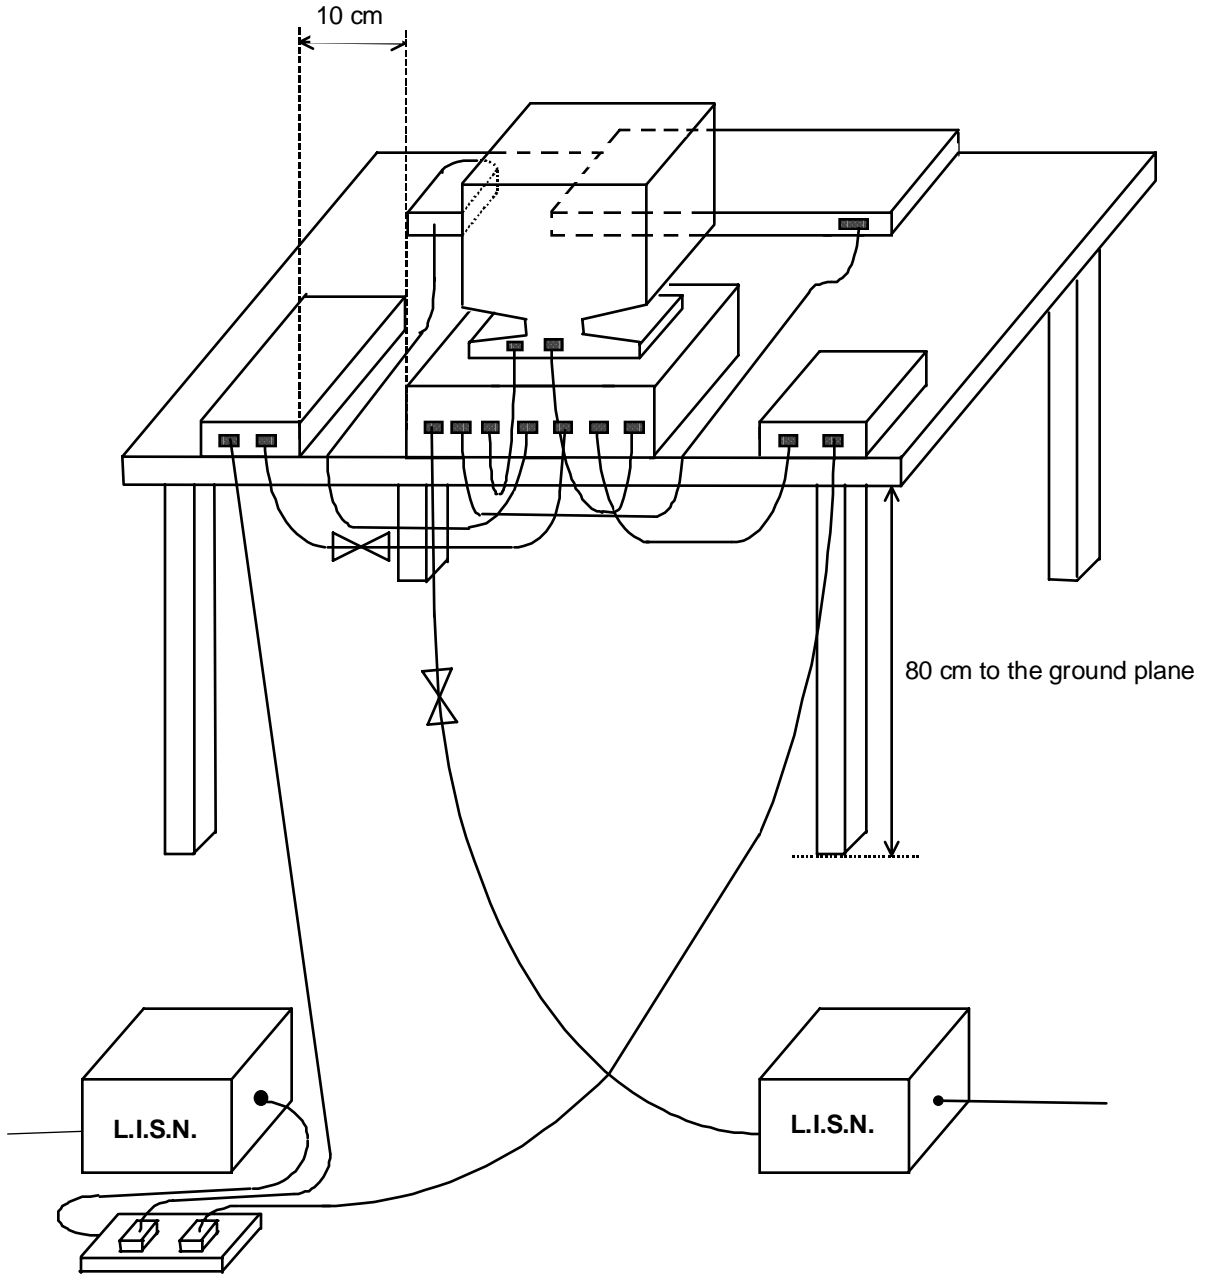

**5.4. Test Result of AC Powerline Conducted Emission**

5.4.1. Test mode : TABLET + PEN

- Temperature : 25°C
- Relative Humidity : 50 %
- Test Date : Apr. 8, 1999

**The Conducted Emission test was passed at minimum margin**

**LINE 0.545 MHz / 39.40 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.400	L	38.30	37.60	82.22	75.86	57.85	47.85	781.03	246.98	-19.55	-10.25
0.545	L	39.40	38.90	93.33	88.10	56.00	46.00	630.96	199.53	-16.60	-7.10
1.272	L	33.00	31.00	44.67	35.48	56.00	46.00	630.96	199.53	-23.00	-15.00
0.195	N	46.00	45.70	199.53	192.75	63.84	53.84	1555.59	491.92	-17.84	-8.14
0.690	N	38.70	37.80	86.10	77.62	56.00	46.00	630.96	199.53	-17.30	-8.20
1.270	N	32.00	28.20	39.81	25.70	56.00	46.00	630.96	199.53	-24.00	-17.80

Test Engineer : \_\_\_\_\_  
 KENNY CHUANG

5.4.2. Test mode : TABLET + MOUSE

- Temperature : 25°C
- Relative Humidity : 50 %
- Test Date : Apr. 8, 1999

**The Conducted Emission test was passed at minimum margin**

**LINE 0.546 MHz / 39.40 dBuV.**

Freq. (MHz)	Line or Neutral	Meter Reading				Limits				Margin	
		Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dBuV)	A.V. (dBuV)	Q.P. (uV)	A.V. (uV)	Q.P. (dB)	A.V. (dB)
0.400	L	38.40	37.80	83.18	77.62	57.85	47.85	781.09	247.00	-19.45	-10.05
0.546	L	39.40	38.90	93.33	88.10	56.00	46.00	630.96	199.53	-16.60	-7.10
4.252	L	33.90	30.90	49.55	35.08	56.00	46.00	630.96	199.53	-22.10	-15.10
0.194	N	45.90	45.60	197.24	190.55	63.84	53.84	1556.35	492.16	-17.94	-8.24
0.689	N	38.50	37.50	84.14	74.99	56.00	46.00	630.96	199.53	-17.50	-8.50
1.562	N	32.80	29.50	43.65	29.85	56.00	46.00	630.96	199.53	-23.20	-16.50

Test Engineer : \_\_\_\_\_  
 KENNY CHUANG

**5.5. Photographs of Counducted Powerline Test Configuration**

- The photographs show the configuration that generates the maximum emission.

TABLET + PEN

FRONT VIEW



REAR VIEW



SIDE VIEW





TABLET + MOUSE

FRONT VIEW



REAR VIEW



SIDE VIEW



## 6. Test of Radiated Emission

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


### 6.1. Major Measuring Instruments

Amplifier	(HP 8447D)
Attenuation	0 dB
RF Gain	25 dB
Signal Input	0.1 MHz to 1.3 GHz
Spectrum Analyzer	(HP 8568B)
Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	1,000 MHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	100 Hz to 1.5 GHz
Quasi-Peak Adapter	(85650A)
Resolution Bandwidth	120 KHz
Frequency Band	30 MHz to 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

**6.2. Test Procedures**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

### 6.3. Typical Test Setup Layout of Radiated Emission

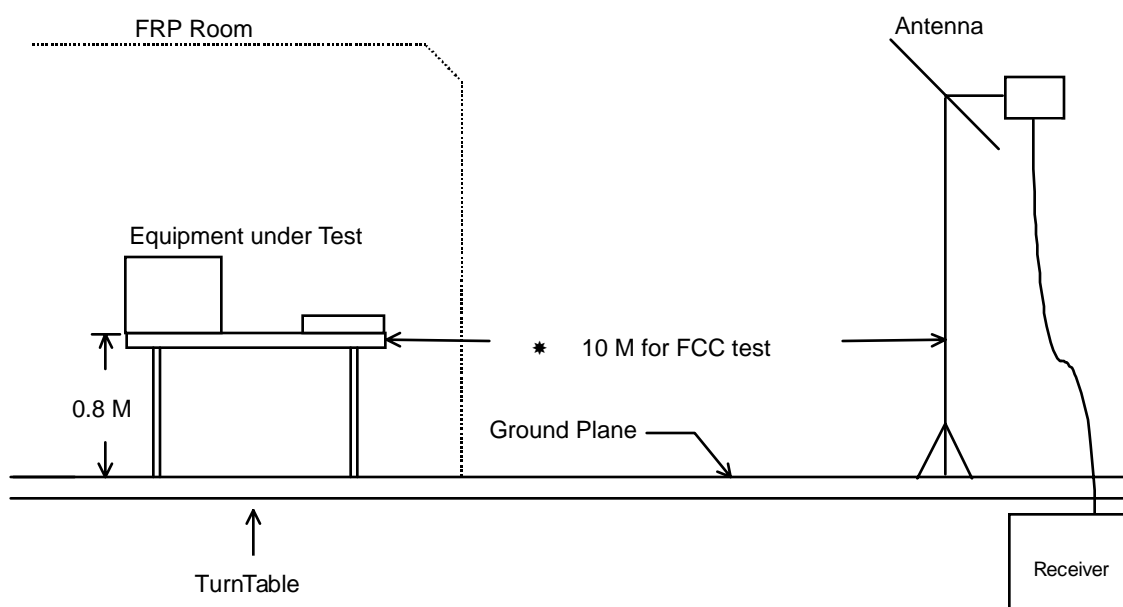

**6.4. Test Result of Radiated Emission**

6.4.1. Test mode : TABLET + PEN

- Test Distance : 10 M
- Temperature : 24°C
- Relative Humidity : 51 %
- Test Date : Apr. 7, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin:**

**VERTICAL 200.10 MHz / 23.90 dBuV Antenna Height 1.3 Meter , Turntable Degree 183 °.**

Frequency ( MHz )	Polarity	Antenna Factor (dB/m)	Cable Loss ( dB )	Reading ( dBuV )	Limits (dBuV/m)	Emission (uV/m)	Level (uV/m)	Margin ( dB )	
82.90	H	8.07	0.93	13.47	30.00	32	22.47	13.29	-7.53
210.10	H	9.70	1.45	10.29	30.00	32	21.44	11.80	-8.56
33.30	V	16.82	0.61	4.47	30.00	32	21.90	12.45	-8.10
82.90	V	8.07	1.00	14.40	30.00	32	23.47	14.91	-6.53
171.40	V	9.69	1.50	10.51	30.00	32	21.70	12.16	-8.30
200.10	V	8.80	1.50	13.60	30.00	32	23.90	15.67	-6.10

Test Engineer : \_\_\_\_\_

JONES JAN

6.4.2. Test mode : TABLET + MOUSE

- Test Distance : 10 M
- Temperature : 24°C
- Relative Humidity : 51 %
- Test Date : Mar. 29, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

**The Radiated Emission test was passed at minimum margin**

**199.90 MHz / 24.50 dBuV (VERTICAL) Antenna Height 1.2 Meter, Turntable Degree 122 °.**

Frequency ( MHz )	Polarity	Antenna Factor (dB/m)	Cable Loss ( dB )	Reading ( dBuV )	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Margin ( dB )
200.10	H	8.80	1.40	12.20	30.00	32	22.40	13.18	-7.60
430.40	H	16.09	2.26	11.35	37.00	71	29.70	30.55	-7.30
33.10	V	16.82	0.80	3.39	30.00	32	21.01	11.23	-8.99
44.20	V	10.50	0.80	10.07	30.00	32	21.37	11.71	-8.63
55.20	V	6.70	0.80	14.18	30.00	32	21.68	12.13	-8.32
199.90	V	8.80	1.40	14.30	30.00	32	24.50	16.79	-5.50

Test Engineer : \_\_\_\_\_

JONES JAN

**6.5. Photographs of Radiated Emission Test Configuration**

- The photographs show the configuration that generates the maximum emission.

TABLET + PEN

FRONT VIEW



REAR VIEW





TABLET + MOUSE

FRONT VIEW



REAR VIEW



**7. Antenna Factor & Cable Loss**

Frequency ( MHz )	Antenna Factor ( dB )	Cable Loss ( dB )
30	17.9	0.8
35	16.1	0.8
40	14.0	0.8
45	10.5	0.8
50	7.9	0.7
55	6.7	0.8
60	5.5	0.9
65	5.5	0.8
70	5.6	0.9
75	6.5	1.0
80	7.5	0.9
85	8.5	1.0
90	9.4	1.0
95	10.4	1.0
100	11.5	1.1
110	12.1	1.1
120	12.6	1.1
130	12.0	1.3
140	11.6	1.2
150	10.5	1.3
160	10.5	1.3
170	9.8	1.4
180	9.2	1.5
190	9.0	1.4
200	8.8	1.4
220	10.5	1.5
240	12.2	1.7
260	13.1	1.7
280	13.2	1.7
300	13.4	1.8
320	13.4	1.9
340	13.4	2.0
360	13.9	2.0
380	14.9	2.1
400	15.6	2.2
450	16.4	2.3
500	16.6	2.4
550	19.7	2.8
600	19.3	2.6
650	20.0	2.8
700	19.5	2.8
750	18.5	3.1
800	17.8	3.4
850	18.3	3.1
900	20.5	3.3
950	21.4	3.7
1000	21.2	3.7

**8. List of Measuring Equipments Used**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz - 18 GHz	Sep. 18, 1998	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Jan. 22, 1999	Conduction
LISN (Support Unit) (site 2)	EMCO	3810/2NM	9703-1839	50 ohm / 50 uH	Jul. 06, 1998	Conduction
Quasi-peak Adapter (site 5)	HP	85650A	2521A00821	9KHz -1 GHz	Nov. 14, 1998	Radiation
Spectrum Analyzer (Site 5)	HP	8568B	2634A03000	100Hz - 1.5GHz	Nov. 14, 1998	Radiation
Amplifier (Site 5)	HP	8447D	2944A08290	0.1MHz -1.3GHz	Nov. 13, 1998	Radiation
Bilog Antenna (Site 5)	CHASE	CBL6112A	2287	30MHz -2GHz	Jan. 07, 1999	Radiation
Half-wave dipole antenna (Site 5)	EMCO	3121C	9705-1285	28 M - 1GHz	May 19, 1998	Radiation
Turn Table (site 5)	EMCO	2080	9711-2021	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 5)	EMCO	2075	9711-2115	1 m- 4 m	N/A	Radiation