

---

# FCC TEST REPORT

for

## PART 15, SUBPART B CLASS B

Equipment : MOUSE

MODEL NO. : NEWSROLL

**F C C I D** : FSUGMZFM

Filing Type : Original Grant


APPLICANT : **KYE SYSTEMS CORP.**

No. 492, Sec. 5, Chung Hsin Rd., San Chung,  
Taipei Hsien, 241, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

**SPORTON INTERNATIONAL INC.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.



## CERTIFICATE OF COMPLIANCE

for

### FCC PART 15, SUBPART B CLASS B

Equipment : MOUSE

MODEL NO. : NETSCROLL

F C C I D : FSUGMZFM


Filing Type : Original Grant

APPLICANT : **KYE SYSTEMS CORP.**

No. 492, Sec. 5, Chung Hsin Rd., San Chung,  
Taipei Hsien, 241, Taiwan, R.O.C.

### I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was *passed* both radiated and conducted emissions class B limits. Testing was carried out on APR. 07, 1998 at **SPORTON International Inc.** in LIN KOU.

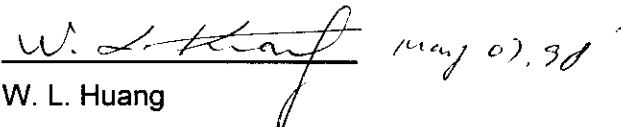  
W. L. Huang  
General Manager

**SPORTON International Inc.**

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

---

## **1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST**

### **1.1. APPLICANT**

**KYE SYSTEMS CORP.**

No. 492, Sec. 5, Chung Hsin Rd., San Chung,  
Taipei Hsien, 241, Taiwan, R.O.C.

### **1.2. MANUFACTURER**

Same as 1.1

### **1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST**

EQUIPMENT : MOUSE

MODEL NO. : NEWSROLL

FCC ID: FSUGMZFM

TRADE NAME : GENIUS

DATA CABLE : Shielded

POWER SUPPLY TYPE : N/A

POWER CORD : N/A

### **1.4. FEATURE OF EQUIPMENT UNDER TEST**

- Compatible with all major application software.
- Ergonomic Design.
- Opto-mechanical Design.
- Micro-switch Button.
- High performance & reliability.
- For SERIAL, PS/2 Port.

---

## 2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

### 2.1. TEST MANNER

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The DELL keyboard, HP monitor, HP printer, GENIUS mouse and ACEEX modem were connected to the LEO PC.
- c. The serial mode and PS/2 mode were tested in order to find the maximum emissions. Since the PS/2 mode generates the worst case, the mode was used as the final data.
- d. During the test, the monitor AC power cord was plugged into the PC computer-mounted AC outlet and a floor-mounted AC outlet to search the maximum emission.
- e. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 1000 MHz.

### 2.2. DESCRIPTION OF TEST SYSTEM

#### Support Device 1. --- PERSONAL COMPUTER (LEO)

FCC ID :N/A  
Model No. :P55T2P4  
Serial No. :SP1040  
Data Cable :Shielded, 360 degree via metal backshells.  
Power Supply Type :Switching  
Power Cord :Shielded

Remark: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

#### Support Device 2. --- MODEM ( ACEEX)

FCC ID :IFAXDM1414  
Model No. :DM-1414  
Serial No. :SP0016  
Data Cable :Shielded, 360 degree via metal backshells  
Power Supply Type :Linear

**Support Device 3. --- PRINTER (HP)**

FCC ID :B94C2642X  
Model No. :DESKJET 400  
Serial No. :SP0003  
Data Cable :Shielded, 360 degree via metal backshells  
Power Supply Type :Linear


**Support Device 4. --- MONITOR (HP)**

FCC ID :ACJ93312116  
Model No. :D2807A  
Serial No. :SP1034  
Data Cable :Shielded  
Power Supply Type :Switching  
Power Cord :Non-shielded

**Support Device 5. --- KEYBOARD (DELL)**

FCC ID :GYUM92SK  
Model No. :AT101  
Serial No. :SP1008  
Data Cable :Shielded, 360 degree via metal backshells

2.3. CONNECTION DIAGRAM OF TEST SYSTEM

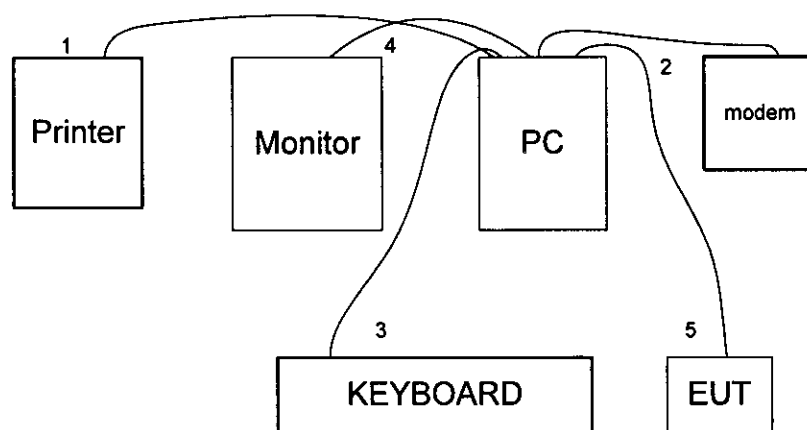

1. The I/O cable is connected to the support device 3.
2. The I/O cable is connected to the support device 2.
3. The I/O cable is connected to the support device 5.
4. The I/O cable is connected to the support device 4.
5. The data cable is connected to the EUT.

## **4. GENERAL INFORMATION OF TEST**

### **4.1. TEST FACILITY**

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 30-1, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,  
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

### **4.2. STANDARD FOR METHODS OF MEASUREMENT**

ANSI C63.4-1992

### **4.3 .TEST IN COMPLIANCE WITH**

FCC PART 15, SUBPART B CLASS B

### **4.4. FREQUENCY RANGE INVESTIGATED**

a. Conduction : from 450 KHz to 30 MHz

b. Radiation : from 30 MHz to 1000 MHz

### **4.5. TEST DISTANCE**

The test distance of radiated emission from antenna to EUT is 3M.

## 5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

### 5.1. MAJOR MEASURING INSTRUMENTS


• Test Receiver	HP85462A
Attenuation	0 dB
Start Frequency	0.45 MHz
Stop Frequency	30 MHz
Step MHz	0.007 MHz
IF Bandwidth	9 KHz



**5.2. TEST PROCEDURES**

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network ( LISN ).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system ( HP receiver 85462A) to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE

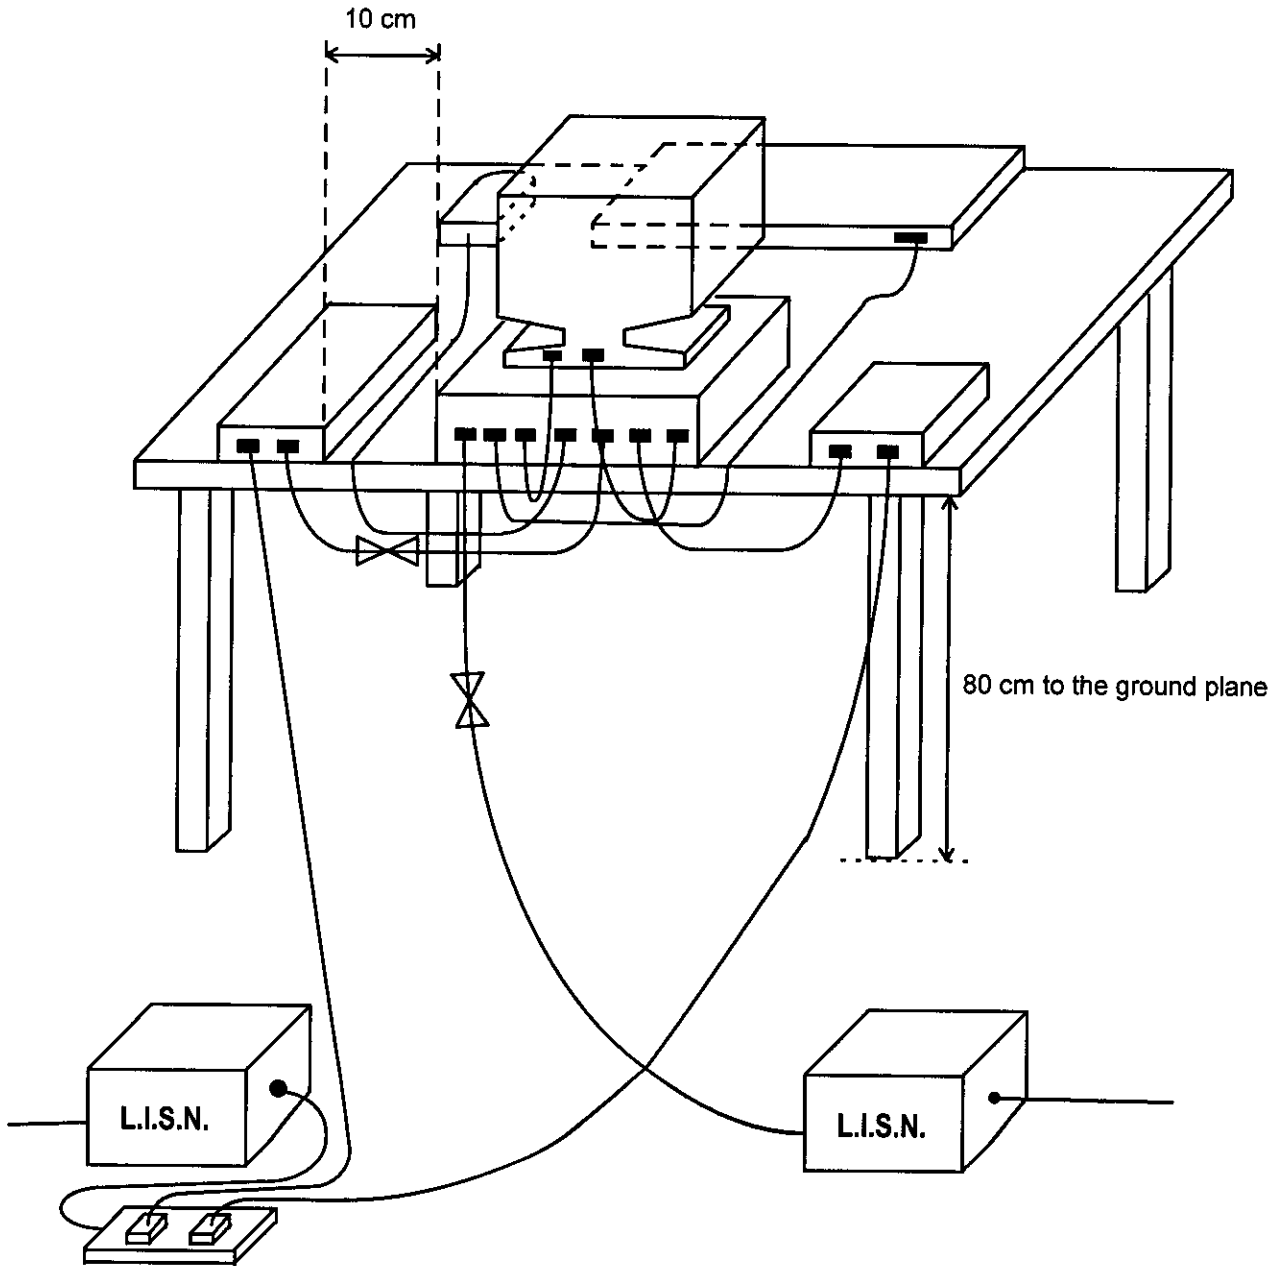

**5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION**

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- Temperature : 22 °C
- Relative Humidity : 52% RH
- TEST MODE: PS/2 MODE
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Test Date : APR. 07, 1998

**The Conducted Emission test was passed at minimum margin**

**NEUTRAL 16.86MHz /33.50dBuV.**

Frequency ( MHz )	Line / Neutral	Meter Reading		Limits		Margin ( dB )
		( dBuV )	( uV )	( dBuV )	( uV )	
11.22	L	24.40	16.60	48.00	251.19	-23.60
16.92	L	33.50	47.32	48.00	251.19	-14.50
24.99	L	28.40	26.30	48.00	251.19	-19.60
11.87	N	25.30	18.41	48.00	251.19	-22.70
16.86	N	33.50	47.32	48.00	251.19	-14.50
24.99	N	25.60	19.05	48.00	251.19	-22.40

Test Engineer :

*Alex*

**6. TEST OF RADIATED EMISSION**

Radiated emissions from 30 MHz to 1000MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

**6.1. MAJOR MEASURING INSTRUMENTS**

- RF Preselector
 

Attenuation	0 dB
RF Gain	20 dB
Signal Input	Input 2 ( for 20 MHz to 2 GHz )
  
- Spectrum Analyzer
 


	8568B
Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	1000MHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	Input 1 ( for 100Hz to 1.5 GHz )
  
- Quasi-Peak Adapter
 

Resolution Bandwidth	120 KHz
Frequency Band	30 MHz to 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

**6.2. TEST PROCEDURES**

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower ( from 1 M to 4 M ) and turn table ( from 0 degree to 360 degrees ) to find the maximum reading.
- f. Set the test-receiver system ( HP 8568B ) to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

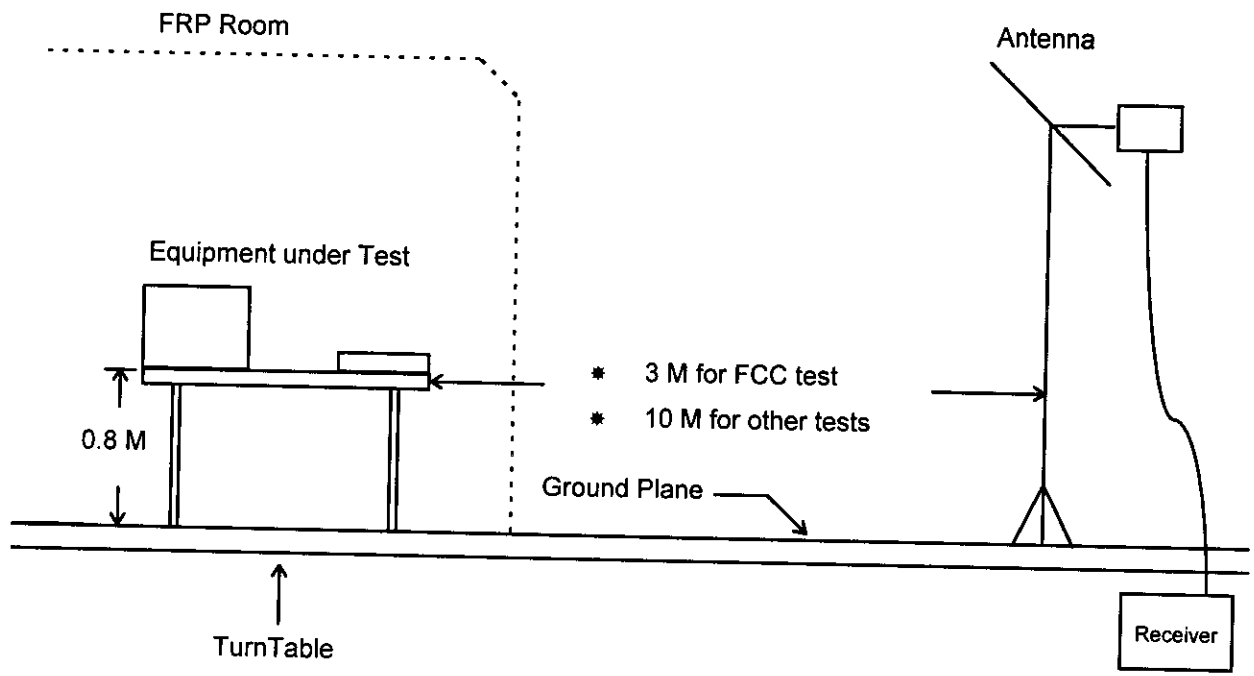

**6.4. TEST RESULT OF RADIATED EMISSION**

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 1000 MHz
- Test Distance : 3 M
- Temperature : 20 °C
- Relative Humidity :67% RH
- TEST MODE: PS/2 MODE
- Test Date :MAR. 12, 1998
- Emission level ( dBuV/m ) = 20 log Emission level ( uV/m )
- Sample Calculation at 252.80MHz  
Corrected Reading = 16.39+ 2.57+ 18.66= 37.62(dBuV/m )

**The Radiated Emission test was passed at minimum margin**

**Vertical 67.05MHz/35.05dBuV**

**Antenna Height 1Meter , Turntable Degree 147°**

Frequency ( MHz )	Polarity	Antenna Factor ( dB )	Cable Loss ( dB )	Reading ( dBuV )	Limits ( dBuV )	Emission Level ( uV )	Level ( dBuV )	Margin ( dB )
67.05	V	5.32	1.20	28.53	40.00	100	35.05	56.56 -4.95
224.80	H	14.50	2.42	16.06	46.00	200	32.99	44.62 -13.01
36.27	H	-0.39	0.85	31.69	40.00	100	32.15	40.50 -7.85
42.54	V	0.91	0.97	30.19	40.00	100	32.07	40.13 -7.93
252.80	V	16.39	2.57	18.66	46.00	200	37.62	76.03 -8.38
159.96	V	12.25	2.01	16.17	43.50	150	30.43	33.23 -13.07

Test Engineer :



7. ANTENNA FACTOR AND CABLE LOSS

Frequency ( Mhz )	Antenna Factor ( dB )	Cable Loss ( dB )
30	-2.20	0.80
35	-0.70	0.82
40	0.51	0.94
45	1.30	1.00
50	2.39	1.00
55	3.14	1.11
60	4.40	1.20
65	5.14	1.20
70	5.59	1.20
75	6.11	1.30
80	7.10	1.40
85	7.53	1.40
90	8.22	1.40
95	8.80	1.40
100	9.36	1.50
110	10.11	1.60
120	10.41	1.70
130	10.74	1.80
140	11.42	1.91
150	11.91	2.01
160	12.25	2.01
170	12.22	2.21
180	13.02	2.30
190	13.50	2.30
200	14.05	2.40
220	14.31	2.40
240	15.11	2.50
260	17.11	2.61
280	17.50	2.70
300	17.99	3.11
320	18.10	3.10
340	19.13	3.20
360	20.14	3.30
380	21.81	3.40
400	22.29	3.60
450	22.40	3.80
500	22.31	4.10
550	23.42	4.40
600	24.01	4.60
650	25.11	5.00
700	26.00	5.30
750	26.51	5.51
800	27.10	5.70
850	27.51	5.90
900	27.90	6.20
950	30.01	6.30
1000	29.00	6.40

※ Remark: For frequency above 1000 MHz, we used low cable loss BNC cable to test.