



**REPORT NO:** RF89062201  
**PRODUCT:** Wireless Mouse  
**MODEL NO:** Netscroll Wireless  
**SERIAL NO:** N/A  
**CLIENT:** KYE SYSTEMS CORP.  
**ADDRESS** No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei Hsien, Taiwan, R.O.C.  
**ISSUED BY:** Advance Data Technology Corporation (ADT Corp.)  
**OFFICE ADDRESS:** 11F, No. 1, Sec. 4, Nan-King East Rd., Taipei, Taiwan, R.O.C.  
**LABORATORY ADDRESS:** No. 47, 14 Ling, Chia Pao Tsuen, Lin Kou Hsiang, Taipei Hsien, Taiwan, R.O.C.  
**TEST STANDARD:** 47CFR Part 15, Subpart C (15.227)  
**TEST DATE:** Jul.11, 2000  
**TEST RESULT:** Pass

This test report consists of 18 pages in total. This test report is the property of ADT Corp. and shall not be reproduced, except in full, without the written consent of ADT. ADT hereby returns all rights in data to the client for legal use by the client. The test results contained in this report apply only to the samples tested.



Accredited Laboratory



## CONTENTS

1. CERTIFICATION.....	3
2. SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION.....	4
3. GENERAL INFORMATION.....	5
3.1 General Description of EUT .....	5
3.2 Description of Test mode .....	6
3.3 Test Methodology .....	6
3.4 Support Units List.....	6
3.5 Configuration of System Under Test .....	6
4.1 Test Lab.: .....	7
4.2 Calibration Interval : .....	7
5. TEST PROCEDURES AND TEST RESULTS .....	8
5.1 Conducted Emission Measurement .....	8
5.2 Radiated Emission Measurement .....	9
5.2.1 Test instruments .....	9
5.2.2 Test Procedure.....	10
5.2.3 Test Setup.....	10
5.2.4 Photograph of Test Setup .....	11
5.2.5 EUT Operating condition.....	12
5.2.6 Climate Condition.....	12
5.2.7 Test Results .....	13
5.2.7.1 Fundamental Frequency.....	13
5.2.7.2 Harmonics and Spurious .....	14
6. Photograph of the EUT.....	15



# 1. CERTIFICATION

Issue Date: Jul. 11, 2000

**PRODUCT:** Wireless Mouse  
**MODEL NO:** Netscroll Wireless  
**FCC ID:** FSUGMZG5  
**CLIENT:** KYE SYSTEM CORP.  
**TEST STANDARD:** FCC 47CFR Part 15, Subpart C (Section 15.227)  
 ANSI C63.4-1992

We, **ADVANCE DATA TECHNOLOGY CORPORATION**, hereby certify that one sample of the designated sample has been tested in our facility. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate representation of the measurements of the sample's EMI characteristics and the energy emitted under the conditions herein specified.

**TESTED BY:** \_\_\_\_\_ **DATE:** \_\_\_\_\_  
 Ellis Wu

**CHECKED BY:** \_\_\_\_\_ **DATE:** \_\_\_\_\_  
 Delphine Chen

**APPROVED BY:** \_\_\_\_\_ **DATE:** \_\_\_\_\_  
 Dr. Alan Lane, Manager



## 2. SUMMARY OF TEST RESULTS & GENERAL STATEMENT OF CERTIFICATION

The EUT has been tested according to the following specifications:

47 CFR Part 15, Subpart C			
PARAGRAPH.	TEST REQUIREMENTS	COMPLIANCE (YES/NO)	TEST RESULT
15.107, 15.109	AC Power Conducted Emissions Spec.: 48 dBuV	N/A	N/A
15.227	Transmitter Radiated Emissions	Yes	Minimum passing margin is -16.1 dBuV At 54.10 MHz



### 3. GENERAL INFORMATION

#### 3.1 General Description of EUT

<b>Product:</b>	<b>Wireless Mouse</b>
<b>Model No:</b>	<b>Netscroll Wireless</b>
<b>Power Supply:</b>	<b>3VDC (2x Battery)</b>
<b>Modulation Type:</b>	<b>FSK</b>
<b>Operating Frequency:</b>	<b>27 MHz</b>
<b>Number of Channel:</b>	<b>2</b>
<b>Channel Spacing:</b>	<b>50kHz</b>
<b>Associated devices:</b>	<b>N/A</b>

***Note: The latest innovation in wireless technology is the NewScroll Wireless mouse. The mouse can be used from a distance from up to 1.5m, even if desktop items are between it and the receiver.***

***The other detailed information, please refer to user's manual.***

### 3.2 Description of Test mode

The EUT has 2 channels for data transmission. According to Part 15, Sec. 15.31(m), the channel 1 was chosen for evaluation.

Below is the channel & frequency table:

Channel	Frequency
1	27.045
2	27.095

### 3.3 Test Methodology


These tests were conducted on a sample of EUT for the evaluation in compliance with FCC CFR47 Part 15, Subpart C (15.227).

Both conducted and radiated emissions measurements were conducted in accordance with ANSI C63.4:1992.

### 3.4 Support Units List

N/A

### 3.5 Configuration of System Under Test

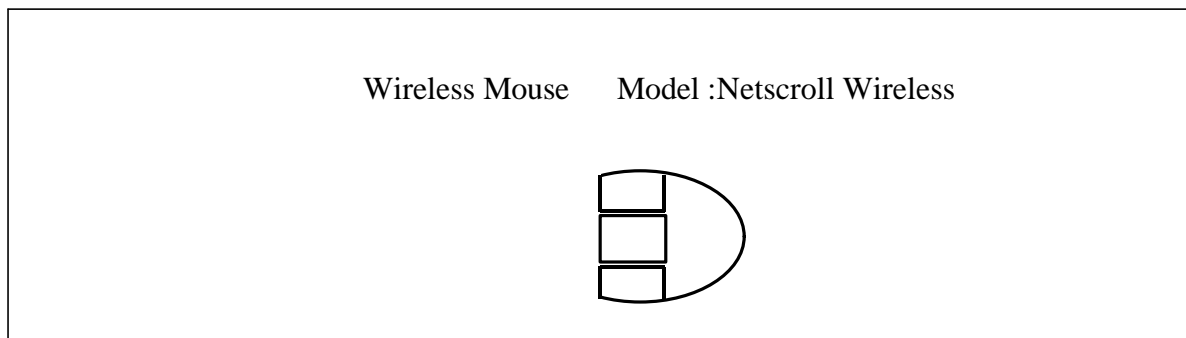

Note: the drawing is only for your reference, please have a look at the attached photo for the actual one.

## 4. GENERAL INFORMATION OF TEST FACILITY

### 4.1 Test Lab.:

**Lin Kuo EMC Lab.**

No. 47, 14 Ling, Chia Pau Tsuen, Lin Kuo Hsiang, Taipei, Taiwan, R.O.C.

**Hsin Chu EMC Lab.**

No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen, Chiung Lin Hsiang, R.O.C.

### 4.2 Calibration Interval :

All calibration interval of the test sites and test instruments is 12 months. The calibrations are traceable to NML/ROC and NIST/USA.



## **5. TEST PROCEDURES AND TEST RESULTS**

### **5.1 Conducted Emission Measurement**

This EUT is excused from investigation of conducted emission, for it is powered by battery only. According to paragraph 15.207(a), measurements to demonstrate compliance with the conducted limited are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.





## 5.2 Radiated Emission Measurement

### 5.2.1 Test instruments


Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8590L	3544A01176	Apr 18, 2001
HP Preamplifier	8447D	2944A08485	Oct. 23, 2000
HP Preamplifier	8347A	3307A01088	Sep. 09, 2000
ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Aug. 27, 2000
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 2000
CHASE BILOG Antenna	CBL6112A	2221	Aug. 10, 2000
SCHWARZBECK Horn Antenna	BBHA9120-D	D130	Jul. 09, 2001
SCHWARZBECK Horn Antenna	BBHA9170	123	Jan. 31, 2001
EMCO Turn Table	1060	1115	N/A
SHOSHIN Tower	AP-4701	A6Y005	N/A
Open Field Test Site	Site 5	ADT-R05	Aug. 09, 2000

The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMAS document NIS81.

### 5.2.2 Test Procedure

- a. The EUT was placed on the top of a turn table 0.8 meter above ground at a 3-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the interference-receiving antenna was moved from 1 meter to 4 meter height above ground and the turn table was rotated from 0 degree to 360 degrees to find the maximum reading.
- e. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and peak values of EUT will be reported. Otherwise the emissions which do not have 10 dB margin will be re-tested one by one using the quasi- peak method or average method as specified and then reported.

### 5.2.3 Test Setup

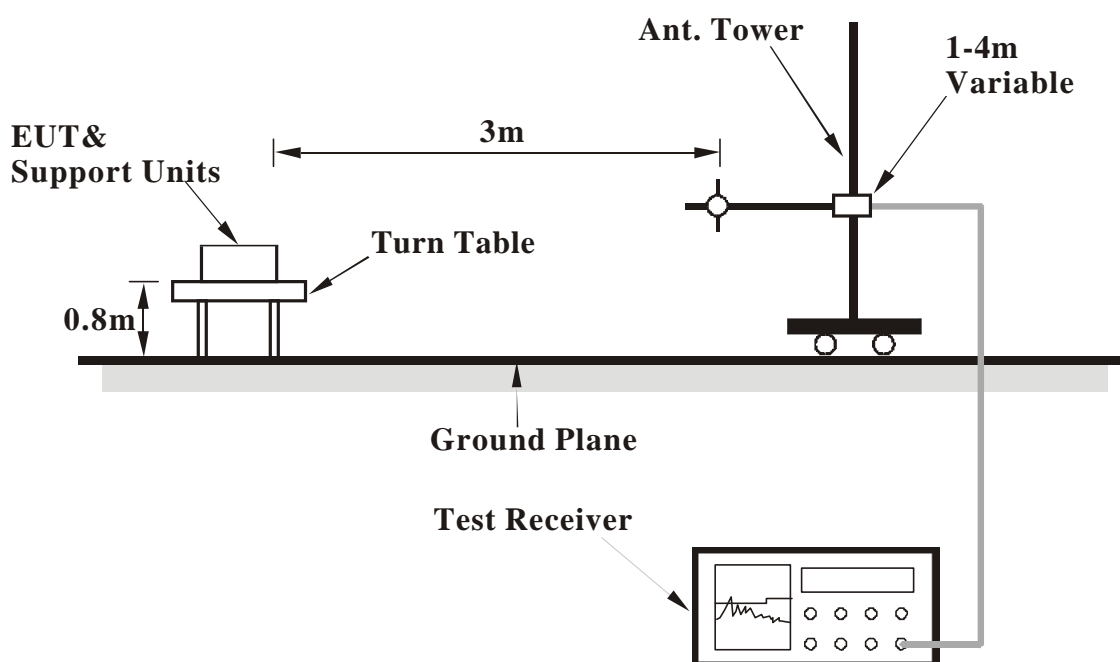

### 5.2.4 Photograph of Test Setup





### **5.2.5 EUT Operating condition**

Set the EUT to transmit continuously at 27MHz channel 1 frequency band. Such function can be activated by pressing two buttons at the same time.

### **5.2.6 Climate Condition**

The temperature and related humidity in test site is 25 and 65% respectively.

## 5.2.7 Test Results

### 5.2.7.1 Fundamental Frequency

ANTENNA POLARITY: Vertical		Detector Function : Peak Average				6dB Bandwidth : 120 kHz.				Distance : 3 M Frequency Range : 30 – 1000 MHz.	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
27.04	8.4	50.2	-	58.4	-	100	80	-41.6	-	100	256

ANTENNA POLARITY: Horizontal		Detector Function : Peak Average				6dB Bandwidth : 120 kHz.				Distance : 3 M Frequency Range : 30 – 1000 MHz.	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)		Antenna Height (cm)	Table Angle (Degree)
		P.K.	A.V.	P.K.	A.V.	P.K.	A.V.	P.K.	A.V.		
27.04	8.4	61.0	-	69.4	-	100	80	-30.6	-	160	-6

- Remarks:**
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. The limit value is defined as per 15.227

**5.2.7.2 Harmonics and Spurious**

ANTENNA POLARITY: Vertical		Detector Function : Quasi-Peak		6dB Bandwidth : 120 kHz.		Distance : 3 M Frequency Range : 30 – 1000 MHz.	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
54.10	7.5	16.4	23.9	40.0	-16.1	215	362
81.11	9.0	8.9	17.9	40.0	-22.1	100	-8
135.21	12.7	1.7	14.4	43.5	-29.1	110	363
216.36	11.3	0.7	12.0	46.0	-34.0	110	270
243.41	13.2	0.6	13.8	46.0	-32.2	136	0

ANTENNA POLARITY: Horizontal		Detector Function : Quasi-Peak		6dB Bandwidth : 120 kHz.		Distance : 3 M Frequency Range : 30 – 1000 MHz.	
Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
54.10	7.5	14.1	21.6	40.0	-18.4	224	-2
81.15	9.0	10.9	19.9	40.0	-20.1	246	362
108.20	12.2	3.0	15.2	43.5	-28.3	157	2
135.25	12.7	1.6	14.3	43.5	-29.2	258	363
216.27	11.3	2.8	14.1	46.0	-31.9	233	-3
243.45	13.2	0.7	13.9	46.0	-32.1	275	363

- Remarks:**
1. Emission level (dBuV/m) = Correction Factor (dB) + Reading value (dBuV).
  2. Correction Factor (dB) = Ant. Factor (dB)+Cable loss (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. The limit value is defined as per 15.227

## 6. Photograph of the EUT



