

FCC TEST REPORT

REPORT NO.: RF930811L01

MODEL NO.: HSTNC-002W

OEM MODEL NO.: BTOM001

RECEIVED: Aug. 11, 2004

TESTED: Jul. 26 ~ Aug. 18, 2004

APPLICANT: KYE SYSTEMS CORP.

ADDRESS: NO. 492, SEC.5, CHUNG HSIN RD., SAN
CHUNG, TAIPEI HSIEN, 241, TAIWAN,
R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan, Taoyuan,
Taiwan, R.O.C.

This test report consists of 71 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agency. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1	CERTIFICATION	5
2	SUMMARY OF TEST RESULTS	6
2.0	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	9
3.4	DESCRIPTION OF SUPPORT UNITS	9
3.5	CONFIGURATION OF SYSTEM UNDER TEST	10
4	TEST PROCEDURES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	NUMBER OF HOPPING FREQUENCY USED	20
4.2.1	LIMIT OF HOPPING FREQUENCY USED	20
4.2.2	TEST INSTRUMENTS	20
4.2.3	TEST PROCEDURES	21
4.2.4	DEVIATION FROM TEST STANDARD	21
4.2.5	TEST SETUP	22
4.2.6	TEST RESULTS	22
4.3	DWELL TIME ON EACH CHANNEL	25
4.3.1	LIMIT OF DWELL TIME USED	25
4.3.2	TEST INSTRUMENTS	25
4.3.3	TEST PROCEDURES	26
4.3.4	DEVIATION FROM TEST STANDARD	26
4.3.5	TEST SETUP	26

4.3.6	TEST RESULTS	27
4.4	CHANNEL BANDWIDTH	32
4.4.1	LIMITS OF CHANNEL BANDWIDTH	32
4.4.2	TEST INSTRUMENTS.....	32
4.4.3	TEST PROCEDURE.....	33
4.4.4	DEVIATION FROM TEST STANDARD	33
4.4.5	TEST SETUP.....	33
4.4.6	EUT OPERATING CONDITION	33
4.4.7	TEST RESULTS	34
4.5	HOPPING CHANNEL SEPARATION	38
4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION	38
4.5.2	TEST INSTRUMENTS.....	38
4.5.3	TEST PROCEDURES	39
4.5.4	DEVIATION FROM TEST STANDARD	39
4.5.5	TEST SETUP.....	39
4.5.6	TEST RESULTS	40
4.6	MAXIMUM PEAK OUTPUT POWER	44
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	44
4.6.2	INSTRUMENTS.....	44
4.6.3	TEST PROCEDURES	45
4.6.4	DEVIATION FROM TEST STANDARD	45
4.6.5	TEST SETUP.....	46
4.6.6	EUT OPERATING CONDITION	46
4.6.7	TEST RESULTS	47
4.7	RADIATED EMISSION MEASUREMENT	51
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	51
4.7.2	TEST INSTRUMENTS.....	52
4.7.3	TEST PROCEDURES	53
4.7.4	DEVIATION FROM TEST STANDARD	53
4.7.5	TEST SETUP.....	54
4.7.6	TEST RESULTS	55
4.8	BAND EDGES MEASUREMENT	61

4.8.1	LIMITS OF BAND EDGES MEASUREMENT.....	61
4.8.2	TEST INSTRUMENTS.....	61
4.8.3	TEST PROCEDURE.....	61
4.8.4	DEVIATION FROM TEST STANDARD	61
4.8.5	EUT OPERATING CONDITION	62
4.8.6	TEST RESULTS	62
4.9	ANTENNA REQUIREMENT	67
4.9.1	STANDARD APPLICABLE	67
4.9.2	ANTENNA CONNECTED CONSTRUCTION	67
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	68
6	INFORMATION ON THE TESTING LABORATORIES	71

1 CERTIFICATION

PRODUCT : Blue Tooth Mouse
BRAND NAME : HP
MODEL NO. : HSTNC-002W
OEM BRAND NAME : KYE
OEM MODEL NO. : BTOM001
APPLICANT : KYE SYSTEMS CORP.
TESTED : Jul. 26 ~ Aug. 18, 2004
TEST ITEM : ENGINEERING SAMPLE
STANDARDS : FCC Part 15, Subpart C (Section 15.247)
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Suntee Liu, **DATE:** Aug. 19, 2004
(Suntee Liu)

TECHNICAL
ACCEPTANCE : Gary Chang, **DATE:** Aug. 19, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang, **DATE:** Aug. 19, 2004
(Cody Chang / Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -16.96 dB at 0.213 MHz
15.247(a)(1)(I)-(ii)	Number of Hopping Frequency Used Spec.: At least 15 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 31.6 second	PASS	Meet the requirement of limit
15.247(a)(1)(I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth, which ever is greater	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 1 MHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -7.81 dB at 168.02 MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.55 dB
	200MHz ~1000MHz	3.58 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Blue Tooth Mouse
MODEL NO.	HSTNC-002W
OEM MODEL NO.	BTOM001
POWER SUPPLY	3 Vdc from batteries 5 Vdc from host equipment for charging mode
MODULATION TYPE	FHSS
MODULATION TECHNOLOGY	GFSK
FREQUENCY RANGE	2402 MHz ~ 2480 MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	-1.59 dBm
ANTENNA TYPE	Printed Antenna with -1.87 dBi gain
DATA CABLE	1.5 m non-shielded USB cable with one core
I/O PORTS	USB Port

NOTE:

1. 2 brands and 2 models are identical to each other due to marketing requirement.

Brand	Model
HP	HSTNC-002W
KYE	BTOM001

2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT.

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2431	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

NOTE:

- There are 2 test modes presented in the report.

Test Mode	Description
A	Continuous transmission mode (Power from batteries)
B	Continuous transmission mode (Power from host equipment via USB cable)

- For conducted test, only charging mode was tested.
- For radiated test below 1 GHz, channel 0, 39 and 78 have been pre-tested. Channel 78, the worst case, was chosen for the final test.
- For radiated test above 1 GHz, channel 0, 39 and 78 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Blue Tooth Mouse. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4:2001

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2 m shielded cable


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

Mode A

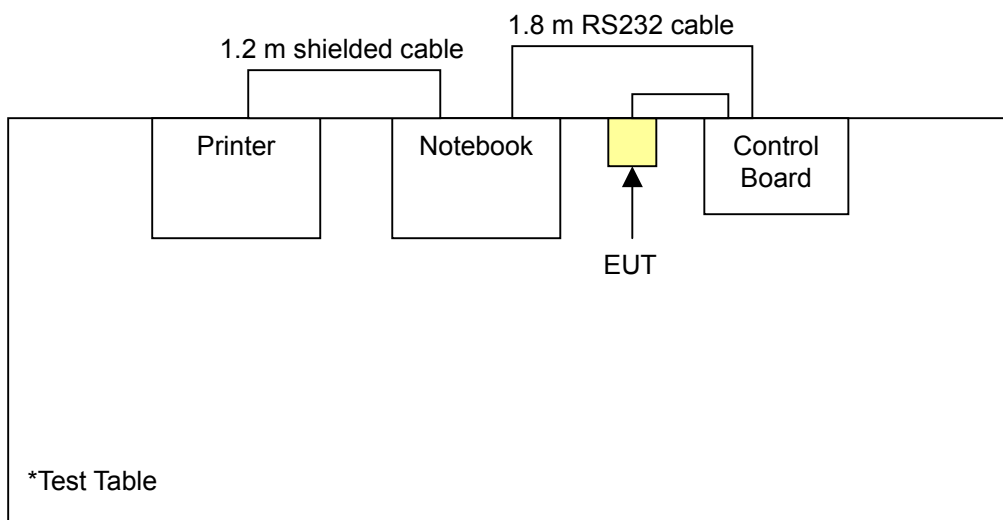

Mode B

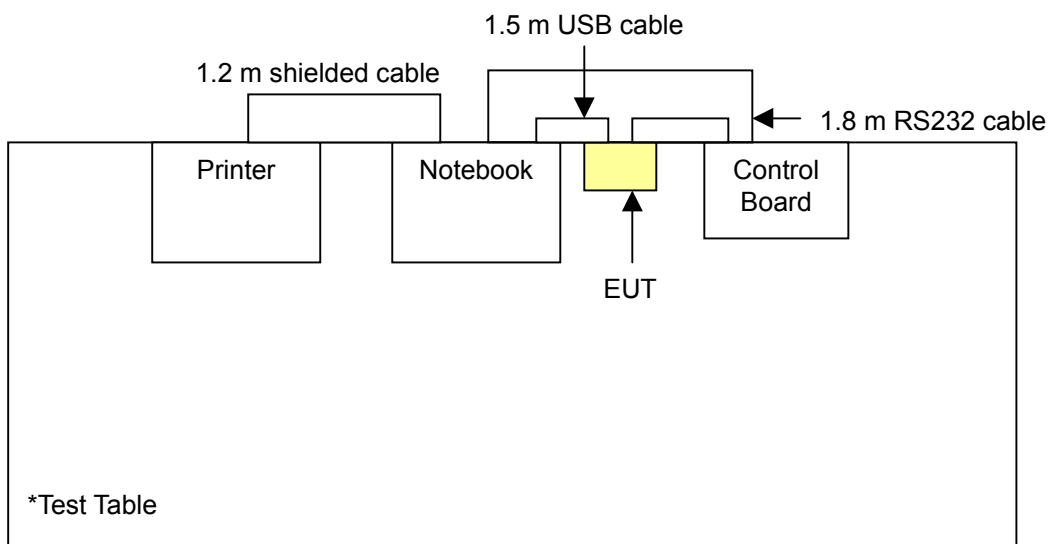

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Dec. 11, 2004
RF signal cable Woken	5D-FB	Cable-HyC02-01	Mar. 07, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Mar. 10, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Mar. 04, 2005
Software ADT	ADT_Conc_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 2.
 3. The VCCI Site Registration No. is C-2047.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit - 20dB was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

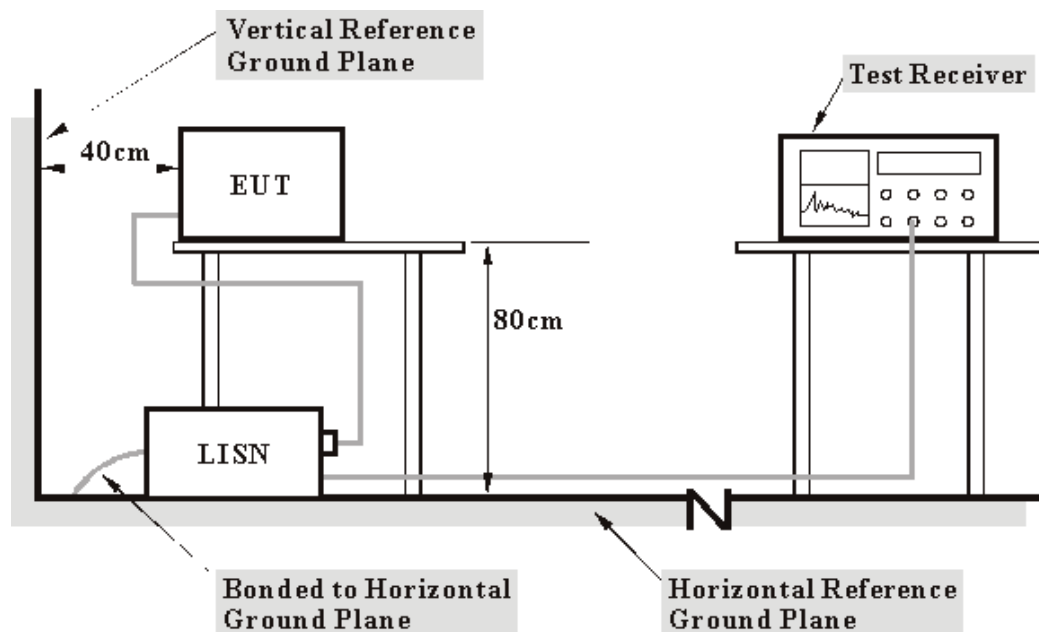

- Note:** 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


- The EUT connected to notebook through control board.
- The Notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- The computer system sent "H" messages to its screen.
- The computer system sent "H" messages to modem.
- The computer system sent "H" messages to printer, and the printer printed them on paper.
- Steps c ~ e were repeated.

4.1.7 TEST RESULTS

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	0	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 54%RH, 991 hPa	TESTED BY	Kevin Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.10	43.98	-	44.08	-	64.98	54.98	-20.90	-
2	0.226	0.10	41.77	-	41.87	-	62.61	52.61	-20.74	-
3	1.355	0.25	28.18	-	28.43	-	56.00	46.00	-27.57	-
4	1.785	0.26	30.28	-	30.54	-	56.00	46.00	-25.46	-
5	7.004	0.44	24.48	-	24.92	-	60.00	50.00	-35.08	-
6	10.000	0.53	30.36	-	30.89	-	60.00	50.00	-29.11	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

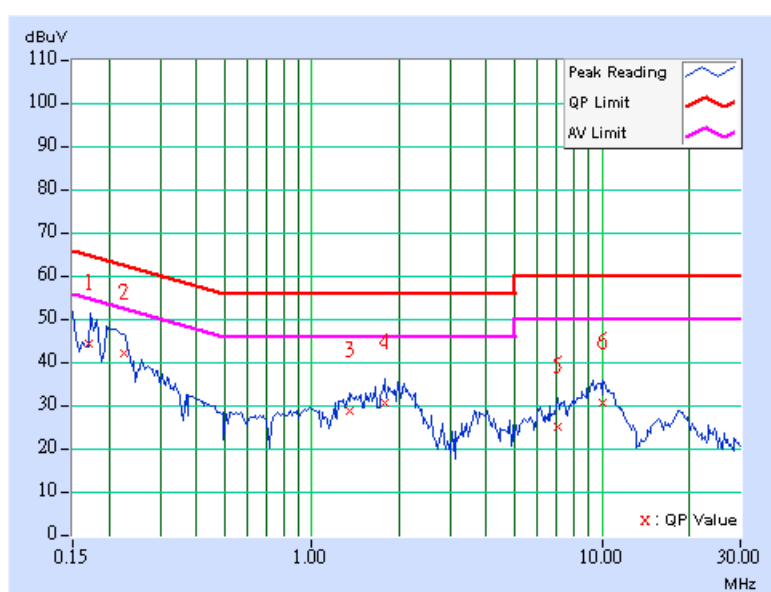

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	0	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 54%RH, 991 hPa	TESTED BY	Kevin Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.154	0.10	46.39	-	46.49	-	65.79	55.79	-19.30	-
2	0.213	0.10	46.05	-	46.15	-	63.11	53.11	-16.96	-
3	1.422	0.24	30.84	-	31.08	-	56.00	46.00	-24.92	-
4	1.930	0.25	30.76	-	31.01	-	56.00	46.00	-24.99	-
5	7.039	0.42	24.84	-	25.26	-	60.00	50.00	-34.74	-
6	10.039	0.49	30.32	-	30.81	-	60.00	50.00	-29.19	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

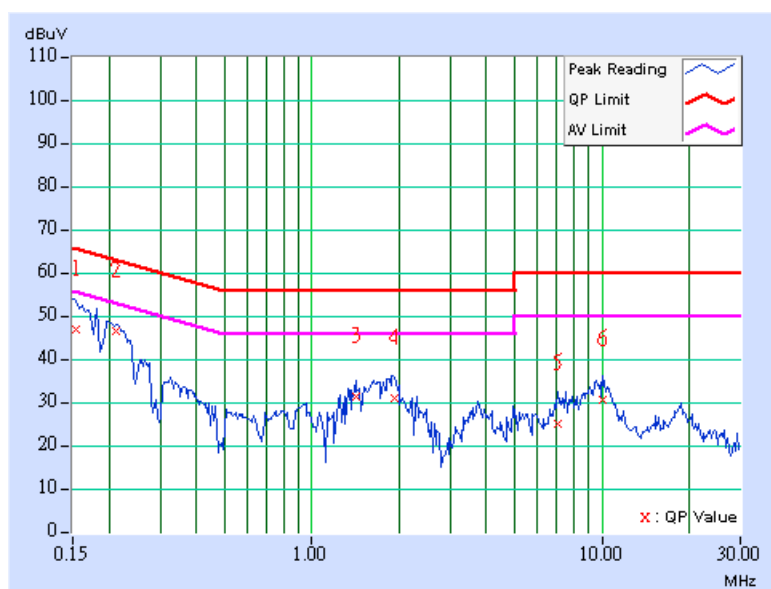

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	39	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 54%RH, 991 hPa	TESTED BY	Kevin Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.158	0.10	44.81	-	44.91	-	65.58	55.58	-20.66	-
2	0.216	0.10	45.38	-	45.48	-	62.96	52.96	-17.47	-
3	0.546	0.15	25.51	-	25.66	-	56.00	46.00	-30.34	-
4	1.965	0.26	30.08	-	30.34	-	56.00	46.00	-25.66	-
5	7.875	0.47	25.57	-	26.04	-	60.00	50.00	-33.96	-
6	10.207	0.54	30.61	-	31.15	-	60.00	50.00	-28.85	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

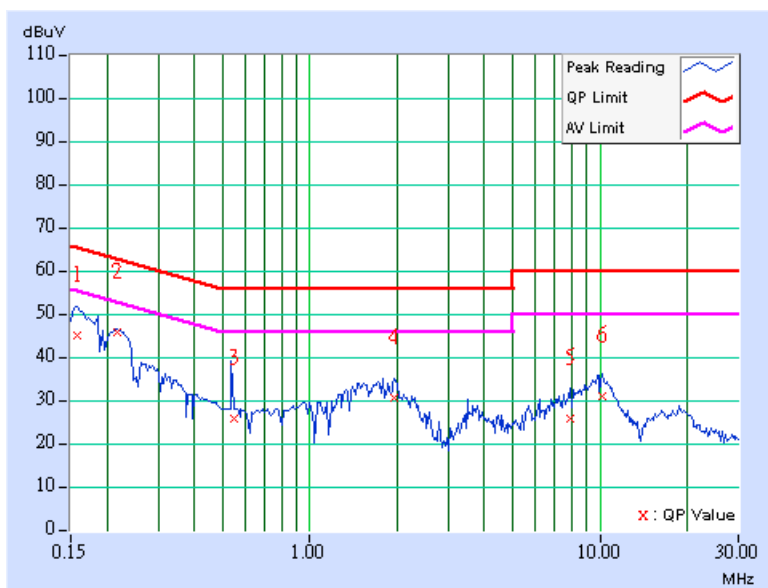

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	39	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 54%RH, 991 hPa	TESTED BY	Kevin Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.173	0.10	46.03	-	46.13	-	64.84	54.84	-18.71	-
2	0.224	0.10	41.85	-	41.95	-	62.66	52.66	-20.71	-
3	1.348	0.24	30.69	-	30.93	-	56.00	46.00	-25.07	-
4	1.922	0.25	32.80	-	33.05	-	56.00	46.00	-22.95	-
5	3.652	0.29	25.60	-	25.89	-	56.00	46.00	-30.11	-
6	10.117	0.49	28.06	-	28.55	-	60.00	50.00	-31.45	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

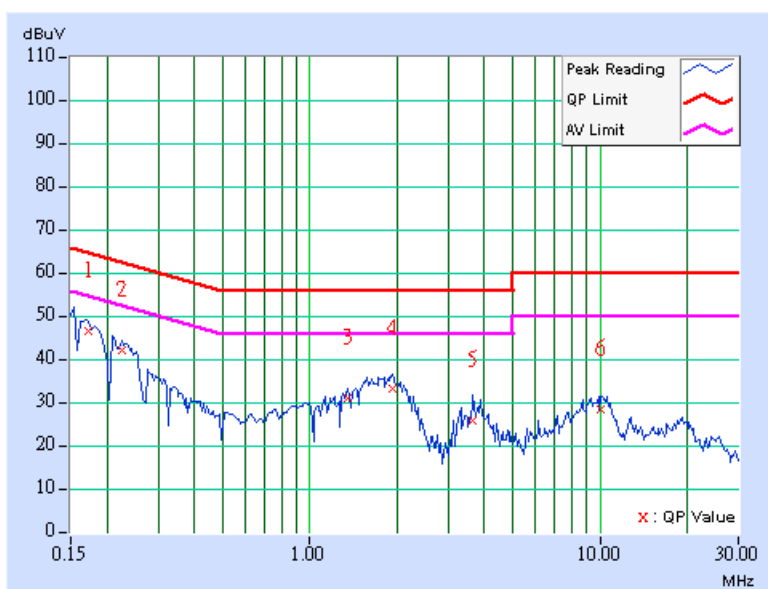

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	78	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	24 deg. C, 54%RH, 991 hPa	TESTED BY	Kevin Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.176	0.10	44.37	-	44.47	-	64.67	54.67	-20.20	-
2	0.236	0.10	39.31	-	39.41	-	62.24	52.24	-22.83	-
3	1.410	0.25	31.24	-	31.49	-	56.00	46.00	-24.51	-
4	1.980	0.26	32.54	-	32.80	-	56.00	46.00	-23.20	-
5	3.645	0.30	24.86	-	25.16	-	56.00	46.00	-30.84	-
6	9.828	0.52	28.17	-	28.69	-	60.00	50.00	-31.31	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

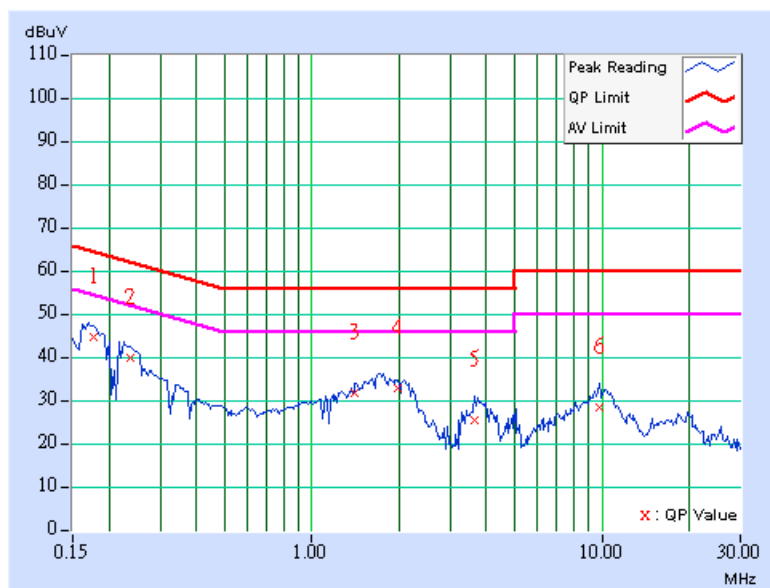

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	78	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	24 deg. C, 54%RH, 991 hPa	TESTED BY	Kevin Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.167	0.10	45.14	-	45.24	-	65.11	55.11	-19.87	-
2	0.224	0.10	40.74	-	40.84	-	62.67	52.67	-21.83	-
3	1.465	0.24	32.13	-	32.37	-	56.00	46.00	-23.63	-
4	1.949	0.25	33.33	-	33.58	-	56.00	46.00	-22.42	-
5	3.754	0.30	26.05	-	26.35	-	56.00	46.00	-29.65	-
6	10.117	0.49	28.34	-	28.83	-	60.00	50.00	-31.17	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

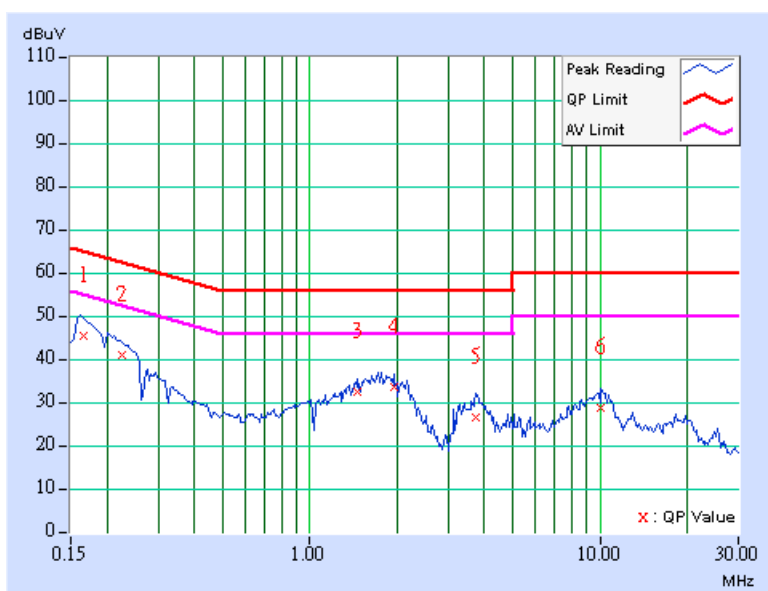

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.2.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.


4.2.5 TEST SETUP



4.2.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

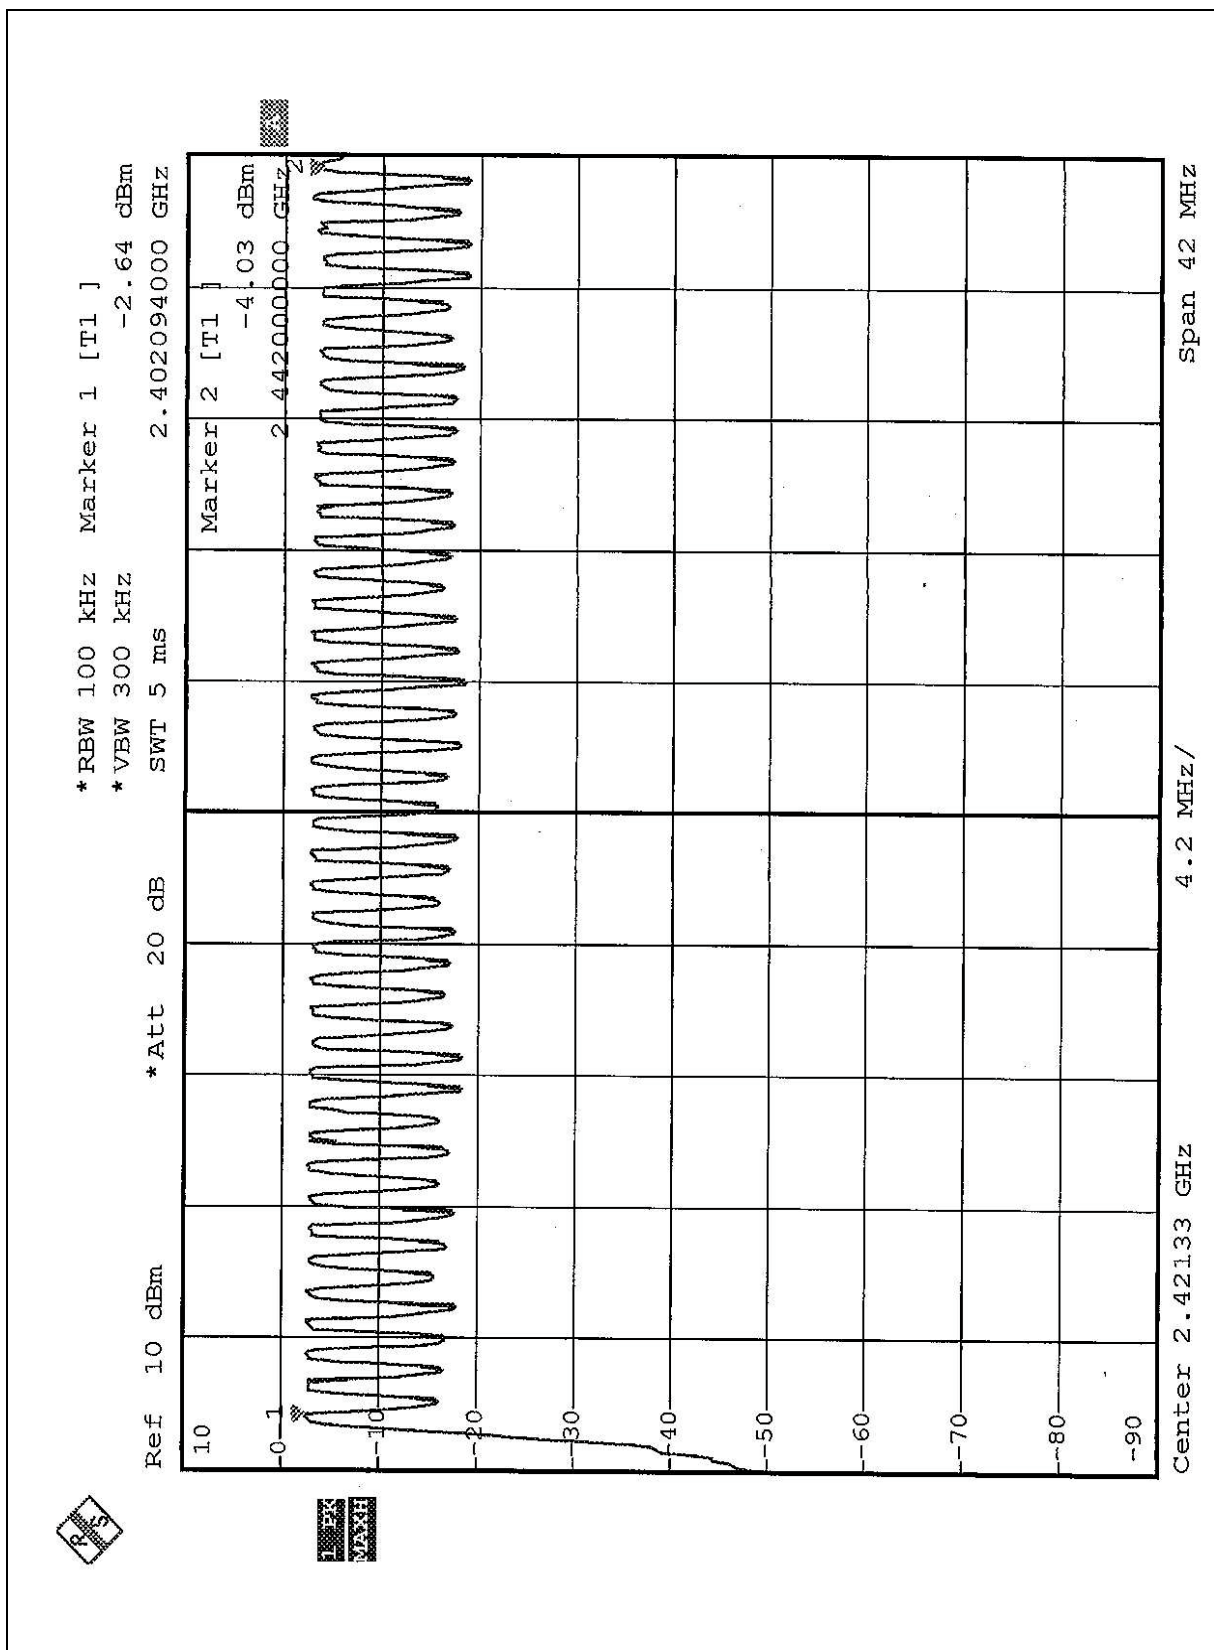

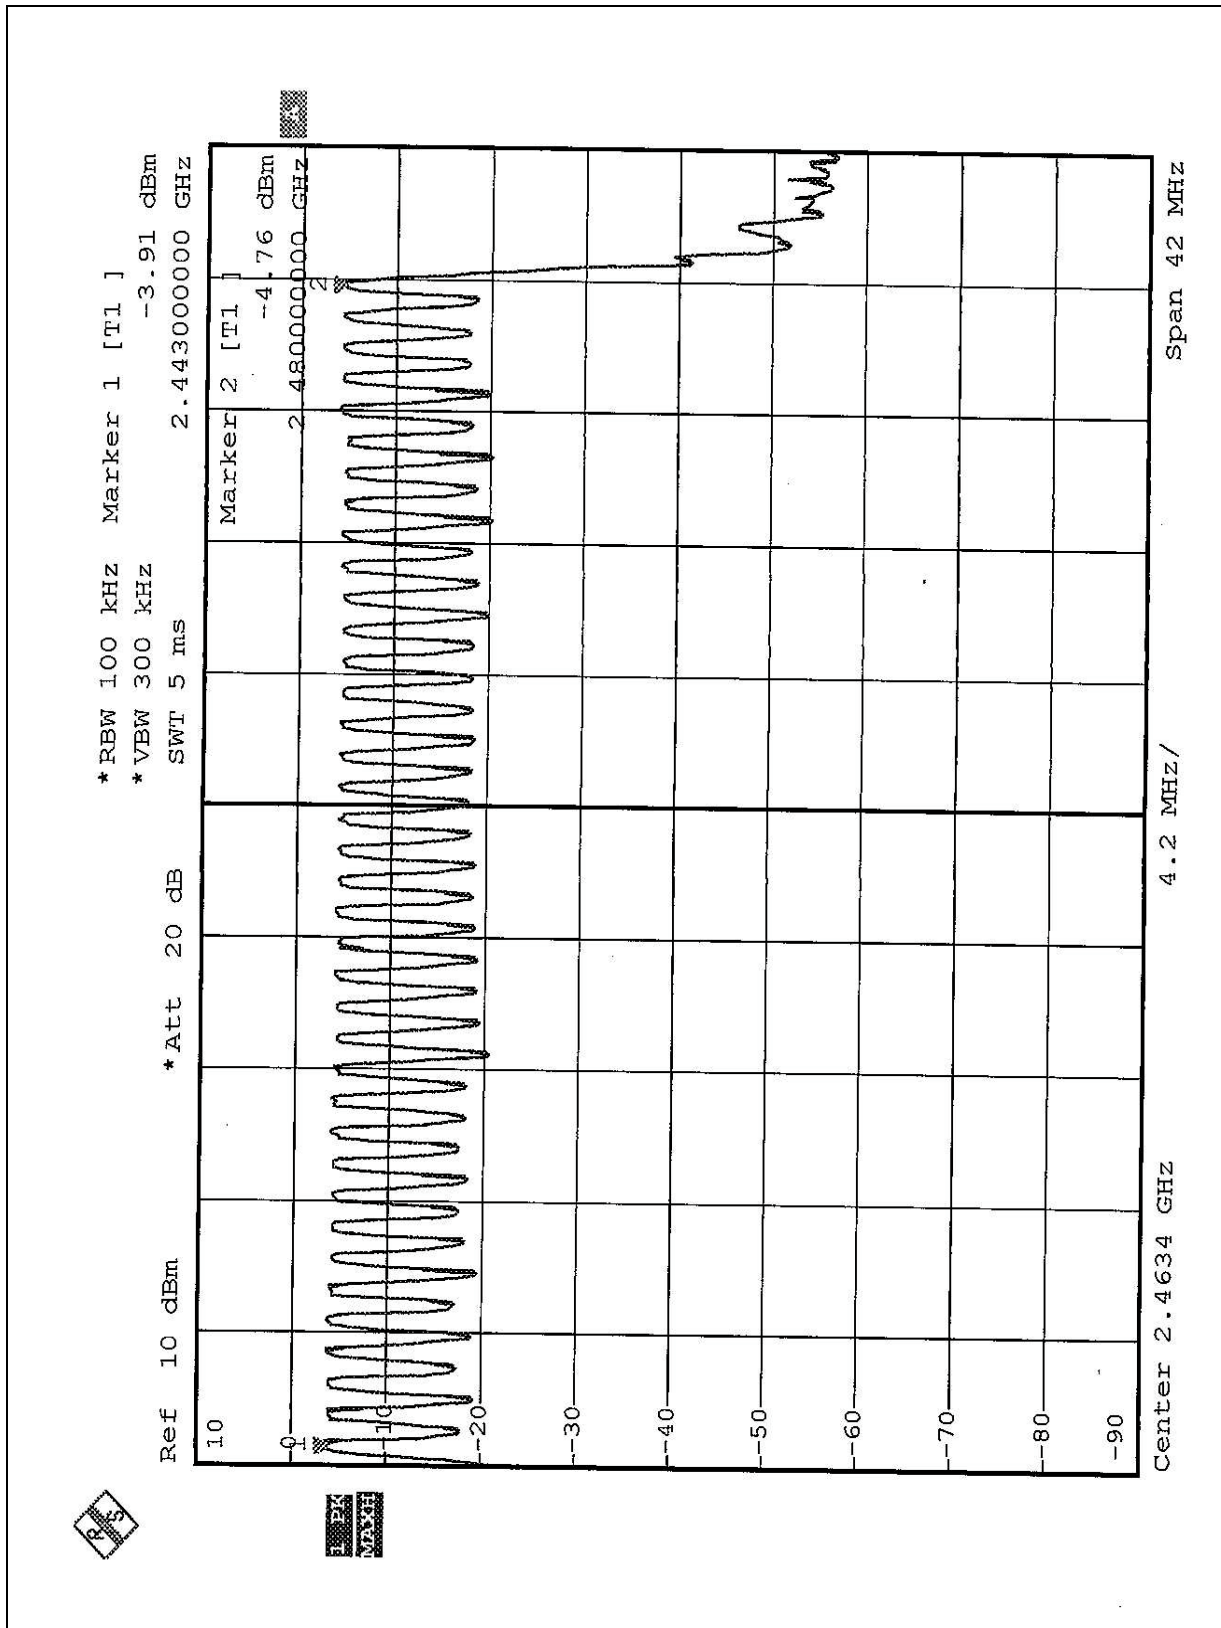

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 31.6 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP




4.3.6 TEST RESULTS

Mode	Number of transmission in a 31.6 (79Hopping*0.4)	Length of transmission time (msec)	Result (msec)	Limit (msec)
DH1	50 (times / 5 sec) *6.32= 316.00 times	0.450	142.20	400
DH3	27 (times / 5 sec) *6.32= 170.64 times	1.800	307.15	400


Note: The EUT only has two transmission modes (DH1 & DH3).

Test plots of the transmitting time slot are shown on next 4 pages.

DH1

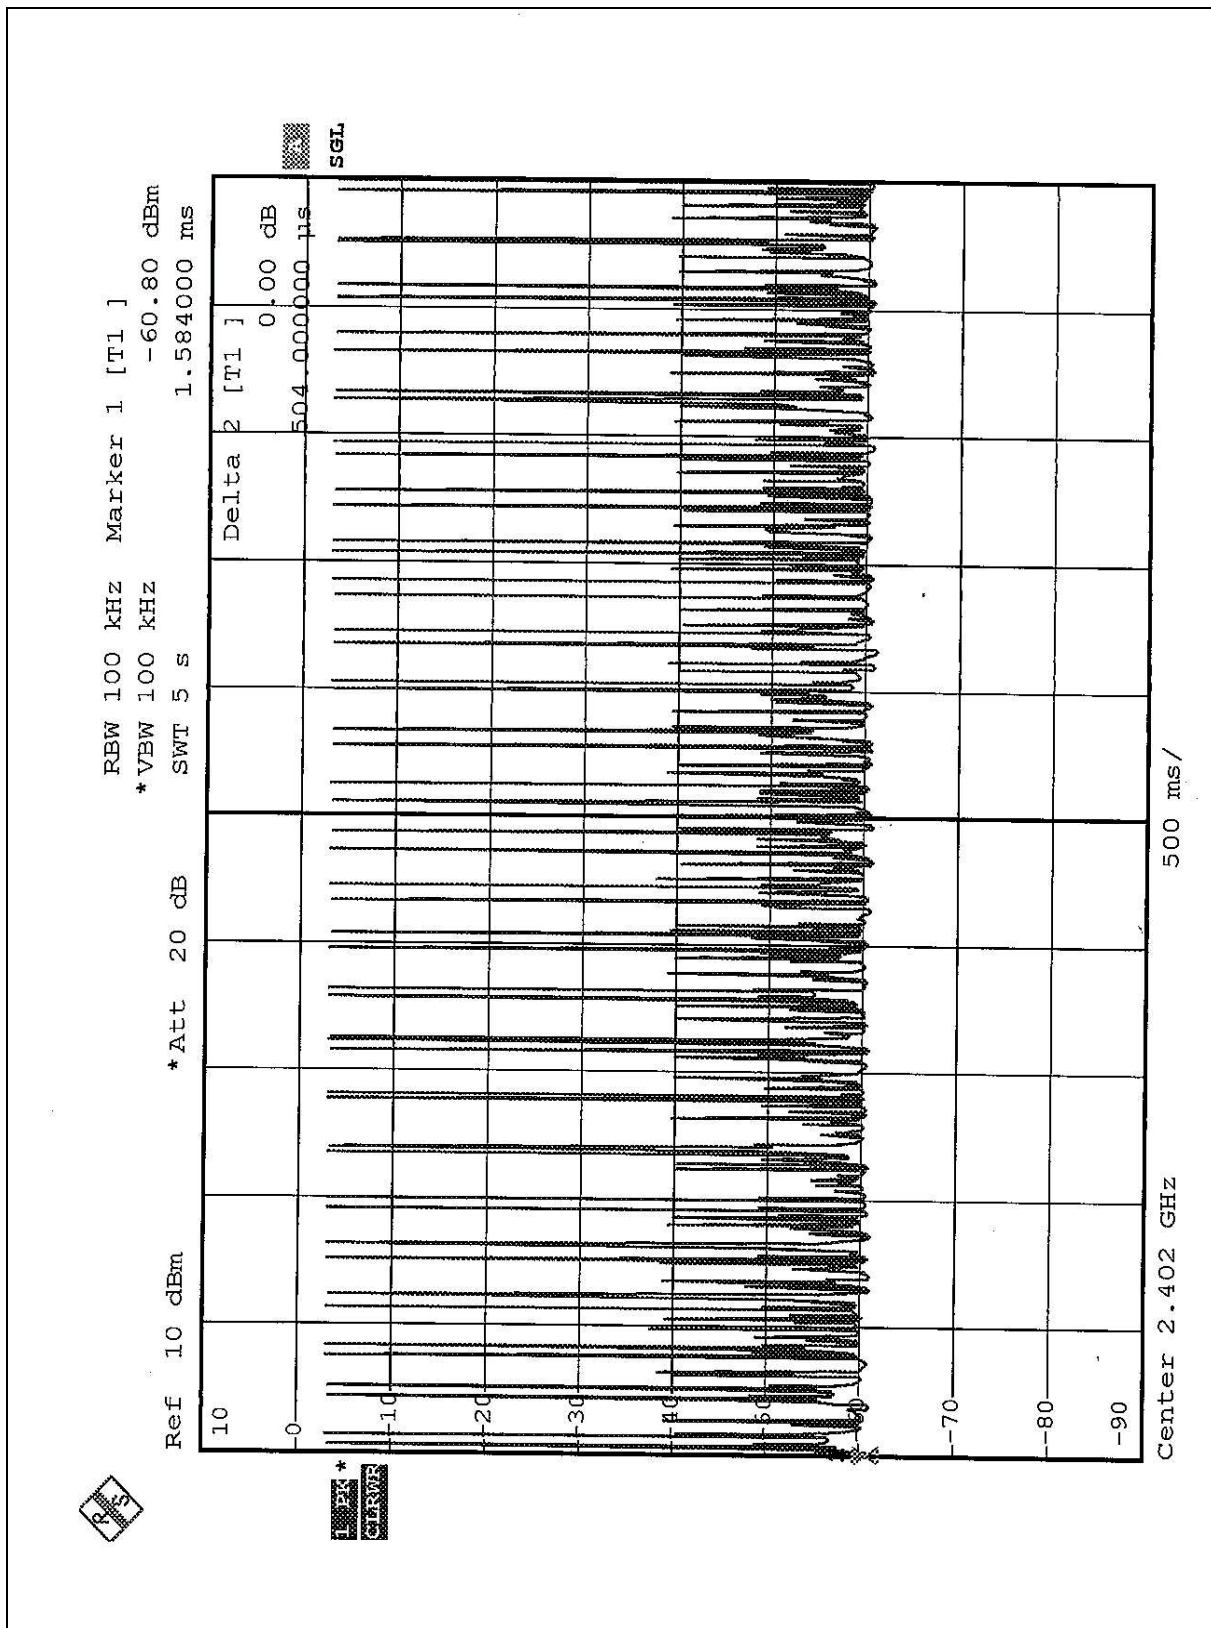


DH1

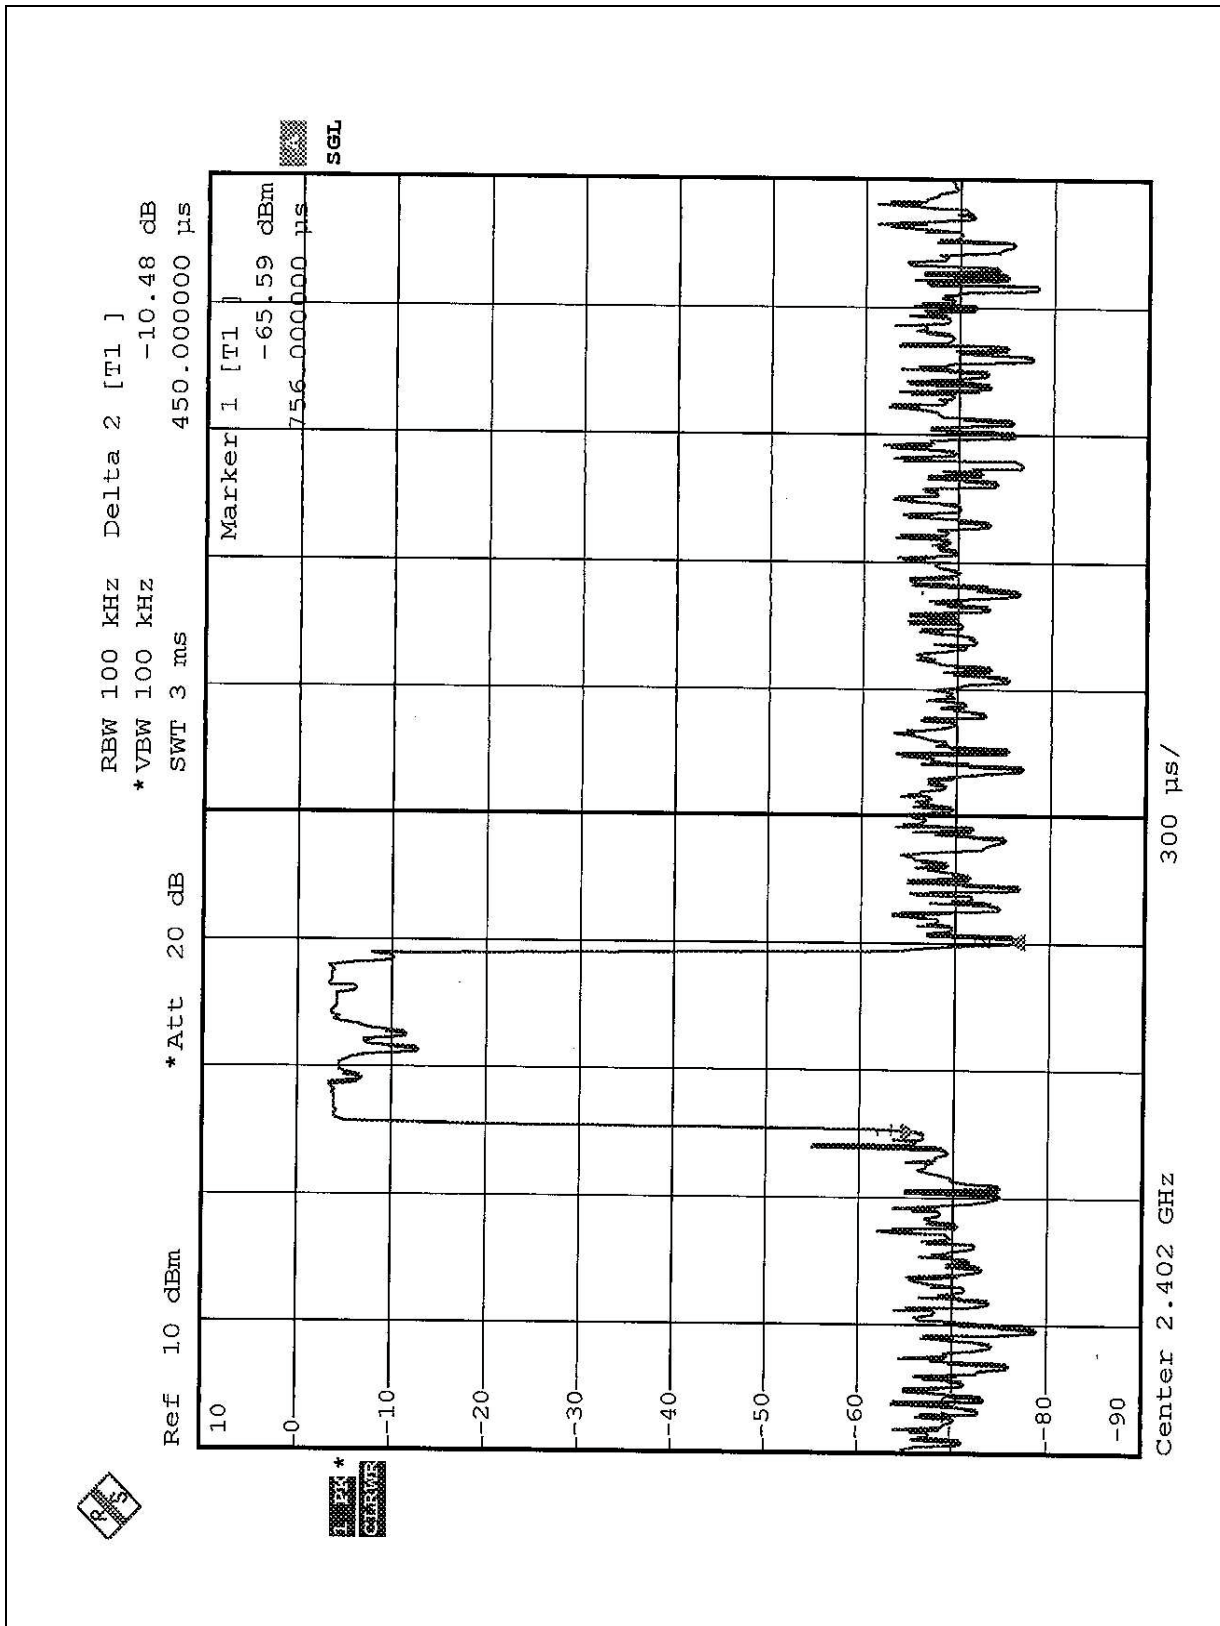

RBW 100 kHz Marker 1 [T1]
 *VBW 100 kHz
 *Att 20 dB
 SWT 5 s
 Delta 2 [T1]
 0.00 dB
 504.000000 us
 SGL

Ref 10 dBm
 Center 2.402 GHz
 500 ms/

DH3

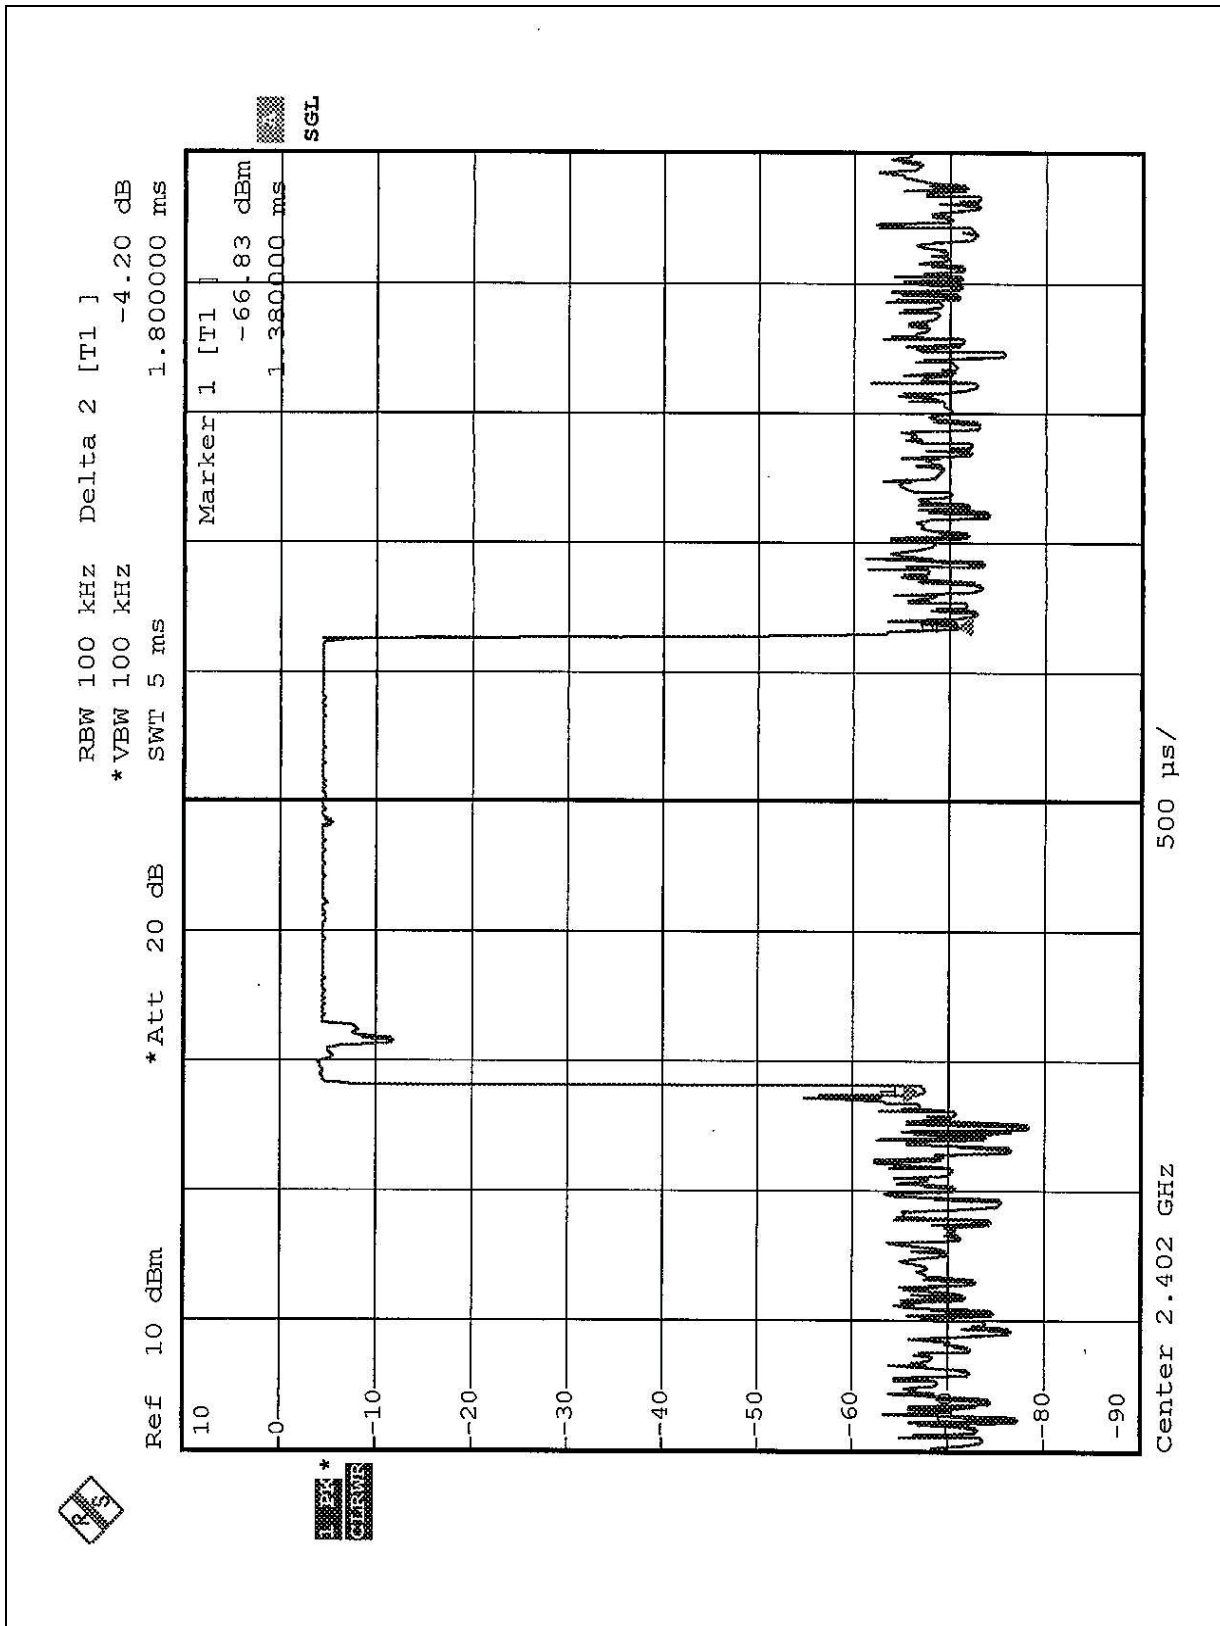

4.4 CHANNEL BANDWIDTH

4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400~2483.5 MHz and 5725~5850 MHz bands, the maximum 20dB bandwidth of the hopping channel is 1 MHz.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.4.7 TEST RESULTS


EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	MAXIMUM LIMIT (MHz)	PASS/FAIL
0	2402	0.960	1	PASS
39	2441	0.969	1	PASS
78	2480	0.966	1	PASS


Channel 0

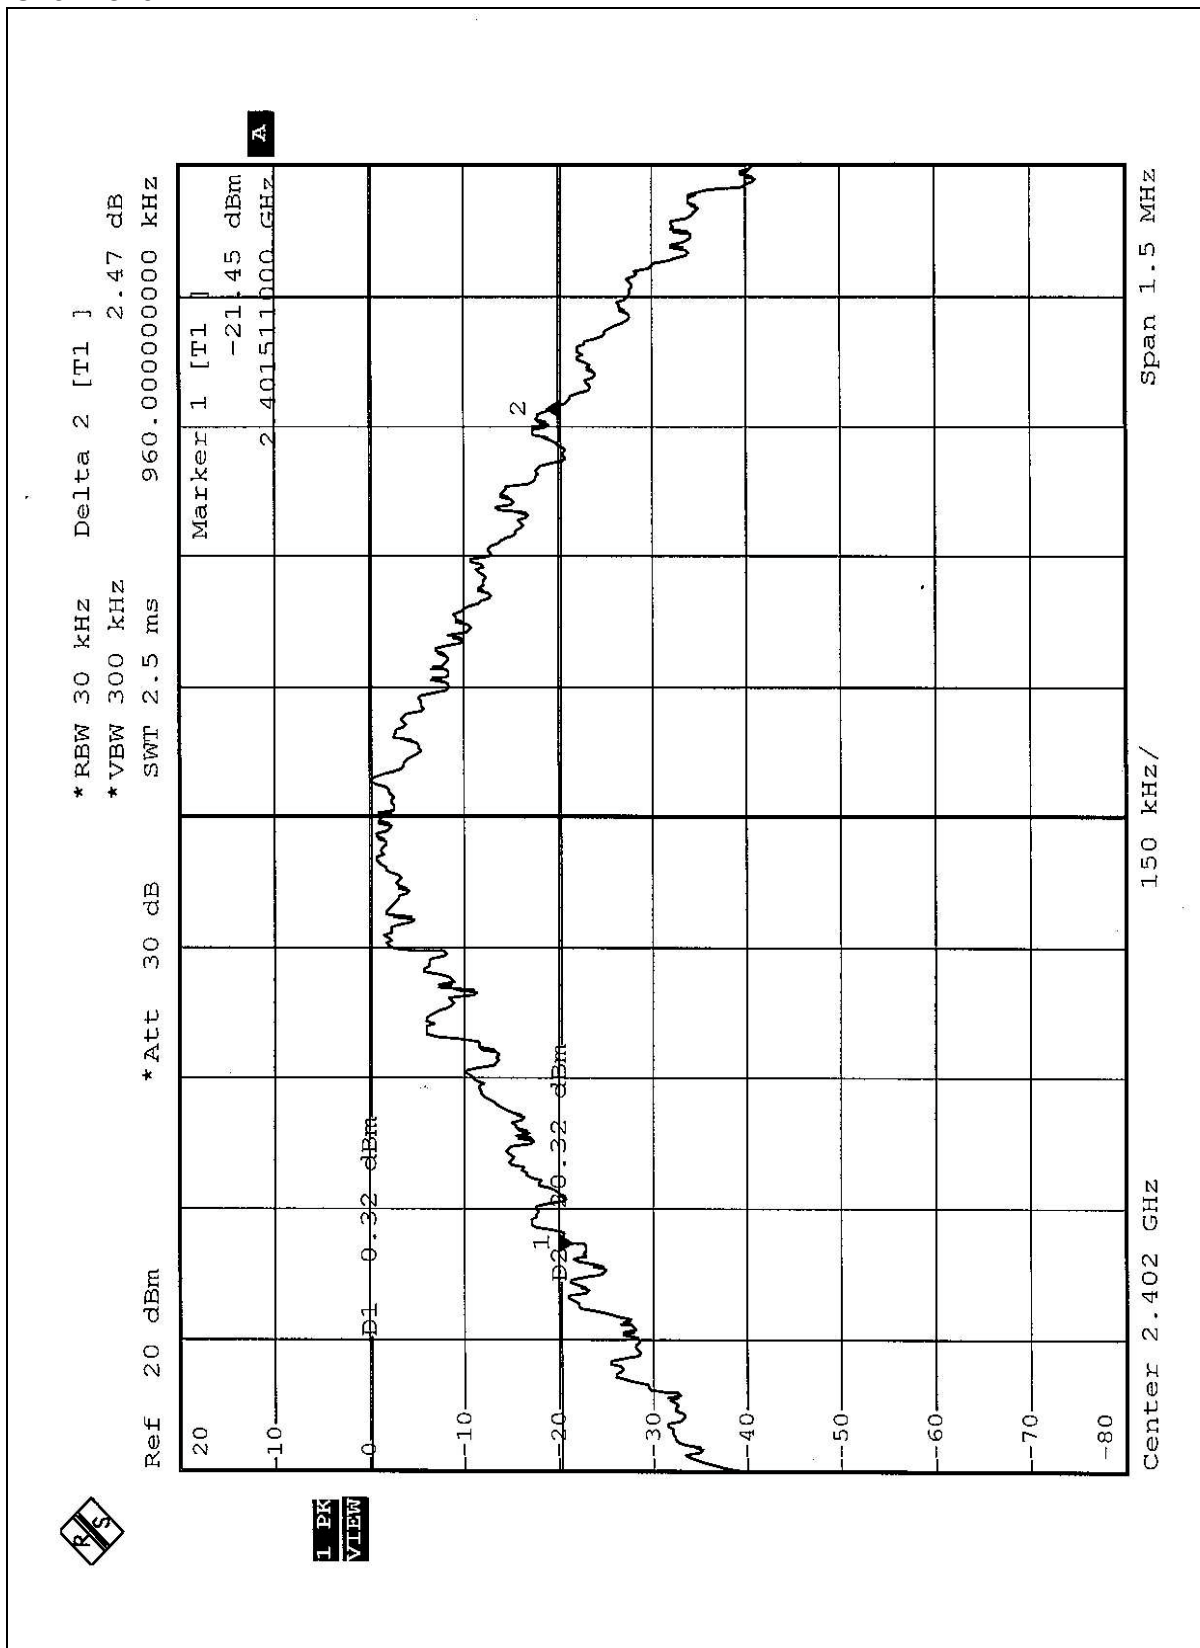

Channel 39

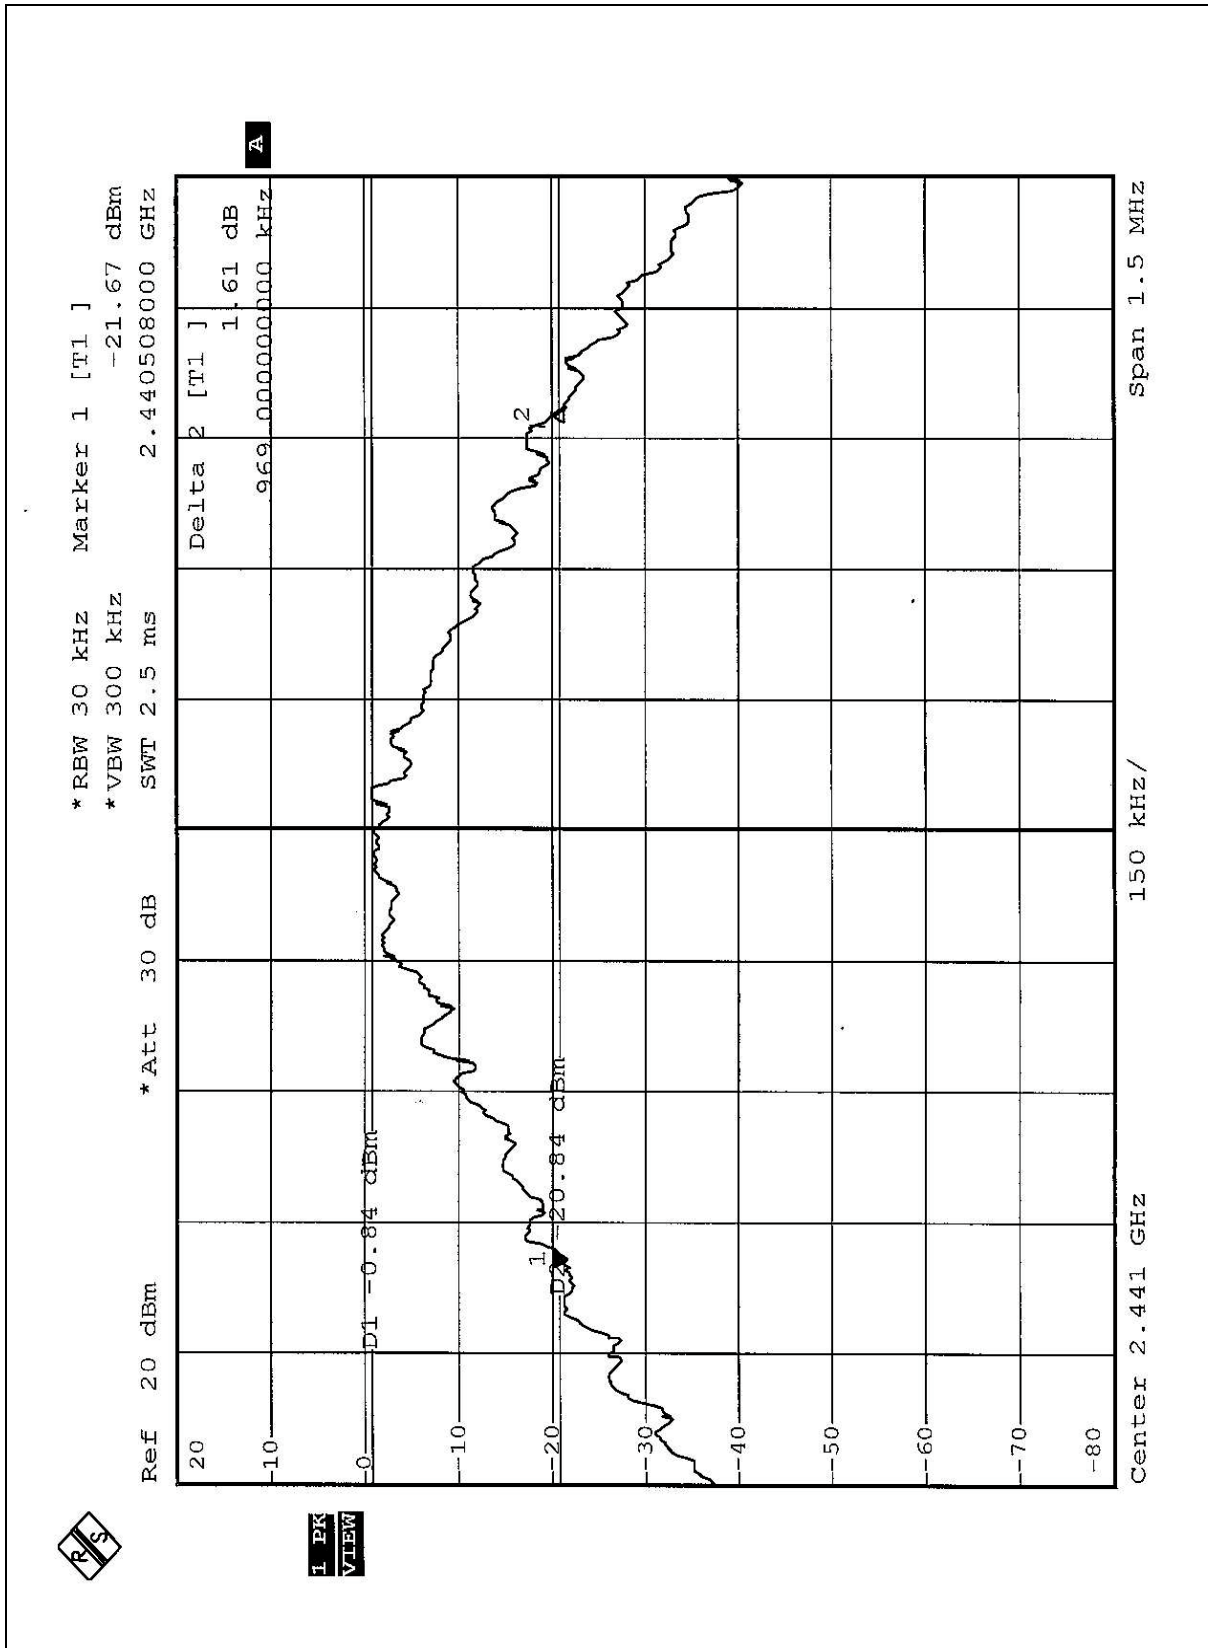

Channel 78

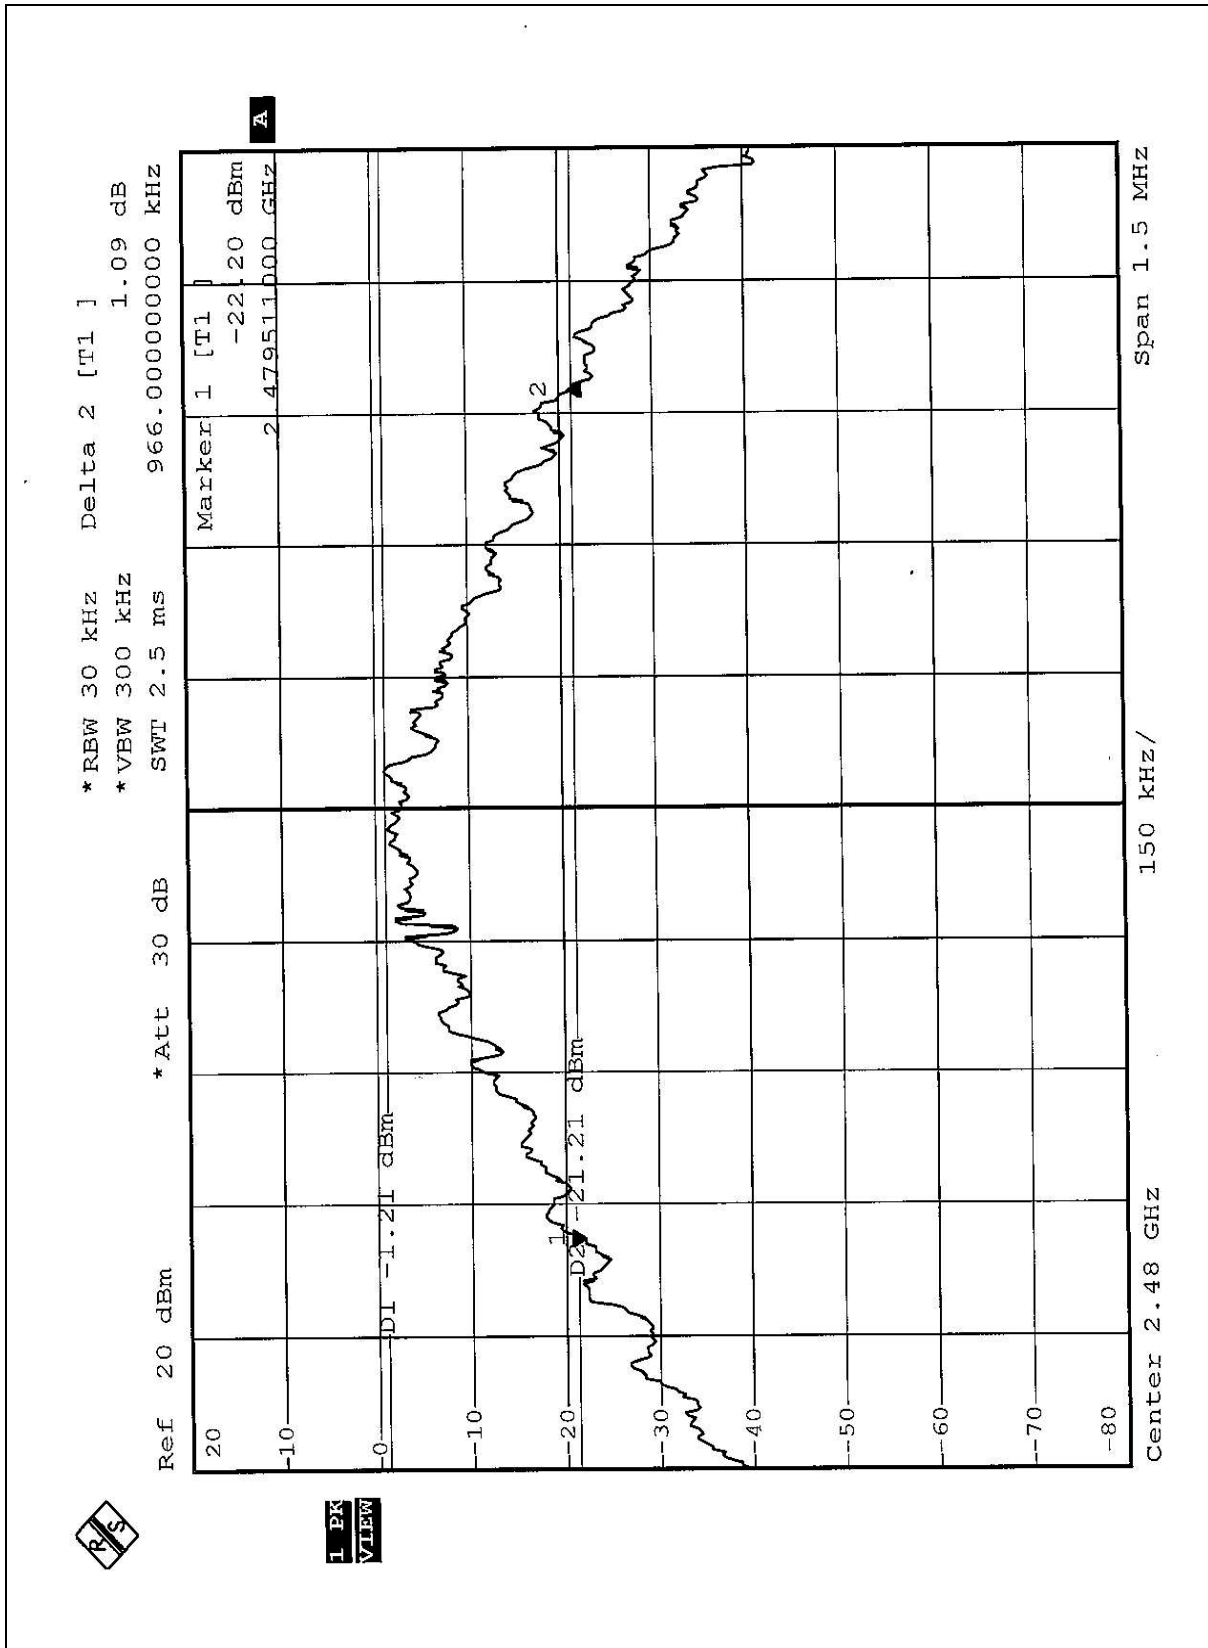

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or 20dB bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP




4.5.6 TEST RESULTS

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
TESTED BY	Long Chen		


Channel	Frequency (MHz)	Adjacent Channel Separation (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.005	0.960	PASS
39	2441	1.005	0.969	PASS
78	2480	1.000	0.966	PASS

The minimum limit is 20dB bandwidth. Test results please refer to next three pages.


Channel 0

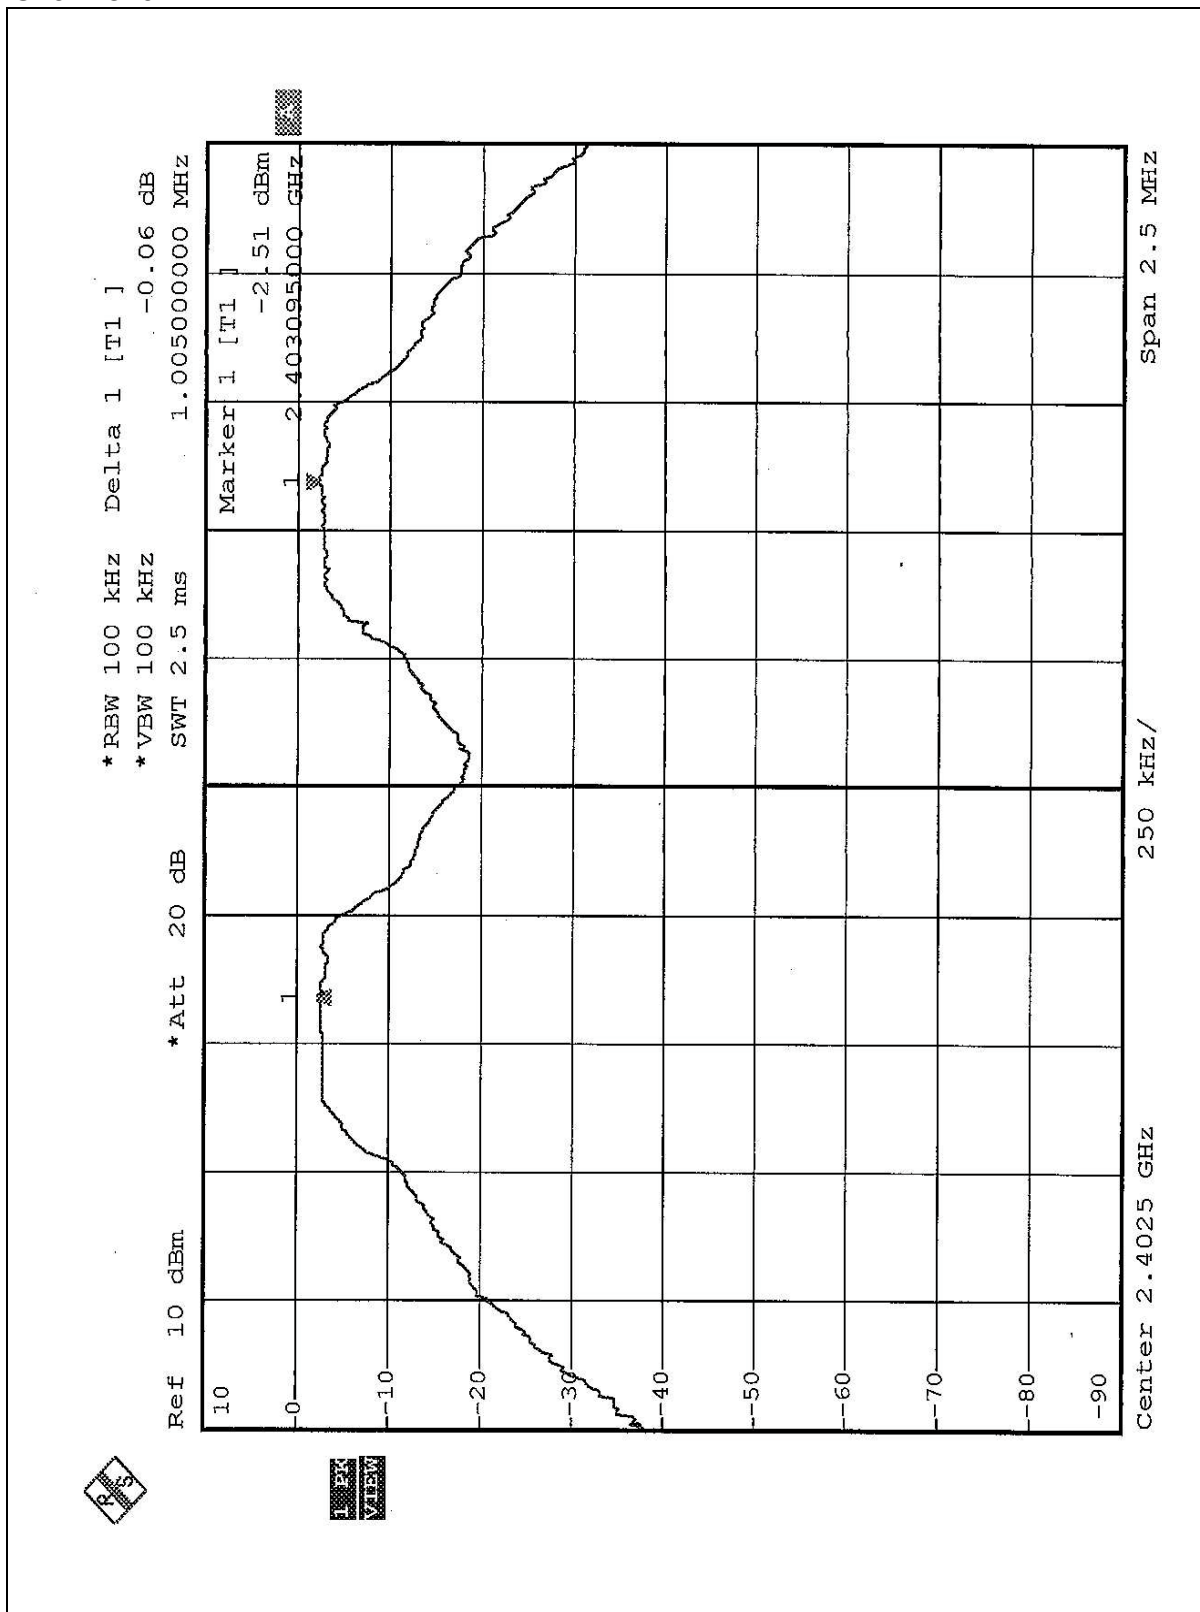

Channel 39

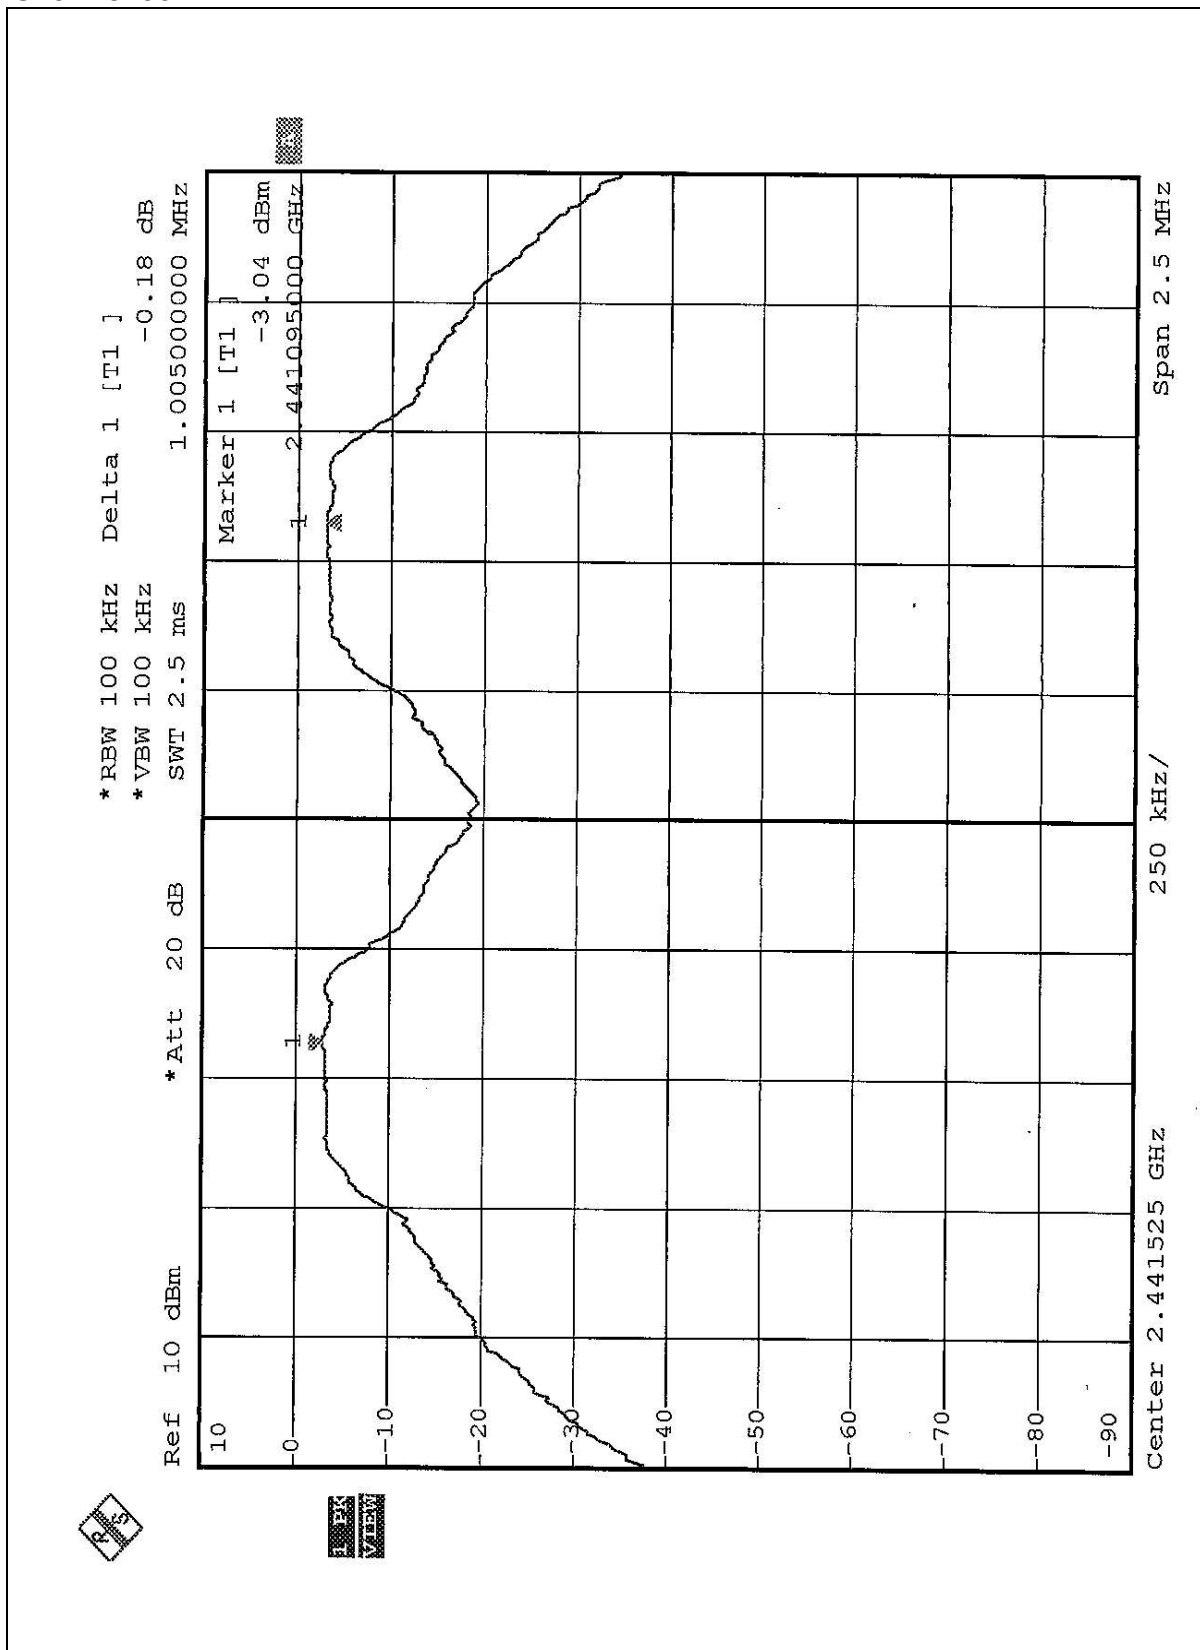

Channel 78

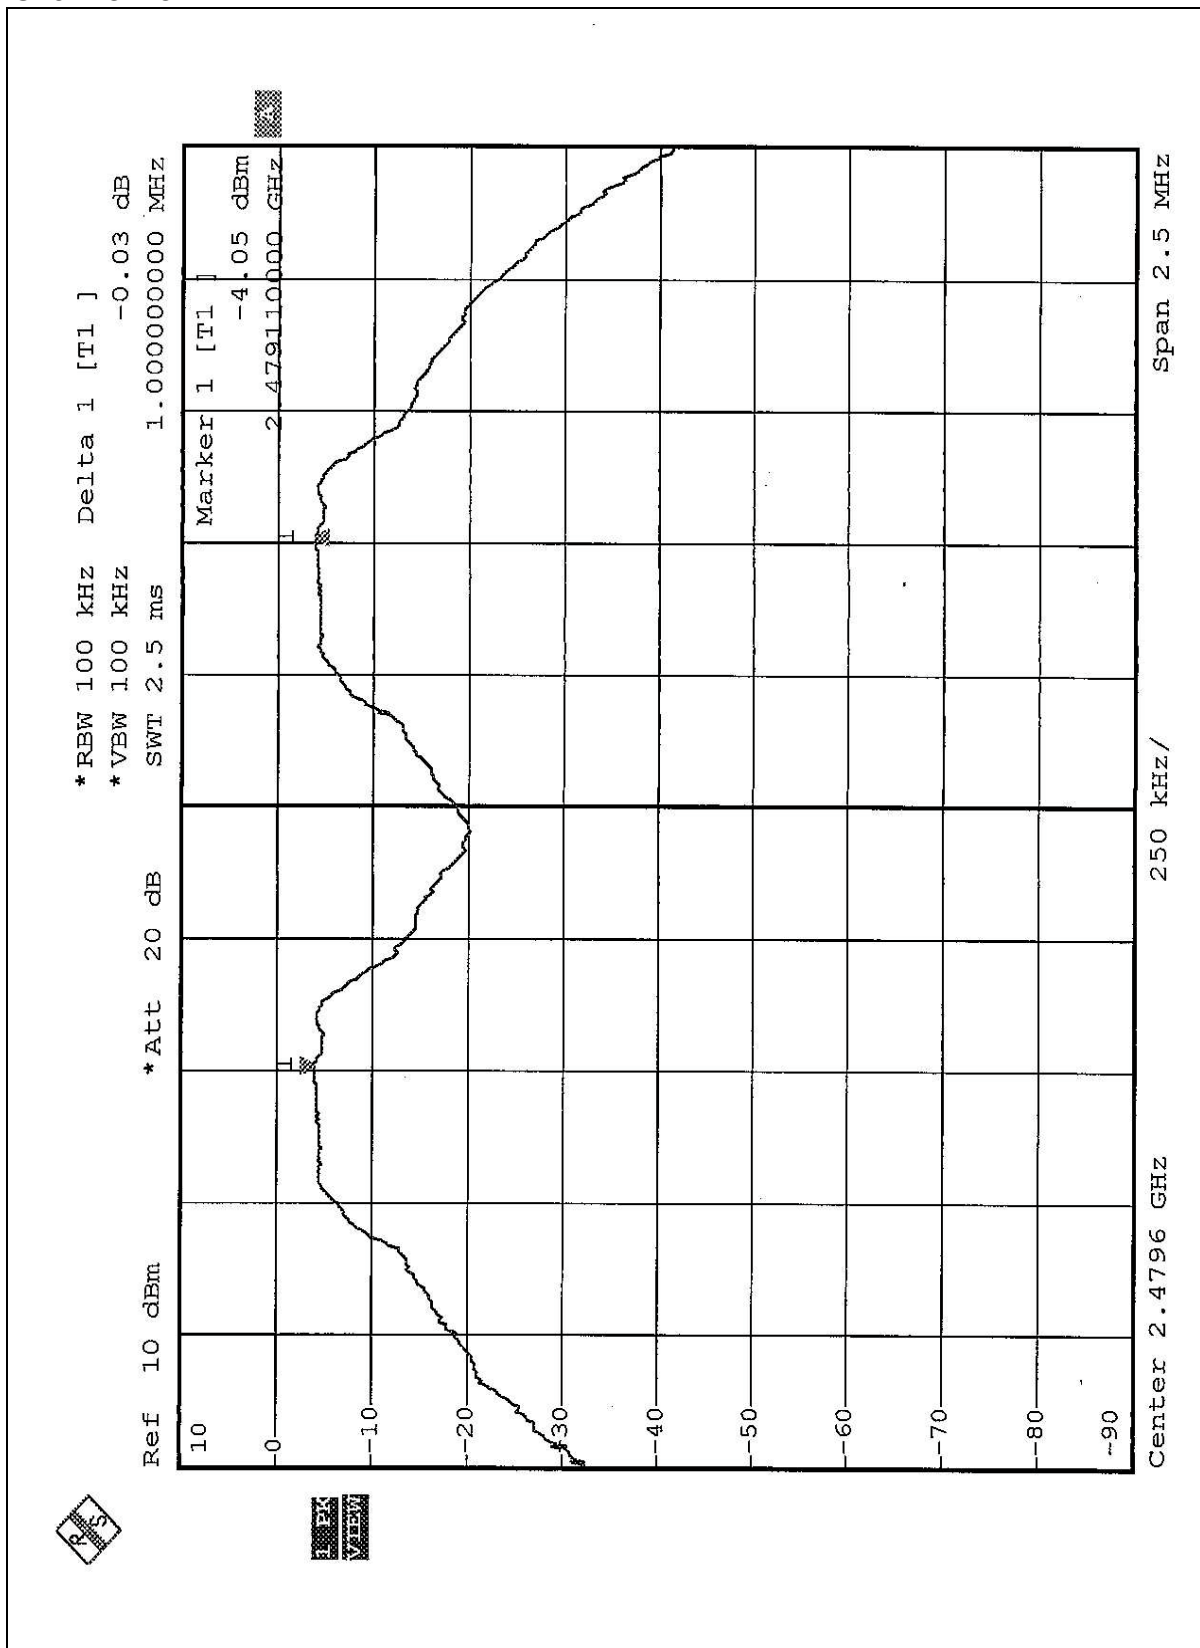

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.6.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 1 MHz RBW and 3 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.7 TEST RESULTS


EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	INPUT POWER (SYSTEM)	120 Vac, 60 Hz
TESTED BY	Long Chen		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	-1.59	30	PASS
39	2441	-2.11	30	PASS
78	2480	-3.06	30	PASS


Channel 0

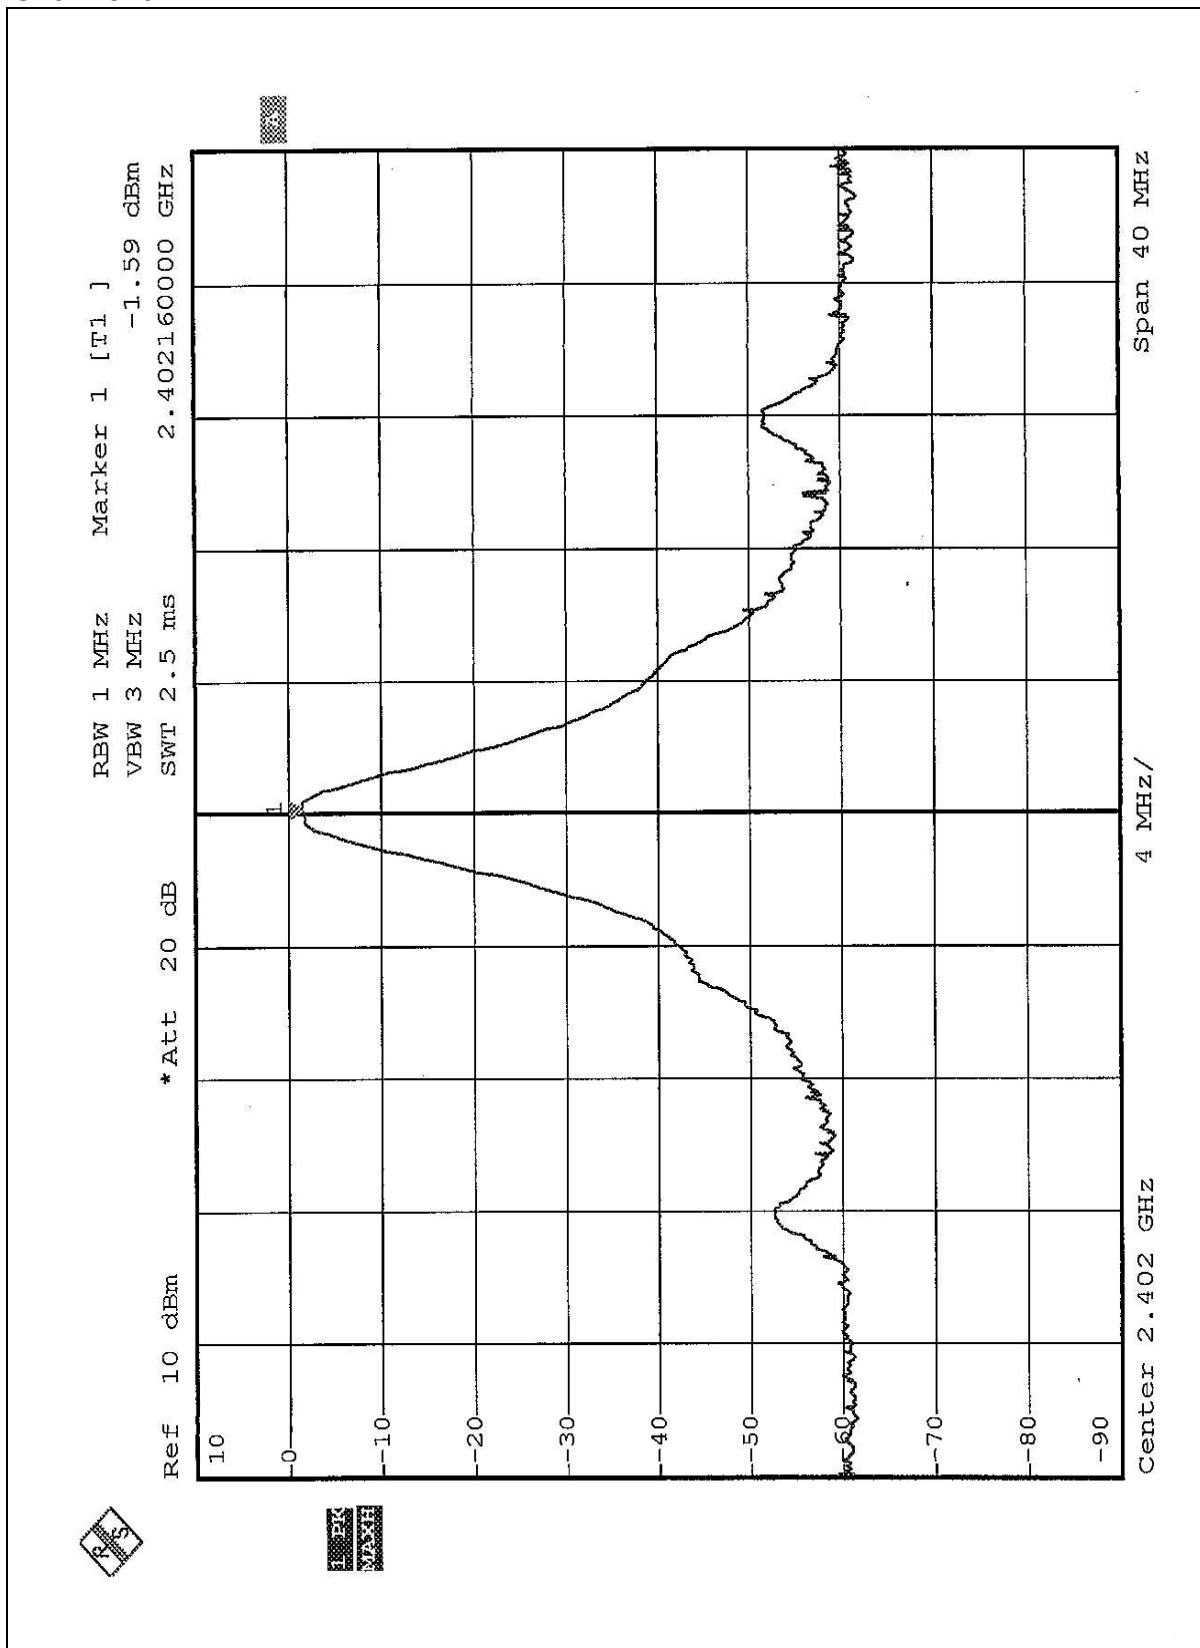

Channel 39

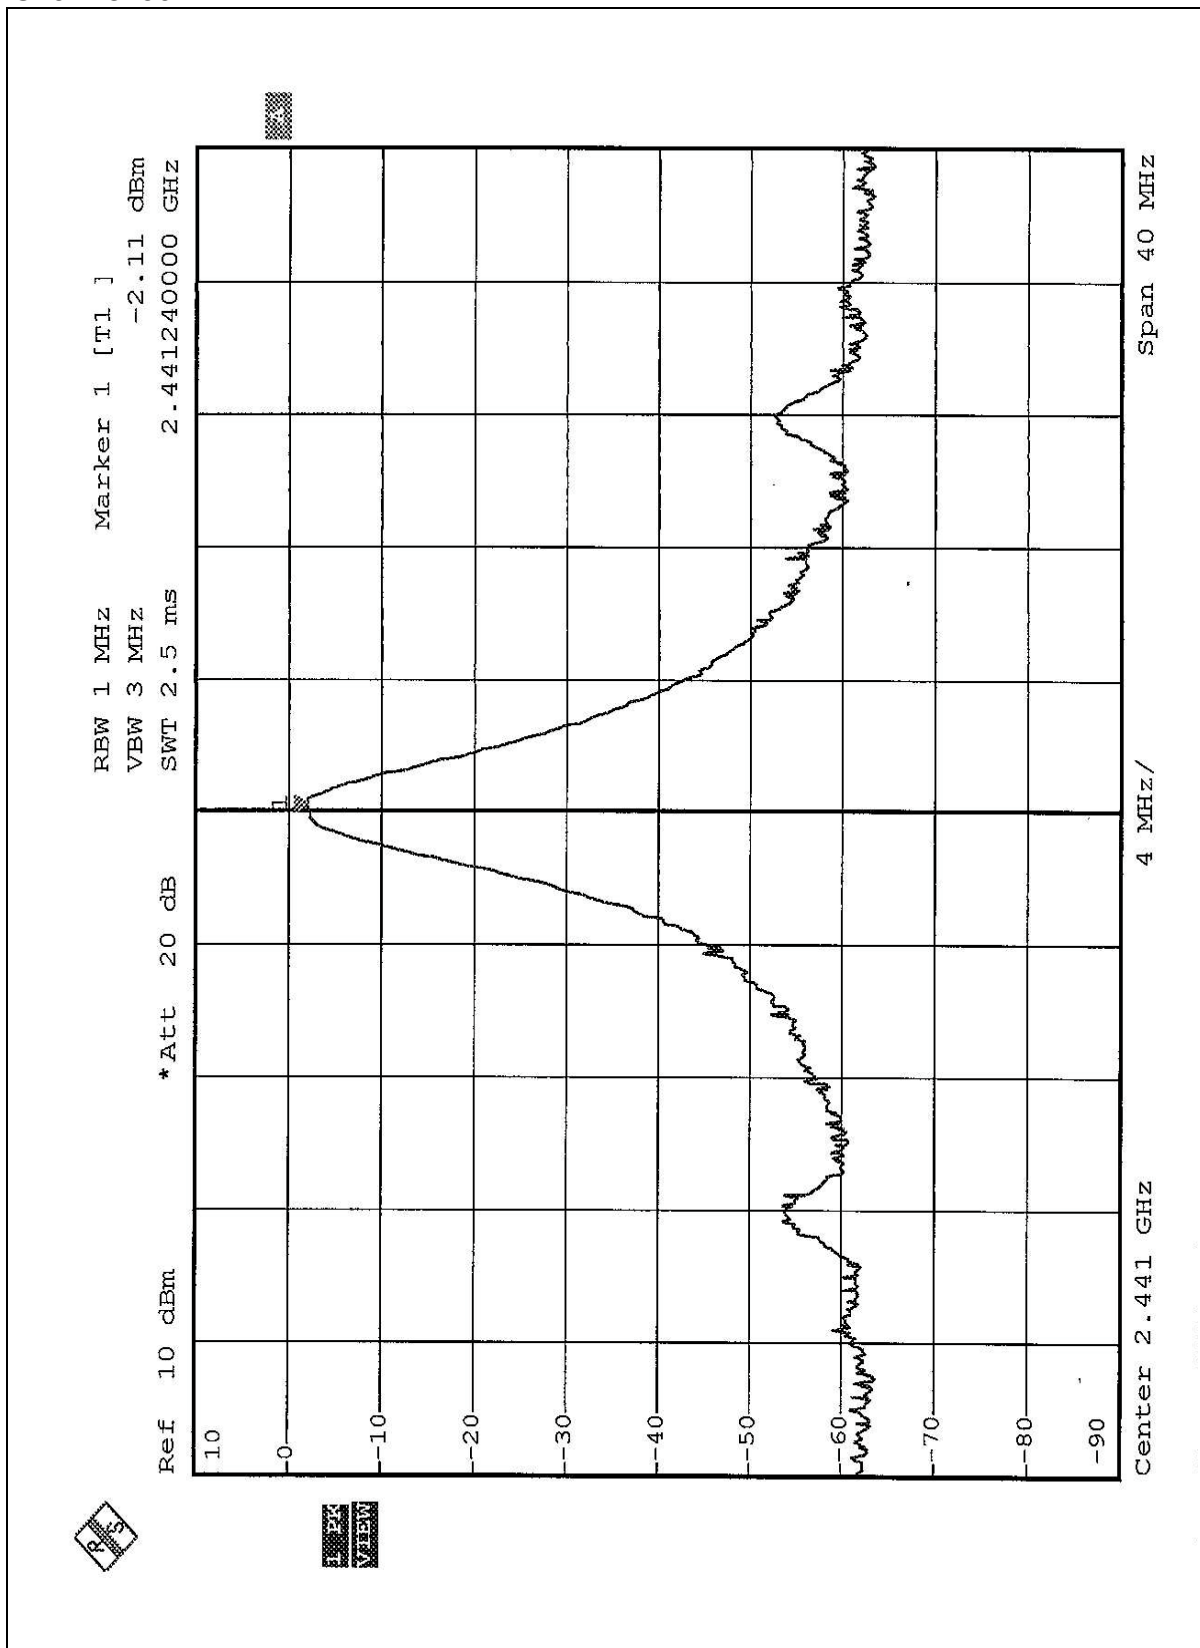

Channel 78

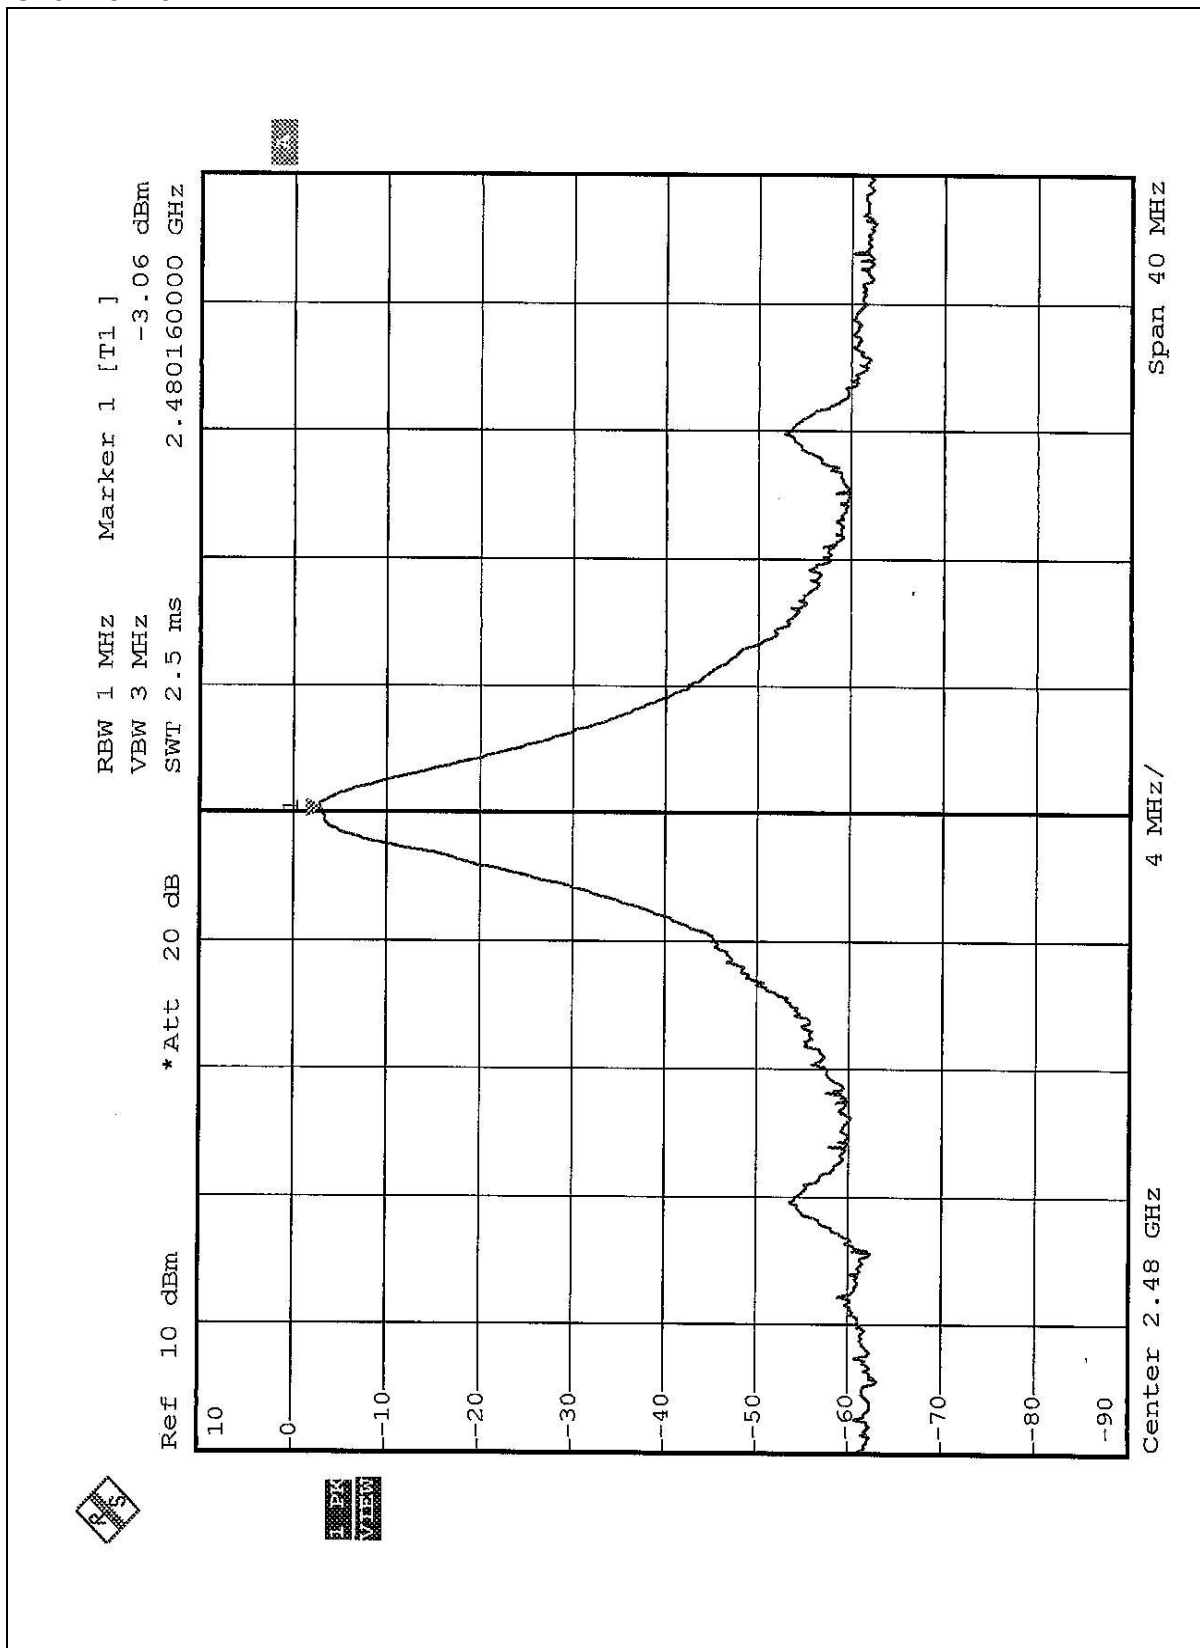

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	$2400/F(\text{kHz})$	300
0.490-1.705	$24000/F(\text{kHz})$	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE: The limit for radiated test was performed according to CISPR 22: 1997, which was specified in FCC PART 15B 15.109(g). Also the limits of ICES-003: 2004 and CISPR 22: 1997 are same.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun, 08, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Feb. 03, 2005
HORN Antenna SCHWARZBECK	9120D	9120D-408	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170243	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10633	Jan. 15, 2005
Preamplifier Agilent	8449B	3008A01964	Jan. 27, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Mar. 05, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Mar. 05, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 2.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-3.

4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation.

4.7.5 TEST SETUP

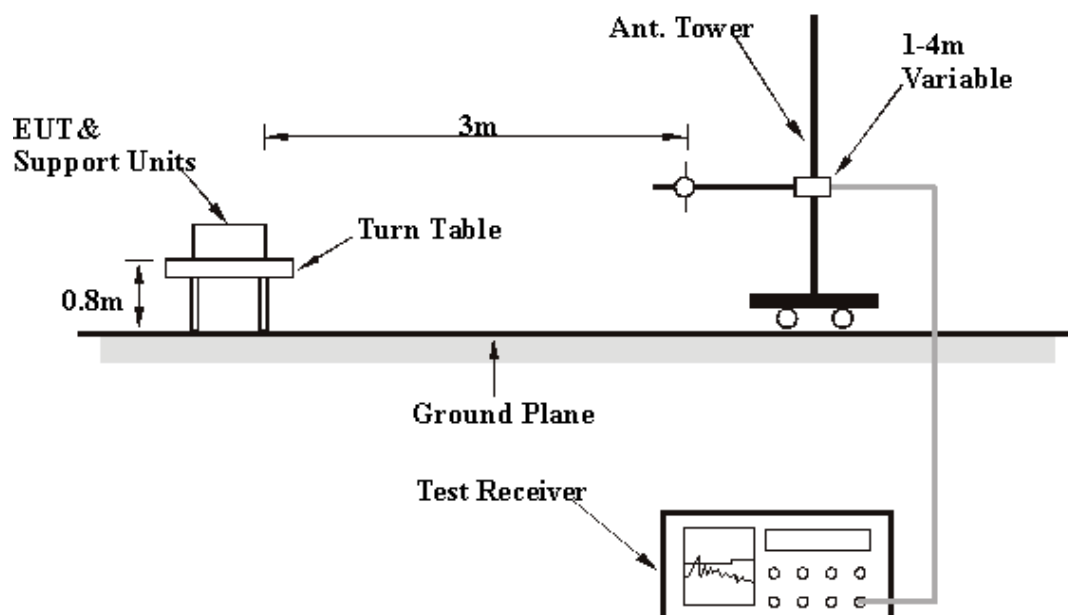

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 TEST RESULTS

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	78	FREQUENCY RANGE	Below 1 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26 deg. C, 60% RH, 991 hPa	TEST MODE	A
TESTED BY	Long Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	123.31	30.12 QP	43.50	-13.38	3.00 H	136	17.06	13.06
2	160.24	27.41 QP	43.50	-16.09	2.00 H	289	12.70	14.71
3	362.40	29.94 QP	46.00	-16.06	1.00 H	13	13.81	16.13
4	733.69	30.94 QP	46.00	-15.06	1.00 H	247	7.64	23.30
5	797.84	31.44 QP	46.00	-14.56	1.00 H	91	7.67	23.77
6	863.93	29.26 QP	46.00	-16.74	1.00 H	133	4.74	24.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.99	24.40 QP	40.00	-15.60	1.00 V	31	10.95	13.46
2	134.97	24.95 QP	43.50	-18.55	1.00 V	286	11.15	13.80
3	168.02	30.43 QP	43.50	-13.07	1.00 V	253	16.39	14.03
4	624.83	27.89 QP	46.00	-18.11	1.00 V	337	6.30	21.59
5	865.87	29.77 QP	46.00	-16.23	2.00 V	124	5.20	24.56
6	933.91	27.24 QP	46.00	-18.76	1.00 V	55	1.61	25.63

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	78	FREQUENCY RANGE	Below 1 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	28 deg. C, 62% RH, 991 hPa	TEST MODE	B
TESTED BY	Leo Hung		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	117.47	31.21 QP	43.50	-12.29	3.00 H	301	18.57	12.63
2	168.02	35.59 QP	43.50	-7.91	2.00 H	325	21.56	14.03
3	214.67	29.21 QP	43.50	-14.29	1.00 H	280	17.39	11.82
4	239.94	33.38 QP	46.00	-12.62	1.00 H	313	20.13	13.25
5	286.59	35.44 QP	46.00	-10.56	1.00 H	340	20.85	14.59
6	300.20	36.89 QP	46.00	-9.11	1.00 H	337	22.07	14.81
7	323.53	37.52 QP	46.00	-8.48	1.00 H	346	22.21	15.30
8	346.85	37.87 QP	46.00	-8.13	1.00 H	340	22.07	15.79
9	395.45	36.18 QP	46.00	-9.82	1.00 H	355	19.32	16.86
10	479.04	32.17 QP	46.00	-13.83	2.00 H	10	13.71	18.46
11	515.97	29.41 QP	46.00	-16.59	2.00 H	22	10.34	19.06
12	597.62	27.67 QP	46.00	-18.33	3.00 H	277	6.49	21.18
13	731.74	32.74 QP	46.00	-13.26	3.00 H	100	9.49	23.25
14	768.68	35.13 QP	46.00	-10.87	1.00 H	25	11.42	23.71
15	805.61	36.60 QP	46.00	-9.40	1.00 H	34	12.78	23.82
16	863.93	32.08 QP	46.00	-13.92	1.00 H	286	7.55	24.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	78	FREQUENCY RANGE	Below 1 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	28 deg. C, 62% RH, 991 hPa	TEST MODE	B
TESTED BY	Leo Hung		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	61.10	30.34 QP	40.00	-9.66	1.00 V	328	16.51	13.83
2	123.31	30.39 QP	43.50	-13.11	1.00 V	298	17.33	13.06
3	168.02	35.69 QP	43.50	-7.81	1.00 V	304	21.66	14.03
4	239.94	30.70 QP	46.00	-15.30	1.00 V	343	17.45	13.25
5	288.54	26.36 QP	46.00	-19.64	2.00 V	307	11.73	14.62
6	300.20	28.85 QP	46.00	-17.15	2.00 V	298	14.04	14.81
7	323.53	27.90 QP	46.00	-18.10	2.00 V	214	12.59	15.30
8	399.34	24.74 QP	46.00	-21.26	1.00 V	70	7.79	16.95
9	465.43	28.94 QP	46.00	-17.06	2.00 V	22	10.64	18.30
10	504.31	25.74 QP	46.00	-20.26	1.00 V	355	6.94	18.80
11	527.64	27.90 QP	46.00	-18.10	1.00 V	334	8.58	19.32
12	597.62	26.54 QP	46.00	-19.46	1.00 V	184	5.36	21.18
13	731.74	28.06 QP	46.00	-17.94	2.00 V	349	4.81	23.25
14	768.68	30.43 QP	46.00	-15.57	1.00 V	340	6.72	23.71
15	817.27	32.49 QP	46.00	-13.51	2.00 V	352	8.55	23.94
16	863.93	30.07 QP	46.00	-15.93	1.00 V	79	5.54	24.53

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	0	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.00	46.31 PK	74.00	-27.69	1.24 H	24	17.74	28.57
2	*2402.00	94.83 PK			1.23 H	358	63.19	31.64
2	*2402.00	60.29 AV			1.23 H	358	28.65	31.64
3	3204.00	45.37 PK	74.00	-28.63	1.73 H	319	11.62	33.75
4	4804.00	61.19 PK	74.00	-12.81	1.16 H	46	23.64	37.55
4	4804.00	26.65 AV	54.00	-27.35	1.16 H	46	-10.90	37.55
5	7206.00	54.27 PK	74.00	-19.73	1.51 H	254	10.21	44.06
5	7206.00	19.73 AV	54.00	-34.27	1.51 H	254	-24.33	44.06
6	9608.00	61.05 PK	74.00	-12.95	2.01 H	1	12.70	48.35
6	9608.00	26.51 AV	54.00	-27.49	2.01 H	1	-21.84	48.35

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1602.00	46.18 PK	74.00	-27.82	1.24 V	25	17.61	28.57
2	*2402.00	96.01 PK			1.23 V	328	64.37	31.64
2	*2402.00	61.47 AV			1.23 V	328	29.83	31.64
3	3204.00	47.02 PK	74.00	-26.98	1.00 V	316	13.27	33.75
4	4804.00	59.96 PK	74.00	-14.04	1.41 V	39	22.41	37.55
4	4804.00	25.42 AV	54.00	-28.58	1.41 V	39	-12.13	37.55
5	7206.00	54.70 PK	74.00	-19.30	1.00 V	15	10.64	44.06
5	7206.00	20.16 AV	54.00	-33.84	1.00 V	15	-23.90	44.06
6	9608.00	60.49 PK	74.00	-13.51	1.58 V	10	12.14	48.35
6	9608.00	25.95 AV	54.00	-28.05	1.58 V	10	-22.40	48.35

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ” : Fundamental frequency
6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*3 per 197.5 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.54$ dB
7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	39	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.00	45.78 PK	74.00	-28.22	1.22 H	38	17.19	28.59
2	*2441.00	97.01 PK			1.20 H	342	65.13	31.88
2	*2441.00	62.47 AV			1.20 H	342	30.59	31.88
3	3256.00	47.98 PK	74.00	-26.02	1.53 H	178	14.11	33.87
4	4882.00	59.48 PK	74.00	-14.52	1.25 H	290	21.81	37.67
4	4882.00	24.94 AV	54.00	-29.06	1.25 H	290	-12.73	37.67
5	7323.00	56.87 PK	74.00	-17.13	1.51 H	58	12.50	44.37
5	7323.00	22.33 AV	54.00	-31.67	1.51 H	58	-22.04	44.37
6	9764.00	59.14 PK	74.00	-14.86	1.00 H	44	10.69	48.45
6	9764.00	24.60 AV	54.00	-29.40	1.00 H	44	-23.85	48.45

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1628.00	44.98 PK	74.00	-29.02	1.28 V	326	16.39	28.59
2	*2441.00	95.90 PK			1.47 V	336	64.03	31.88
2	*2441.00	61.36 AV			1.47 V	336	29.48	31.88
3	3256.00	47.30 PK	74.00	-26.70	1.71 V	309	13.42	33.87
4	4882.00	60.65 PK	74.00	-13.35	1.00 V	40	22.98	37.67
4	4882.00	26.11 AV	54.00	-27.89	1.00 V	40	-11.56	37.67
5	7323.00	56.57 PK	74.00	-17.43	1.16 V	34	12.20	44.37
5	7323.00	22.03 AV	54.00	-31.97	1.16 V	34	-22.34	44.37
6	9764.00	60.13 PK	74.00	-13.87	1.13 V	18	11.68	48.45
6	9764.00	25.59 AV	54.00	-28.41	1.13 V	18	-22.86	48.45

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*3 per 197.5 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.54$ dB
 7. Average value = peak reading $-20\log(\text{duty cycle})$

EUT	Blue Tooth Mouse	MODEL	HSTNC-002W
CHANNEL	78	FREQUENCY RANGE	1 ~ 25 GHz
INPUT POWER (SYSTEM)	120 Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 65 % RH, 991 hPa	TESTED BY	Long Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1654.00	48.31 PK	74.00	-25.69	1.00 H	34	19.71	28.60
2	*2480.00	97.78 PK			1.22 H	327	65.67	32.11
2	*2480.00	63.24 AV			1.22 H	327	31.13	32.11
3	3308.00	47.19 PK	74.00	-26.81	1.00 H	189	13.18	34.01
4	4960.00	54.17 PK	74.00	-19.83	1.61 H	86	16.36	37.81
4	4960.00	19.63 AV	54.00	-34.37	1.61 H	86	-18.18	37.81
5	7440.00	57.93 PK	74.00	-16.07	1.50 H	74	13.30	44.63
5	7440.00	23.39 AV	54.00	-30.61	1.50 H	74	-21.24	44.63
6	9920.00	60.00 PK	74.00	-14.00	1.74 H	115	11.18	48.82
6	9920.00	25.46 AV	54.00	-28.54	1.74 H	115	-23.36	48.82

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1654.00	46.58 PK	74.00	-27.42	1.25 V	38	17.98	28.60
2	*2480.00	93.49 PK			1.00 V	24	61.38	32.11
2	*2480.00	58.95 AV			1.00 V	24	26.54	32.11
3	3308.00	47.95 PK	74.00	-26.05	1.00 V	328	13.94	34.01
4	4960.00	59.32 PK	74.00	-14.68	1.33 V	33	21.51	37.81
4	4960.00	24.78 AV	54.00	-29.22	1.33 V	33	-13.03	37.81
5	7440.00	58.10 PK	74.00	-15.90	1.34 V	82	13.47	44.63
5	7440.00	23.56 AV	54.00	-30.44	1.34 V	82	-21.07	44.63
6	9920.00	60.90 PK	74.00	-13.10	1.82 V	222	12.08	48.82
6	9920.00	26.36 AV	54.00	-27.64	1.82 V	222	-21.96	48.82

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ” : Fundamental frequency
 6. The DH3 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625*3 per 197.5 ms per channel. Therefore, the duty cycle be equal to: $20\log(1.875/100) = -34.54$ dB
 7. Average value = peak reading $-20\log(\text{duty cycle})$

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.8.6 TEST RESULTS


The spectrum plots are attached on the following 4 pages. D2 line indicates the highest level and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


NOTE1: The band edge emission plot on the following 1 ~ 2 pages show 52.81 dB delta between carrier maximum power and local maximum emission in restrict band (2.3782 GHz). The emission of carrier strength list in the test result of channel 0 at the item 4.7.6 is 61.47 dBuV/m, so the maximum field strength in restrict band is $61.47 - 52.81 = 8.66$ dBuV/m which is under 54 dBuV/m limit.

NOTE2: The band edge emission plot on the following 3 ~ 4 pages show 46.01dB delta between carrier maximum power and local maximum emission in restrict band (2.4959GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.6 is 63.24 dBuV/m, so the maximum field strength in restrict band is $63.24 - 46.01 = 17.23$ dBuV/m which is under 54 dBuV/m limit.

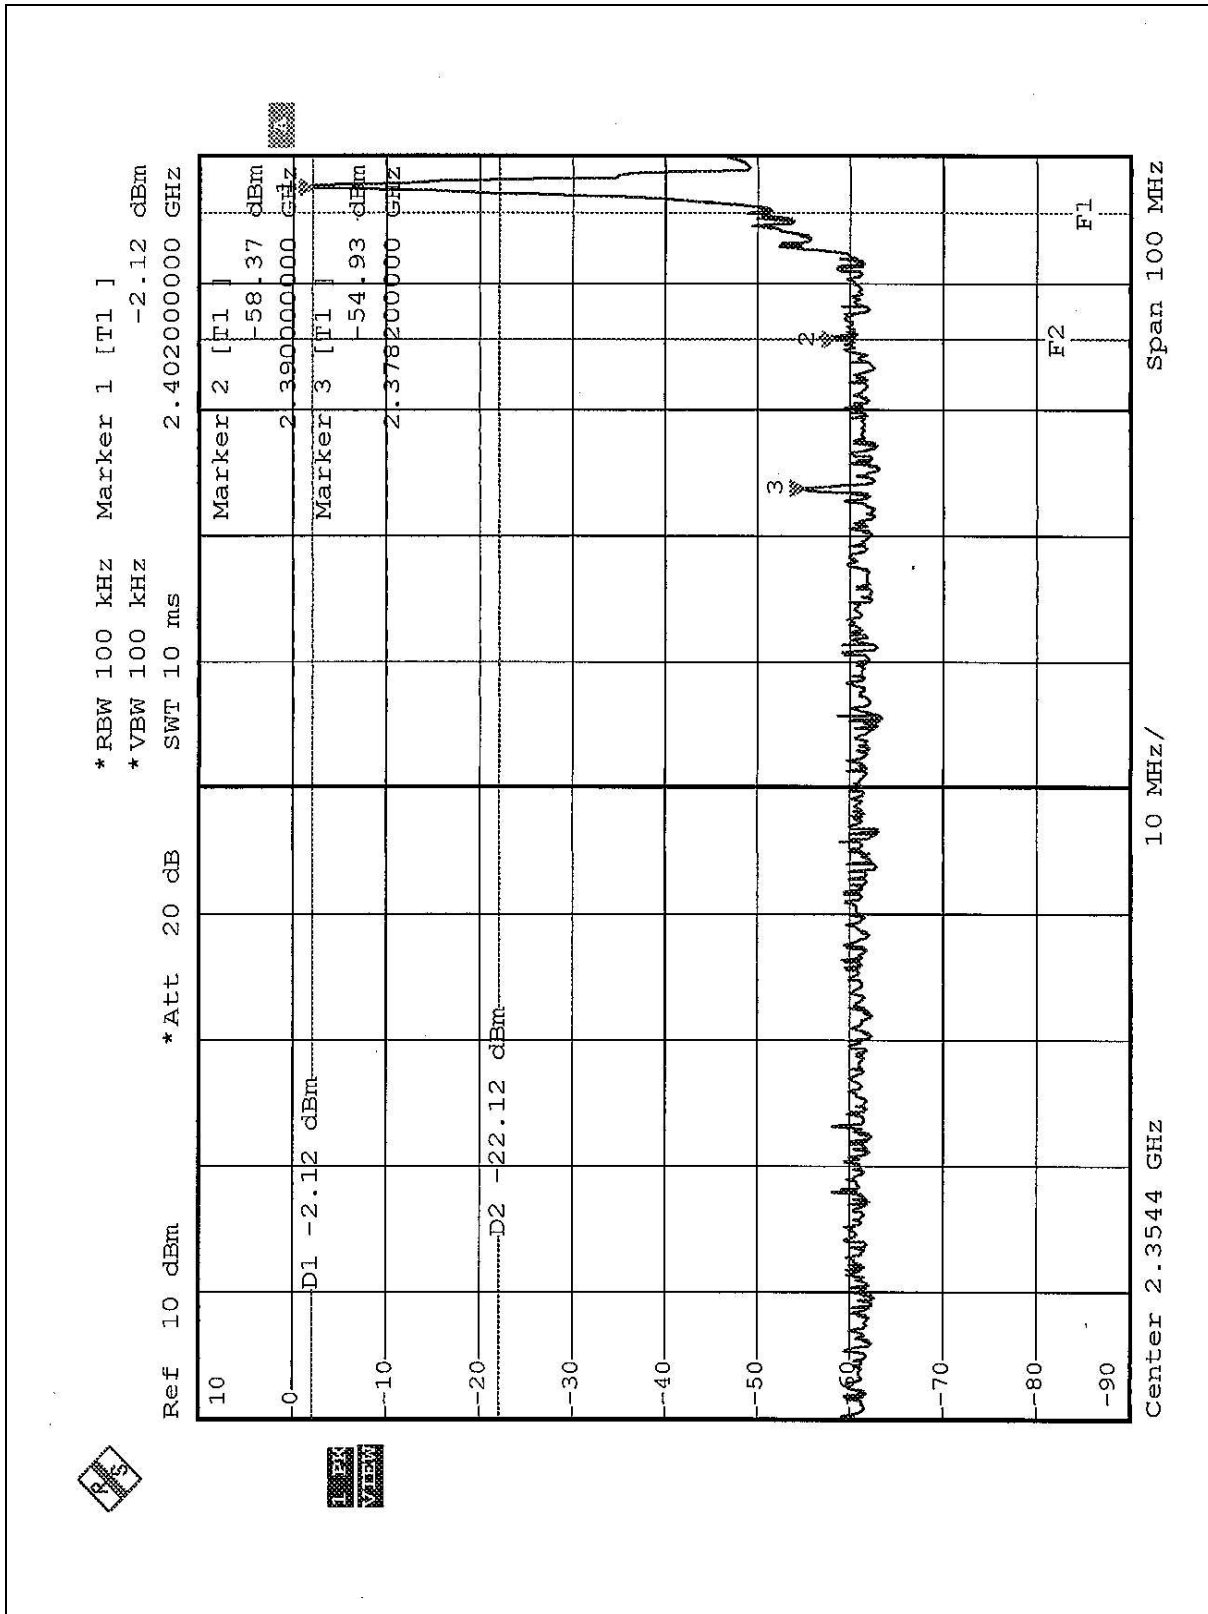

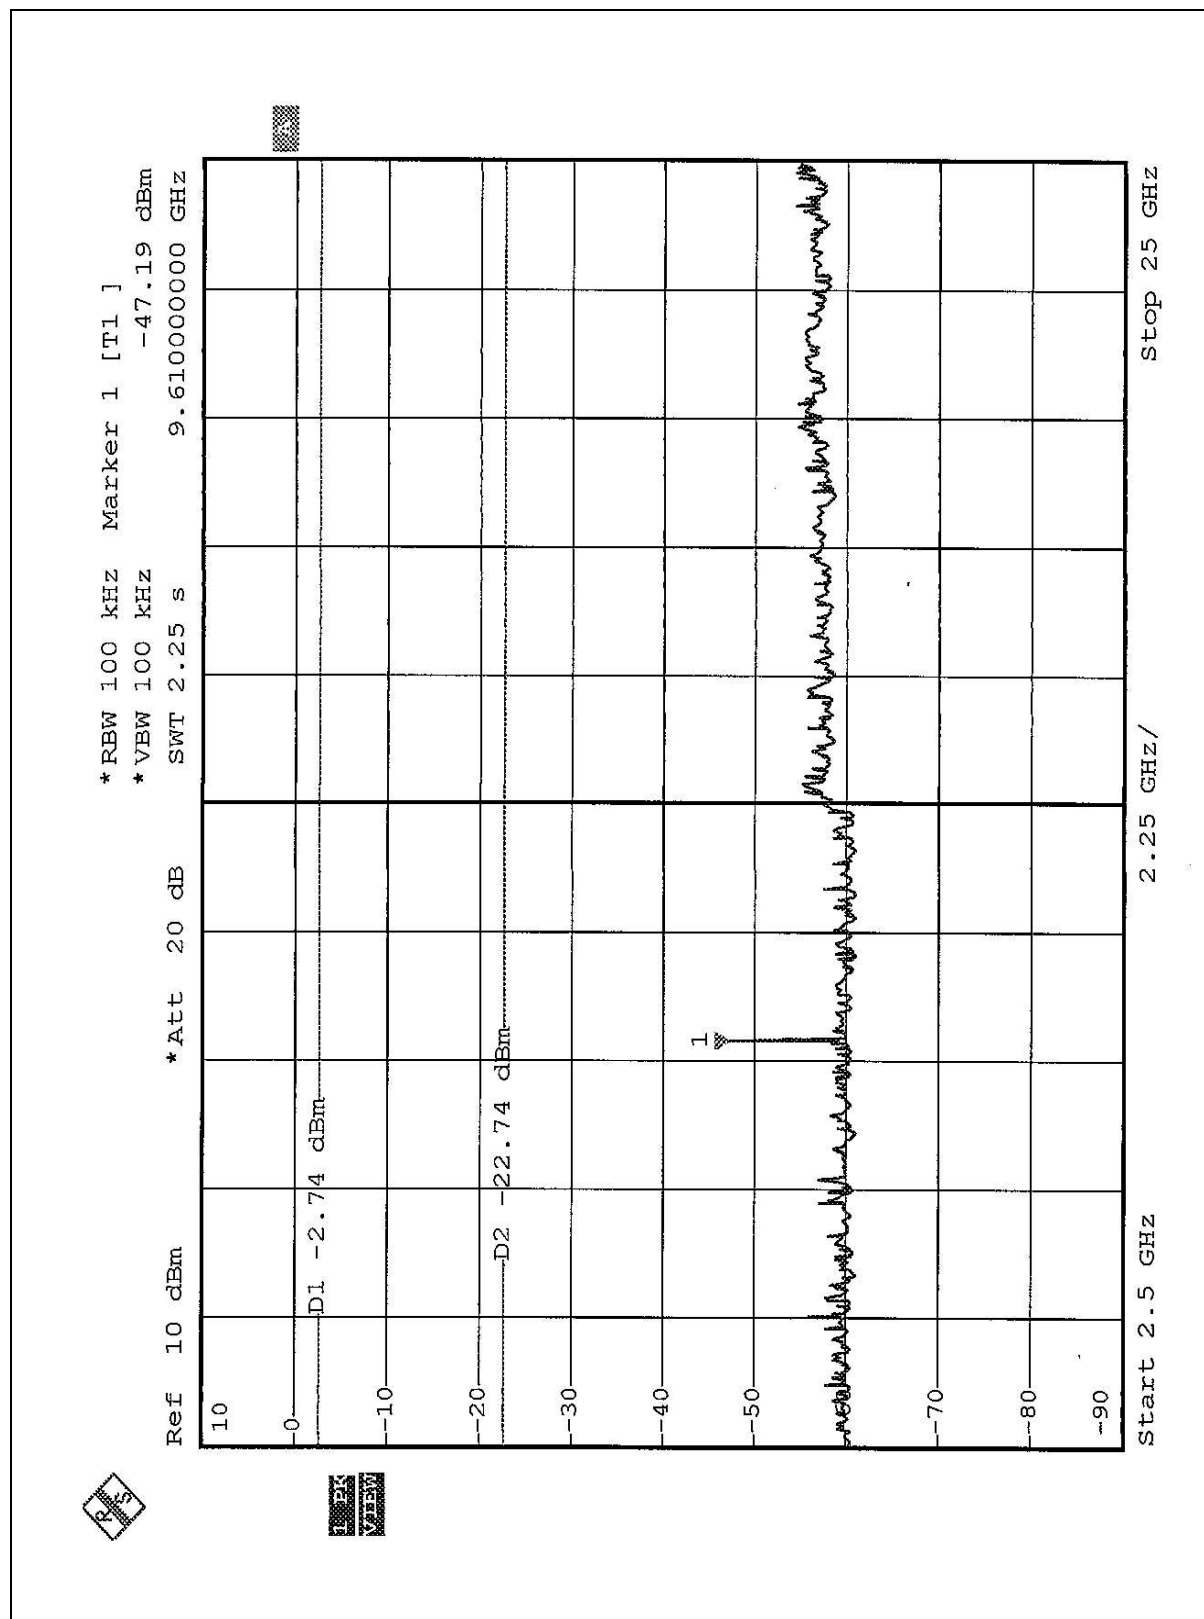

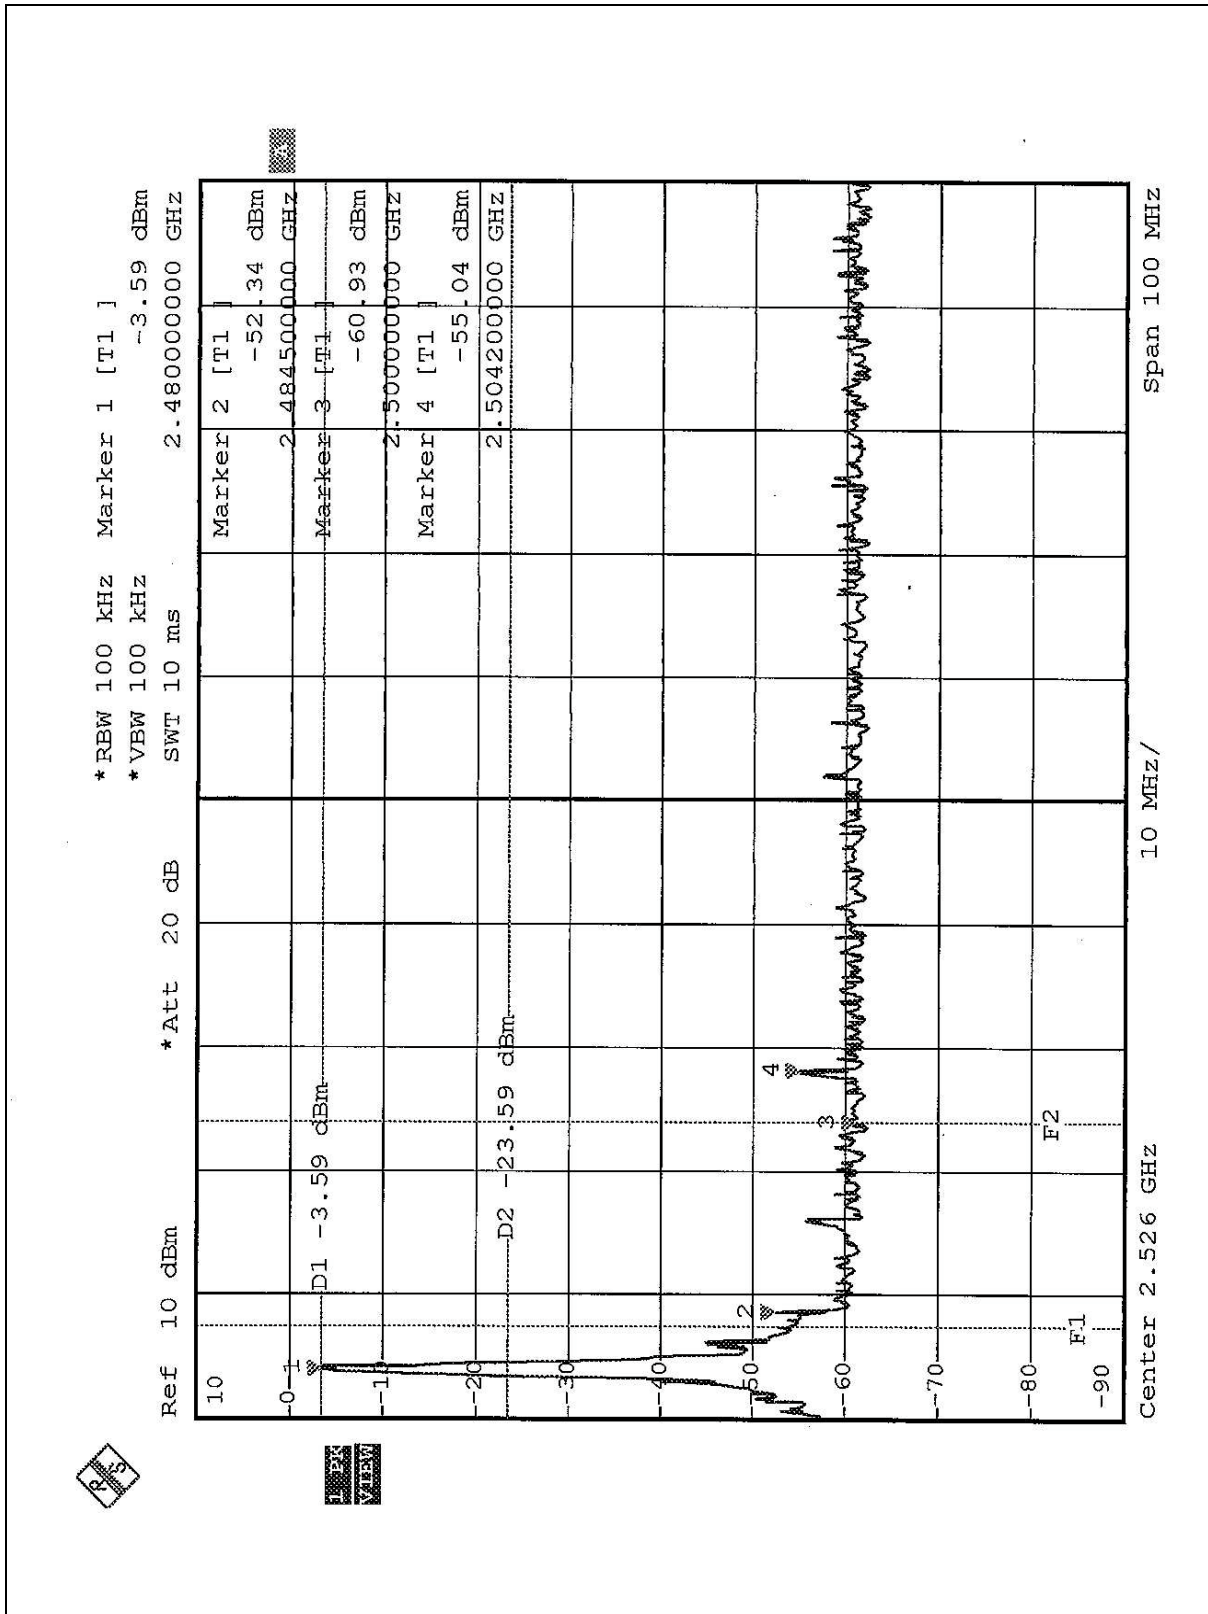

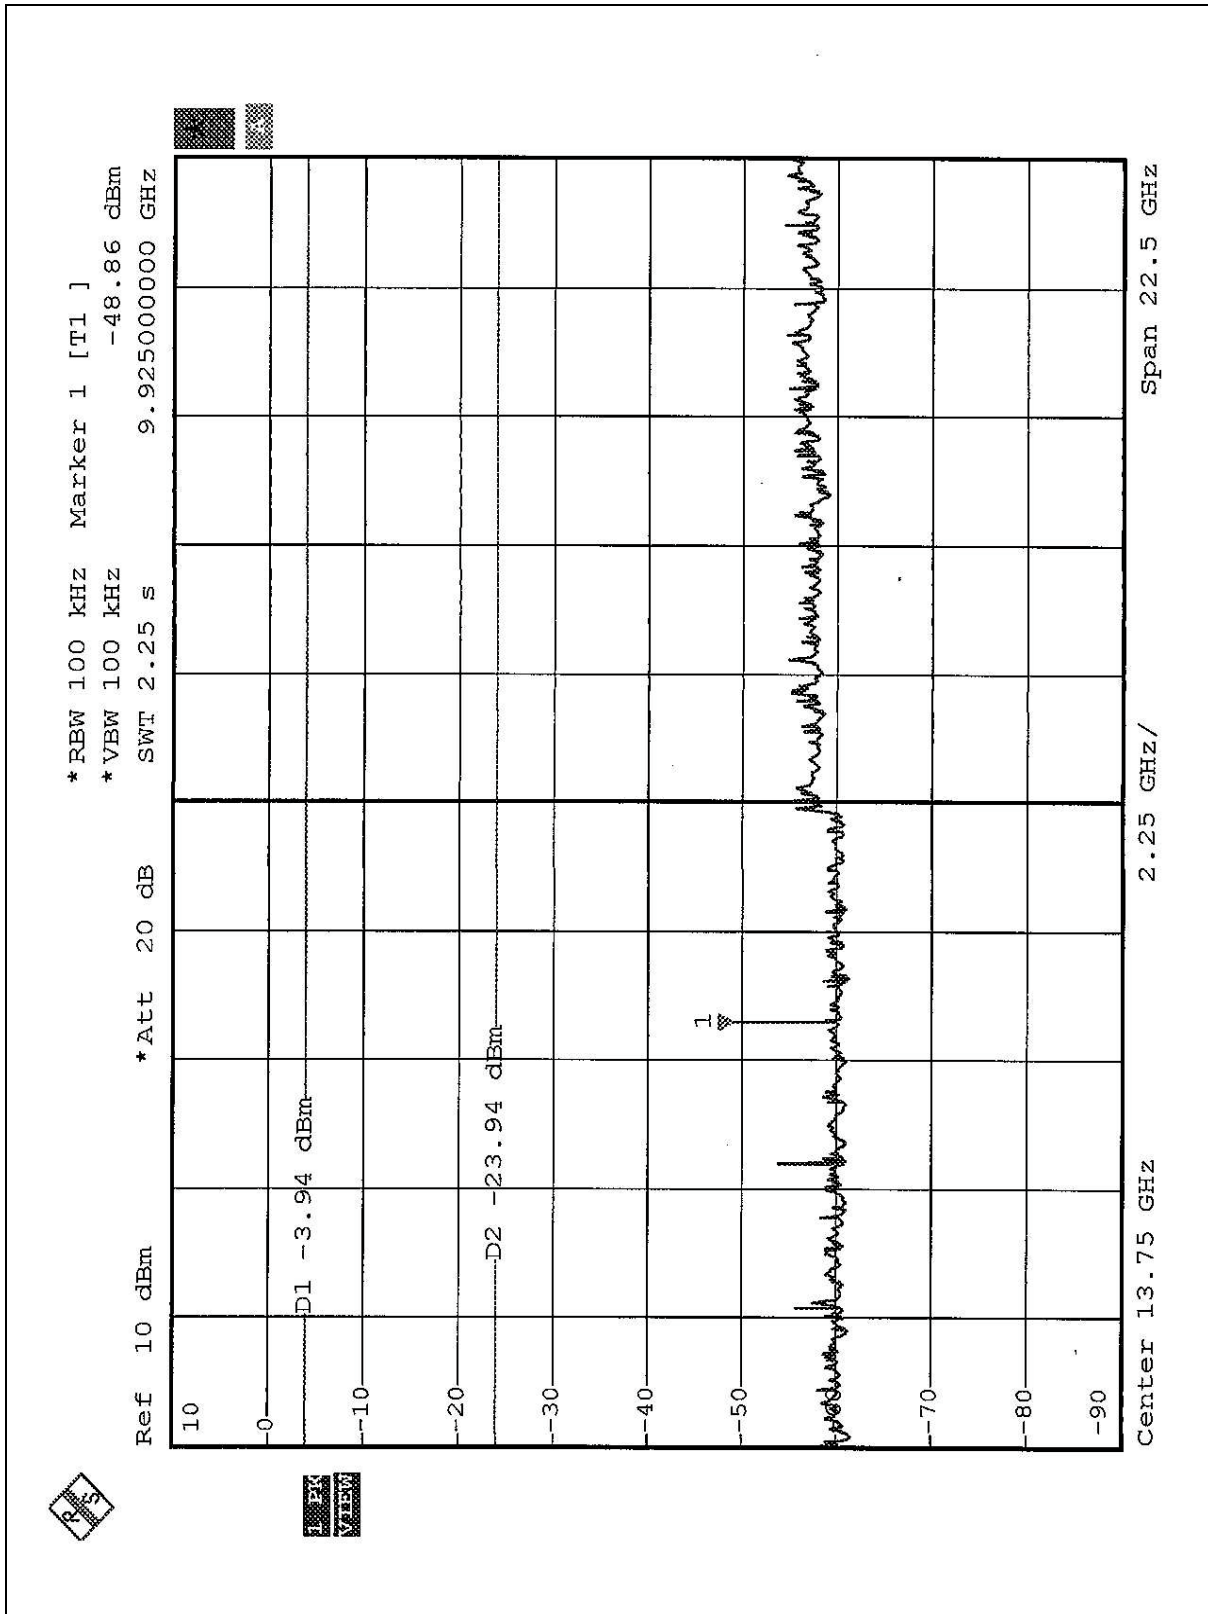



4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION



The antenna used in this product is printed antenna without antenna connector. The maximum gain of this antenna is -1.87 dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION



CONDUCTED EMISSION TEST



RADIATED EMISSION TEST (Mode A)

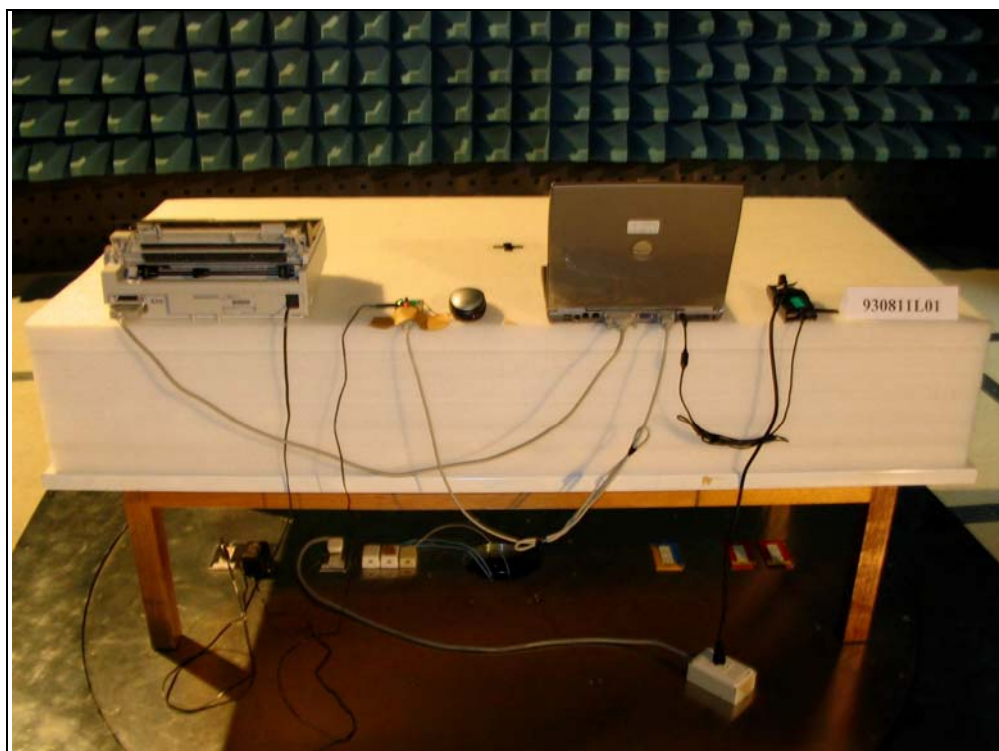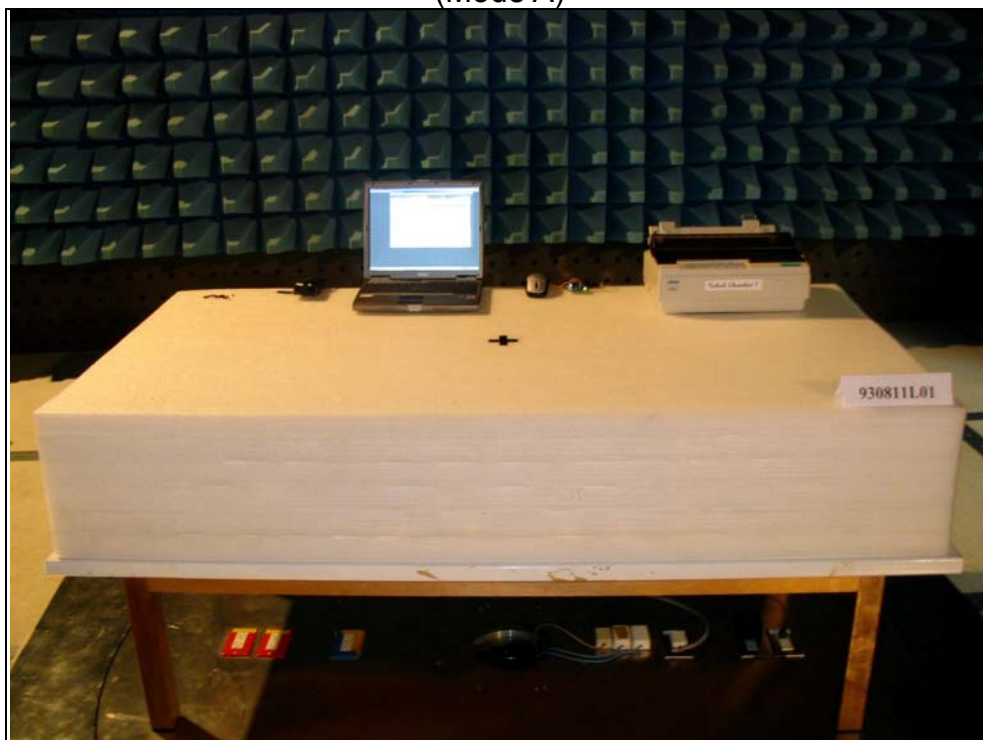

(Mode B)

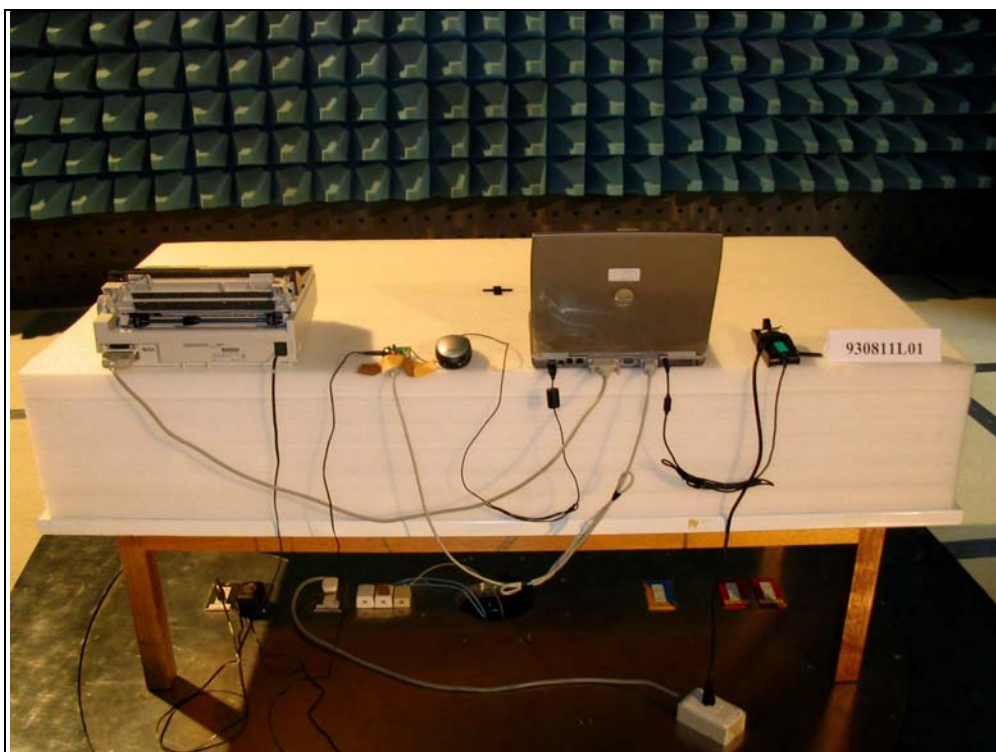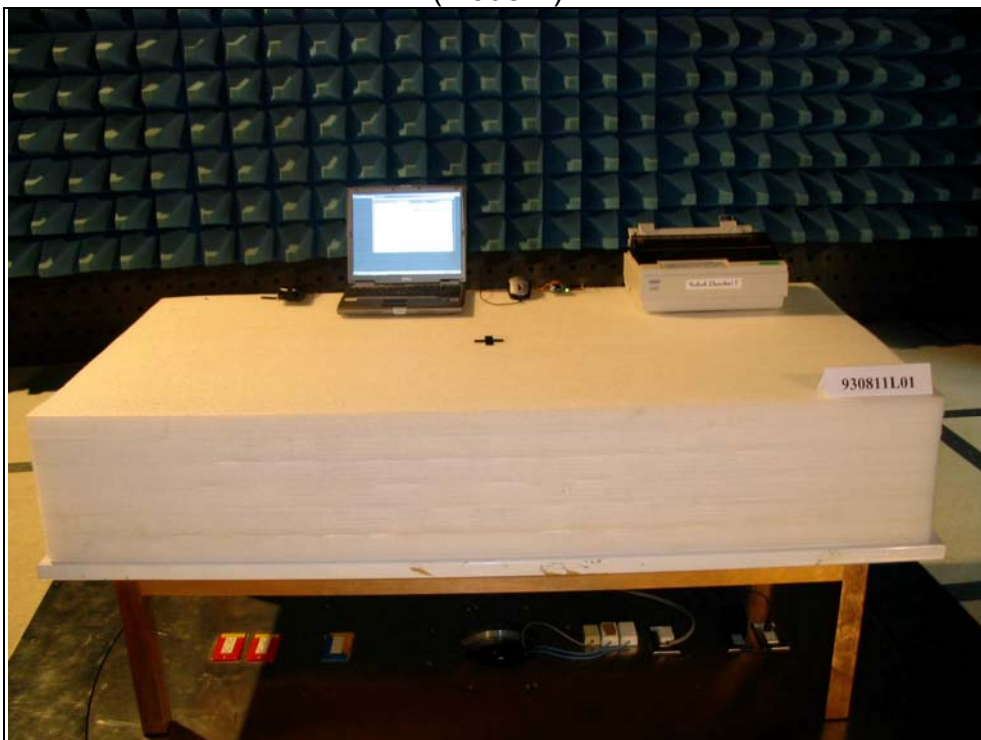

6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910
Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.3