



## Test Report

Product Name	Navigator 900BT
Model No.	GM-080013
FCC ID.	FSUGMZIL

Applicant	KYE SYSTEMS CORP. (Genius)
Address	No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei Hsien, 24160, Taiwan, R. O. C.

Date of Receipt	Nov. 05, 2008
Issued Date	Jan. 06, 2009
Report No.	08B085R-RFUSP06V01
Version	V1.0

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

# Test Report Certification

Issued Date: Jan. 06, 2009

Report No.: 08B085R-RFUSP06V01



Product Name	Navigator 900BT
Applicant	KYE SYSTEMS CORP. (Genius)
Address	No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei Hsien, 24160, Taiwan, R. O. C.
Manufacturer	KYE SYSTEMS CORP. (Genius)
Model No.	GM-080013
FCC ID.	FSUGMZIL
Rated Voltage	AC 120V/60Hz
Working Voltage	DC 3V (Power by Battery)
Trade Name	Genius
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2007 ANSI C63.4: 2003
Test Result	Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Rita Huang  
(Engineering Adm. Specialist / Rita Huang)



Tested By : Eason Hung  
(Engineer / Eason Hung)



Approved By : Vincent Lin  
(Manager / Vincent Lin)

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. EUT Description.....	5
1.2. Operational Description.....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System .....	8
1.5. EUT Exercise Software .....	8
1.6. Test Facility .....	9
<b>2. CONDUCTED EMISSION .....</b>	<b>10</b>
2.1. Test Equipment.....	10
2.2. Test Setup .....	10
2.3. Limits.....	11
2.4. Test Procedure .....	11
2.5. Uncertainty .....	11
2.6. Test Result of Conducted Emission.....	12
<b>3. PEAK POWER OUTPUT .....</b>	<b>13</b>
3.1. Test Equipment.....	13
3.2. Test Setup .....	13
3.3. Limit .....	13
3.4. Test Procedure .....	13
3.5. Uncertainty .....	13
3.6. Test Result of Peak Power Output.....	14
<b>4. RADIATED EMISSION .....</b>	<b>15</b>
4.1. Test Equipment.....	15
4.2. Test Setup .....	15
4.3. Limits.....	16
4.4. Test Procedure .....	17
4.5. Uncertainty .....	17
4.6. Test Result of Radiated Emission.....	18
<b>5. RF ANTENNA CONDUCTED TEST .....</b>	<b>22</b>
5.1. Test Equipment.....	22
5.2. Test Setup .....	22
5.3. Limits.....	22
5.4. Test Procedure .....	22
5.5. Uncertainty .....	22
5.6. Test Result of RF Antenna Conducted Test.....	23
<b>6. BAND EDGE .....</b>	<b>26</b>
6.1. Test Equipment.....	26
6.2. Test Setup .....	26
6.3. Limit .....	27
6.4. Test Procedure .....	27
6.5. Uncertainty .....	27
6.6. Test Result of Band Edge .....	28
<b>7. CHANNEL NUMBER.....</b>	<b>32</b>
7.1. Test Equipment.....	32
7.2. Test Setup .....	32
7.3. Limit .....	32
7.4. Test Procedure .....	32
7.5. Uncertainty .....	32
7.6. Test Result of Channel Number.....	33
<b>8. CHANNEL SEPARATION.....</b>	<b>34</b>
8.1. Test Equipment.....	34
8.2. Test Setup .....	34
8.3. Limit .....	34
8.4. Test Procedure .....	34
8.5. Uncertainty .....	34
8.6. Test Result of Channel Separation.....	35
<b>9. DWELL TIME.....</b>	<b>36</b>
9.1. Test Equipment.....	36

---

9.2.	Test Setup .....	36
9.3.	Limit .....	36
9.4.	Test Procedure .....	36
9.5.	Uncertainty .....	36
9.6.	Test Result of Dwell Time .....	37
<b>10.</b>	<b>OCCUPIED BANDWIDTH .....</b>	<b>40</b>
10.1.	Test Equipment .....	40
10.2.	Test Setup .....	40
10.3.	Limits.....	40
10.4.	Test Procedure .....	40
10.5.	Uncertainty .....	40
10.6.	Test Result of Occupied Bandwidth .....	41
<b>11.</b>	<b>EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>44</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	Navigator 900BT
Trade Name	Genius
Model No.	GM-080013
FCC ID.	FSUGMZIL
Frequency Range	2402 – 2480MHz
Channel Number	79
Type of Modulation	GFSK(1Mbps)
Antenna Type	Printed on PCB
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”

#### Antenna List

No.	Manufacturer	Part No.	Peak Gain
1	Genius	N/A	-0.04 dBi for 2.4 GHz

## Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. The transmitter is presented with a continuous data stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its 79 channels and over the minimum number of hopping channels (75 channels).

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Note:

1. This device is an Navigator 900BT with a built-in 2.4GHz Bluetooth 2.0 transceiver.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
4. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

## 1.2. Operational Description

The EUT is a Navigator 900BT with built-in 2.4GHz Bluetooth 2.0 transceiver. The number of the channels is 79 in 2402-2480MHz. This Bluetooth version 2.0 includes AFH so the minimum amount of channels is 20 in 2402-2480MHz. The device SIG certificate number: B014674.

The device adapts the frequency hopping spread spectrum modulation. The antenna is Printed on PCB and provides diversity function to improve the receiving function.

This device provides wireless technology that revolutionizes personal connectivity. It is the solution for the seamless integration of Bluetooth technology into personal computer enabling short-range wireless connections between desktop/laptop computers, Bluetooth-enabled peripherals, and portable handheld devices.

Test Mode	Mode 1: Transmitter - 1Mbps (GFSK)
-----------	------------------------------------


**1.3. Tested System Details**

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
(1) N/A	N/A	N/A	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A. N/A	N/A

**1.4. Configuration of Tested System**

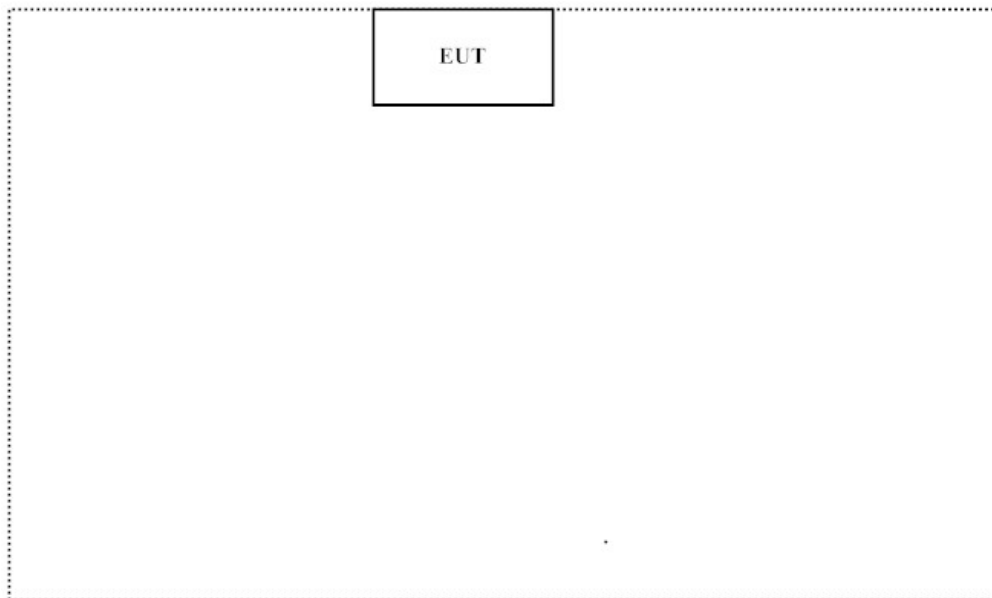

**1.5. EUT Exercise Software**

1	Setup the EUT and display as shown on 1.4
2	Installs the battery.
3	The EUT will continuously transmit the radio signal.



**1.6. Test Facility**

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation’s Web Site : <http://tw.quietek.com/modules/myalbum/>

The address and introduction of Quietek Corporation’s laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on  
 Federal Communications Commission  
 FCC Engineering Laboratory  
 7435 Oakland Mills Road  
 Columbia, MD 21046  
 Registration Number: 92195



Accreditation on NVLAP  
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation  
 Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,  
 Lin-Kou Shiang, Taipei,  
 Taiwan, R.O.C.  
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
 E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014



## 2. Conducted Emission


### 2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/014	Feb., 2008	
2	L.I.S.N.	R & S	ESH3-Z5/825562/002	Feb., 2008	EUT
3	L.I.S.N.	R & S	ENV4200/848411/010	Feb., 2008	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2/100410	July, 2008	
5	No.1 Shielded Room			N/A	

Note: All instruments are calibrated every one year.

### 2.2. Test Setup

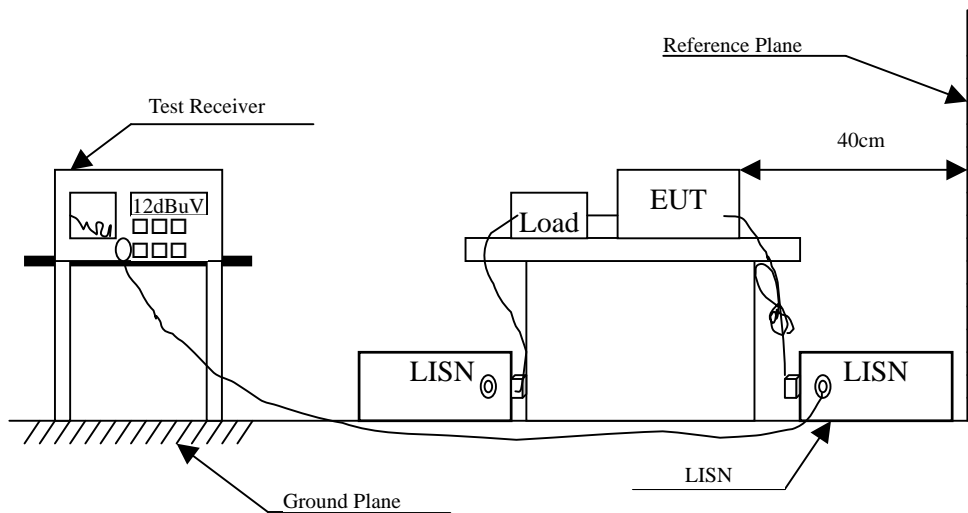

**2.3. Limits**

<b>FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit</b>		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

**2.4. Test Procedure**

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**2.5. Uncertainty**

± 2.26 dB

## 2.6. Test Result of Conducted Emission

Owing to the DC operation of EUT, this test item is not performed.

### 3. Peak Power Output


#### 3.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Power Meter	Anritsu	ML2495A/6K00003357	May, 2008
X Power Sensor	Anritsu	MA2491A/034457	May, 2008

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by “X” are used to measure the final test results.

#### 3.2. Test Setup

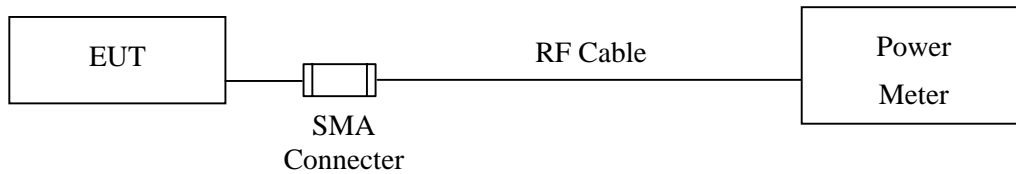

#### 3.3. Limit

The maximum peak power shall be less 0.125Watt.

#### 3.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

#### 3.5. Uncertainty

± 1.27 dB

### 3.6. Test Result of Peak Power Output

Product : Navigator 900BT  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

Channel No.	Frequency (MHz)	Measurement	Required Limit	Result
Channel 00	2402.00	3.54dBm	0.125 Watt= 20.97 dBm	Pass
Channel 39	2441.00	3.84dBm	0.125 Watt= 20.97 dBm	Pass
Channel 78	2480.00	3.75dBm	0.125 Watt= 20.97 dBm	Pass

## 4. Radiated Emission

### 4.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2008
	X Pre-Amplifier	HP	8447D/2944A09549	Sep., 2008
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2008
	X Spectrum Analyzer	HP	E4407B / US39440758	May, 2008
	X Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2008
	X Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by "X" are used to measure the final test results.

### 4.2. Test Setup

Below 1GHz

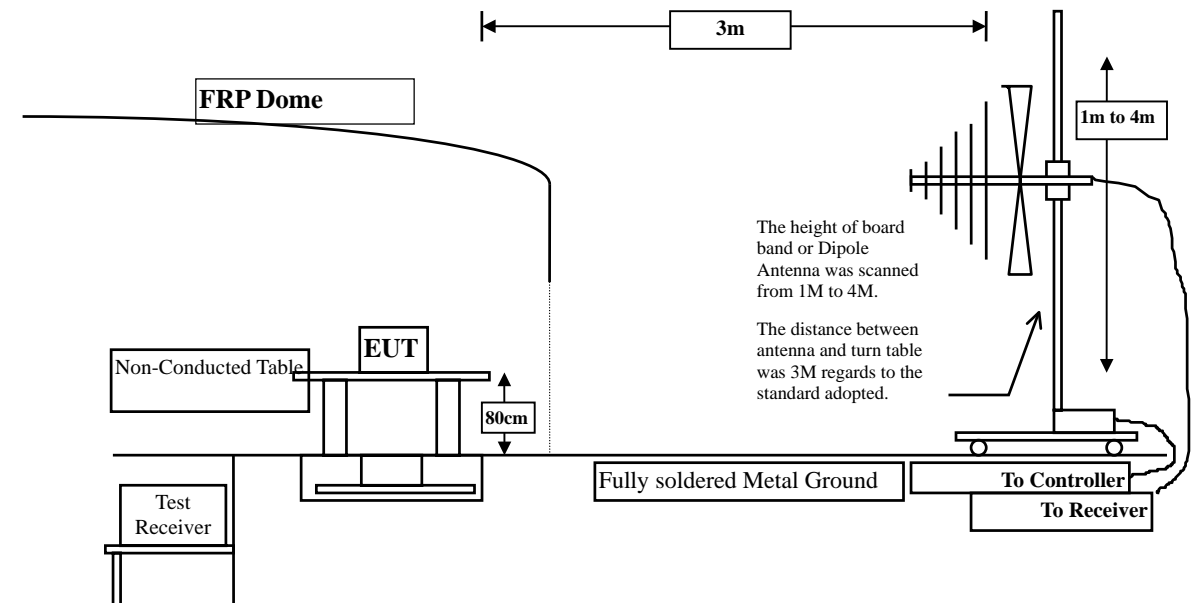

Above 1GHz

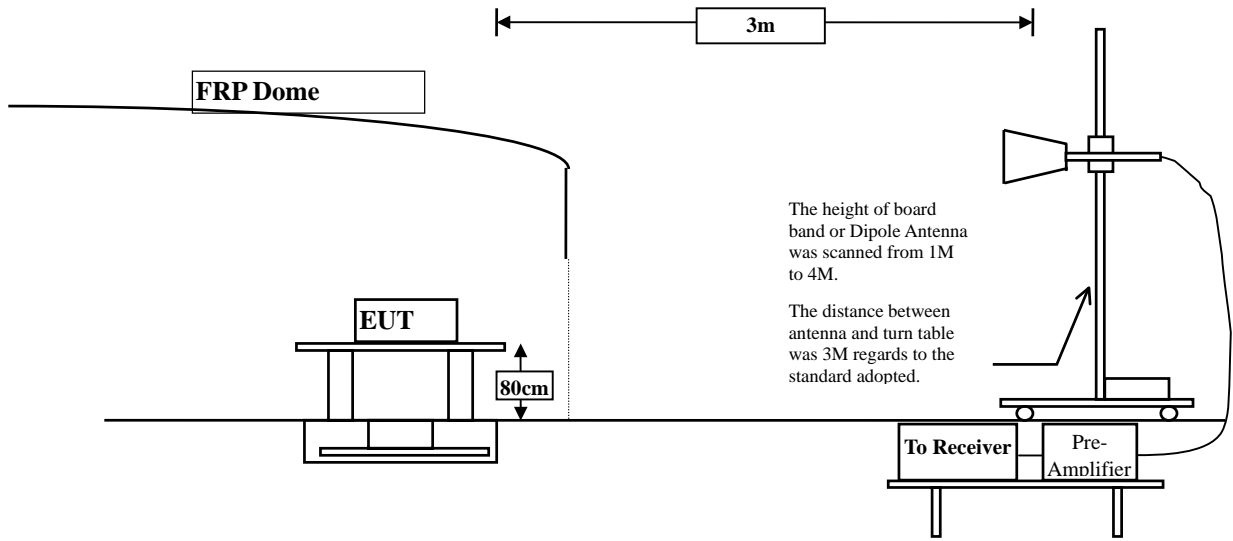

**4.3. Limits**

➤ **General Radiated Emission Limits**

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.



#### 4.4. Test Procedure

The EUT was setup according to ANSI C63.4, 2003 and tested according to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2003 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB beamwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The frequency range from 30MHz to 10th harmonics is checked.

#### 4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

#### 4.6. Test Result of Radiated Emission

Product : Navigator 900BT  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	-0.205	43.190	42.985	-31.015	74.000
7206.000	3.294	41.790	45.084	-28.916	74.000
9608.000	5.696	41.140	46.836	-27.164	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	-0.205	42.670	42.465	-31.535	74.000
7206.000	3.294	41.530	44.824	-29.176	74.000
9608.000	5.696	40.580	46.276	-27.724	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:10Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Navigator 900BT  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)(2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4882.000	2.932	42.860	45.792	-28.208	74.000
7323.000	3.330	41.580	44.909	-29.091	74.000
9764.000	6.262	40.650	46.913	-27.087	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4802.000	-0.202	43.280	43.078	-30.922	74.000
7323.000	3.330	41.260	44.589	-29.411	74.000
9764.000	6.262	39.800	46.063	-27.937	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:10Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Navigator 900BT  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)(2480MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4960.000	0.591	42.910	43.501	-30.499	74.000
7440.000	3.924	40.390	44.314	-29.686	74.000
9920.000	6.468	39.530	45.998	-28.002	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4960.000	34.103	42.260	42.851	-31.149	74.000
7440.000	38.738	40.410	44.334	-29.666	74.000
9920.000	40.622	39.760	46.228	-27.772	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:10Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Correct Factor.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : Navigator 900BT  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK) (2441MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
30.000	-0.230	20.953	20.723	-19.277	40.000
377.260	1.008	21.961	22.969	-23.031	46.000
544.100	4.180	22.869	27.049	-18.951	46.000
741.980	3.690	26.630	30.320	-15.680	46.000
901.060	5.603	22.328	27.931	-18.069	46.000
1000.000	9.390	20.700	30.090	-23.910	54.000
<b>Vertical</b>					
377.260	0.548	22.005	22.553	-23.447	46.000
544.100	1.310	21.922	23.232	-22.768	46.000
606.180	2.020	21.226	23.246	-22.754	46.000
689.600	2.131	21.532	23.663	-22.337	46.000
802.120	2.720	21.957	24.677	-21.323	46.000
967.020	3.695	22.135	25.830	-28.170	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “█” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.
4. The radiated emissions below 1GHz of the lowest, middle, highest frequency are pretested. Only the worst case is shown on the report.


**5. RF Antenna Conducted Test**

**5.1. Test Equipment**

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Jun, 2008

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments Marked “X” are used to measure the final test results.

**5.2. Test Setup**

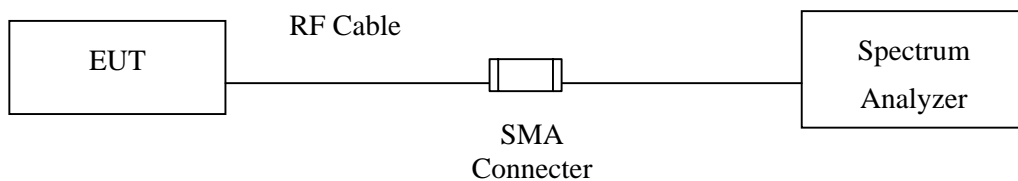

**5.3. Limits**

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**5.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.


**5.5. Uncertainty**

± 150Hz

**5.6. Test Result of RF Antenna Conducted Test**


Product : Navigator 900BT  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

**Figure Channel 00: 30MHz-25GHz**

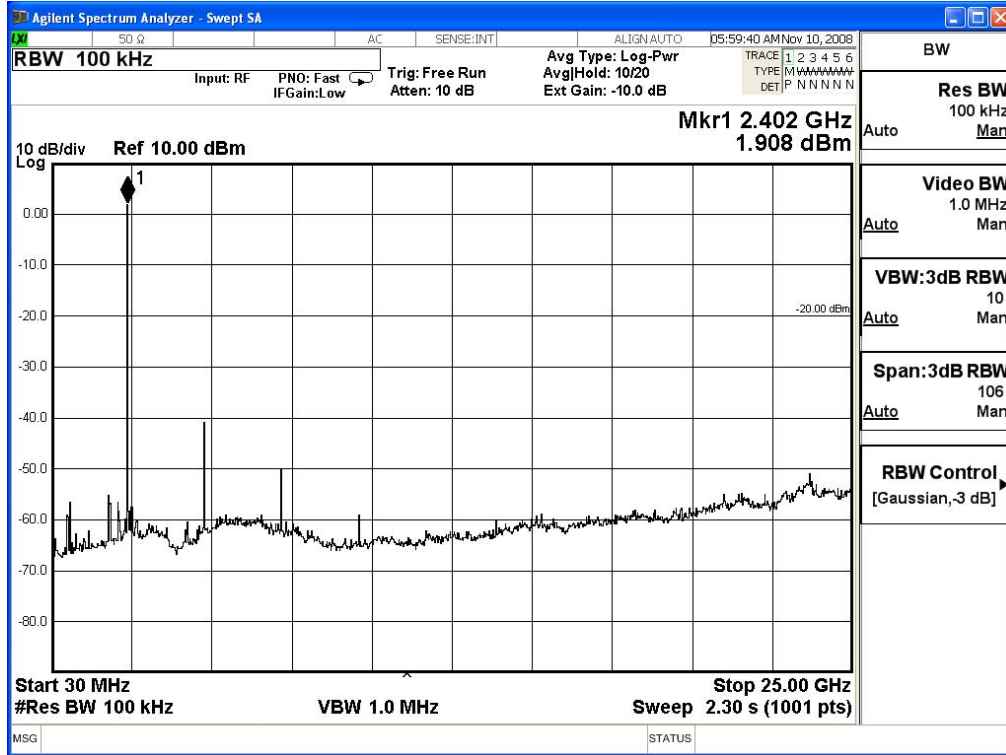

Product : Navigator 900BT  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

**Figure Channel 39: 30MHz-25GHz**

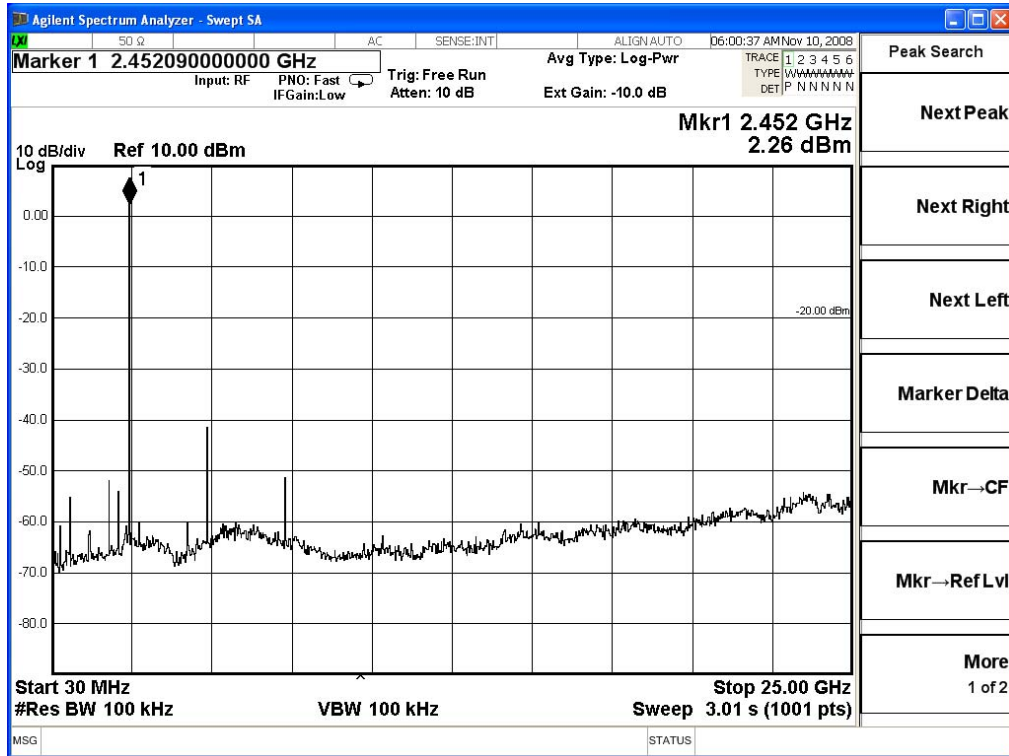



Product : Navigator 900BT  
 Test Item : RF Antenna Conducted Test  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

**Figure Channel 78: 30MHz-25GHz**



## 6. Band Edge

### 6.1. Test Equipment

The following test equipments are used during the band edge tests:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2008
	X Pre-Amplifier	HP	8447D/2944A09549	Sep., 2008
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2008
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008
	X Coaxial Cable	QuietTek	QTK-CABLE/ CAB5	Feb., 2008
	X Controller	QuietTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments marked by "X" are used to measure the final test results.

### 6.2. Test Setup

#### RF Radiated Measurement:

Above 1GHz

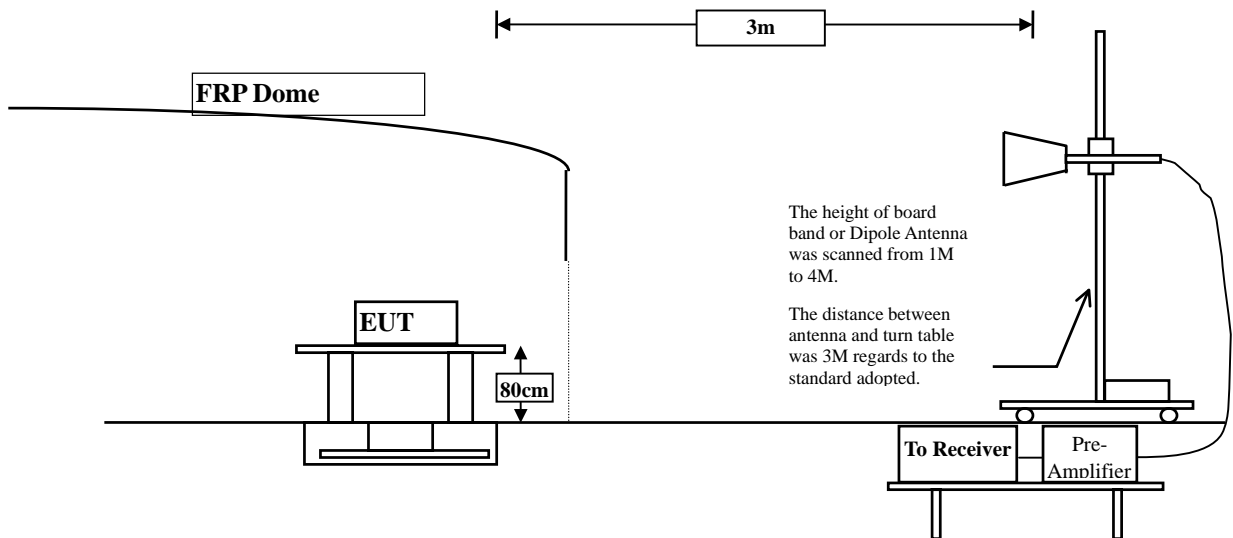

### 6.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 6.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz


**6.6. Test Result of Band Edge**

Product : Navigator 900BT  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2386.200	-2.418	44.934	42.516	74.00	54.00	Pass
00 (Average)	--	--	--	--	74.00	54.00	Pass

**Figure Channel 00: Horizontal (Peak)**

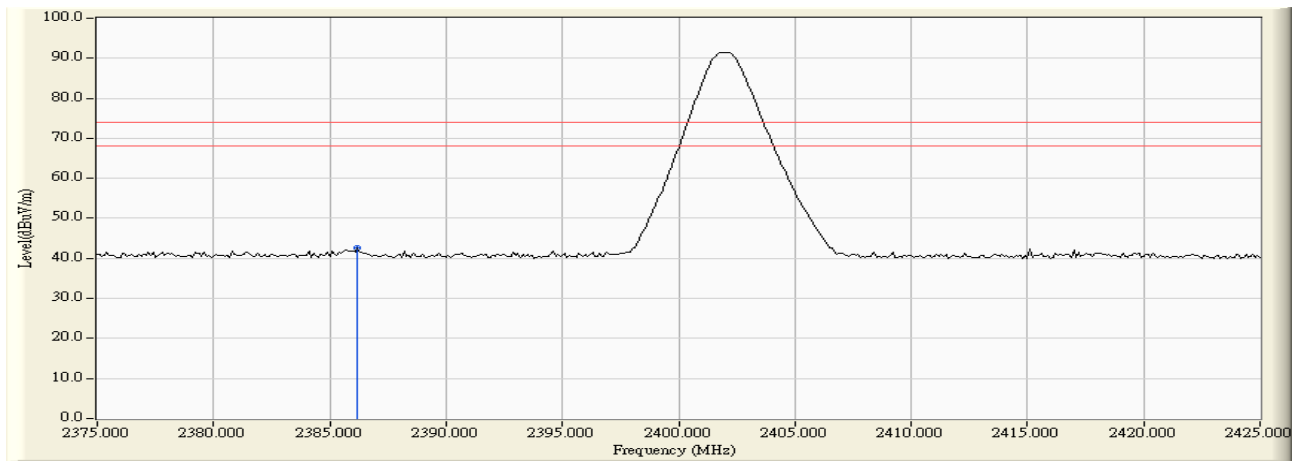


Note: RBW=1MHz, VBW=3MHz, Sweep=500ms

Product : Navigator 900BT  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2386.000	-2.419	46.316	43.897	74.00	54.00	Pass
00 (Average)	--	--	--	--	74.00	54.00	Pass

**Figure Channel 00: Vertical (Peak)**

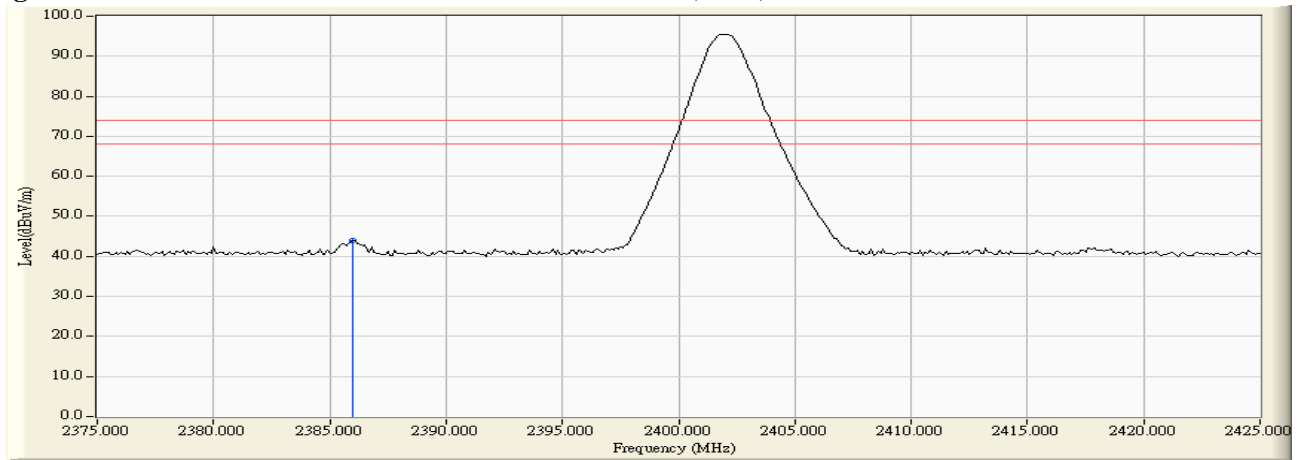


Note: RBW=1MHz, VBW=3MHz, Sweep=500ms

Product : Navigator 900BT  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2483.500	-1.987	49.949	47.962	74.00	54.00	Pass
78 (Average)	--	--	--	--	74.00	54.00	Pass

**Figure Channel 78: Horizontal (Peak)**

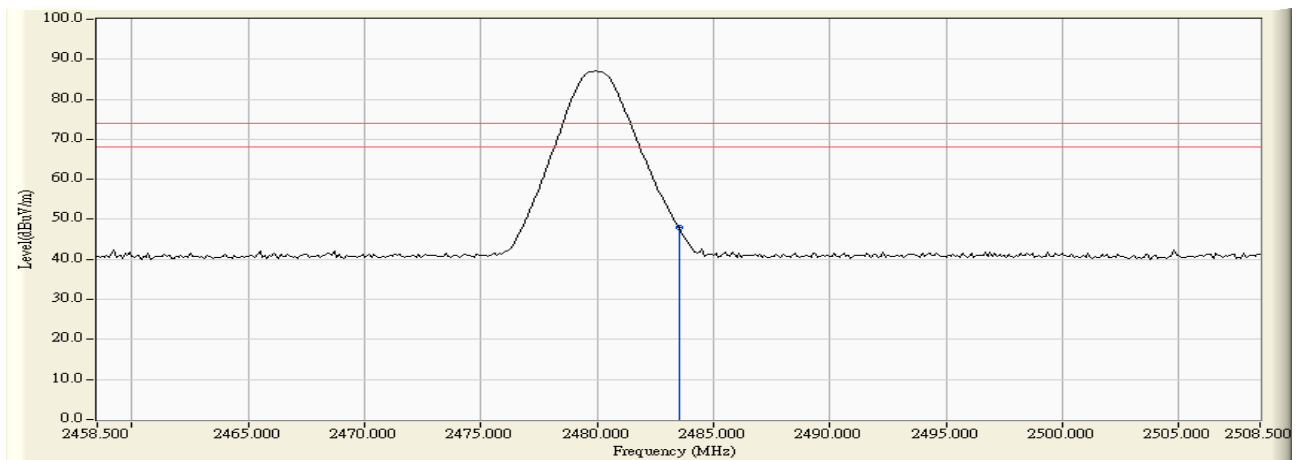


Note: RBW=1MHz, VBW=3MHz, Sweep=500ms

Product : Navigator 900BT  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78 (Peak)	2483.500	-1.987	50.893	48.906	74.00	54.00	Pass
78 (Average)	--	--	--	--	74.00	54.00	Pass

**Figure Channel 78: Vertical (Peak)**

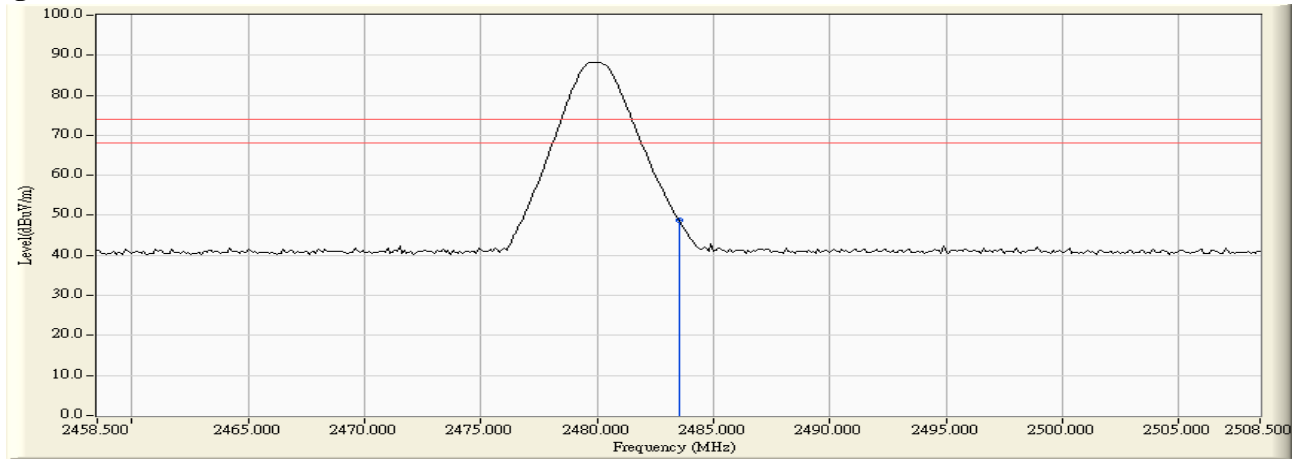

Note: RBW=1MHz, VBW=3MHz, Sweep=500ms

**7. Channel Number**


**7.1. Test Equipment**

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R & S	FSP40 / 100170	Nov, 2008
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Jun, 2008
Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments marked by “X” are used to measure the final test results.

**7.2. Test Setup**

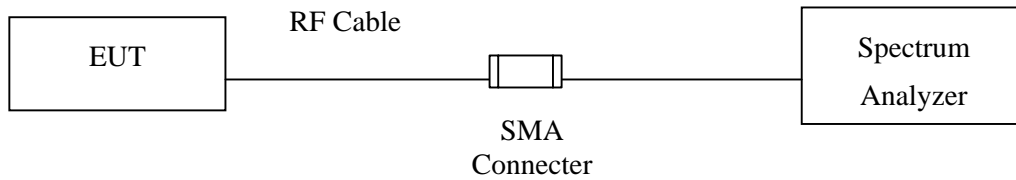

**7.3. Limit**

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 15 hopping frequencies.

**7.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**7.5. Uncertainty**

N/A




**7.6. Test Result of Channel Number**

Product : Navigator 900BT  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>15	Pass

**2402-2480MHz**

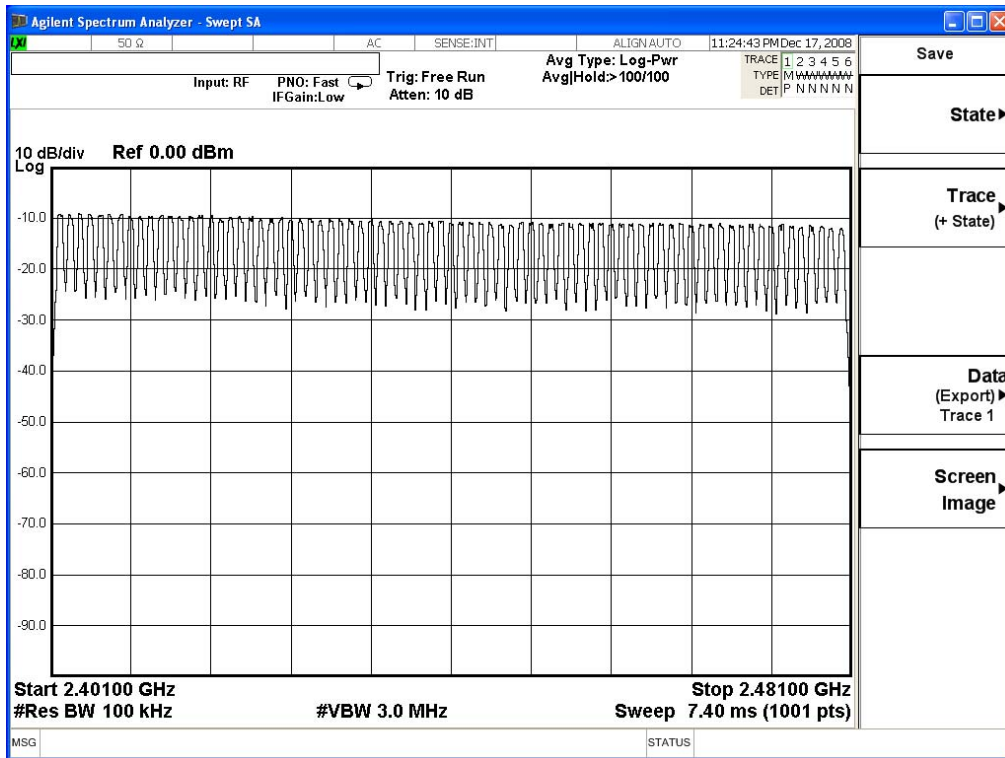

Note:

1. The device support Bluetooth version 2.0 includes AFH so the minimum amount of channels is 20.
2. The device SIG certificate number: B014674.

## 8. Channel Separation


### 8.1. Test Equipment

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R & S	FSP40 / 100170	Nov, 2008
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Jun, 2008
Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments mark by “X” are used to measure the final test results.

### 8.2. Test Setup

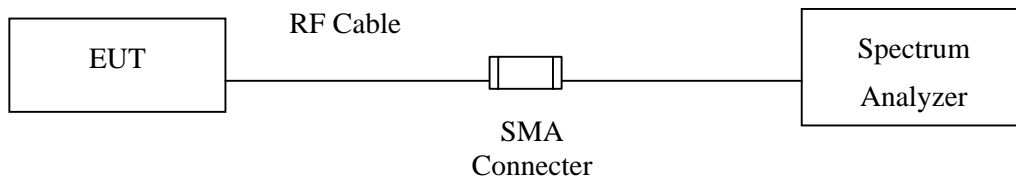

### 8.3. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 8.5. Uncertainty


± 150Hz

### 8.6. Test Result of Channel Separation


Product : Navigator 900BT  
 Test Item : Channel Separation  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)

Frequency (MHz)	Measurement Level (MHz)	Limit	Limit of (2/3)*20dB Bandwidth (kHz)	Result
2402	1.00	>25 kHz	> 760.0	Pass
2441	1.00	>25 kHz	> 753.3	Pass
2480	1.00	>25 kHz	> 766.6	Pass


Channel 00 2402MHz

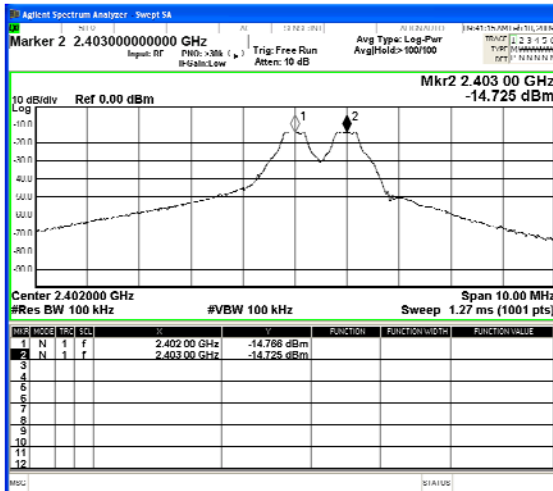

Channel 39 2441MHz

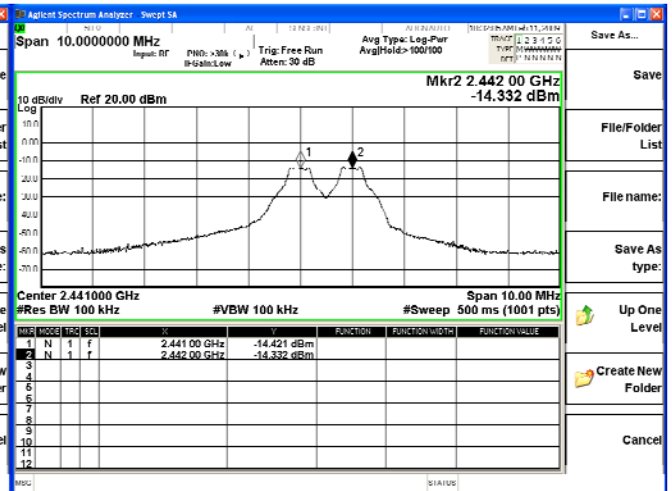

Channel 78 2480 MHz

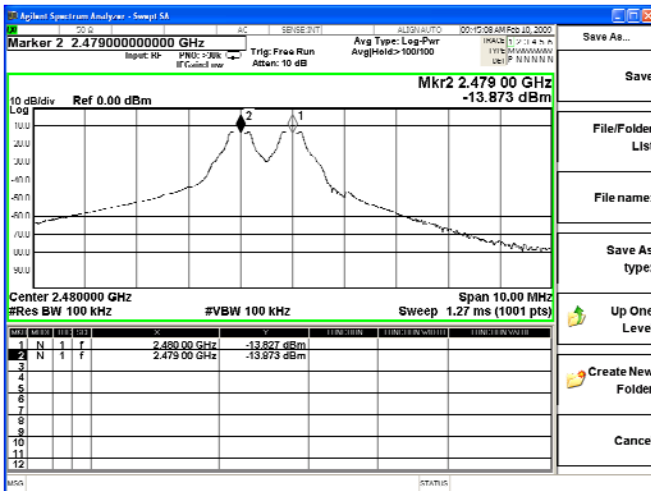

**9. Dwell Time**


**9.1. Test Equipment**

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R & S	FSP40 / 100170	Nov, 2008
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Jun, 2008
Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008

- Note:
1. All equipments are calibrated every one year.
  2. The test instruments marked by “X” are used to measure the final test results.

**9.2. Test Setup**

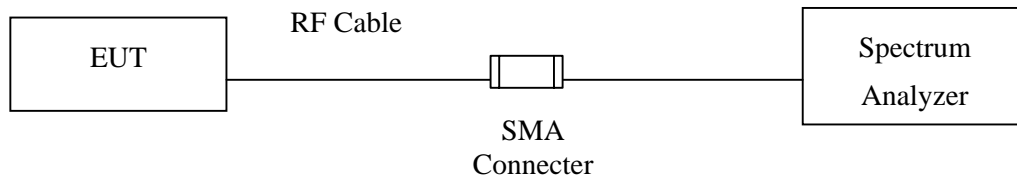

**9.3. Limit**

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

**9.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**9.5. Uncertainty**

± 25msec


### 9.6. Test Result of Dwell Time

Product : Navigator 900BT  
 Test Item : Dwell Time  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK) (Channel 00,39,78 –DH1)


Frequency (MHz)	Time solt length(ms)	Duty Cycle	Dwell Time (s)	Limit (s)	Result
2402	0.420	(1600/2)*0.42ms	0.1344	0.4	Pass
2441	0.420	(1600/2)*0.42ms	0.1344	0.4	Pass
2480	0.410	(1600/2)*0.42ms	0.1312	0.4	Pass

Note: Dwell Time = (duty cycle/79)\* 79\*0.4s


CH 00 Time solt length

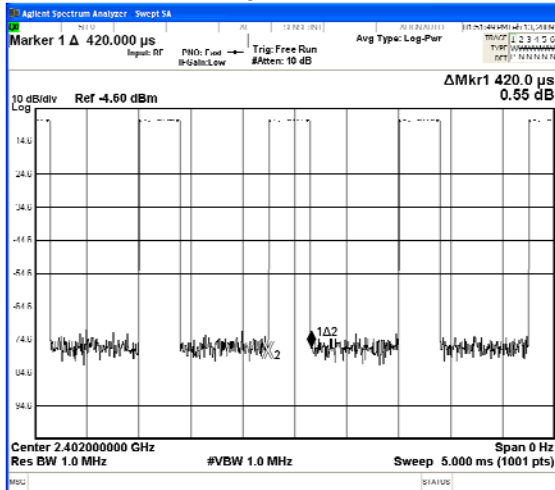

CH 39 Time solt length

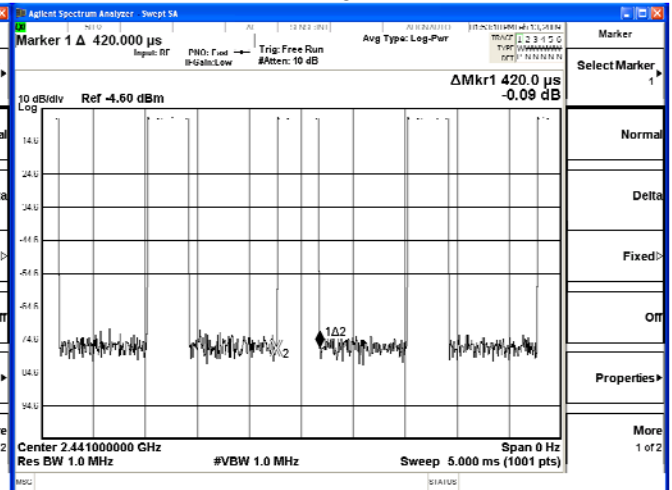

CH 78 T Time solt length

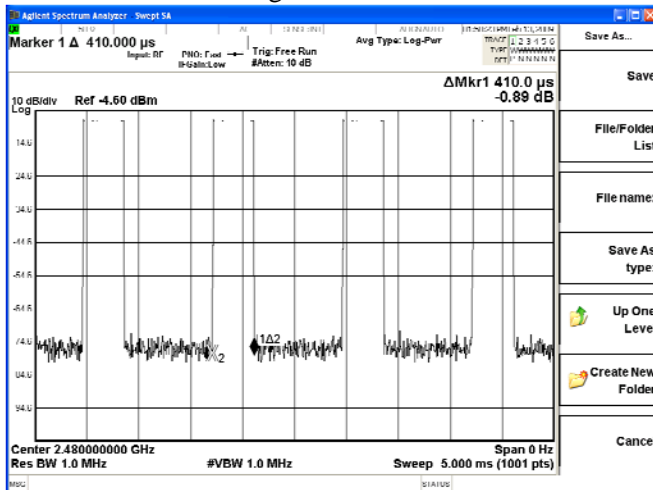


Product : Navigator 900BT  
 Test Item : Dwell Time  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK) (Channel 00,39,78 –DH3)


Frequency (MHz)	Time slot length(ms)	Duty Cycle	Dwell Time (s)	Limit (s)	Result
2402	1.680	(1600/4)*1.680ms	0.2688	0.4	Pass
2441	1.695	(1600/4)*1.695ms	0.2712	0.4	Pass
2480	1.685	(1600/4)*1.685ms	0.2695	0.4	Pass

Note: Dwell Time = (duty cycle/79)\* 79\*0.4s


CH 00 Time slot length

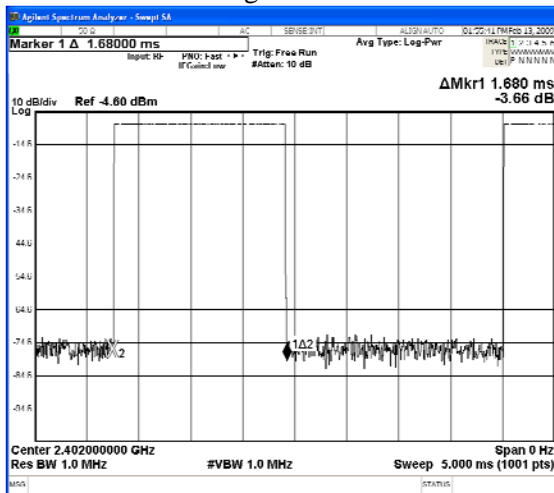

CH 39 Time slot length

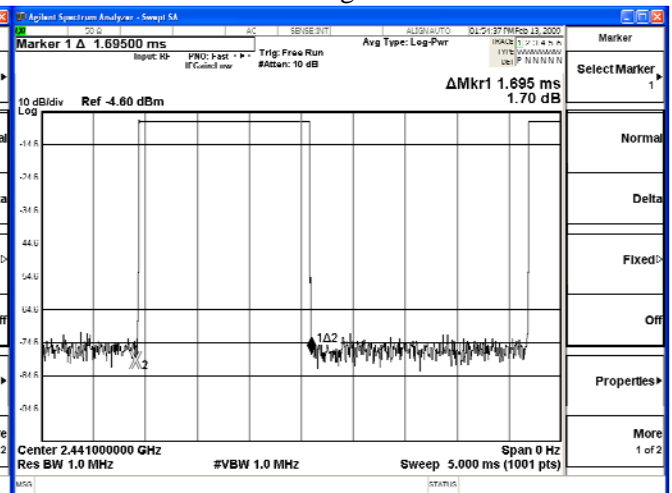

CH 78 T Time slot length

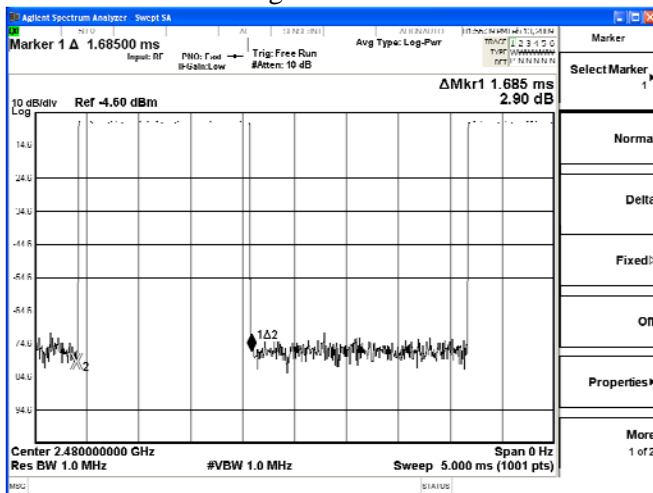


Product : Navigator 900BT  
 Test Item : Dwell Time  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK) (Channel 00,39,78 –DH5)

Frequency (MHz)	Time solt length(ms)	Duty Cycle	Dwell Time (s)	Limit (s)	Result
2402	3.045	(1600/6)*3.045ms	0.3248	0.4	Pass
2441	2.940	(1600/6)*2.940ms	0.3136	0.4	Pass
2480	2.925	(1600/6)*2.925ms	0.3120	0.4	Pass


Note: Dwell Time = (duty cycle/79)\* 79\*0.4s

CH 00 Time solt length

CH 39 Time solt length

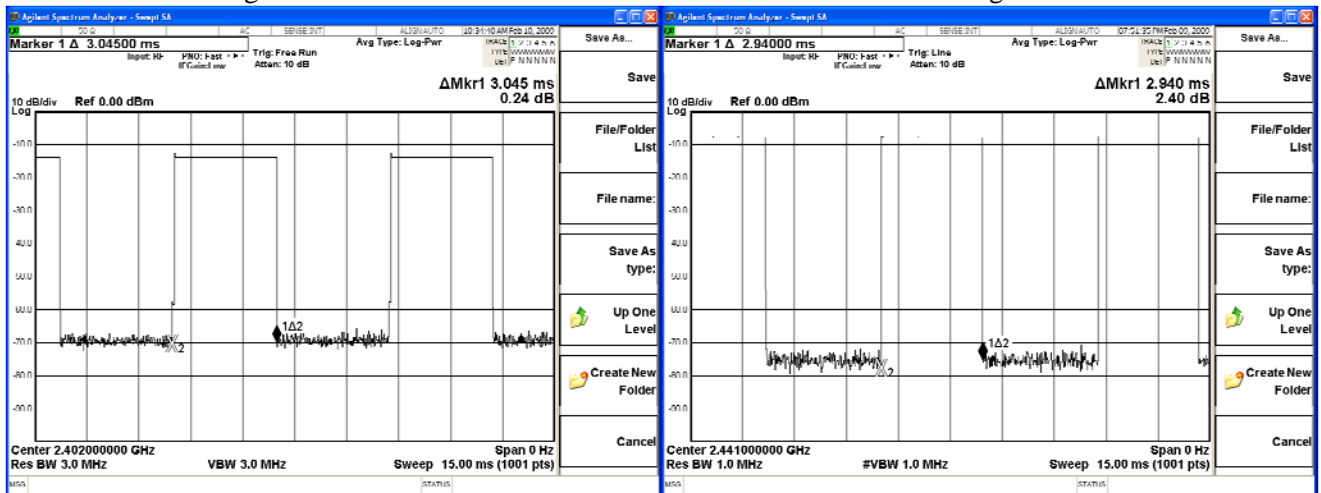

CH 78 T Time solt length

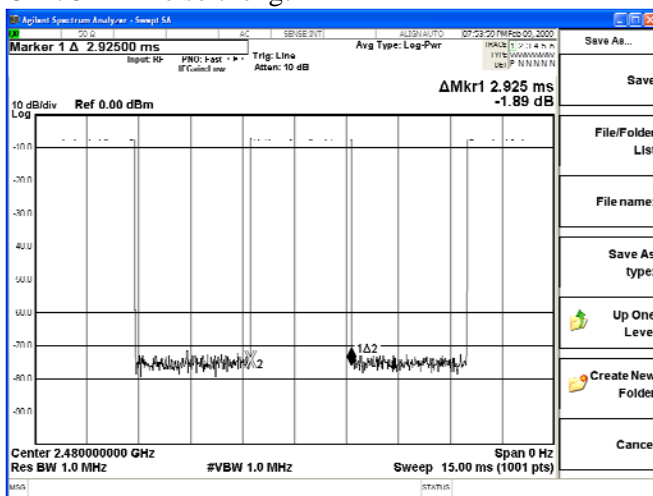

Note:

The dwell times of the packet type of DH1, DH3, and DH5 are tested. Only the worst case is shown on the report.

**10. Occupied Bandwidth**


**10.1. Test Equipment**

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R & S	FSP40 / 100170	Nov, 2008
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Jun, 2008
Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2008

Note: 1. All equipments are calibrated every one year.  
 2. The test instruments marked by “X” are used to measure the final test results.

**10.2. Test Setup**

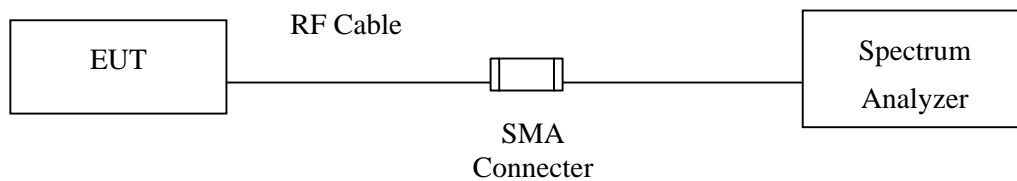

**10.3. Limits**

N/A

**10.4. Test Procedure**

The EUT was setup to ANSI C63.4, 2003; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

**10.5. Uncertainty**

± 150Hz




### 10.6. Test Result of Occupied Bandwidth

Product : Navigator 900BT  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)(2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	1140	--	NA


Figure Channel 00:

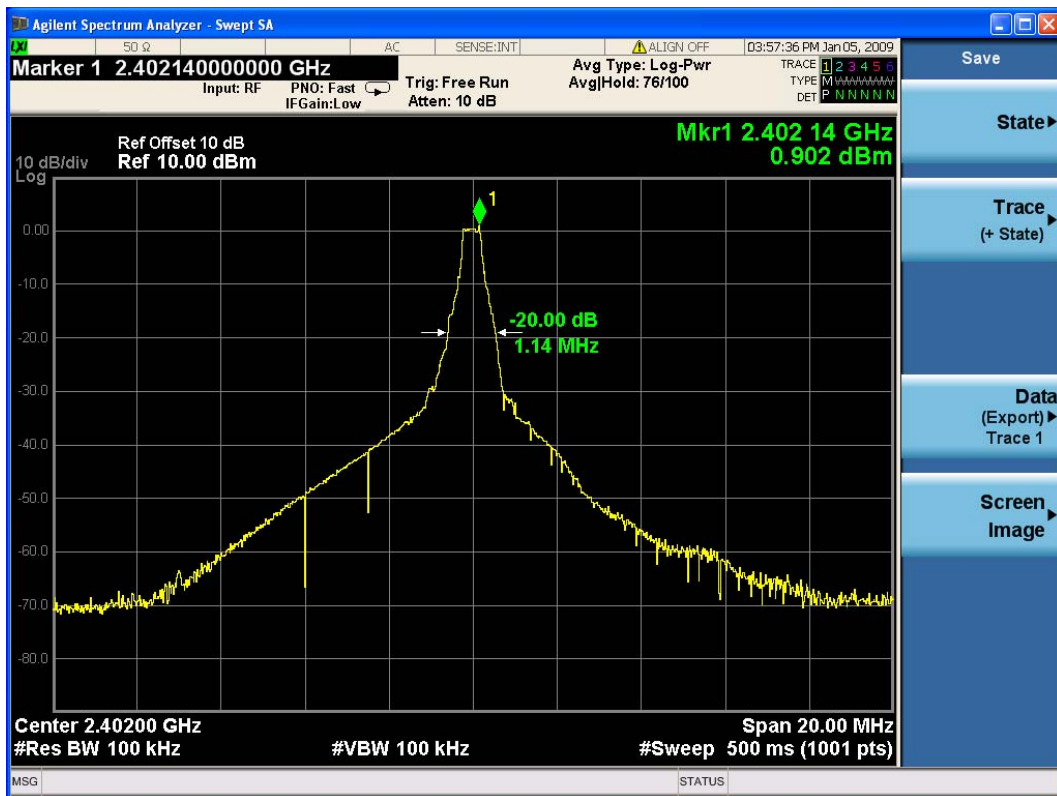

Product : Navigator 900BT  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)(2441MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2441	1130	--	NA


Figure Channel 39:

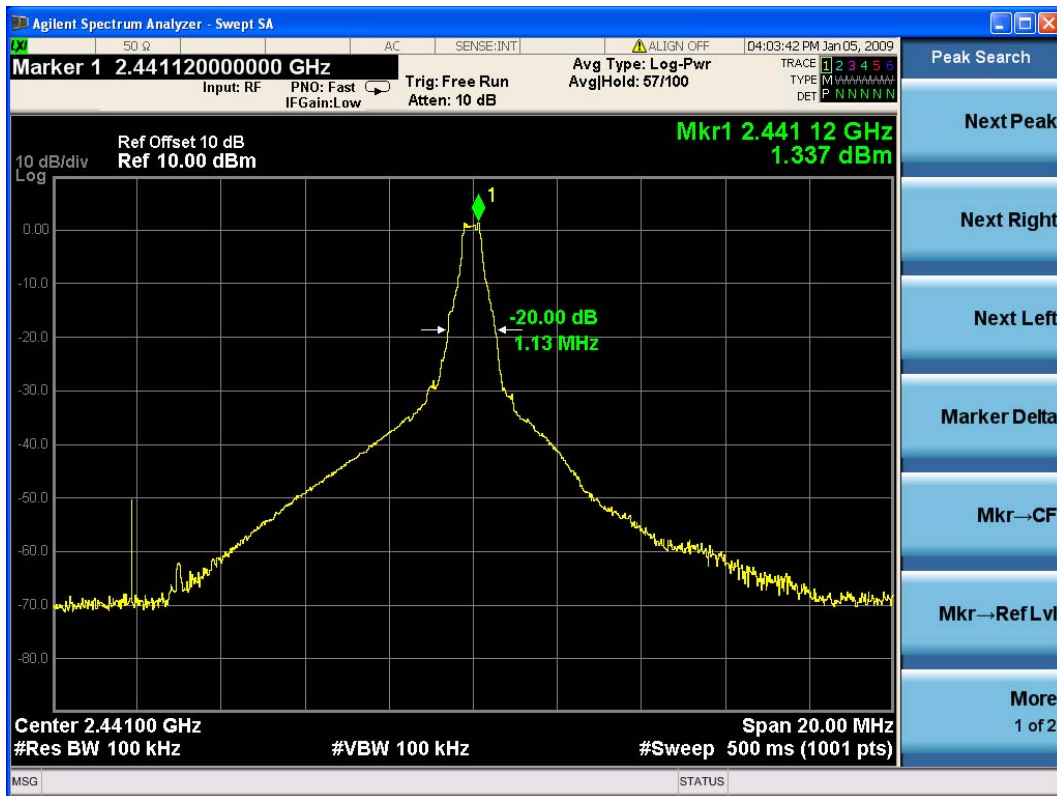

Product : Navigator 900BT  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmitter - 1Mbps (GFSK)(2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
78	2480	1150	--	NA

Figure Channel 78:

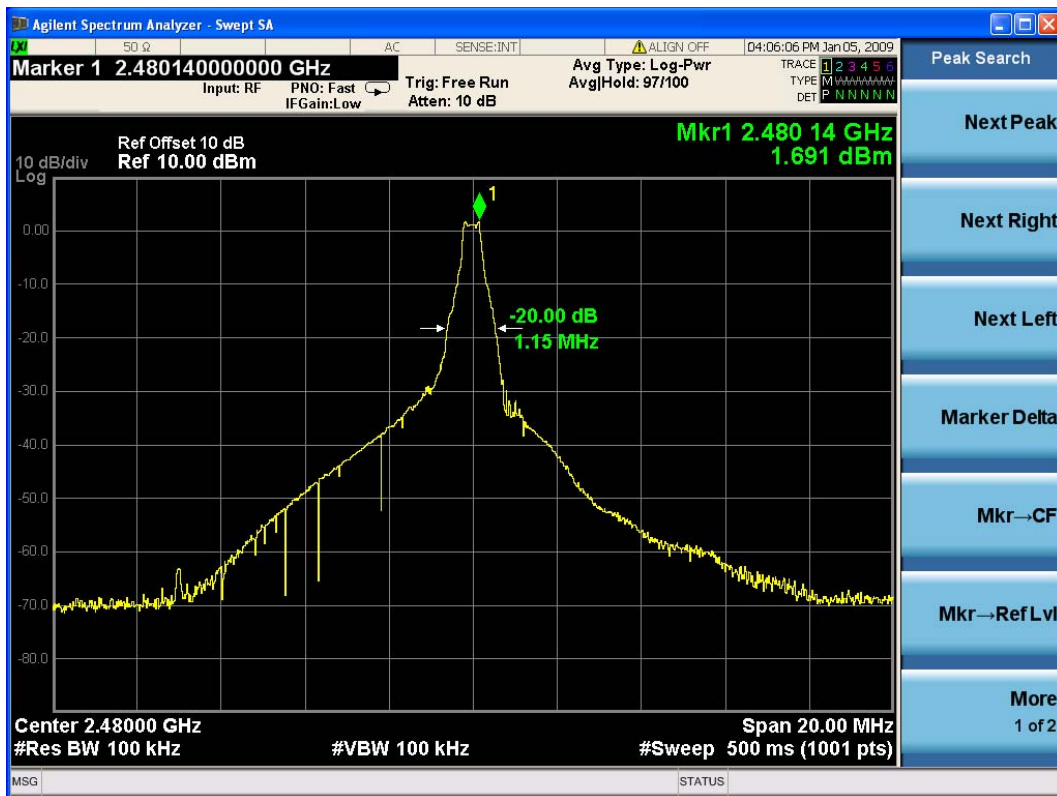

## 11. EMI Reduction Method During Compliance Testing

No modification was made during testing.