



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

FOR

Product Name: Pen mouse

Model : GM-100005/T

Trade Name: Genius

Issued to

KYE SYSTEMS CORP.

No.492,Sec.5, Chung Hsin Rd., San Chung, Taipei Hsien, 24160, Taiwan, R.O.C.

Issued by

Global Certification Corp.

| | | |
|------------------|--------------------------|----------------------------------------------------------------------------------|
| EMI Test Site | Sansia Lab | NO.34-3,Zihhe Rd.,Sansia Township,Taipei County 237, Taiwan ,R.O.C. |
| EMC Test Site | Sijhih office and Lab | No. 146. Sec.2. Siangjhang Rd. Sijhih City. Taipei County 221, Taiwan(R.O.C.) |

Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of Global Certification Corporation. This document may be altered or revised by Global Certification Corporation. Personnel only, and shall be noted in the revision section of the document.



| | |
|-----------------------------------------------------------------------|-----------|
| TABLE OF CONTENTS | 2 |
| 1. GENERAL INFORMATION | 3 |
| 1.1 DESCRIPTION OF THE TESTED SAMPLES | 4 |
| 2. TEST METHODOLOGY | 5 |
| 2.1 GENERAL TEST PROCEDURES | 5 |
| 2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS | 5 |
| 2.3 DESCRIPTION OF TEST MODES | 6 |
| 2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS | 7 |
| 3. TEST AND MEASUREMENT EQUIPMENT | 9 |
| 3.1 CALIBRATION | 9 |
| 3.2 EQUIPMENT | 9 |
| 4. SECTION 15.249 REQUIREMENTS (FUNDAMENTAL/ HARMONICS) | 11 |
| 4.1 TEST SETUP | 11 |
| 4.2 LIMIT | 11 |
| 4.3 RESULT: PASSED | 11 |
| 4.4 TEST DATA: | 11 |
| 5. SECTION 15.205 REQUIREMENTS (BAND EDGE) | 20 |
| 5.1 TEST SETUP | 20 |
| 5.2 LIMIT | 20 |
| 5.3 RESULT: PASSED | 21 |
| 5.4 TEST DATA: | 21 |
| 6. SECTION 15.209 REQUIREMENTS (GENERAL RADIATED EMISSION) | 25 |
| 6.1 TEST SETUP | 25 |
| 6.2 LIMIT | 26 |
| 6.3 TEST PROCEDURE | 27 |
| 6.4 RESULT: PASSED | 27 |
| 6.5 TEST DATA: | 28 |
| 7. SECTION 15.207 REQUIREMENTS (POWERLINE CONDUCTED EMISSIONS) | 30 |
| APPENDIX 1 | |
| PHOTOS OF TEST CONFIGURATION | |
| APPENDIX 3 | |
| PHOTOS OF EUT | |



1. GENERAL INFORMATION

Applicant : KYE SYSTEMS CORP.
Address : No.492,Sec.5, Chung Hsin Rd., San Chung, Taipei Hsien, 24160, Taiwan, R.O.C.
Manufacturer : KYE SYSTEMS CORP.
Address : No.492,Sec.5, Chung Hsin Rd., San Chung, Taipei Hsien, 24160, Taiwan, R.O.C.
EUT : Pen mouse
Model Name : GM-100005/T
Model Differences : N/A

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.4-2003. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

FCC part 15 subpart C

Receipt Date : 09/29/2010

Final Test Date : 10/07/2010

Taipei, Taiwan

(Place)

Oct. 07, 2010

(Date)

Alex Chou / Manager

(Signature)

Designation Number: TW1030



1.1 DESCRIPTION OF THE TESTED SAMPLES

EUT Name : Pen mouse
 Model Number : GM-100005/T
 FCC ID : FSUGMZJ9
 Input Voltage : 1.5Vdc
 Power From Inside Outside
Adaptor BATTERY AC Power Source DC Power Source
Support Unit PC
 Operate Frequency : Refer to the channel list as described below
 Modulation Technique : GFSK
 Number of Channels : 77
 Channel spacing : N/A 7 1 MHz
 Operating Mode : Simplex Duplex
 Antenna Type : integral antenna: PCB Printing a dedicated antenna
 Antenna gain : -3dBi

| Channels | Frequencies (MHz) | Channels | Frequencies (MHz) |
|-----------------|--------------------------|-----------------|--------------------------|
| 0 | 2402 | 40 | 2442 |
| 1 | 2403 | 41 | 2443 |
| 2 | 2404 | 42 | 2444 |
| 3 | 2405 | 43 | 2445 |
| 4 | 2406 | 44 | 2446 |
| 5 | 2407 | 45 | 2447 |
| 6 | 2408 | 46 | 2448 |
| 7 | 2409 | 47 | 2449 |
| 8 | 2410 | 48 | 2450 |
| 9 | 2411 | 49 | 2451 |
| 10 | 2412 | 50 | 2452 |
| 11 | 2413 | 51 | 2453 |
| 12 | 2414 | 52 | 2454 |
| 13 | 2415 | 53 | 2455 |
| 14 | 2416 | 54 | 2456 |
| 15 | 2417 | 55 | 2457 |
| 16 | 2418 | 56 | 2458 |
| 17 | 2419 | 57 | 2459 |
| 18 | 2420 | 58 | 2460 |
| 19 | 2421 | 59 | 2461 |
| 20 | 2422 | 60 | 2462 |
| 21 | 2423 | 61 | 2463 |
| 22 | 2424 | 62 | 2464 |



| | | | |
|----|------|----|------|
| 23 | 2425 | 63 | 2465 |
| 24 | 2426 | 64 | 2466 |
| 25 | 2427 | 65 | 2467 |
| 26 | 2428 | 66 | 2468 |
| 27 | 2429 | 67 | 2469 |
| 28 | 2430 | 68 | 2470 |
| 29 | 2431 | 69 | 2471 |
| 30 | 2432 | 70 | 2472 |
| 31 | 2433 | 71 | 2473 |
| 32 | 2434 | 72 | 2474 |
| 33 | 2435 | 73 | 2475 |
| 34 | 2436 | 74 | 2476 |
| 35 | 2437 | 75 | 2477 |
| 36 | 2438 | 76 | 2478 |
| 37 | 2439 | | |
| 38 | 2440 | | |
| 39 | 2441 | | |

2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI C63.4:2003 and FCC CFR 47 Part 15 Subpart C.

2.1 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.4:2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:



| MHz | MHz | MHz | GHz |
|---------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| 10.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

2.3 DESCRIPTION OF TEST MODES

The EUT was tested under following modes:

Modes:

1. Continuous transmitting

Channels:


1. 2.402GHz (Lowest Channel)
2. 2.448GHz (Middle Channel)
3. 2.478GHz (Highest Channel)



2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

Setup Diagram

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

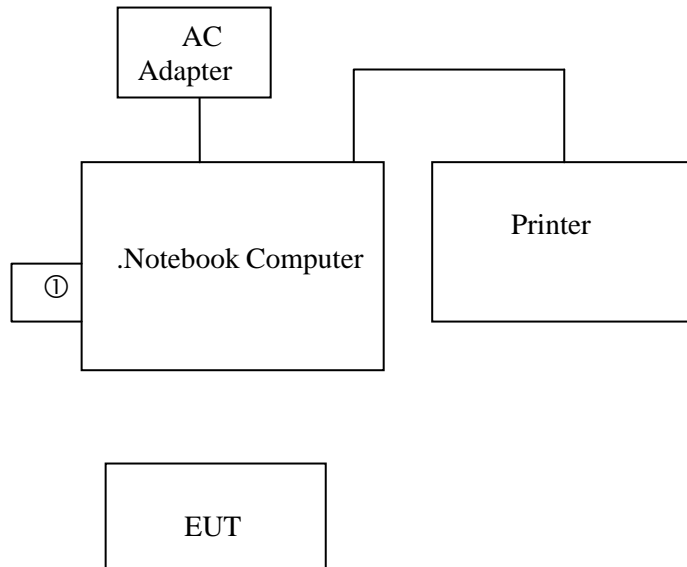

① Dongle



Support Equipment

Peripherals Devices:

| OUTSIDE SUPPORT EQUIPMENT | | | | | | | |
|---------------------------|----------------------|----------|----------------------|--------------------|------------|--------------------|--------------------|
| No. | Equipment | Model | Serial No. | FCC ID/ BSMI ID | Trade name | Data Cable | Power Cord |
| 1. | Notebook Computer | NOM-018 | 00-06-1B- DF87-D7 | R33026 | IBM | Unshielded 1.0M | Unshielded 1.8M |
| 2 | PRINTER | PHOTO750 | BDEK017 629 | 3872P011 | EPSON | Shielded 1.8M | Unshielded 1.8M |
| 3 | Dongle | N/A | N/A | N/A | N/A | N/A | N/A |
| INSIDE SUPPORT EQUIPMENT | | | | | | | |
| No. | Equipment | Model | Serial No. | FCC ID/ BSMI ID | Trade name | Data Cable | Power Cord |
| | N/A | | | | | | |

Note: All the above equipment /cable were placed in worse case position to maximize emission signals during emission test
Grounding: Grounding was in accordance with the manufacturer’s requirement and conditions for the intended use.



3. TEST AND MEASUREMENT EQUIPMENT

3.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer’s recommendations, and is traceable to recognized national standards.

3.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.

TABLE 1 LIST OF TEST AND MEASUREMENT EQUIPMENT

| Instrument | Manufacturer | Model No. | Serial No. | Calibration Due Date | Note |
|--------------------|--------------|-----------------|------------|----------------------|------|
| EMC Test Receiver | R&S | ESCI | 100438 | Jun 29, 2011 | |
| Bilog Antenna | SUNOL | JB1 | A052204 | Nov 06, 2010 | |
| Turn table | EMCO | 2080 | 9508-1805 | N/A | |
| Controller | EMCO | 2090 | 9804-1328 | N/A | |
| Amplifier | G.W | GAP-801 | EF150001 | Jul.18, 2011 | |
| Amplifier | Schwarzbeck | BBV 9718 | 9718-008 | Aug. 10, 2011 | |
| Spectrum Analyzer | NEX | NS-265 | 5044006 | May 11, 2011 | |
| RF Cable | JYE BAO | RG214/U | 28M-002 | Nov 02, 2010 | |
| RF Cable | Huber Suhner | SUCOFLEX 104 | 293864/4 | Nov. 13, 2010 | |
| Thermo-Hygro meter | WISEWIND | 4-IN-1 | 0412 | Apr.10, 2011 | |
| Loop Antenna | Teseq GmbH | HLA 6120 | 26439 | Sep. 11, 2011 | |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 9120D-491 | Aug. 05, 2011 | |



✧ Calibration interval of instruments listed above is one year



4. SECTION 15.249 REQUIREMENTS (FUNDAMENTAL/ HARMONICS)

4.1 TEST SETUP

Refer to paragraph 6.1.

4.2 LIMIT

| Fundamental Frequency (MHz) | Field Strength of Fundamental (dBμV/m at 3-meter) | Detector |
|-----------------------------------------|-------------------------------------------------------------------------|-----------------|
| 902 - 928 2400 – 2483 5725 - 5875 | 114 | Peak |
| 902 - 928 2400 – 2483 5725 - 5875 | 94 | AV |

| Fundamental Frequency (MHz) | Field Strength of Harmonics (dBμV/m at 3-meter) | Detector |
|-----------------------------------------|-----------------------------------------------------------------------|-----------------|
| 902 - 928 2400 – 2483 5725 - 5875 | 74 | Peak |
| 902 - 928 2400 – 2483 5725 - 5875 | 54 | AV |


4.3 RESULT: PASSED

4.4 TEST DATA:



Fundamental


HORIZONTAL

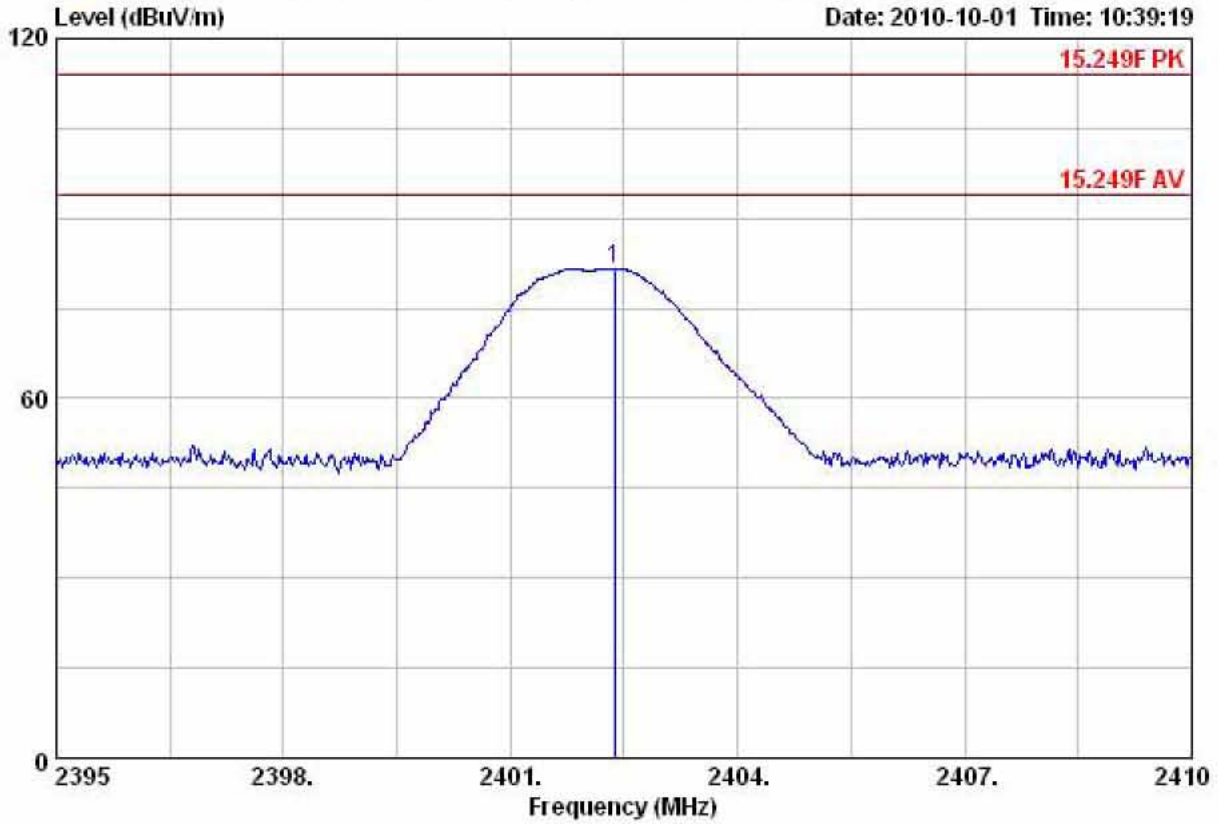

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---------|------------|--------|--------|------------|------------|--------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 2402.38 | 88.08 | -6.44 | 81.64 | 114.00 | -32.36 | Peak |




VERTOCAL

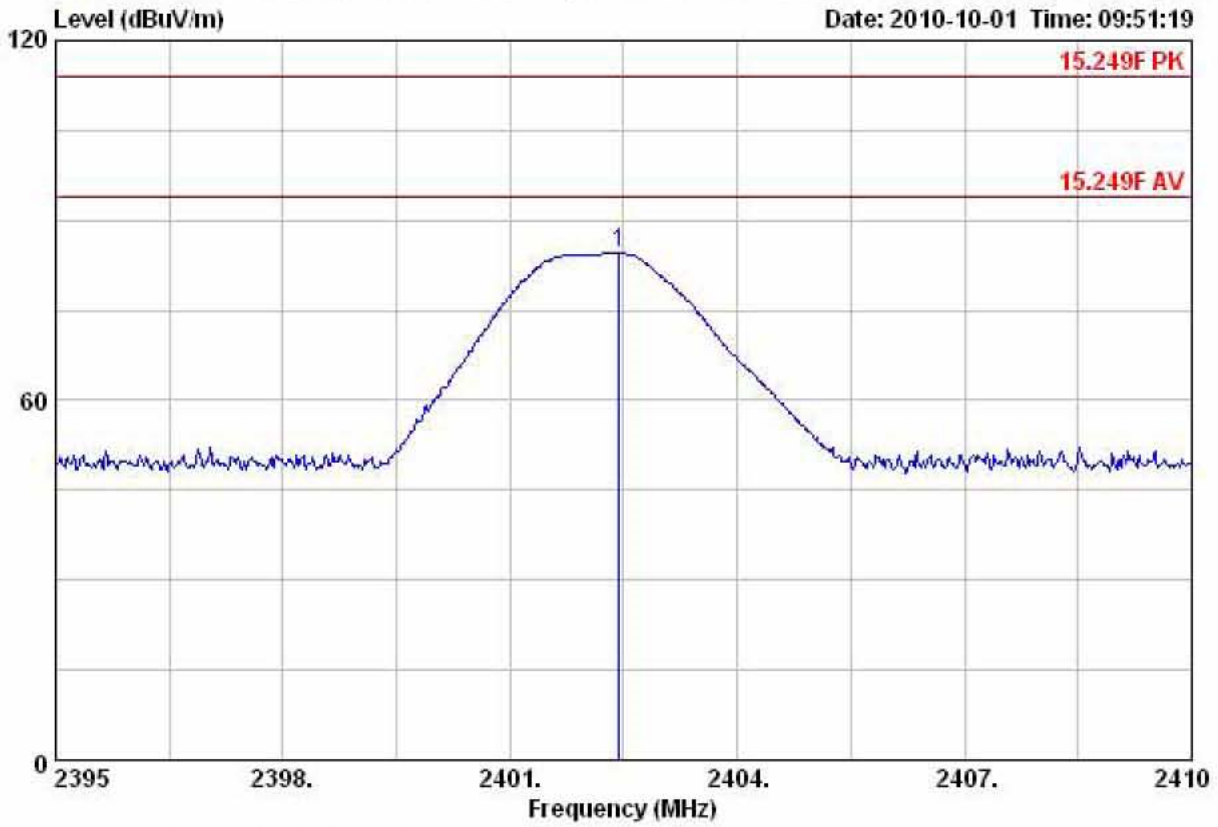

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---------|------------|--------|--------|------------|------------|--------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 2402.44 | 91.06 | -6.44 | 84.62 | 114.00 | -29.38 | Peak |




HORIZONTAL

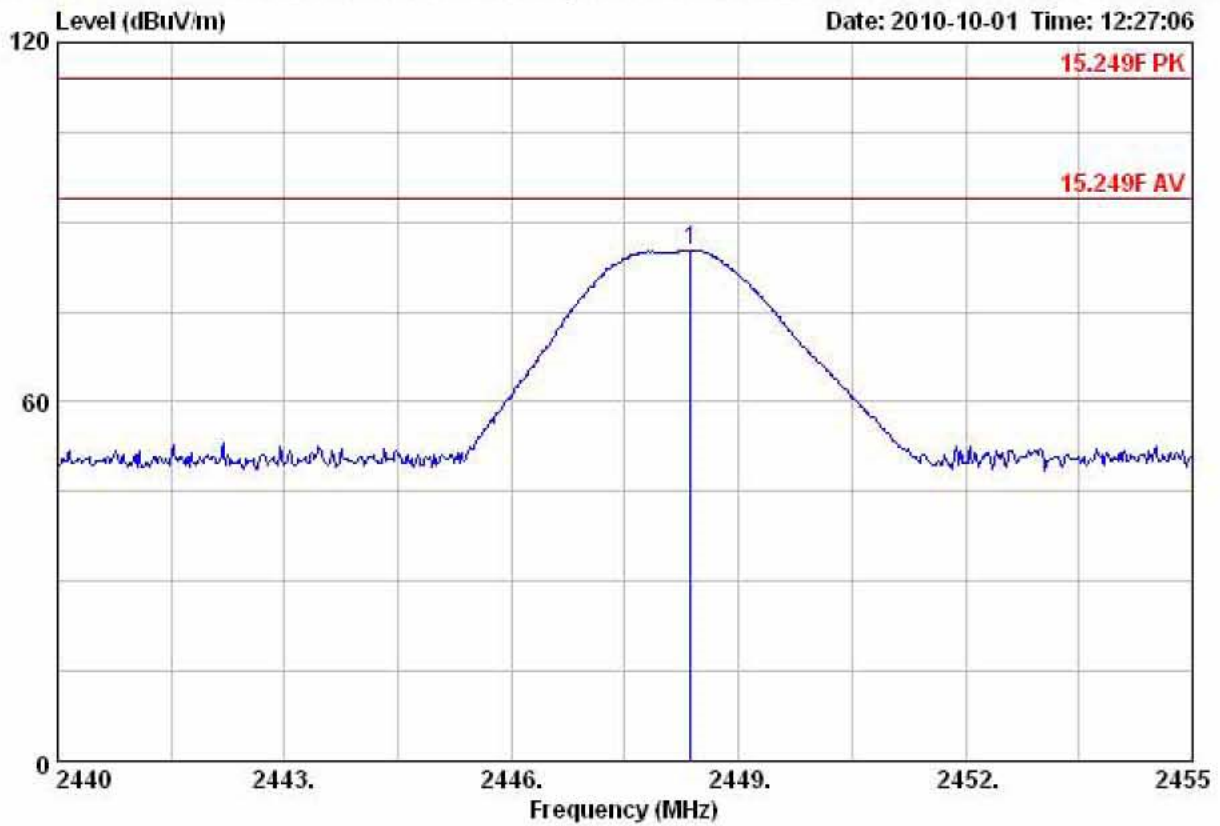

| Read Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|--------------|---------------|--------|--------|---------------|---------------|--------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 2448.37 | 91.28 | -6.05 | 85.23 | 114.00 | -28.77 | Peak |




VERTOCAL

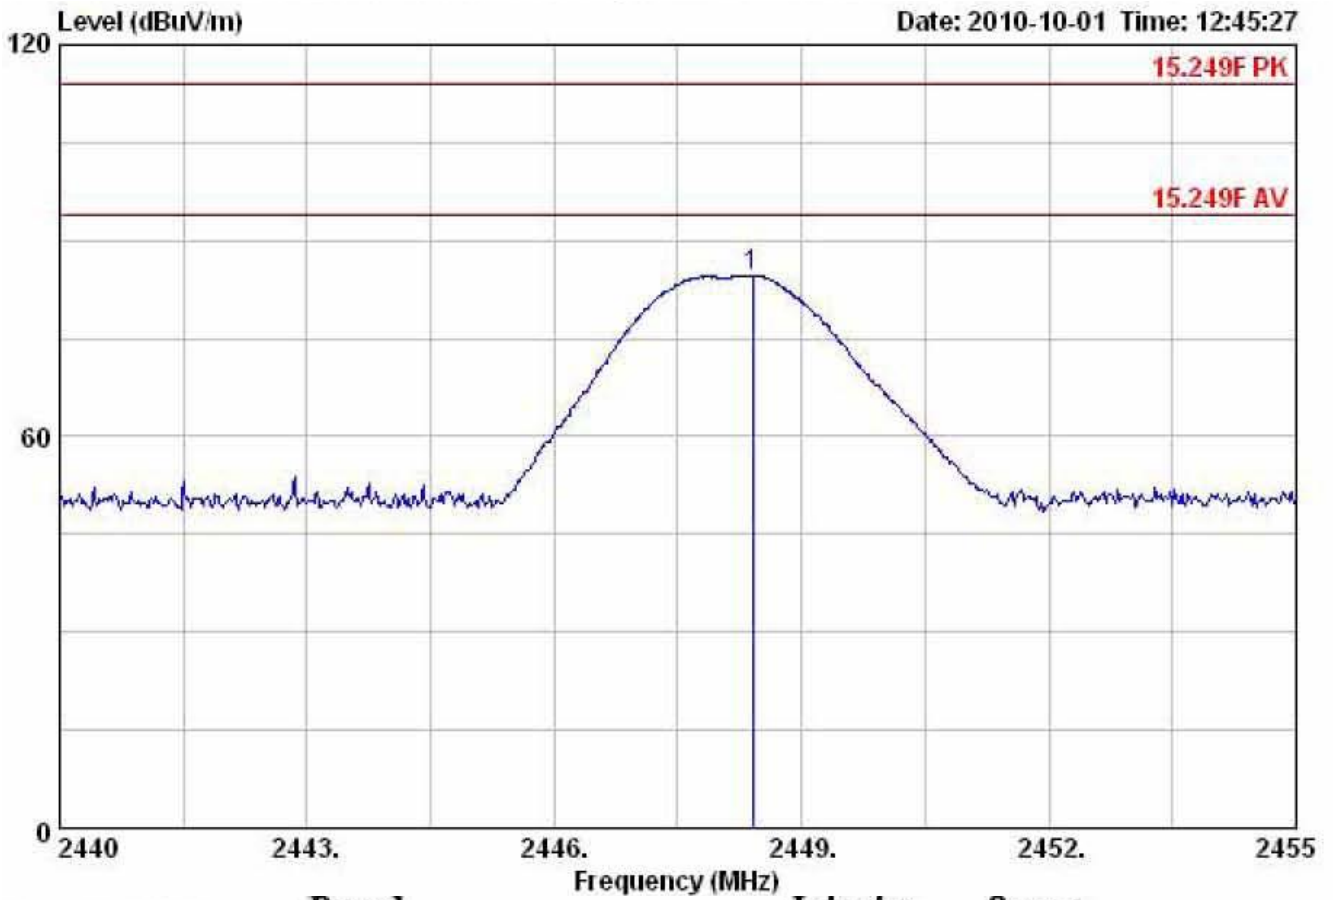

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---------|------------|--------|--------|------------|------------|--------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 2448.40 | 90.76 | -6.05 | 84.71 | 114.00 | -29.29 | Peak |




HORIZONTAL

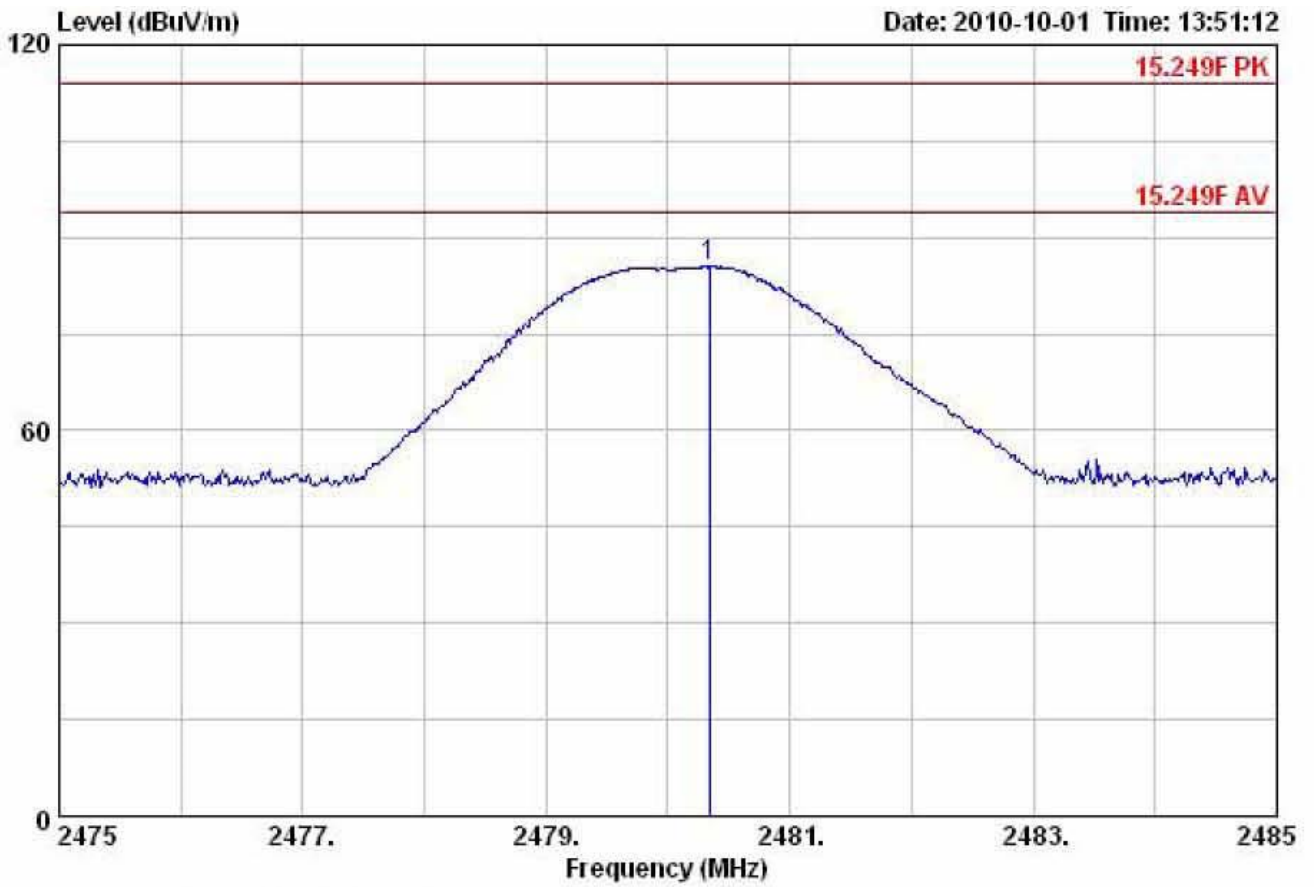

| | Read | | Limit | Over | |
|-----------|-------|--------|--------|--------|--------------|
| Freq | Level | Factor | Level | Line | Limit Remark |
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB |
| 1 2480.34 | 91.32 | -5.76 | 85.56 | 114.00 | -28.44 Peak |



VERTOCAL

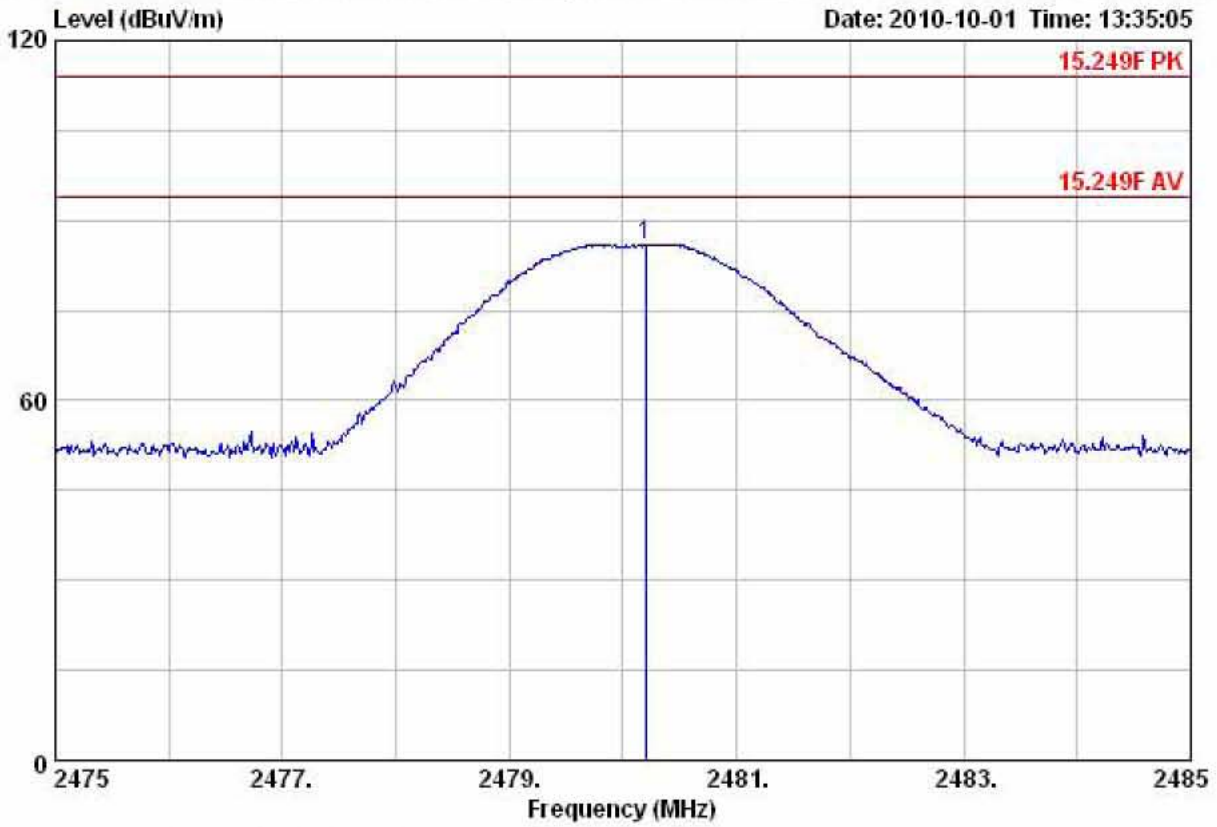

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---------|------------|--------|--------|------------|------------|--------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 2480.20 | 91.80 | -5.76 | 86.04 | 114.00 | -27.96 | Peak |



Harmonics -Lowest Channel

HORIZONTAL

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|-------------|-------------------|---------------|---------------|-------------------|-------------------|---------------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 4804.00 | 43.20 | 0.94 | 44.14 | 74.00 | -29.86 | Peak |
| 7206.00 | 40.74 | 7.28 | 48.02 | 74.00 | -25.98 | Peak |
| 9608.00 | 40.48 | 10.49 | 50.97 | 74.00 | -23.03 | Peak |

VERTICAL

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|-------------|-------------------|---------------|---------------|-------------------|-------------------|---------------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 4804.00 | 38.67 | 0.94 | 39.61 | 74.00 | -34.39 | Peak |
| 7206.00 | 38.76 | 7.28 | 46.04 | 74.00 | -27.96 | Peak |
| 9608.00 | 38.59 | 10.49 | 49.08 | 74.00 | -24.92 | Peak |

Harmonics –Middle Channel

HORIZONTAL

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|-------------|-------------------|---------------|---------------|-------------------|-------------------|---------------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 4896.00 | 42.15 | 1.02 | 43.17 | 74.00 | -30.83 | Peak |
| 7344.00 | 40.12 | 8.28 | 48.40 | 74.00 | -25.60 | Peak |
| 9792.00 | 38.69 | 10.83 | 49.52 | 74.00 | -24.48 | Peak |

VERTICAL

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|-------------|-------------------|---------------|---------------|-------------------|-------------------|---------------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 4896.00 | 43.42 | 1.02 | 44.44 | 74.00 | -29.56 | Peak |
| 7344.00 | 39.67 | 8.28 | 47.95 | 74.00 | -26.05 | Peak |
| 9792.00 | 40.02 | 10.83 | 50.85 | 74.00 | -23.15 | Peak |



Harmonics -Highest Channel

HORIZONTAL

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|-------------|-------------------|---------------|---------------|-------------------|-------------------|---------------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 4960.00 | 43.19 | 1.07 | 44.26 | 74.00 | -29.74 | Peak |
| 7440.00 | 41.52 | 8.97 | 50.49 | 74.00 | -23.51 | Peak |
| 9920.00 | 41.90 | 11.05 | 52.95 | 74.00 | -21.05 | Peak |

VERTICAL

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|-------------|-------------------|---------------|---------------|-------------------|-------------------|---------------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 4960.00 | 43.53 | 1.07 | 44.60 | 74.00 | -29.40 | Peak |
| 7440.00 | 39.61 | 8.97 | 48.58 | 74.00 | -25.42 | Peak |
| 9920.00 | 40.71 | 11.05 | 51.76 | 74.00 | -22.24 | Peak |

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW
6. Peak detector measurement data will represent the worst case results.
7. “---” denotes the data which is not available.



5. SECTION 15.205 REQUIREMENTS (BAND EDGE)

5.1 TEST SETUP

Refer to paragraph 6.1.

5.2 LIMIT

Restricted Bands:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.


| Frequency (Hz) | Field Strength (μ V/m at 3-meter) | Field Strength (dB μ V/m at 3-meter) |
|----------------|-------------------------------------------|---------------------------------------------|
| 1.705-30 | 30 (at 30-meter) | 49.5 |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |



5.3 RESULT: PASSED

5.4 TEST DATA:


Lowest Channel-Horizontal

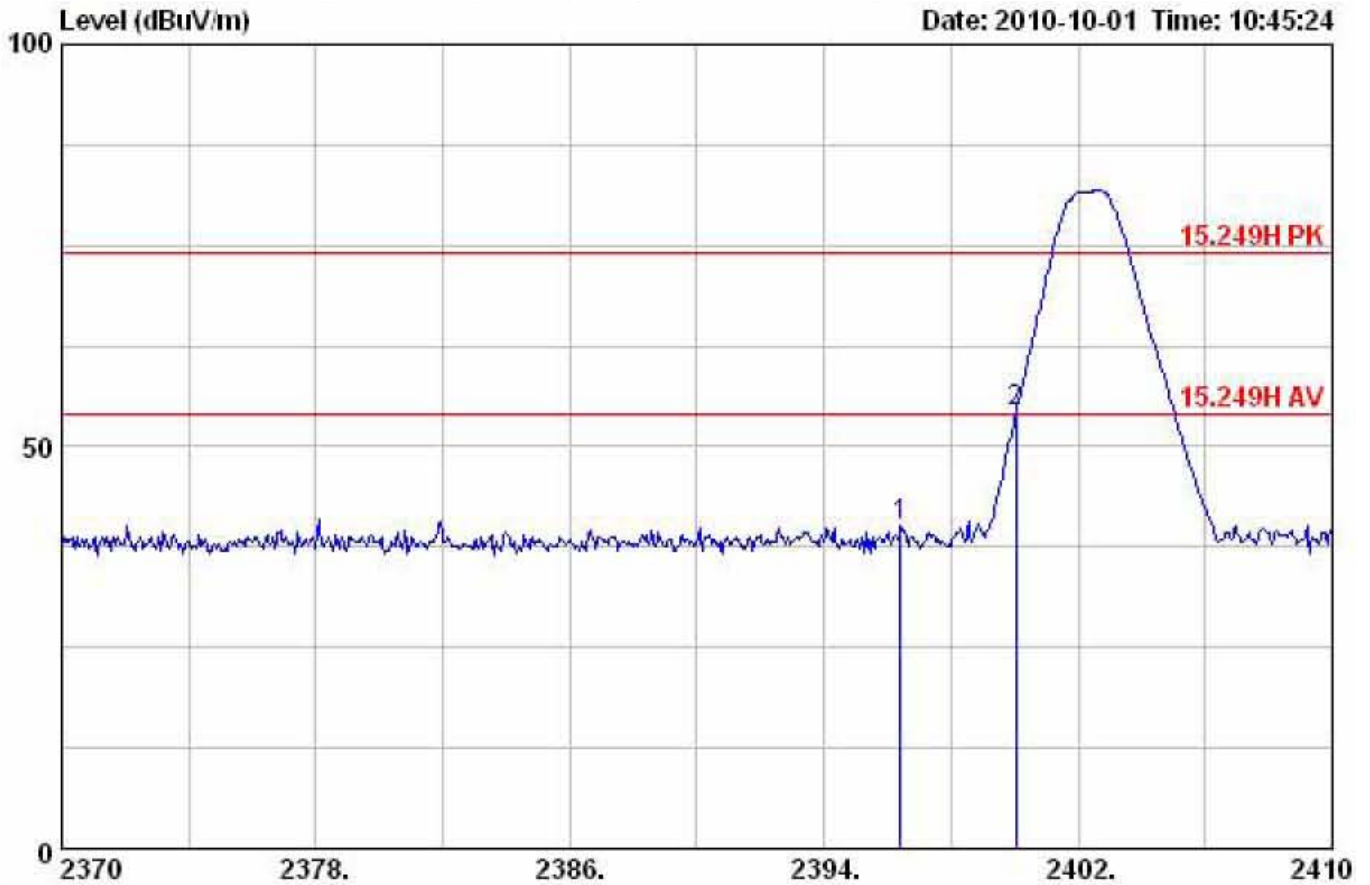


| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|--------|--------|------------|------------|--------|
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2396.40 | 46.67 | -6.49 | 40.18 | 74.00 | -33.82 | Peak |
| 2 | 2400.04 | 60.69 | -6.46 | 54.23 | 74.00 | -19.77 | Peak |



Lowest Channel-Vertical

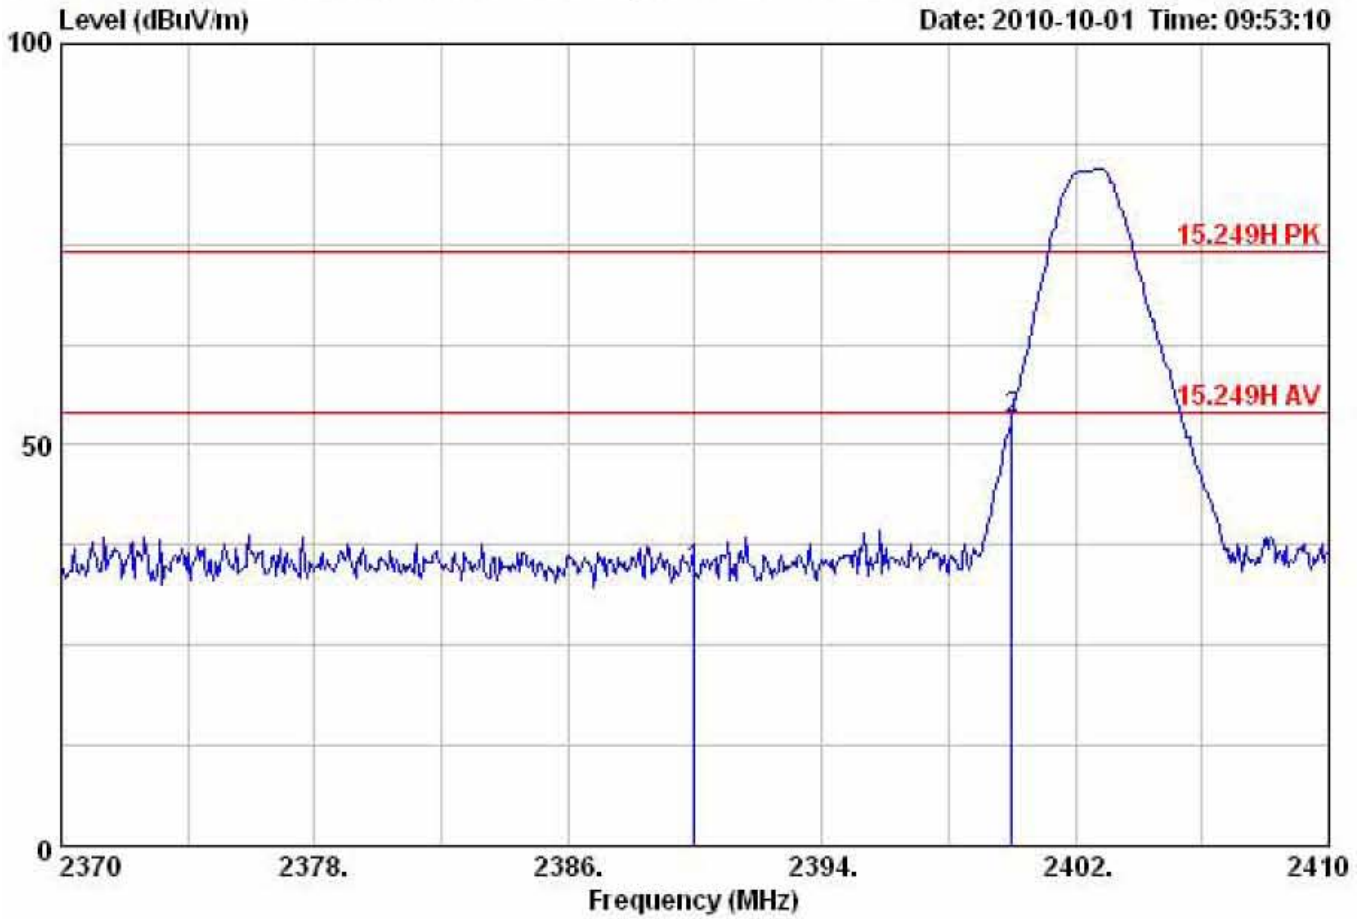


| | Read | | Limit | Over | | |
|------|---------|--------|--------|--------|--------|-------------|
| Freq | Level | Factor | Line | Limit | Remark | |
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2390.00 | 40.77 | -6.54 | 34.23 | 74.00 | -39.77 Peak |
| 2 | 2400.00 | 59.78 | -6.46 | 53.32 | 74.00 | -20.68 Peak |

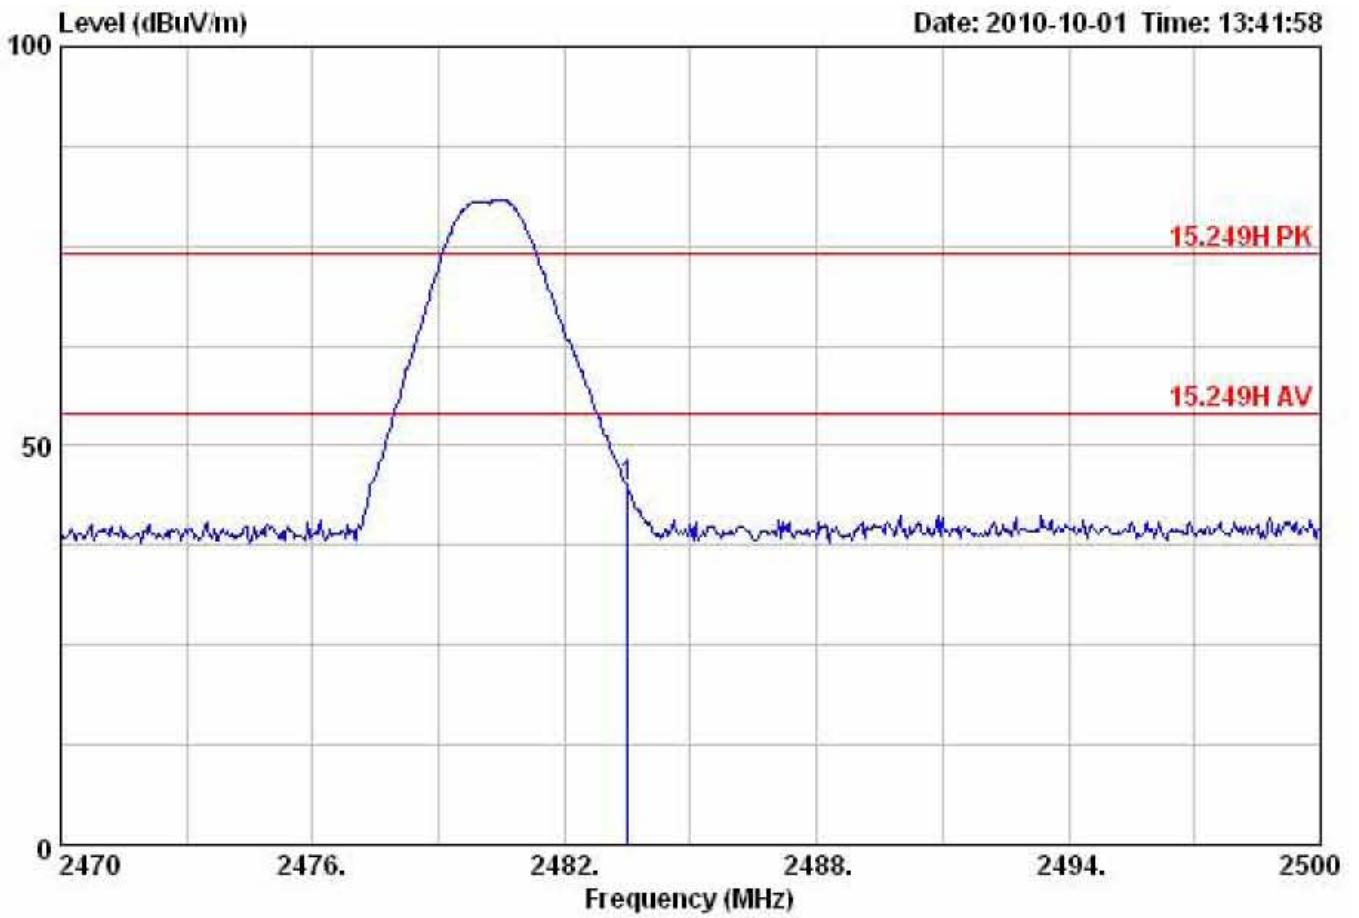

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|--------|--------|------------|------------|--------|
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2483.50 | 50.55 | -5.74 | 44.81 | 74.00 | -29.19 | Peak |

Highest Channel-Vertical

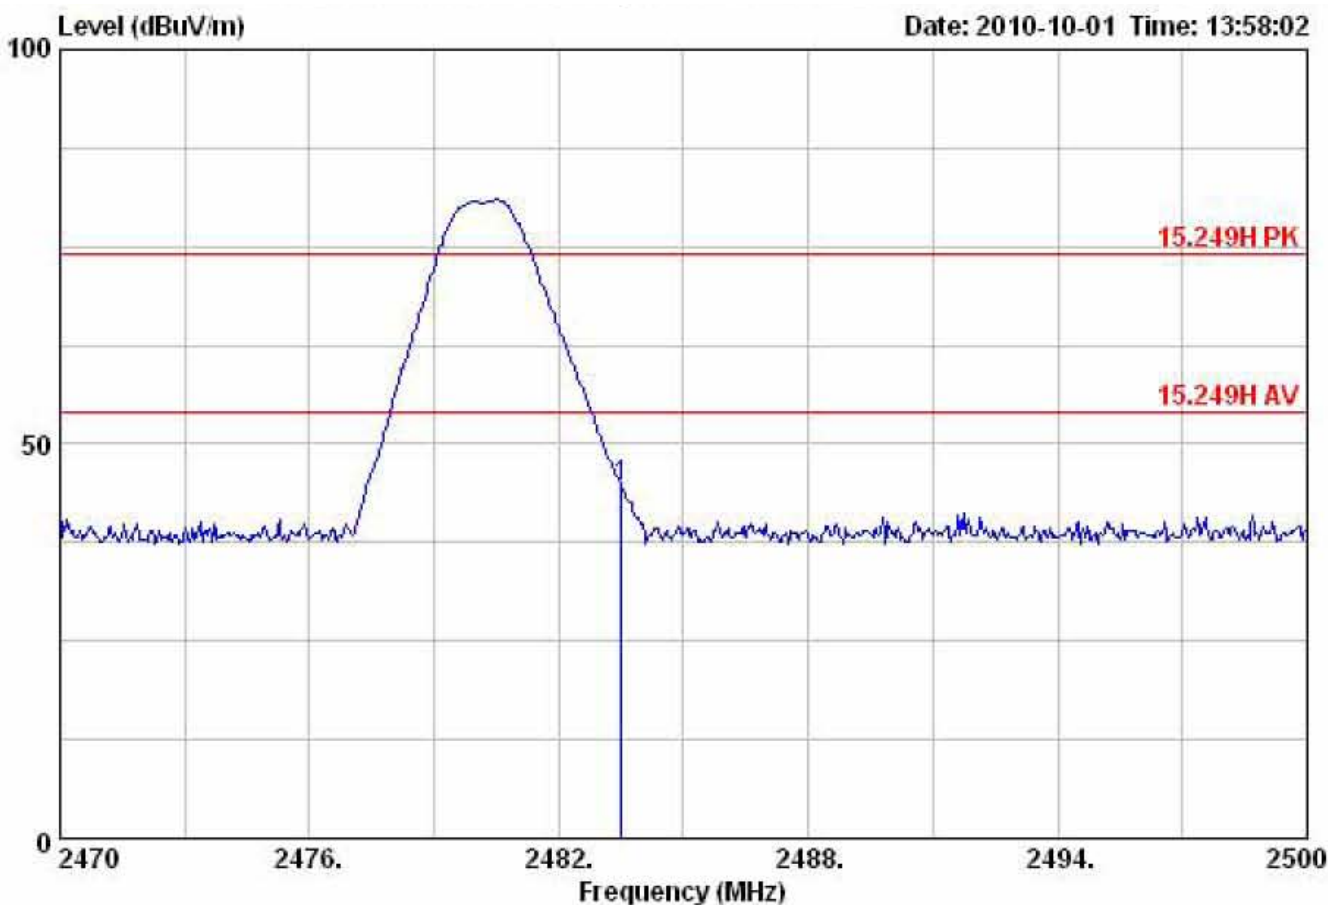


| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|--------|--------|------------|------------|--------|
| | MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 2483.50 | 50.22 | -5.74 | 44.48 | 74.00 | -29.52 | Peak |

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW.
6. Peak detector measurement data will represent the worst case results.

6. SECTION 15.209 REQUIREMENTS (GENERAL RADIATED EMISSION)

6.1 TEST SETUP

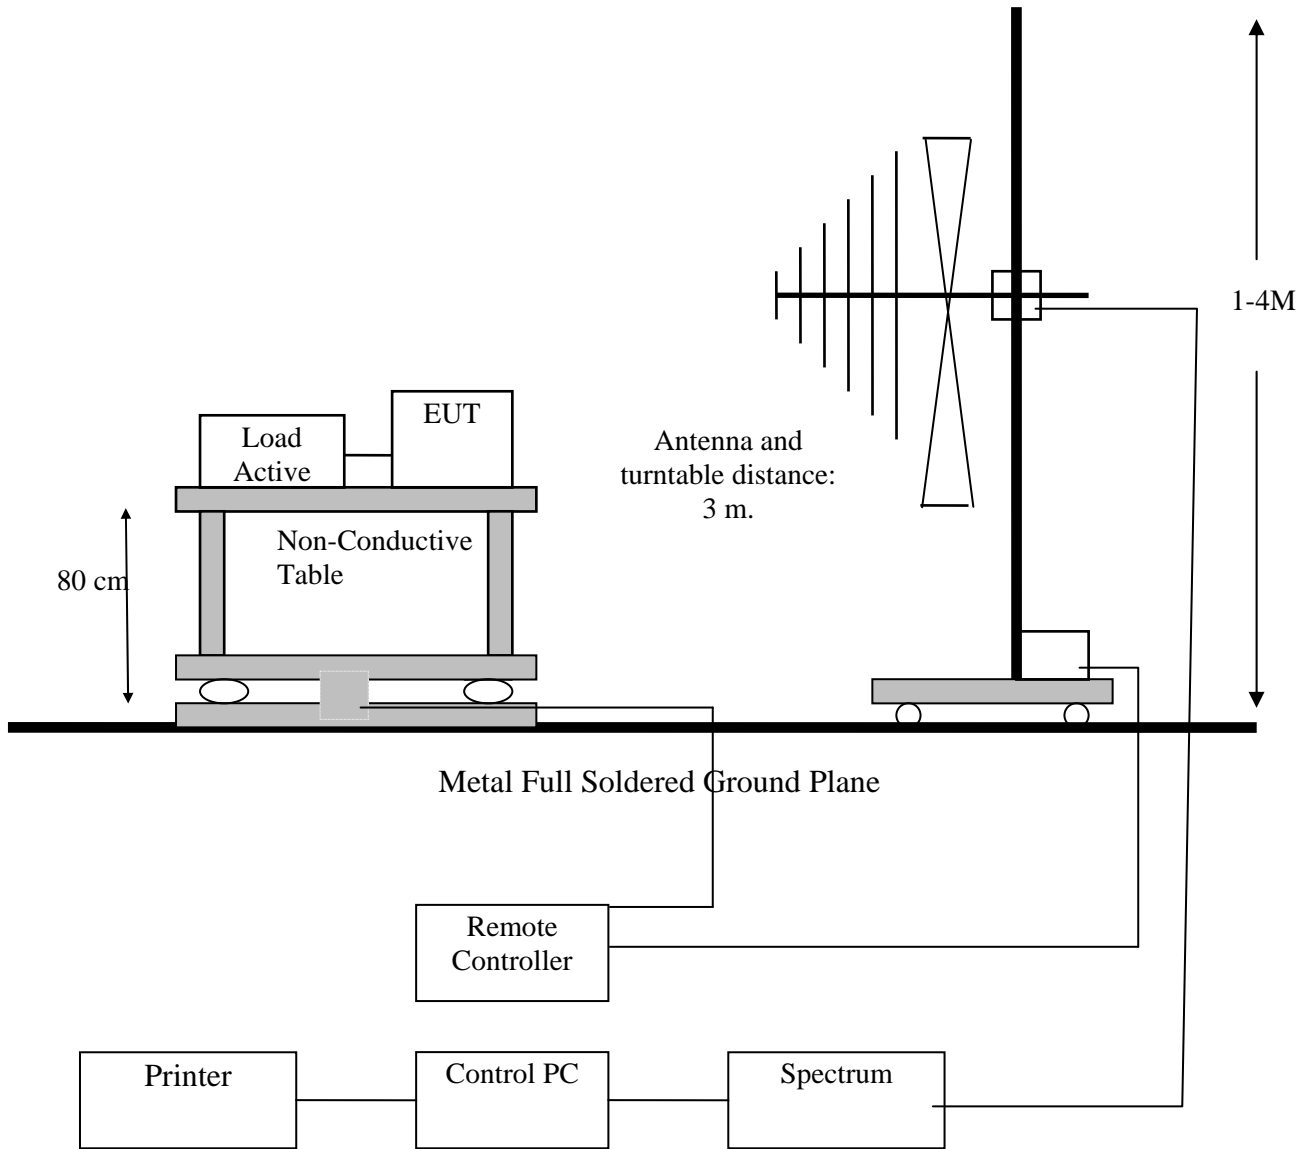



6.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

| Frequency (MHz) | Field Strength (mV/m) | Measurement Distance (m) |
|-----------------|-----------------------|--------------------------|
| 1.705-30 | 30 | 30 |
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500* | 3 |

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

In the above emission table, the tighter limit applies at the band edges.

| Frequency (Hz) | Field Strength ($\mu\text{V/m}$ at 3-meter) | Field Strength (dB $\mu\text{V/m}$ at 3-meter) |
|----------------|-------------------------------------------------|---------------------------------------------------|
| 1.705-30 | 30 (at 30-meter) | 49.5 |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |



6.3 TEST PROCEDURE

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.

6.4 RESULT: PASSED



6.5 TEST DATA:

All frequencies not described in this test report and within the range of the general radiated emission limits are not detectable significantly. The table as below is representing worst emissions found.

Highest Channel (worst emissions found)

HORIZONTAL

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|-------------|-------------------|---------------|---------------|-------------------|-------------------|---------------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 82.38 | 41.96 | -18.28 | 23.68 | 30.00 | -6.32 | Peak |
| 212.36 | 41.75 | -14.39 | 27.36 | 30.00 | -2.64 | Peak |
| 233.70 | 33.91 | -13.51 | 20.40 | 37.00 | -16.60 | Peak |
| 633.34 | 31.77 | -2.42 | 29.35 | 37.00 | -7.65 | Peak |
| 740.04 | 31.31 | -0.54 | 30.77 | 37.00 | -6.23 | Peak |
| 790.48 | 30.39 | 0.58 | 30.97 | 37.00 | -6.03 | Peak |
| 902.03 | 32.65 | 3.32 | 35.97 | 37.00 | -1.03 | Peak |

VERTICAL

| Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|-------------|-------------------|---------------|---------------|-------------------|-------------------|---------------|
| MHz | dBuV | dB/m | dBuV/m | dBuV/m | dB | |
| 49.40 | 41.02 | -17.67 | 23.35 | 30.00 | -6.65 | Peak |
| 59.10 | 39.73 | -18.62 | 21.11 | 30.00 | -8.89 | Peak |
| 161.92 | 35.25 | -13.33 | 21.92 | 30.00 | -8.08 | Peak |
| 377.26 | 32.37 | -8.88 | 23.49 | 37.00 | -13.51 | Peak |
| 670.20 | 33.67 | -1.70 | 31.97 | 37.00 | -5.03 | Peak |
| 788.54 | 29.75 | 0.53 | 30.28 | 37.00 | -6.72 | Peak |

Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, PreAmp, etc.



3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements from 9 kHz to 150 kHz, Peak detector setting: 100 Hz RBW
5. Measurements from 150 kHz to 30MHz, Peak detector setting: 10 kHz RBW
6. Measurements from 30 MHz to 1000 MHz, Peak detector setting: 100 kHz RBW
7. Measurements from 9 kHz to 150 kHz, CISPR Quasi-Peak detector: 200 Hz RBW
8. Measurements from 150 kHz to 30MHz, CISPR Quasi-Peak detector: 9 kHz RBW
9. Measurements from 30 MHz to 1000 MHz, CISPR Quasi-Peak detector: 120 kHz RBW
10. Peak detector measurement data will represent the worst case results.



7. SECTION 15.207 REQUIREMENTS (POWERLINE CONDUCTED EMISSIONS)

The EUT is powered by the battery; therefore this test item is not applicable.



Global Certification Corp.

Appendix 1

PHOTOS OF TEST CONFIGURATION

