

RFI / EMI TEST REPORT

APPLICANT : EVERSPRING INDUSTRY CO., LTD.

E U T Type : Interface Base Unit of DSS Wireless Hands-free Kit

MODEL NO. : FB004

FCC ID : FU5F004U

REGULATION : CFR 47 , Part 15 Subpart C , **Class B**

TEST SITE : PEP Testing Laboratory

TEST ENGINEER : Jason Gong

TEST DATE : 05 29, 2001

ISSUED DATE : 06-13-2001

REPORT NO. : E900310

VERIFICATION

WE HEREBY VERIFY THAT:

The EUT listed below has completed RFI testing by PEP Testing Laboratory and it does comply with the limitation of FCC Part 15, Section 15.247 limitations .

The tested configurations and the facility complies with the radiated and AC line conducted test site criteria in ANSI C63 .4 - 1992 .

Any data in this RFI report is “ reference “ only .

APPLICANT : EVERSPRING INDUSTRY CO., LTD.*
PRODUCT : Interface Base Unit of D.S.S. Wireless Hands-free Kit *
FCC ID : FU5F004U *
MODEL : FB004*

M. Y. Tsui

M. Y. TSUI / President

PEP Testing Laboratory

12-3FL., NO. 27-1, Lane 169, Kang-Ning St.,
Hsi-Chi, Taipei Hsien, Taiwan, R. O. C.
TEL : 886-2-6922097 FAX : 886-2-6956236

TABLE OF CONTENTS

I.	GENERAL INFORMATION	4
1.1	Description of EUT	
1.2	Supporting Devices for EUT testing	
1.3	EUT Test Setup Configuration	
1.4	Channels Verification (15.205)	
II.	15.207 POWER LINE CONDUCTED EMISSION TEST	8
2.1	Testing Description	
2.2	Software Using	
2.3	Test Result	
2.4	Conducted Emission Test Photo.	
III.	15.247(a)(2) -6dB BANDWIDTH FOR DIRECT SEQUENCE SYSTEMS	12
3.1	Test result of bandwidth	
3.2	Spectrum Plot Data	
IV.	15.247(b)(1) : The MAXIMUM PEAK OUTPUT POWER ($\leq 1\text{watt}$)	16
4.1	Testing Description	
4.2	Software Using	
4.3	Test Result of Fundamental Emissions	
4.4	Radiate Emission Testing Photo	
4.5	Spurious Emissions Test (15.247(c))	
4.5.1	Test result of second harmonic	
4.5.2	Test result of spurious radiated emissions	
4.5.3	Radiate Emission Testing Photo.	
V.	15.247(c) : CARRIER FREQUENCY	38
VI.	15.247(d) : POWER SPECTRAL DENSITY	41
VII.	15.247(e) : PROCESSING GAIN	48
7.1	Test Condition & Setup	
A	Bit Error Rate (Pe)	
B	Jamming Margin Method	
7.2	Test Instruments Configuration	
7.3	Test Procedure	
VIII.	List of Test Instruments	54

FCC ID : FU5F004U

I. General Information

The EUT is a base unit model FB004 for DIGITALKI Wireless Hands-free kit system F004U, it is a very low power communication device and defined as a direct sequence spread spectrum intentional radiators system employing 20 channels and operating within the 902 – 928MHz band, it does comply with the provisions of FCC Section 15.247, its complete system includes one interface base module model FB004, one earphone set model FE004 , , one AC Adapter model DCU120030, one Dual-Plug charging cable, and one charger model FA004 to enhance your mobile communication. For more detail specification about the EUT, please refer to the user's manual.

1.1 Description of EUT

EUT Type	: D.S.S. Wireless Hands-free Kit (Interface Base Unit)
FCC ID	: FU5F004U
EUT Model No.	: FB004
Frequency Range	: 904.2 – 925.8 MHz
Support Channel	: 20 channels
Modulation	: TDMA / Spread Spectrum
Antenna Type	: Comply with FCC Part 15, Section 15.203; Build-in PCB trace type, can't be removed by the user
Power Supply	: a. Plug-in type AC Linear Adapter model DCU120030 input rated 120Vac 9W, output rated 12Vdc 300mA for Charger model FA004 b. DC Charger Box Model FA004, output rated 4.8Vdc c. Li-Polymer recharging battery rated 3.6-4.5Vdc for Interface Base Unit FB004
Power Cord	: Non-shielded for Charger input

Supporting Devices for EUT testing

FCC ID : FU5F004U

No	Subject	MFR.	Model	FCC ID	Serial No.	I/P Rating	Power Cord	Data Cable
1	PC	Asus		DoC		115V 2A	Non-shielded	N/A
2	Monitor	SAMSUNG	550S	E5XKB	DP15H8WKB 10383B	AC100- 240V 1.2A	Non-Shielded	Shielded, 1.5m Non- detachable
3	KB	BTC	5121W	5121WTH 0110	H02608899	DC+5V 170mA	N/A	Shielded, 1.6m Non- detachable
4	Printer	HP	C2642E	DoC	TH926185HY	120V 0.22A	Non-Shielded	Shielded, 1.2m Non- detachable
5	Modem	ACEEX	1414	IFAXDM 1414	9038526	120V 12W	Non-Shielded	Shielded, 1.2m Non- detachable
6	Mouse	Logitech	M-CAA43	DoC	LEE02553536	DC+5V 2.5mA	N/A	Shielded, 1.8m Non- detachable

1.2 EUT Test Setup Configuration

- A) Test Procedure: As required by ANSI C63.4 (1992)
- B) Channel Verification: In order to force selection of the typical channels for testing, one special module was connected between the EUT and control PC through RS232 interface and using the driver "FCCV3V.exe", supplied from Rockwell, under Win98 to force the channel selection by control PC, then set the EUT in high power and continuously transmitting mode for detecting the operating frequency, the test result for 20 channels is operating within 904.2 – 925.8 MHz band.
- C) Measurement Procedure: As required by FCC Part15, Section 15.31(m) measurements on intentional radiators or receiver should be performed at three frequencies for operating frequency over 10MHz, one near top, one near middle and one near bottom.
- D) Test Channel: Due to the support channels are 20 channels, the selected three frequencies for testing would be 904.2MHz near top for CH 1, 915MHz near middle for CH 11 and 925.8MHz near bottom for CH 20.
- E) Test Mode: To comply with the FCC Part 15, Section 15.247, following tests are performed under the worst emission condition for all of the test conditions as listed below:

FCC ID : FU5F004U

Test Items	FCC-15 Rules	FCC Limits	Test Condition	Test Software	Report Section
Channel Frequency	15.205		Transmitting (Tx-on)	FCCV3V.exe	1.4
Conducted EMI	15.207	< 48dBuV	Charging Mode	N/A	2.1
-6dB Bandwidth	15.247(a)(2)	> 500KHz	Transmitting (Tx-on)	FCCV3V.exe	3.1
O/P Power E.I.R.P	15.247(b)(1)	E.I.R.P. < 1W RBW=3MHz	Transmitting (Tx-on)	FCCV3V.exe	4.1
Spurious Radiated EMI	15.247(c) 15.209(a)	> 20dB RBW=.1MHz	1) Transmitting 2) Tx-on / Rx-on	1) N/A 2) FCCV3V	4.5
Carrier Frequency	15.247(d)	> 20dB RBW=0.1MHz	Transmitting (Tx-on)	N/A	5.1
Power Spectral Density	15.247(d)	E.R.P. < 8dBm RBW=3KHz	Transmitting (Tx-on)	N/A	6.1
Processing Gain	15.247(e)	> 10dB			7.1


(F) At the frequencies where the peak values of the emission exceeded the quasi-peak limit, the emissions were also measured with the quasi-peak detectors. The average detector also measured the emission either (a) quasi-peak values were under quasi-peak limit but exceeded average limit, or (b) peak values were under quasi-peak limit but exceeded average limit.

(G) In this RFI test report, we provided the worst case conducted emission test data and radiated emission test data. The entire testing data was recorded and provided in this report.

1.4 Channels Verification

FCC ID : FU5F004U

Charging Mode

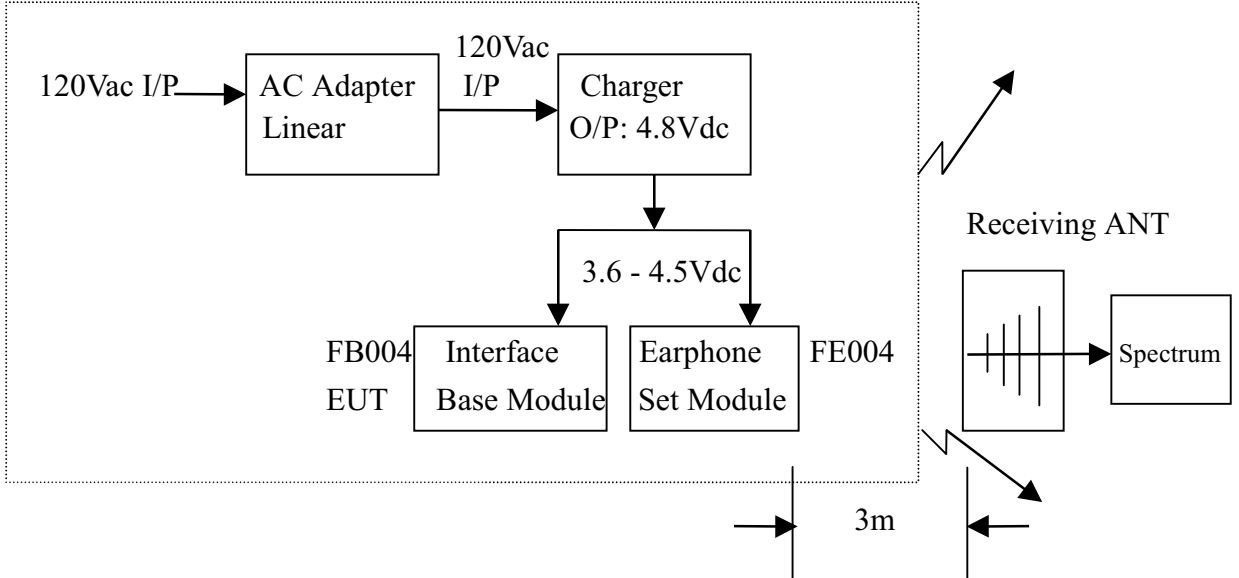

Frequency Range : 904.2 MHz to 925.8 MHz

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	904.2	11	915.6
2	904.8	12	916.8
3	906.0	13	918.0
4	907.2	14	919.2
5	908.4	15	920.4
6	909.6	16	921.6
7	910.8	17	922.8
8	912.0	18	924.0
9	913.2	19	925.2
10	914.4	20	925.8

Note :

1. All channels located in the frequency range as below :

902 MHz --- 928 MHz Yes No


Typical Channel for testing :

Channel	Channel Number	Frequency (MHz)
Top	1	904.2
Middle	10	914.4
Bottom	20	925.8

II . Power Line Conducted Emission Test

FCC ID : FU5F004U

2.1 Testing Description

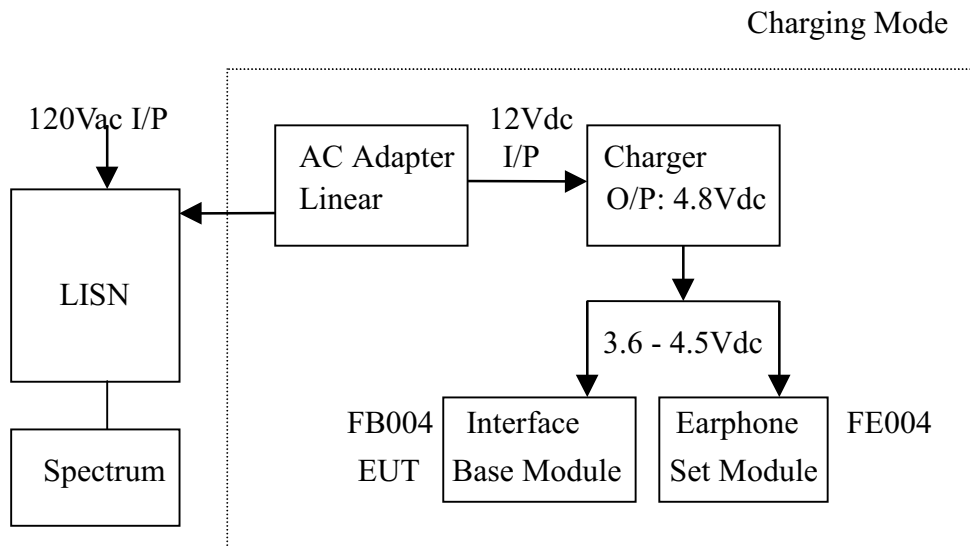

2.2 Software Using


The EUT was assembled on a wooden table which is 80cm in height, and placed 40cm from the back-wall.

It was scanned from 450KHz to 30MHz during charging mode as shown above. The physical arrangement of the EUT System was varied to get the worst case.

Test Result


FCC ID : FU5F004U
 EUT Model No. FB004

LINE

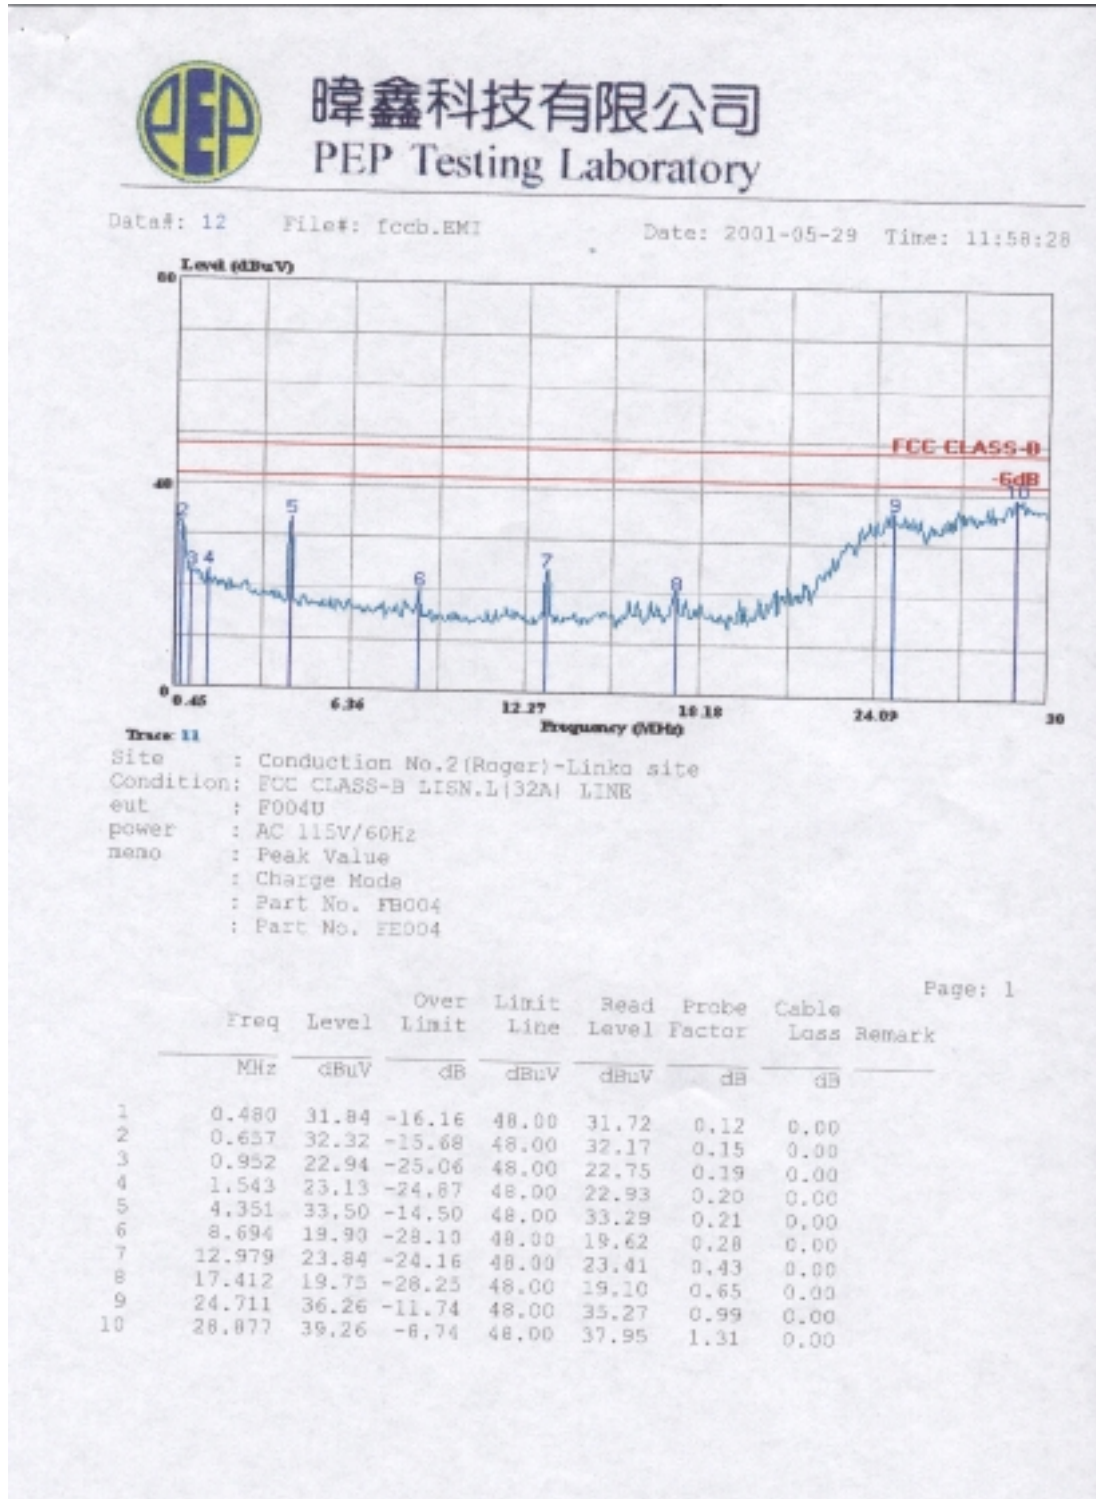

EUT Model No.: FB004

NEUTRAL

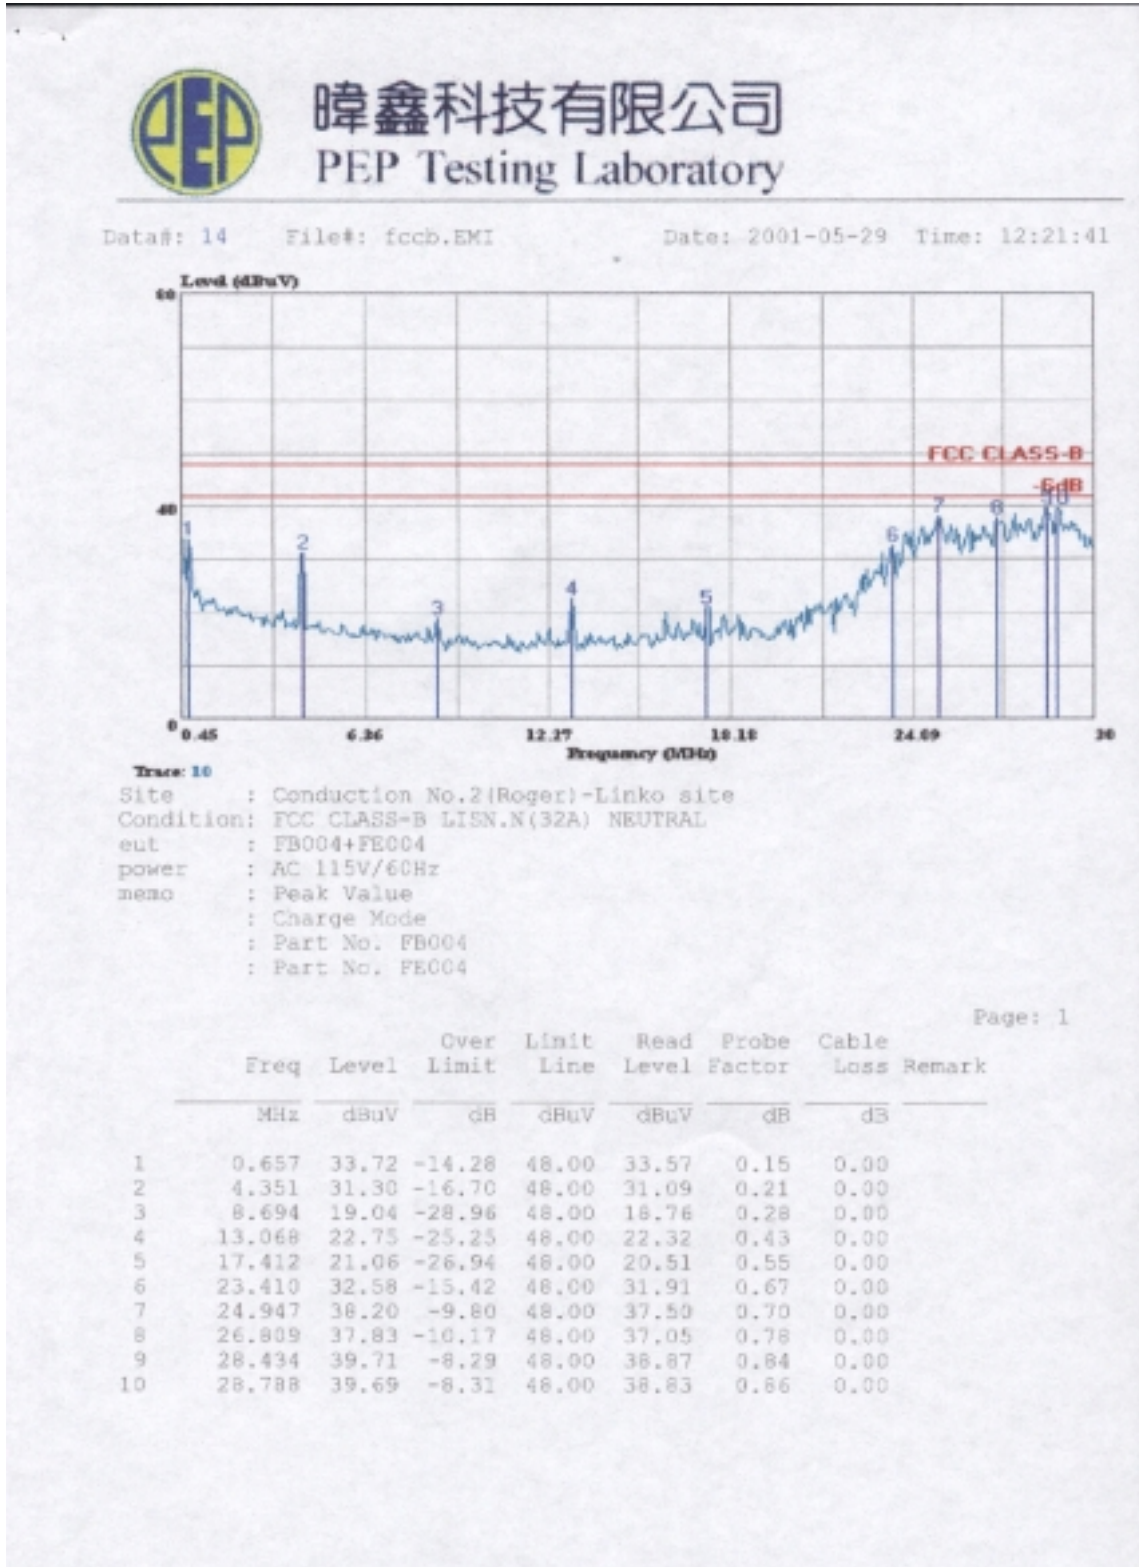

2.4 Conducted Emission Test Photo.

FCC ID : FU5F004U

EUT Model No. FB004

< FRONT VIEW >



III . § 15.247(a)(2) : -6dB bandwidth for Direct Sequence Systems

FCC ID : FU5F004U

3.1 Test result of bandwidth

EUT Model No. FB004

Top Channel : 1

Frequency : 904.198 MHz

-6dB bandwidth : 936 KHz > 500 KHz

Middle Channel : 10

Frequency : 914.402 MHz

-6dB bandwidth : 931 KHz > 500 KHz

Bottom Channel : 20


Frequency : 925.800 MHz

-6dB bandwidth : 938 KHz > 500 KHz


3.2 Spectrum Plot Data

FCC ID : FU5F004U

EUT Model No. FB004

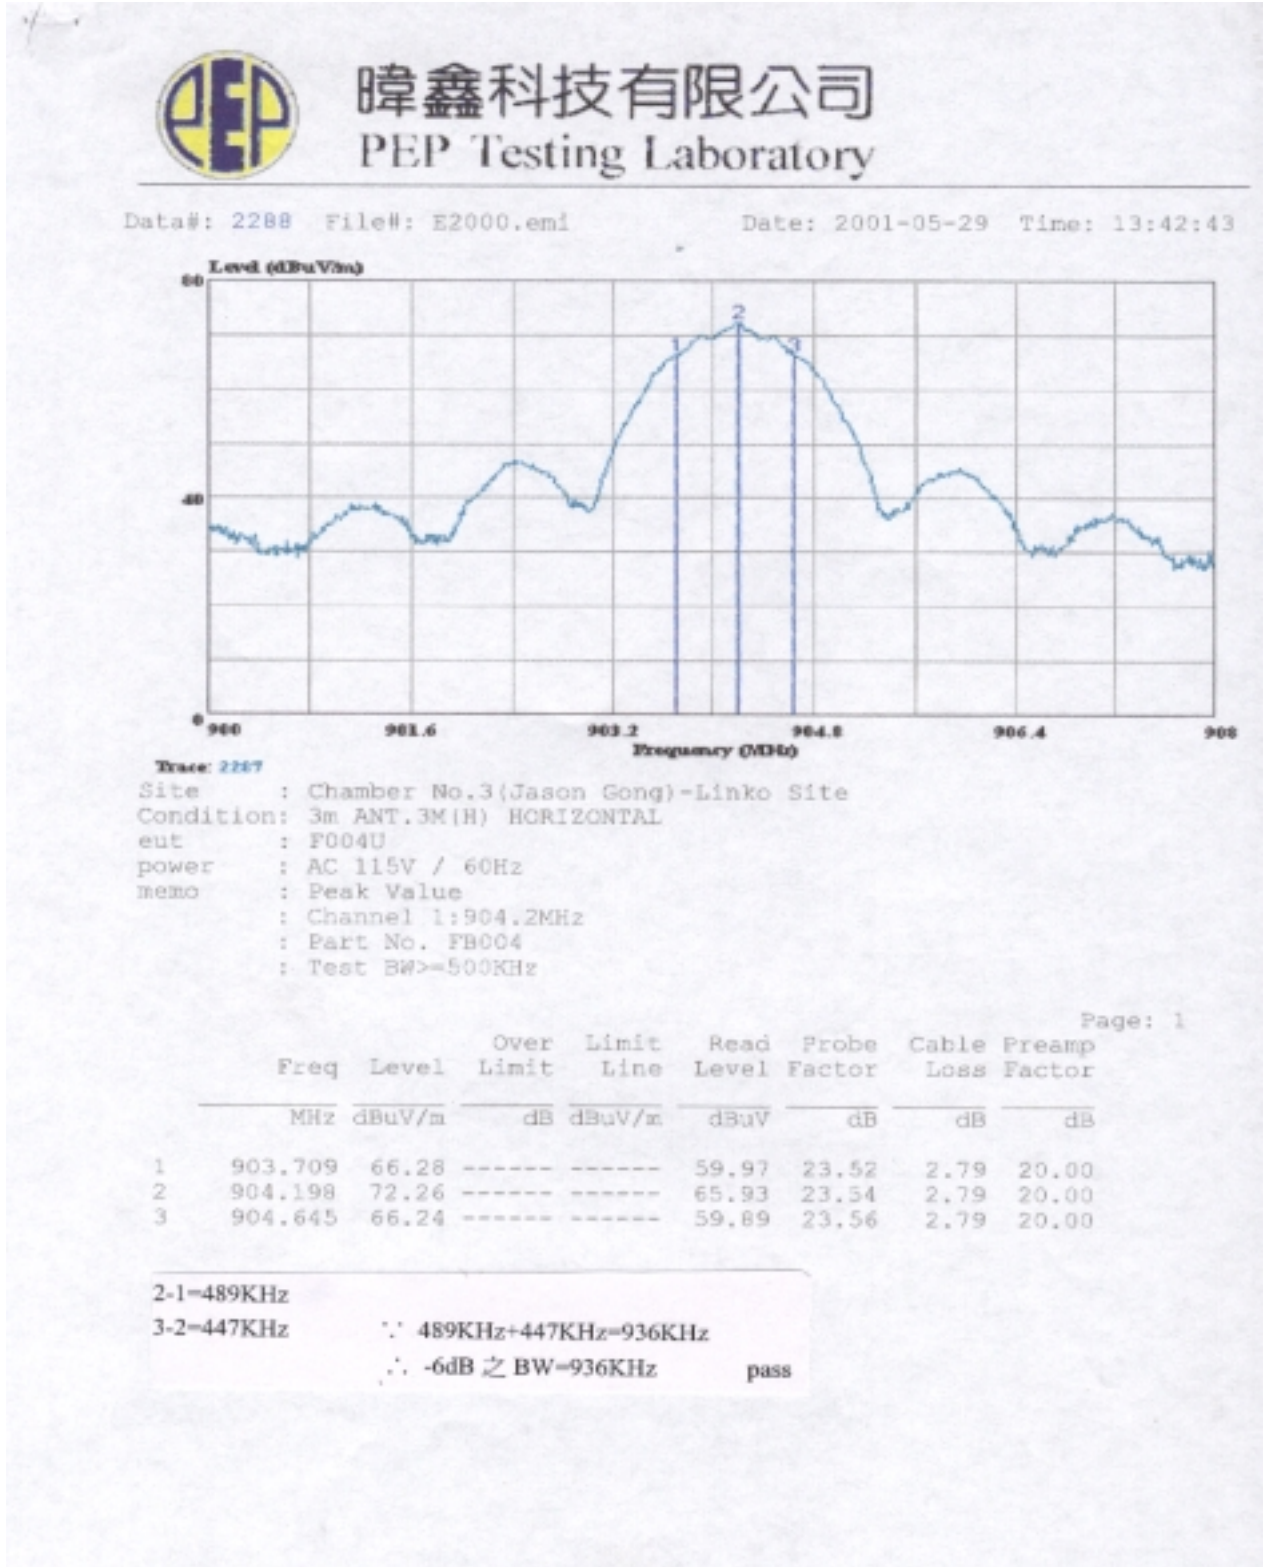

Data#: 2290 File#: E2000.emi Date: 2001-05-29 Time: 13:53:16

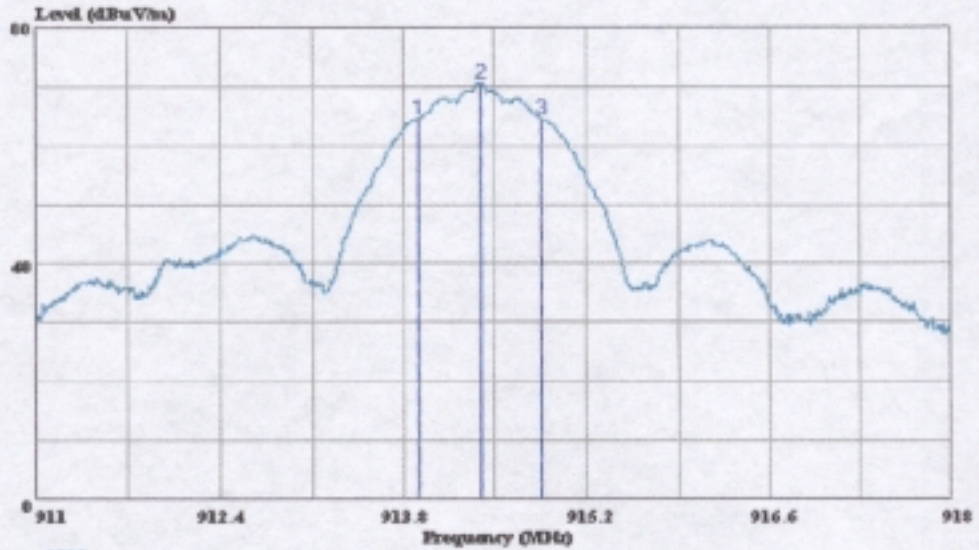

Trace: 2289


Site : Chamber No.3(Jason Gong)-Linko Site
 Condition: 3m ANT.3M(H) HORIZONTAL
 eut : F004U
 power : AC 115V / 60Hz
 memo : Peak Value
 : Channel 10:914.4MHz
 : Part No. FB004
 : Test BW>=500KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB
1	913.926	64.58	-----	-----	57.88	23.92	2.78	20.00
2	914.402	70.57	-----	-----	63.86	23.93	2.78	20.00
3	914.857	64.61	-----	-----	57.88	23.95	2.78	20.00

2-1=476KHz ∴ 476KHz+455KHz=931KHz
 3-2=455KHz ∴ -6dB 之 BW=931KHz pass

Data#: 2292 File#: E2000.emi Date: 2001-05-29 Time: 14:04:25

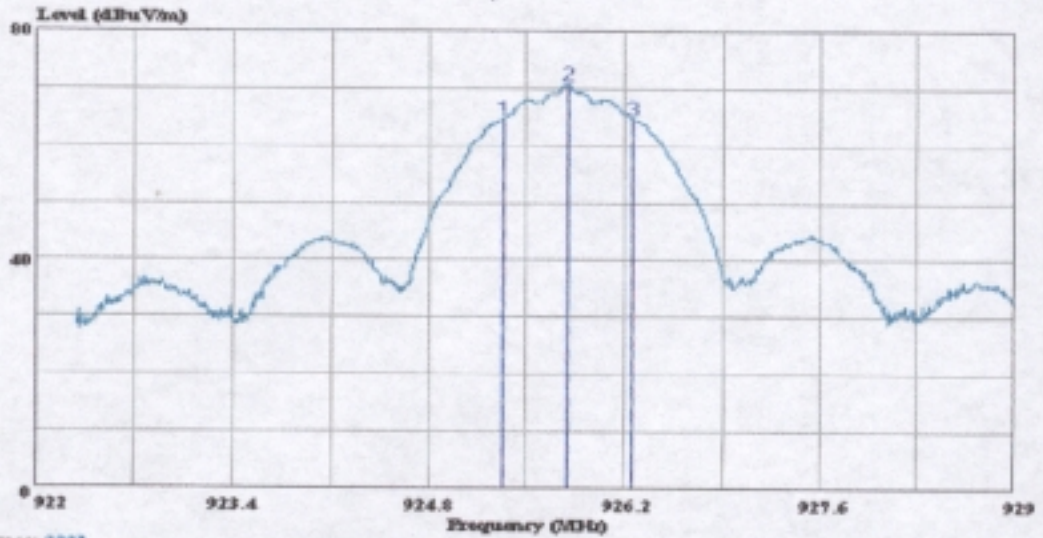

Trace: 2291

Site : Chamber No.3(Jason Gong)-Linko Site
 Condition: 3m ANT.3M(H) HORIZONTAL
 out : F004U
 power : AC 115V / 60Hz
 memo : Peak Value
 : Channel 20:925.8MHz
 : Prnt No.FB004
 : Test BW>=500KHz

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB
1	925.331	64.64	-----	-----	57.51	24.36	2.77	20.00
2	925.800	70.65	-----	-----	63.49	24.39	2.77	20.00
3	926.269	64.58	-----	-----	57.40	24.41	2.77	20.00


2-1 = 469KHz ∴ 469KHz+469KHz=938KHz
 3-2 = 469KHz ∴ -6dB 之 BW=938KHz pass

IV. § 15.247(b) : The maximum peak output power ($\leq 1\text{watt}$)

4.1 Testing Description

FCC ID : FU5F004U

Charging Mode

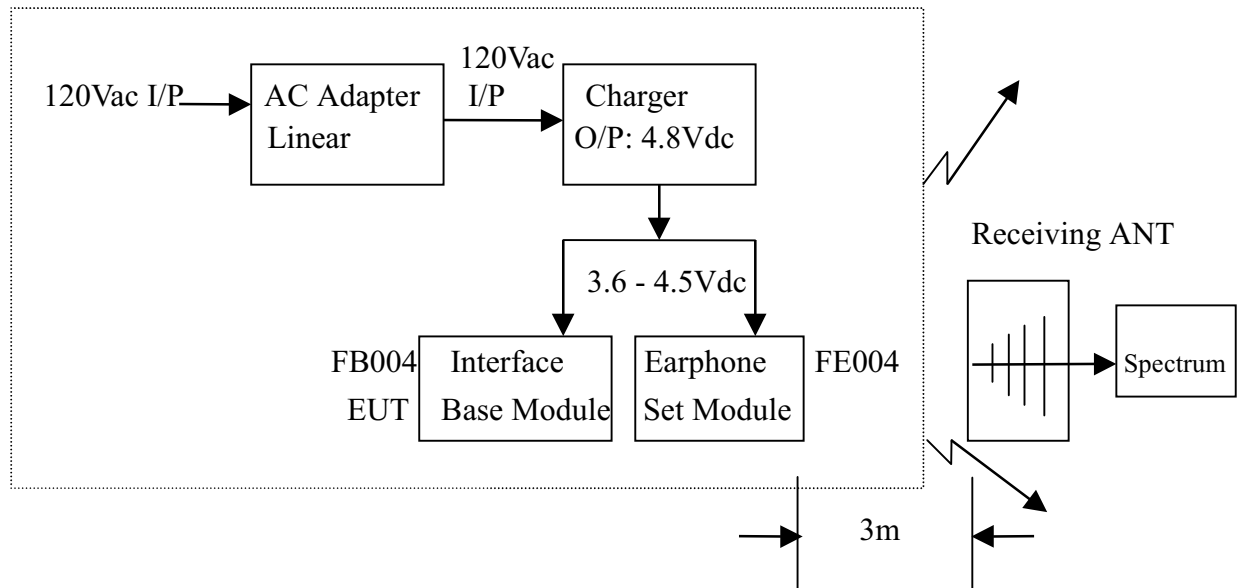

Three channels were tested : CH01, CH10 AND CH20 Measurements were taken by using both horizontal and vertical antenna polarization, and the antenna was raised and lowered from one to four meters to find the worst emission levels.

4.2 Software Using

The driver of “ FCCV3V.exe” is used to detect the support channel as mentioned on section 1.3 (b) listed above

4.3 Test Result of Fundamental Emissions

FCC ID : FU5F004U

EUT Model No. FB004

channel	Frequency (MHz)	A.P. (H/V)	S.P. Read (dBuV/m)	C.F. (dB)	Level (dBuV/m)	Turn Table Azimuth (degree)	Antenna Height (m)	E.I.R.P. (mW)
Top	904.2	H	75.33	6.33	81.66	0°	1	0.05
		V	74.90	6.32	81.22	42°	1.7	0.05
Middle	914.4	H	73.66	6.71	80.37	264°	1	0.03
		V	72.11	6.71	78.82	0°	1.7	0.0192
Bottom	925.8	H	72.81	7.16	79.97	260°	1	0.03
		V	69.61	7.16	76.77	40°	1	0.0012

Note :

1. "A.P." means antenna polarity .
2. "S.P." Read means amplitude read by spectrum analyzer .
3. "C.F." means corrected factor = antenna factor + cable loss
Pre-amplifier Gain .
4. Level means emission amplitude = S.P. + C.F. + duty cycle factor
5. Conducted output power : $P = (E d)^2 / 30G$
where $E (V) = \text{Level (V)}$
 $d (m) = \text{measurement distance} = 3m$
 $G = 1$ (the gain of the transmitting antenna over isotropic antenna)
 $P = \text{E.I.R.P.}$
6. Example :

If Level = 120 dBuV/m

$$10^{(120 / 20)} \times 10^{-6} = 1 \text{ V}$$

$$\text{E.I.R.P.} = (1 \times 3)^2 / 30 = 300 \text{ mW}$$

FCC ID : FU5F004U

EUT Model No. FB004

