

# FCC Test Report

Product Name	U-net Repeater
Model No.	SA823-2
FCC ID.	FU5SA823

Applicant	EVERSPRING INDUSTRY CO., LTD
Address	3F, No.50, Sec.1, Zhonghua Rd., Tucheng Dist., New Taipei City 23666, Taiwan

Date of Receipt	Sep. 18, 2017
Issued Date	Sep. 27, 2017
Report No.	1790241R-RFUSP01V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

# Test Report

Issued Date: Sep. 27, 2017

Report No.: 1790241R-RFUSP01V00




Product Name	U-net Repeater
Applicant	EVERSPRING INDUSTRY CO., LTD
Address	3F, No.50, Sec.1, Zhonghua Rd., Tucheng Dist., New Taipei City 23666, Taiwan
Manufacturer	Dong-Guan Li Yuan Electronics Co.,Ltd
Model No.	SA823-2
FCC ID.	FU5SA823
EUT Rated Voltage	AC 100-240V 50/60Hz or DC 6V by Battery
EUT Test Voltage	AC 120V / 60Hz
Trade Name	EVERSPRING
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2016 ANSI C63.4: 2014, ANSI C63.10: 2013 KDB 558074 D01 DTS Meas Guidance v04
Test Result	Complied

Documented By :



( Senior Adm. Specialist / Genie Chang )

Tested By :



( Senior Engineer / Ivan Chuang )

Approved By :



( Director / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. EUT Description .....	4
1.2. Operational Description .....	6
1.3. Tested System Details .....	7
1.4. Configuration of Tested System .....	7
1.5. EUT Exercise Software .....	7
1.6. Test Facility .....	8
1.7. List of Test Equipment .....	9
<b>2. CONDUCTED EMISSION .....</b>	<b>10</b>
2.1. Test Setup .....	10
2.2. Limits .....	10
2.3. Test Procedure .....	11
2.4. Uncertainty .....	11
2.5. Test Result of Conducted Emission .....	12
<b>3. PEAK POWER OUTPUT .....</b>	<b>14</b>
3.1. Test Setup .....	14
3.2. Limit .....	14
3.3. Test Procedure .....	14
3.4. Uncertainty .....	14
3.5. Test Result of Peak Power Output .....	15
<b>4. RADIATED EMISSION .....</b>	<b>16</b>
4.1. Test Setup .....	16
4.2. Limits .....	17
4.3. Test Procedure .....	18
4.4. Uncertainty .....	19
4.5. Test Result of Radiated Emission .....	20
<b>5. RF ANTENNA CONDUCTED TEST .....</b>	<b>23</b>
5.1. Test Setup .....	23
5.2. Limits .....	23
5.3. Test Procedure .....	23
5.4. Uncertainty .....	23
5.5. Test Result of RF Antenna Conducted Test .....	24
<b>6. BAND EDGE .....</b>	<b>25</b>
6.1. Test Setup .....	25
6.2. Limit .....	26
6.3. Test Procedure .....	26
6.4. Uncertainty .....	26
6.5. Test Result of Band Edge .....	27
<b>7. 6DB BANDWIDTH .....</b>	<b>28</b>
7.1. Test Setup .....	28
7.2. Limits .....	28
7.3. Test Procedure .....	28
7.4. Uncertainty .....	28
7.5. Test Result of 6dB Bandwidth .....	29
<b>8. POWER DENSITY .....</b>	<b>30</b>
8.1. Test Setup .....	30
8.2. Limits .....	30
8.3. Test Procedure .....	30
8.4. Uncertainty .....	30
8.5. Test Result of Power Density .....	31
<b>9. DUTY CYCLE .....</b>	<b>32</b>
9.1. Test Setup .....	32
9.2. Test Procedure .....	32
9.3. Uncertainty .....	32
9.4. Test Result of Duty Cycle .....	33
<b>10. EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>34</b>
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	U-net Repeater
Trade Name	EVERSPRING
Model No.	SA823-2
FCC ID.	FU5SA823
Frequency Range	923MHz
Channel Number	1CH
Type of Modulation	FSK
Antenna Type	Inverted F Antenna
Antenna Gain	Refer to the table “Antenna List”
Power Adapter	MFR: TenPao, M/N:S018BAU0900200 Input: AC 100-240V ~50/60Hz 500mA Output: 9.0V $\overline{=}$ 2000mA Cable Out: Non-Shielded, 1.8m, with one ferrite core bonded.

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Everspring	N/A (Antenna 1)	Inverted F Antenna	0 dBi
2	Everspring	N/A (Antenna 2)	Inverted F Antenna	0 dBi

Note: The antenna of EUT is conforming to FCC 15.203.

## Center Frequency of Each Channel:

Channel	Frequency
01	923 MHz

## Note:

1. The EUT is a U-net Repeater with a built-in 923MHz transceiver.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of 923MHz transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
4. The EUT is using dual-antenna (Antenna 1 & Antenna 2). Both of Antenna 1 & Antenna 2 are performed during test, only the worst case (Antenna 1) is shown in this report.

Test Mode	Mode 1: Transmit
-----------	------------------


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
N/A				

Signal Cable Type	Signal cable Description
N/A	

### 1.4. Configuration of Tested System

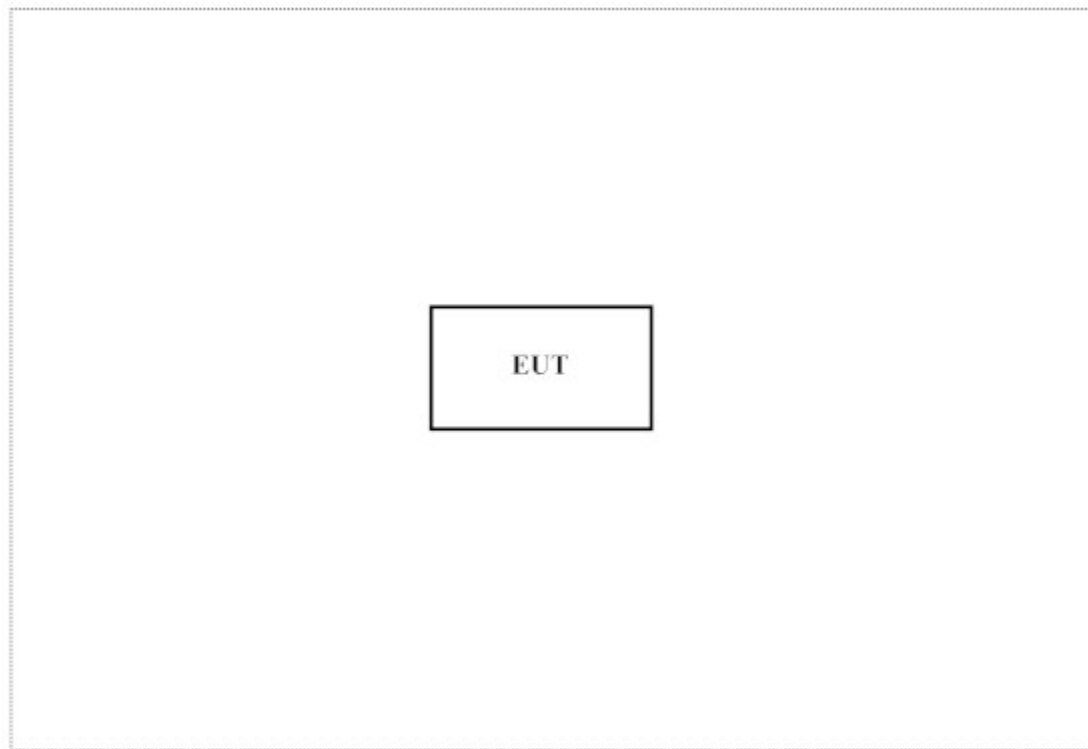

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Press the button of the EUT.
- (3) Start the continuous transmit.
- (4) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from DEKRA Testing and Certification Co., Ltd. Web Site:

<http://www.dekra.com.tw/english/about/certificates.aspx?bval=5>

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: [http://www.dekra.com.tw/index\\_en](http://www.dekra.com.tw/index_en)

Site Description: Accredited by TAF  
Accredited Number: 3023

Site Name: DEKRA Testing and Certification Co., Ltd.  
Site Address: No.159, Sec. 2, Wenhua 1st Rd., Linkou Dist.,  
New Taipei City 24457, Taiwan.  
TEL: 886-2-2602-7968 / FAX : 866-2-2602-3286  
E-Mail : [info.tw@dekra.com](mailto:info.tw@dekra.com)

FCC Accreditation Number: TW3023

## 1.7. List of Test Equipment

### For Conduction measurements /ASR1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	EMI Test Receiver	R&S	ESR7	101601	2017.01.06	2018.01.05
X	Two-Line V-Network	R&S	ENV216	101306	2017.02.16	2018.02.15
X	Two-Line V-Network	R&S	ENV216	101307	2017.03.17	2018.03.16
X	Coaxial Cable	Quietek	RG400_BNC	RF001	2017.05.24	2018.05.23

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113

### For Conducted measurements /ASR4

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Spectrum Analyzer	R&S	FSV30	103464	2017.01.09	2018.01.08
X	Power Meter	Anritsu	ML2496A	1548003	2016.12.15	2017.12.14
X	Power Sensor	Anritsu	MA2411B	1531024	2016.12.15	2017.12.14
X	Power Sensor	Anritsu	MA2411B	1531025	2016.12.15	2017.12.14
	Bluetooth Tester	R&S	CBT	101238	2017.01.03	2018.01.02

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek Conduction Test System V8.0.110

### For Radiated measurements /ACB1

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Data	Due. Data
X	Loop Antenna	TESEQ	HLA6121	37133	2016.03.18	2018.03.17
X	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-674	2017.02.13	2018.02.12
X	Horn Antenna	ETS-Lindgren	3117	00203800	2016.10.13	2017.10.12
X	Horn Antenna	Com-Power	AH-840	101087	2017.05.24	2018.05.23
X	Pre-Amplifier	EMCI	EMC001330	980316	2017.05.16	2018.05.15
X	Pre-Amplifier	EMCI	EMC051835SE	980311	2017.05.17	2018.05.16
	Pre-Amplifier	EMCI	EMC05820SE	980310	2017.05.17	2018.05.16
X	Pre-Amplifier	EMCI	EMC184045SE	980314	2017.05.17	2018.05.16
	Filter	MICRO TRONICS	BRM50702	G249	2017.08.11	2018.08.10
	Filter	MICRO TRONICS	BRM50716	G187	2017.08.16	2018.08.15
X	EMI Test Receiver	R&S	ESR7	101602	2016.12.15	2017.12.14
X	Spectrum Analyzer	R&S	FSV40	101148	2017.01.24	2018.01.23
X	Coaxial Cable	SUHNER	SUCOFLEX 106	RF002	2017.05.25	2018.05.24
	Mircoflex Cable	HUBER SUHNER	SUCOFLEX 102	MY3381/2	2017.08.11	2018.08.10


Note:

1. Loop Antenna is calibrated every two year, the other equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version : QuieTek EMI 2.0 V2.1.113



## 2. Conducted Emission

### 2.1. Test Setup

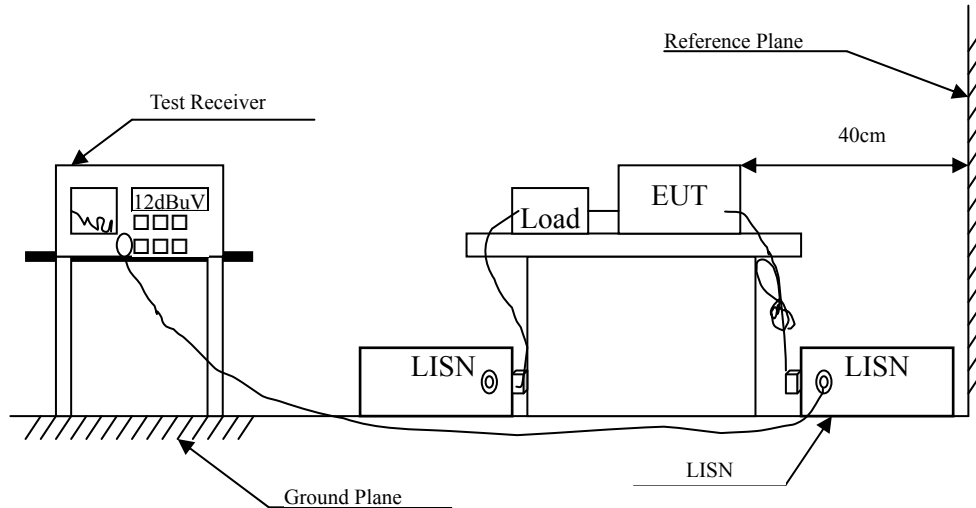

### 2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

### **2.3. Test Procedure**

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.4, 2014; tested to DTS test procedure of FCC KDB-558074 for compliance to FCC 47CFR Subpart C requirements.

### **2.4. Uncertainty**

±2.35dB

## 2.5. Test Result of Conducted Emission

Product : U-net Repeater  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Date : 2017/09/21  
 Test Mode : Mode 1: Transmit

Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V	Margin dB	Limit dB $\mu$ V
<b>LINE 1</b>					
<b>Quasi-Peak</b>					
0.166	9.647	41.467	51.114	-14.429	65.543
0.330	9.688	32.782	42.470	-18.387	60.857
0.660	9.701	11.974	21.675	-34.325	56.000
2.300	9.762	5.683	15.445	-40.555	56.000
4.900	9.829	14.052	23.881	-32.119	56.000
24.330	10.100	11.374	21.474	-38.526	60.000
<b>Average</b>					
0.166	9.647	16.979	26.626	-28.917	55.543
0.330	9.688	20.438	30.126	-20.731	50.857
0.660	9.701	5.832	15.533	-30.467	46.000
2.300	9.762	-0.555	9.207	-36.793	46.000
4.900	9.829	6.903	16.732	-29.268	46.000
24.330	10.100	7.131	17.231	-32.769	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : U-net Repeater  
 Test Item : Conducted Emission Test  
 Power Line : Line 2  
 Test Date : 2017/09/21  
 Test Mode : Mode 1: Transmit


Frequency MHz	Correct Factor dB	Reading Level dB $\mu$ V	Measurement Level dB $\mu$ V	Margin dB	Limit dB $\mu$ V
<b>LINE 2</b>					
<b>Quasi-Peak</b>					
0.159	9.623	42.276	51.899	-13.844	65.743
0.680	9.707	16.655	26.362	-29.638	56.000
2.249	9.763	11.318	21.080	-34.920	56.000
2.723	9.770	11.387	21.157	-34.843	56.000
4.878	9.829	10.771	20.600	-35.400	56.000
24.450	10.140	2.118	12.258	-47.742	60.000
<b>Average</b>					
0.159	9.623	18.072	27.695	-28.048	55.743
0.680	9.707	12.328	22.034	-23.966	46.000
2.249	9.763	6.317	16.080	-29.920	46.000
2.723	9.770	4.360	14.129	-31.871	46.000
4.878	9.829	5.811	15.640	-30.360	46.000
24.450	10.140	-2.051	8.089	-41.911	50.000

## Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "█" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

### 3. Peak Power Output

#### 3.1. Test Setup

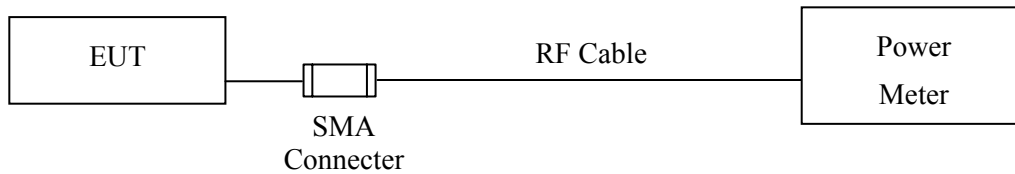

#### 3.2. Limit

The maximum peak power shall be less 1Watt.

#### 3.3. Test Procedure

Tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.3 PKPM1 Peak-reading power meter method

#### 3.4. Uncertainty

$\pm 0.86$  dB

### 3.5. Test Result of Peak Power Output

Product : U-net Repeater  
Test Item : Peak Power Output  
Test Mode : Mode 1: Transmit  
Test Date : 2017/09/21

#### Antenna 1

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
01	923	14.50	1 Watt= 30 dBm	Pass


#### Antenna 2

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
01	923	9.81	1 Watt= 30 dBm	Pass


#### 4. Radiated Emission

##### 4.1. Test Setup


Radiated Emission Under 30MHz

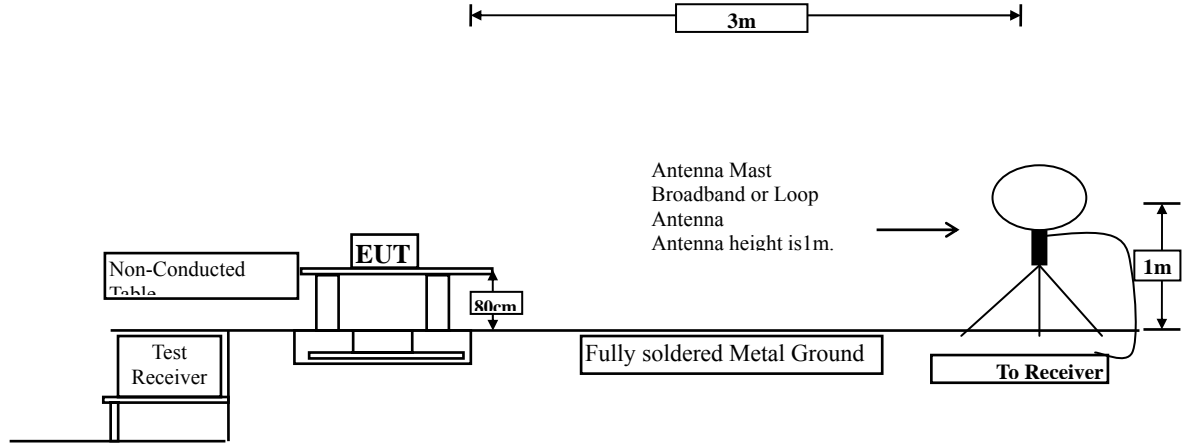

Radiated Emission Below 1GHz

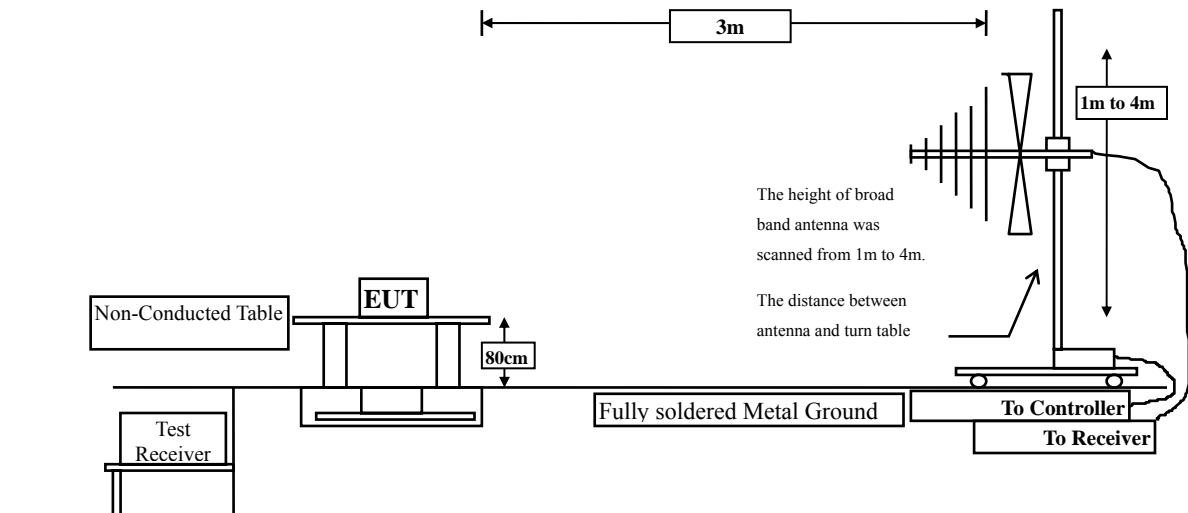

Radiated Emission Above 1GHz

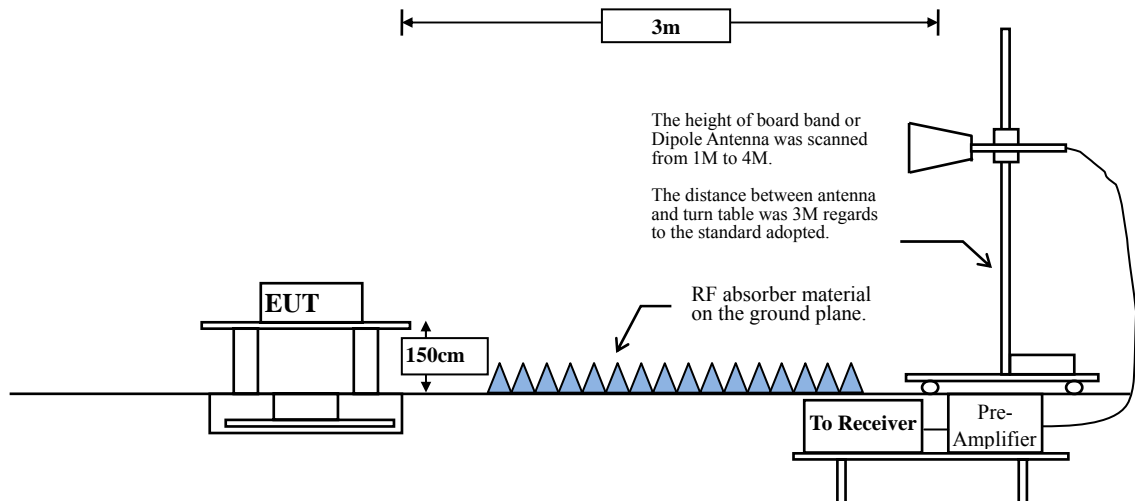

## 4.2. Limits

### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

<b>FCC Part 15 Subpart C Paragraph 15.209 Limits</b>		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.



### 4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

### RBW and VBW Parameter setting:

According to KDB 558074 section 12.2.4. Peak power measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$ .

**Table 1 —RBW as a function of frequency**

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to KDB 558074 section 12.2.5. Average power measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle  $\geq 98\%$

$VBW \geq 1/T$ , when duty cycle  $< 98\%$

( T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
923 MHz	90.61	3.2888	304	500

Note: Duty Cycle Refer to Section 9

## 4.4. Uncertainty

Horizontal polarization :

30-300MHz:  $\pm 4.08$ dB ; 300M-1GHz:  $\pm 3.86$ dB ; 1-18GHz:  $\pm 3.77$ dB ; 18-40GHz:  $\pm 3.98$ dB

Vertical polarization :

30-300MHz:  $\pm 4.81$ dB ; 300M-1GHz:  $\pm 3.87$ dB ; 1-18GHz:  $\pm 3.83$ dB ; 18-40GHz:  $\pm 3.98$ dB

#### 4.5. Test Result of Radiated Emission

Product : U-net Repeater  
 Test Item : Harmonic Radiated Emission  
 Test Mode : Mode 1: Transmit  
 Test Date : 2017/09/21

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
1846.000	-8.078	55.120	47.041	-26.959	74.000
2769.000	-5.359	53.420	48.062	-25.938	74.000
3692.000	-4.662	49.940	45.278	-28.722	74.000
4615.000	-2.930	46.790	43.860	-30.140	74.000
5538.000	-2.005	51.390	49.384	-24.616	74.000
6461.000	-0.248	49.790	49.542	-24.458	74.000
7384.000	0.489	52.540	53.029	-20.971	74.000
8307.000	1.077	44.270	45.347	-28.653	74.000
9230.000	1.846	44.250	46.096	-27.904	74.000
<b>Average</b>					
<b>Detector:</b>					
--					
<b>Peak Detector:</b>					
1846.000	-8.078	51.680	43.601	-30.399	74.000
2769.000	-5.359	53.600	48.242	-25.758	74.000
3692.000	-4.662	51.630	46.968	-27.032	74.000
4615.000	-2.930	48.330	45.400	-28.600	74.000
5538.000	-2.005	54.340	52.334	-21.666	74.000
6461.000	-0.248	51.960	51.712	-22.288	74.000
7384.000	0.489	54.840	55.329	-18.671	74.000
8307.000	1.077	45.880	46.957	-27.043	74.000
9230.000	1.846	41.990	43.836	-30.164	74.000
<b>Average</b>					
<b>Detector:</b>					
7384.000	0.489	40.880	41.369	-12.631	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : U-net Repeater  
 Test Item : General Radiated Emission  
 Test Mode : Mode 1: Transmit  
 Test Date : 2017/09/20


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
140.580	-10.961	45.844	34.882	-8.618	43.500
182.806	-12.534	51.300	38.767	-4.733	43.500
225.149	-12.600	51.600	38.999	-7.001	46.000
272.500	-10.736	50.553	39.817	-6.183	46.000
354.045	-8.643	50.340	41.697	-4.303	46.000
389.533	-7.634	46.400	38.766	-7.234	46.000
<b>Vertical</b>					
101.780	-15.561	53.356	37.795	-5.705	43.500
143.490	-10.855	45.300	34.444	-9.056	43.500
183.039	-12.560	49.800	37.241	-6.259	43.500
225.940	-12.582	49.507	36.925	-9.075	46.000
354.821	-8.620	49.300	40.680	-5.320	46.000
389.380	-7.638	49.800	42.162	-3.838	46.000

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

## 5. RF Antenna Conducted Test

### 5.1. Test Setup

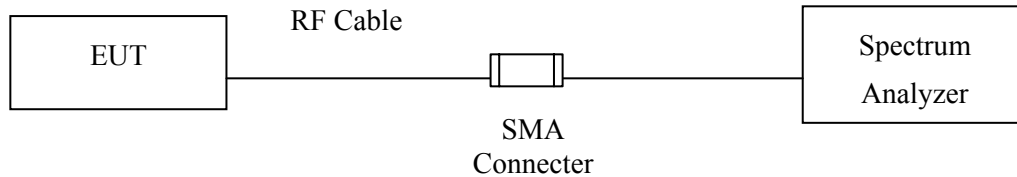

### 5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.3. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.


### 5.4. Uncertainty

±1.23dB

### 5.5. Test Result of RF Antenna Conducted Test

Product : U-net Repeater  
 Test Item : RF Antenna Conducted Test  
 Test Mode : Mode 1: Transmit  
 Test Date : 2017/09/21

**Figure Channel 01:**

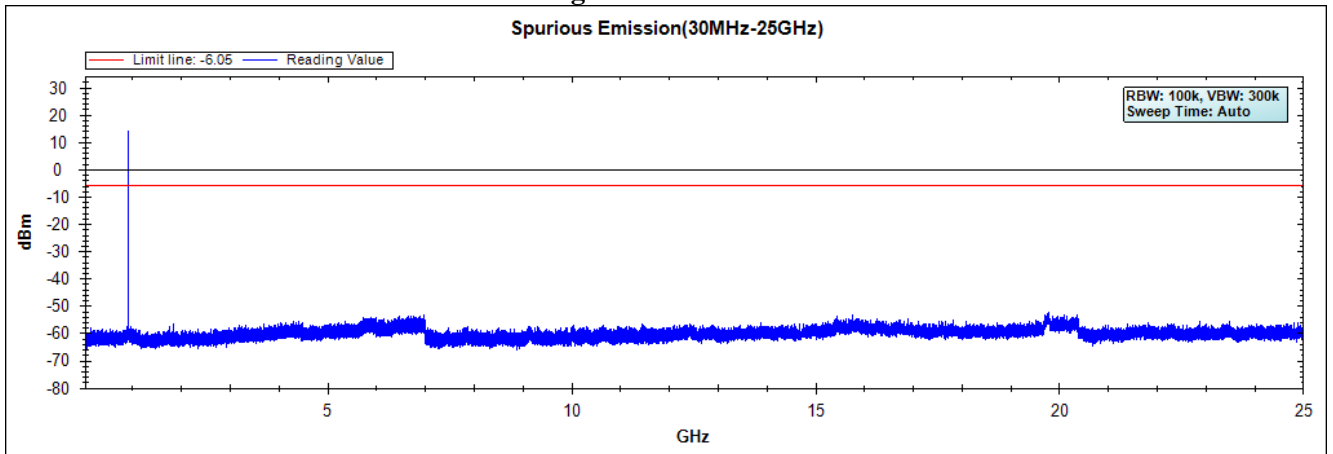


Note: The above test pattern is synthesized by multiple of the frequency range.


## 6. Band Edge

### 6.1. Test Setup

#### RF Conducted Measurement

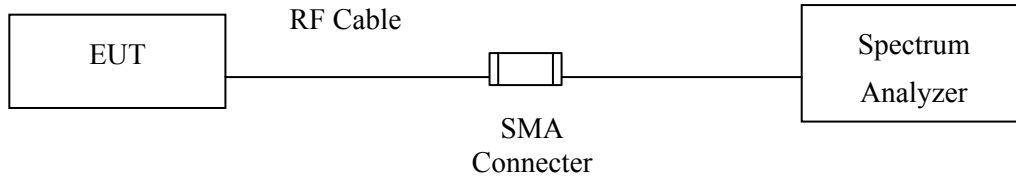

#### RF Radiated Measurement:

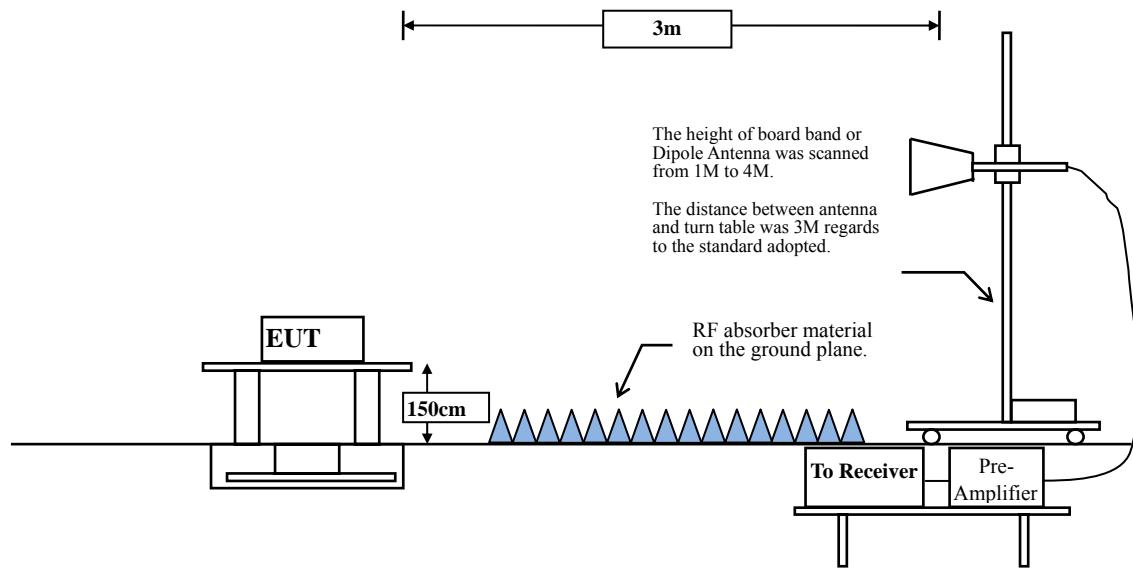



## 6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

## 6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

## 6.4. Uncertainty

Conducted:  $\pm 1.23$ dB

Radiated:

Horizontal polarization :

30-300MHz:  $\pm 4.08$ dB ; 300M-1GHz:  $\pm 3.86$ dB ; 1-18GHz:  $\pm 3.77$ dB ; 18-40GHz:  $\pm 3.98$ dB


Vertical polarization :

30-300MHz:  $\pm 4.81$ dB ; 300M-1GHz:  $\pm 3.87$ dB ; 1-18GHz :  $\pm 3.83$ dB ; 18-40GHz:  $\pm 3.98$ dB

### 6.5. Test Result of Band Edge

Product : U-net Repeater  
 Test Item : Band Edge  
 Test Mode : Mode 1: Transmit


Measurement Level	Result
$\Delta$ (dB)	
> 20	PASS

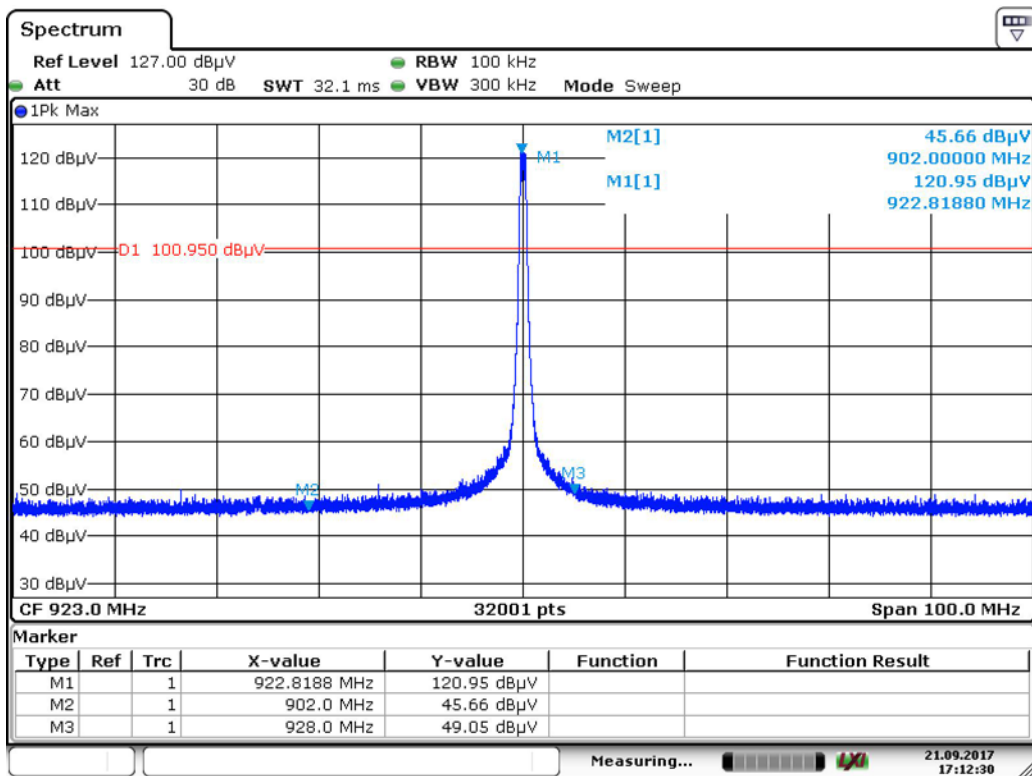

Date: 21.SEP.2017 17:12:30

## 7. 6dB Bandwidth

### 7.1. Test Setup

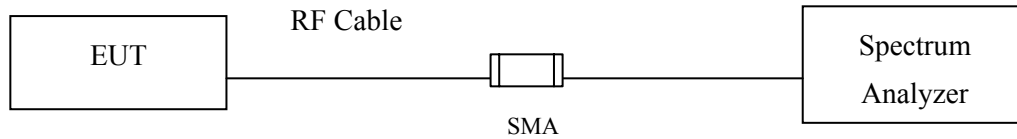

### 7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

### 7.3. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth,  $VBW \geq 3 * RBW$

### 7.4. Uncertainty


$\pm 279.2\text{Hz}$

### 7.5. Test Result of 6dB Bandwidth

Product : U-net Repeater  
 Test Item : 6dB Bandwidth Data  
 Test Mode : Mode 1: Transmit

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	923	570	≥ 500	Pass


Figure Channel 01:

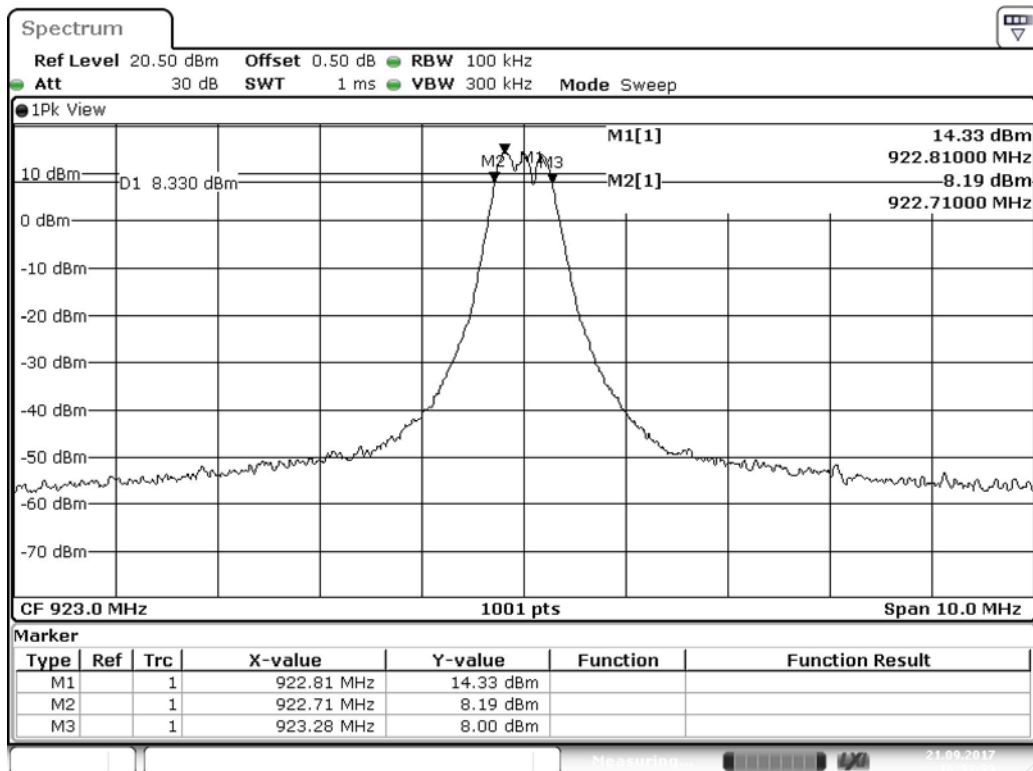

Date: 21.SEP.2017 16:33:39

## 8. Power Density

### 8.1. Test Setup

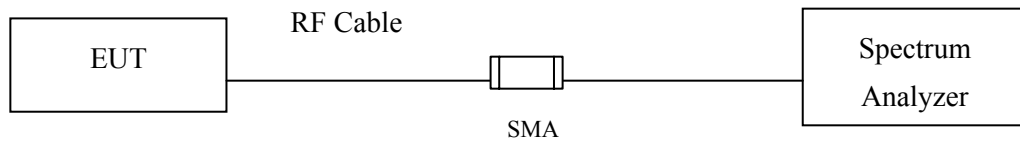

### 8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

### 8.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013, the maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

### 8.4. Uncertainty


±1.23dB

### 8.5. Test Result of Power Density

Product : U-net Repeater  
 Test Item : Power Density Data  
 Test Mode : Mode 1: Transmit

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
01	923	7.89	≤ 8dBm	Pass


Figure Channel 01:

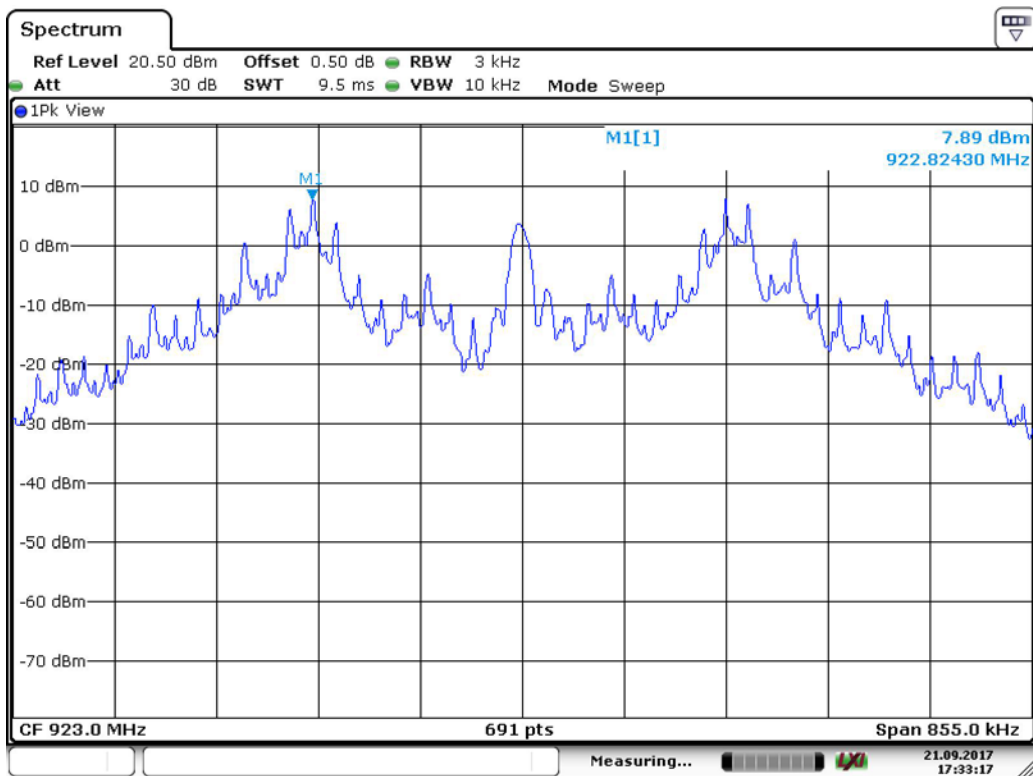

Date: 21.SEP.2017 17:33:18

## 9. Duty Cycle

### 9.1. Test Setup

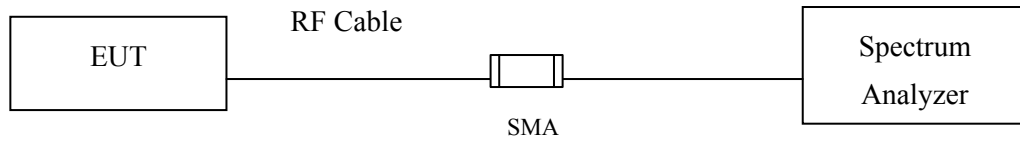

### 9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

### 9.3. Uncertainty

$\pm 2.31\text{msec}$

### 9.4. Test Result of Duty Cycle

Product : U-net Repeater  
 Test Item : Duty Cycle  
 Test Mode : Mode 1: Transmit


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:

band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
923MHz	3.2888	3.6294	90.61	0.43

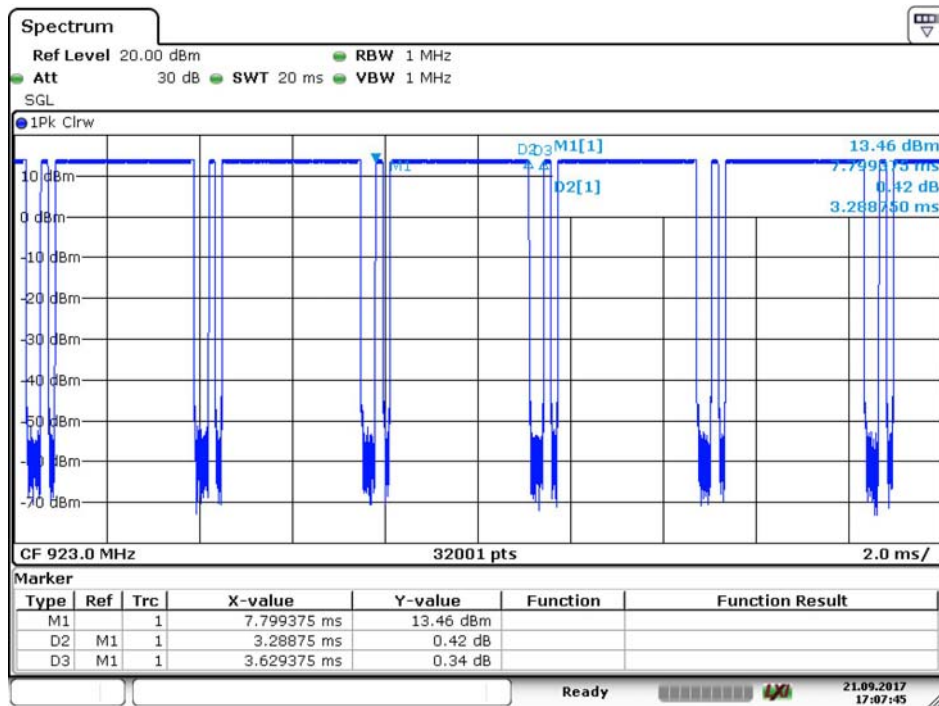

Date: 21.SEP.2017 17:07:45



---

**10. EMI Reduction Method During Compliance Testing**

No modification was made during testing.