



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

|                        |   |
|------------------------|---|
| Applicant's company    | Everspring Industry Co., Ltd.   |
| Applicant Address      | 7F, No. 609 Wan Shou Road Sec. 1, Kweishan, Taoyuan Hsien 333, Taiwan, R.O.C. |
| FCC ID                 | FU5SR101  |
| Manufacturer's company | Everspring Industry Co., Ltd.   |
| Manufacturer Address   | 7F, No. 609 Wan Shou Road Sec. 1, Kweishan, Taoyuan Hsien 333, Taiwan, R.O.C. |

|                   |   |
|-------------------|---|
| Product Name      | Wireless alarm system / Chime Remote Button |
| Brand Name        | EVERSPRING                                  |
| Model Name        | SR101                                       |
| Test Freq. Range  | 315MHz                                      |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart C                |
| Receive Date      | June 30, 2005                               |
| Test Date         | Aug. 19, 2005                               |
| File Type         | New Applicant                               |
| Multiple Listing  | NA  |



### Statement

The test result in this report refers exclusively to the presented test model / sample.  
Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.  
The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.  
The test equipment used to perform the test is calibrated and traceable to NML/ROC.

  
Wayne Hsu / Supervisor  
Sporton International Inc.

NVLAQ®

Lab Code: 200079-0



## Table of Contents

|   |                |
|---|----------------|
| <b>1. INTRODUCTION .....</b>                                  | <b>1</b>       |
| <b>2. GENERAL INFORMATION .....</b>                           | <b>2</b>       |
| 2.1. Product Details.....                                     | 2              |
| 2.2. Accessories.....   | 2              |
| 2.3. Antenna Information.....                                 | 2              |
| 2.4. Technical Specifications.....                            | 2              |
| 2.5. Test Configuration.....                                  | 4              |
| 2.6. Support Equipment.....                                   | 4              |
| 2.7. Test Software.....                                       | 4              |
| 2.8. Test Procedure.....                                      | 4              |
| <b>3. GENERAL INFORMATION OF FACILITY.....</b>                | <b>5</b>       |
| 3.1. Test Location.....                                       | 5              |
| 3.2. Test Equipment Calibration.....                          | 5              |
| <b>4. SUMMARY OF THE TEST RESULTS.....</b>                    | <b>6</b>       |
| <b>5. TEST RESULT .....</b>                                   | <b>7</b>       |
| 5.1. Field Strength of Fundamental Emissions Measurement..... | 7              |
| 5.2. Radiated Emissions Measurement.....                      | 11             |
| 5.3. 20dB Spectrum Bandwidth Measurement.....                 | 23             |
| 5.4. Dwell Time of Periodic Operation Measurement.....        | 26             |
| 5.5. Antenna Requirements.....                                | 29             |
| <b>6. List of Measuring Equipments.....</b>                   | <b>30</b>      |
| <b>7. SPORTON COMPANY PROFILE .....</b>                       | <b>32</b>      |
| 7.1. Test Location.....                                       | 32             |
| <b>8. Certificate of NVLAP Accreditation.....</b>             | <b>33</b>      |
| <b>Appendix A. Photographs of EUT.....</b>                    | <b>A1 ~ A5</b> |



### History of This Test Report

Original Issue Date: Aug. 25, 2005

Report No.: FR563004-02

No additional attachment.

Additional attachment were issued as following record:

| Attachment No. | Issue Date | Description |
|----------------|------------|-------------|
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |
|                |            |             |



## 1. INTRODUCTION

EUT is as a Wireless alarm system / Chime Remote Button.

Test results and procedures were in compliance and were performed in accordance with Federal Communications Commission (FCC) 47 CFR FCC Part 15 Subpart C standards/regulations:

| Sections/Parts        | Description  |
|-----------------------|--|
| Section 15.203        | Antenna Requirements                                   |
| Section 15.204        | External RF Power Amplifiers and Antenna Modifications |
| Section 15.205        | Restricted Bands of Operation                          |
| Section 15.207        | AC Power Line Conducted Emissions                      |
| Section 15.209        | Radiated Emissions (General Requirements)              |
| Section 15.215        | General Radiated Emissions Limitation                  |
| Section 15.231        | Periodic Operation Intentional Radiators               |
| Section 15.231(c)     | 20dB Spectrum Bandwidth                                |
| Section 15.231(b)/(e) | Field Strength of Fundamental EmissionS                |
| Section 15.231(b)/(e) | Out of Band Emissions                                  |
| Section 15.231(a)/(e) | Dwell Time of Periodic Operation                       |

## 2. GENERAL INFORMATION

### 2.1. Product Details

| Items          | Description                                 |
|----------------|---|
| Product Type   | Wireless alarm system / Chime Remote Button |
| Radio Type     | Intentional Transmitter                     |
| Power Type     | TX-Battery                                  |
| Interface Type | TX-None                                     |

### 2.2. Accessories

| Adaptor          |                                     |
|------------------|-------------------------------------|
| AC Adaptor Brand | Without AC Adapter (Not Applicable) |
| AC Adapter Model | Without AC Adapter (Not Applicable) |

### 2.3. Antenna Information

| Ant. | Antenna Type    | Connector    | Gain (dBi) |
|------|-----------------|--------------|------------|
| 1    | Helical Antenna | No Connector | -          |

### 2.4. Technical Specifications

| Items               | Description                  |
|---------------------|------------------------------|
| Modulation Type     | ASK                          |
| Frequency Range     | 315MHz                       |
| Number of Channels  | 1                            |
| Max. Field Strength | 68.16 dBuV/m at 3m (Average) |
| Channel Space       | Not-applicable               |
| Power Supply        | TX - 3.0 Vdc from battery    |




### Frequency Allocation

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 315MHz         | 1           | 315MHz    | -           | -         |

## 2.5. Test Configuration

### Radiation Emissions Test Configuration

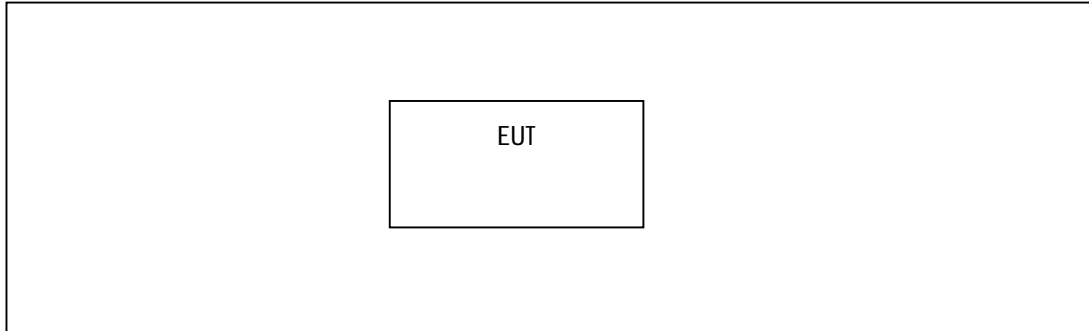

## 2.6. Support Equipment

### Radiation Emissions Test Configuration

There is no supporting equipment for the test.

## 2.7. Test Software

During testing, there is not any test software to support continuous transmission (CTX). CTX is controlled by hardware.

## 2.8. Test Procedure

Emissions measurements were performed in accordance with the procedures of ANSI C63.4-2003, Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz .

### 3. GENERAL INFORMATION OF FACILITY

#### 3.1. Test Location

| Test Site No. | Site Category | Location | FCC Reg. No. | IC File No. | VCCI Reg. No |
|---------------|---------------|----------|--------------|-------------|--------------|
| 03CH03-HY     | SAC           | Hwa Ya   | 101377       | IC 4088     | -            |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 7 for Test Site Address.

#### 3.2. Test Equipment Calibration

All measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent CNLA registered laboratory such as Electronics Testing Center, Taiwan (ETC) or the National Measurement Laboratory (NML). All equipment calibration is traceable to Chinese national standards at the National Measurements Laboratory. The reference antenna calibration was performed by NML and the working antennas (biconical, log-periodic and horn) was calibrated by the CNLA approved procedures. The complete list of test equipment used for the measurements, including calibration dates and traceability is contained in section 6 of this report.





#### 4. SUMMARY OF THE TEST RESULTS

| Applied Standard: 47 CFR FCC Part 15 Subpart C |               |   |                |
|--|---------------|---|----------------|
| Part   | Rule Section  | Description of Test                       | Result         |
| -  | 15.207        | AC Power Line Conducted Emissions         | Not Applicable |
| 5.1  | 15.231(b)/(e) | Field Strength of Fundamental EmissionS   | Complies       |
| 5.2  | 15.209        | Radiated Emissions (General Requirements) | Complies       |
| 5.2  | 15.231(b)/(e) | Out of Band Emissions                     | Complies       |
| 5.3  | 15.231(c)     | 20dB Spectrum Bandwidth                   | Complies       |
| 5.4  | 15.231(a)/(e) | Dwell Time of Periodic Operation          | Complies       |
| 5.5  | 15.203        | Antenna Requirements                      | Complies       |

Note:

The EUT is powered by battery. So AC power line conducted emissions was not implemented.

## 5. TEST RESULT

### 5.1. Field Strength of Fundamental Emissions Measurement

#### 5.1.1. Applicable Standard

47 CFR FCC Part 15 Subpart C, section 15.231(b)/(e):

If devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(a). The field strength of emissions from intentional radiators at 3 meters operated under this Section shall not exceed the following:

| Frequency Band (MHz) | Fundamental Emissions Limit (uV/m) at 3m |
|----------------------|--|
| 40.66-40.70          | 2250                                     |
| 70-130               | 1250                                     |
| 130-174              | 1250-3750(**)                            |
| 174-260              | 3750                                     |
| 260-470              | 3750-12500(**)                           |
| Above 470            | 12500                                    |

\*\*1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

(1) for the band 130 - 174 MHz,  $\mu\text{V/m}$  at 3 meters =  $56.81818 \times (\text{operating frequency, MHz}) - 6136.3636$ ;

(2) for the band 260 - 470 MHz,  $\mu\text{V/m}$  at 3 meters =  $41.6667 \times (\text{operating frequency, MHz}) - 7083.3333$ .

If devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(e). The field strength of emissions from intentional radiators at 3 meters operated under this Section shall not exceed the following:

| Frequency Band (MHz) | Fundamental Emissions Limit (uV/m) at 3m |
|----------------------|--|
| 40.66-40.70          | 1000                                     |
| 70-130               | 500                                      |
| 130-174              | 500-1500(**)                             |
| 174-260              | 1500                                     |
| 260-470              | 1500-5000(**)                            |
| Above 470            | 5000                                     |

\*\* 1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

(1) for the band 130 - 174 MHz,  $\mu\text{V/m}$  at 3 meters =  $22.72727 \times (\text{operating frequency, MHz}) - 2454.545$ ;

(2) for the band 260 - 470 MHz,  $\mu\text{V/m}$  at 3 meters =  $16.6667 \times (\text{operating frequency, MHz}) - 2833.3333$ .

### 5.1.2. Measuring Instruments

Refer to section 6 in this report.


### 5.1.3. Major Test Instruments Setting

| Receiver Parameter | Setting               |
|--------------------|-----------------------|
| Attenuation        | Auto                  |
| Center Frequency   | Fundamental Frequency |
| RB                 | 120 KHz               |
| Detector           | Peak / Average        |

### 5.1.4. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. Set the test-receiver system to Peak and Average Detect Function with specified bandwidth under Maximum Hold Mode.
5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

### 5.1.5. Test Setup Layout

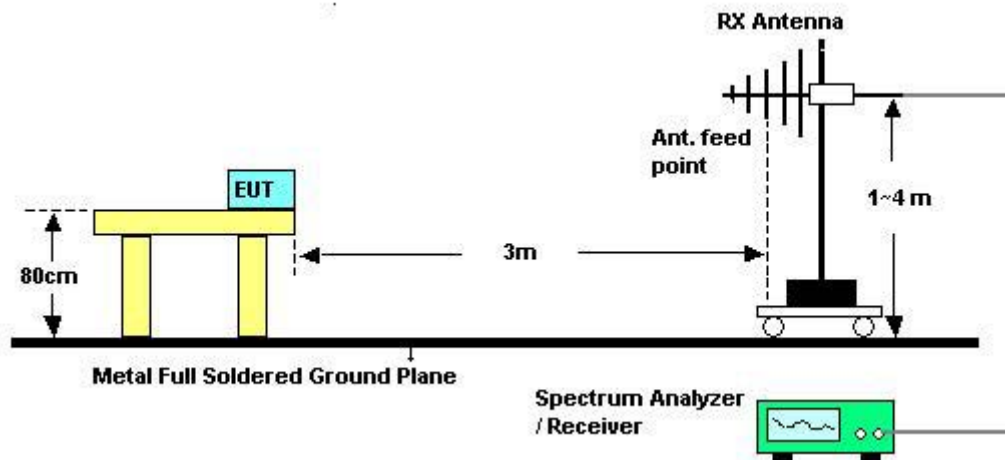

### 5.1.6. Test Deviation

The measurement uncertainty is 2.54dB. Test methods have no deviation with original standard.

### 5.1.7. Test Mode(s)

EUT is CTX mode (Continuous Transmission). Measurements have been done on channel 1, 315MHz. X, Y and Z axes should be test, but only x axis, the worst case, was shown in the tets report.

### 5.1.8. Calculation of Voltage Levels

Measurements are reported in units of dB relative to one microvolt per metre (dB $\mu$ V/m).

The field strength was calculated automatically by the software using all the pre-stored calibration data.

The method of calculation is shown below:

$E = V + AF - G + L$  Where:

$E$  = Radiated Field Strength in dB $\mu$ V/m.

$V$  = EMI Receiver Voltage in dB $\mu$ V. (measured value)

$AF$  = Antenna Factor in dB(m<sup>-1</sup>). (stored as a data array)

$G$  = Preamplifier Gain in dB. (stored as a data array)

$L$  = Cable insertion loss in dB. (stored as a data array of Insertion Loss versus frequency)

Level = Read Level + Factor.

Factor =  $AF - G + L$ .

When pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. So duty factor is show below:

duty factor =  $20 \times \log_{10}(\text{duty cycle}) = -6.9\text{dB}$

Average value = Peak value + duty factor




The devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(a) or 15.231(e). The field strength of emissions from intentional radiators at 3 meters operated under this Section shall not exceed the following:

| Carrier Frequency (MHz) | Fundamental Emissions Limit (dBuV/m) at 3m |
|-------------------------|--|
| 315MHz                  | 75.62 (Average)                            |
| 315MHz                  | 95.62 (Peak)                               |

5.1.9. Test Result

|               |           |
|---------------|-----------|
| Test Site     | 03CH03-HY |
| Temperature   | 20        |
| Humidity      | 65%       |
| Test Engineer | Ted Chiu  |

315MHz / Maximum Polarization : Horizontal

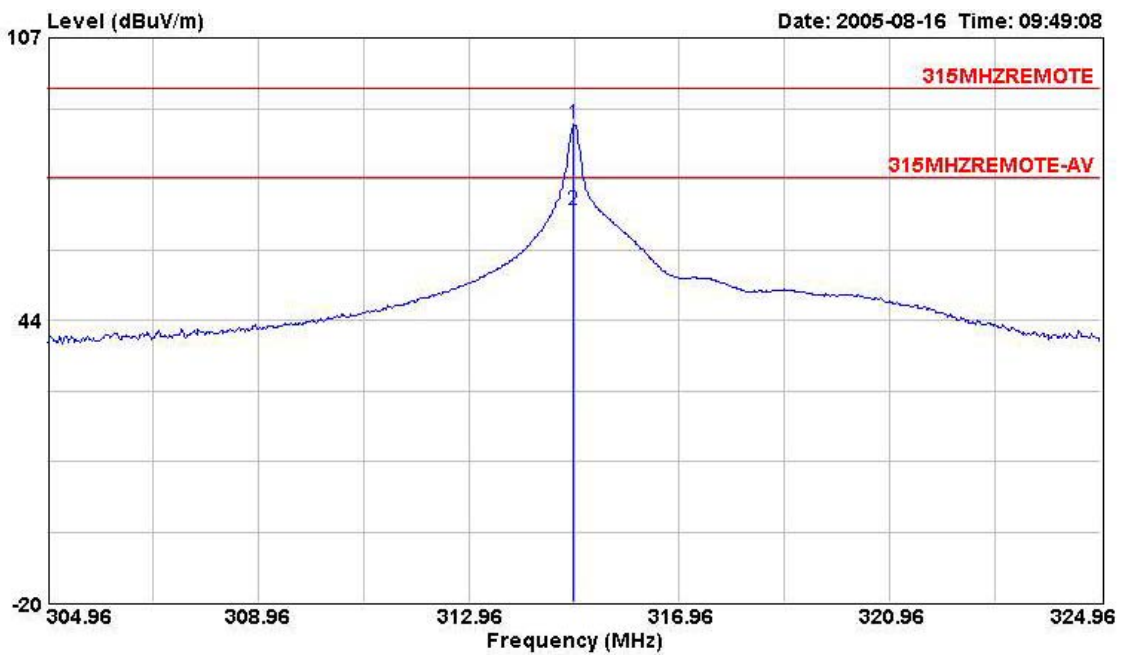

|   | Freq    | Level  | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark  | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|---------|---------|-----------|
|   | MHz     | dBuV/m | dB         | dBuV       | dBuV/m     | dB         | dB/m           | dB            |         | cm      | deg       |
| 1 | 314.940 | 87.48  | -8.14      | 102.07     | 95.62      | 1.72       | 14.27          | 30.58         | Peak    | ---     | ---       |
| 2 | 314.940 | 68.16  | -7.46      | 82.75      | 75.62      | 1.72       | 14.27          | 30.58         | Average | ---     | ---       |

## 5.2. Radiated Emissions Measurement

### 5.2.1. Applicable Standard

47 CFR FCC Part 15 Subpart C, section 15.231(b)/(e):

If devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(a). The field strength of emissions from intentional radiators at 3 meters operated under this Section shall not exceed the following:

| Frequency Band (MHz) | Spurious Emissions Limit (uV/m) at 3m |
|----------------------|---------------------------------------|
| 40.66-40.70          | 225                                   |
| 70-130               | 125                                   |
| 130-174              | 125-375(**)                           |
| 174-260              | 375                                   |
| 260-470              | 375-1250(**)                          |
| Above 470            | 1250                                  |

\*\*1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

(1) for the band 130 - 174 MHz,  $\mu V/m$  at 3 meters =  $56.81818 \times (\text{operating frequency, MHz}) - 6136.3636$ ;

(2) for the band 260 - 470 MHz,  $\mu V/m$  at 3 meters =  $41.6667 \times (\text{operating frequency, MHz}) - 7083.3333$ .

(3) The maximum permitted unwanted emissions level is 20 dB below the maximum permitted fundamental level. In addition field strength of any emissions which appear outside of this band shall not exceed the general radiated emissions limits in Section 15.209.

If devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(e). The field strength of emissions from intentional radiators at 3 meters operated under this Section shall not exceed the following:

| Frequency Band (MHz) | Spurious Emissions Limit (uV/m) at 3m |
|----------------------|---------------------------------------|
| 40.66-40.70          | 100                                   |
| 70-130               | 50                                    |
| 130-174              | 50-150(**)                            |
| 174-260              | 150                                   |
| 260-470              | 150-500(**)                           |
| Above 470            | 500                                   |

\*\* 1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

(1) for the band 130 - 174 MHz,  $\mu V/m$  at 3 meters =  $22.72727 \times (\text{operating frequency, MHz}) - 2454.545$ ;

(2) for the band 260 - 470 MHz,  $\mu V/m$  at 3 meters =  $16.6667 \times (\text{operating frequency, MHz}) - 2833.3333$ .

(3) The maximum permitted unwanted emissions level is 20 dB below the maximum permitted fundamental level. In addition field strength of any emissions which appear outside of this band shall not exceed the general radiated emissions limits in Section 15.209.

47 CFR FCC Part 15 Subpart C, section 15.215: In most cases, unwanted emissions outside of the frequency bands shown in these alternative provisions must be attenuated to the emissions limits shown in Section 15.209. In no case shall the level of the unwanted emissions from an intentional radiator operating under these additional provisions exceed the field strength of the fundamental emissions.

| Outside Frequency Band Edge (MHz) | Limit (dBuV/m) at 3m |
|-----------------------------------|----------------------|
| 315MHz                            | 46                   |

### 5.2.2. Measuring Instruments

Please refer to section 6 in this report.

### 5.2.3. Major Test Instruments Setting

| Spectrum Parameter | Setting                  |
|--------------------|--------------------------|
| Attenuation        | Auto                     |
| Start Frequency    | 1000 MHz                 |
| Stop Frequency     | 10th carrier harmonic    |
| RB / VB            | 1 MHz / 1MHz for Peak    |
| RB / VB            | 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~ 150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~ 30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~ 1000MHz / RB 120kHz for QP |

### 5.2.4. Test Procedures

#### For radiated emissions below 30MHz

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the receiving antenna was fixed at one meter above ground to find the maximum emissions field strength.
4. Set the test-receiver system to QP Detect Function with specified bandwidth under Maximum Hold Mode.

#### For radiated emissions above 30MHz

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a

height-variable antenna tower was placed 3 meters far away from the turntable.

2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.




### 5.2.5. Test Mode(s)


EUT is CTX mode (Continuous Transmission). Measurements have been done on channel 1, 315 MHz. X, Y and Z axes should be test, but only x axis, the worst case, was shown in the tests report.

### 5.2.6. Test Setup Layout

For radiated emissions below 30MHz

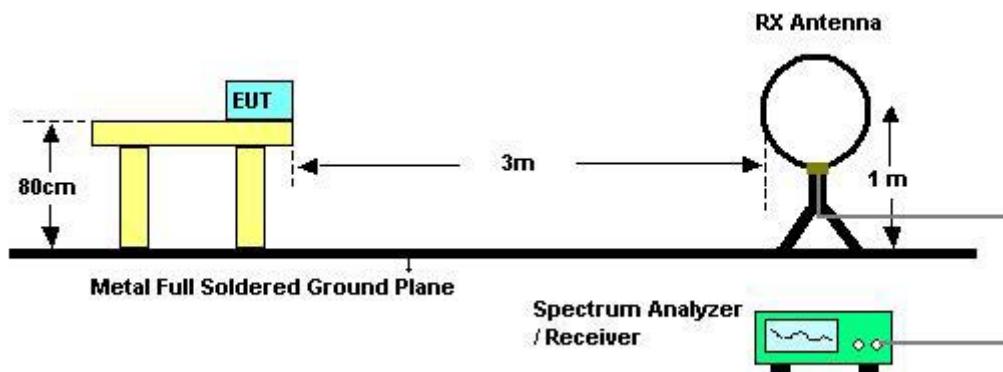

For radiated emissions above 30MHz

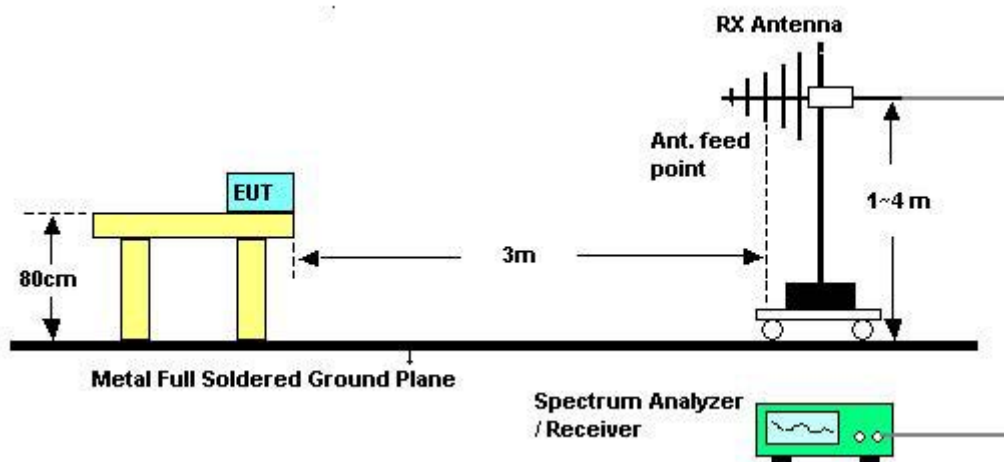

### 5.2.7. Test Deviation

The measurement uncertainty is 2.26dB. Test methods have no deviations with original standard.

### 5.2.8. Calculation of Voltage Levels

Measurements are reported in units of dB relative to one microvolt per metre (dB $\mu$ V/m).

The field strength was calculated automatically by the software using all the pre-stored calibration data.

The method of calculation is shown below:

$E = V + AF - G + L$  Where:

$E$  = Radiated Field Strength in dB $\mu$ V/m.

$V$  = EMI Receiver Voltage in dB $\mu$ V. (measured value)

$AF$  = Antenna Factor in dB(m<sup>-1</sup>). (stored as a data array)

G = Preamplifier Gain in dB. (stored as a data array)

L = Cable insertion loss in dB. (stored as a data array of Insertion Loss versus frequency)

Level = Read Level + Factor.

Factor = AF - G + L.

When measurement frequency was below 30MHz, the results shall be extrapolated to the specified distance using an extrapolation factor of 40 dB/decade. If measurement frequency was above 30MHz, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade.

When pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. So duty factor is show below:

duty factor =  $20 \times \log_{10}(\text{duty cycle}) = -16.9\text{dB}$

Average value = Peak value + duty factor

#### 5.2.9. Test Data Requirement

Test data records were performed in accordance with the following ANSI C63.4-2003. For intentional radiators, for each of the frequencies to which the device is tuned, the frequency and amplitude of the highest fundamental emissions, the frequency and amplitude of the three highest harmonic or spurious emissions relative to the limit, and the frequency and amplitude of the three highest restricted band emissions relative to the limit shall be reported.

#### 5.2.10. Results of Bandedge Emissions

Please refer to section 5.2 of test result.

#### 5.2.11. Results of Radiated Emissions

|               |           |
|---------------|-----------|
| Test Site     | 03CH03-HY |
| Temperature   | 20        |
| Humidity      | 65%       |
| Test Engineer | Ted Chiu  |


Note:

Results for the radiated measurement below 30MHz, no emissions found and caused by the EUT.


If any spurious emissions are in non-restriction bands, these emissions comply with 20dB down of fundamental emissions. The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

315MHz (Below 1GHz)

Vertical Polarization

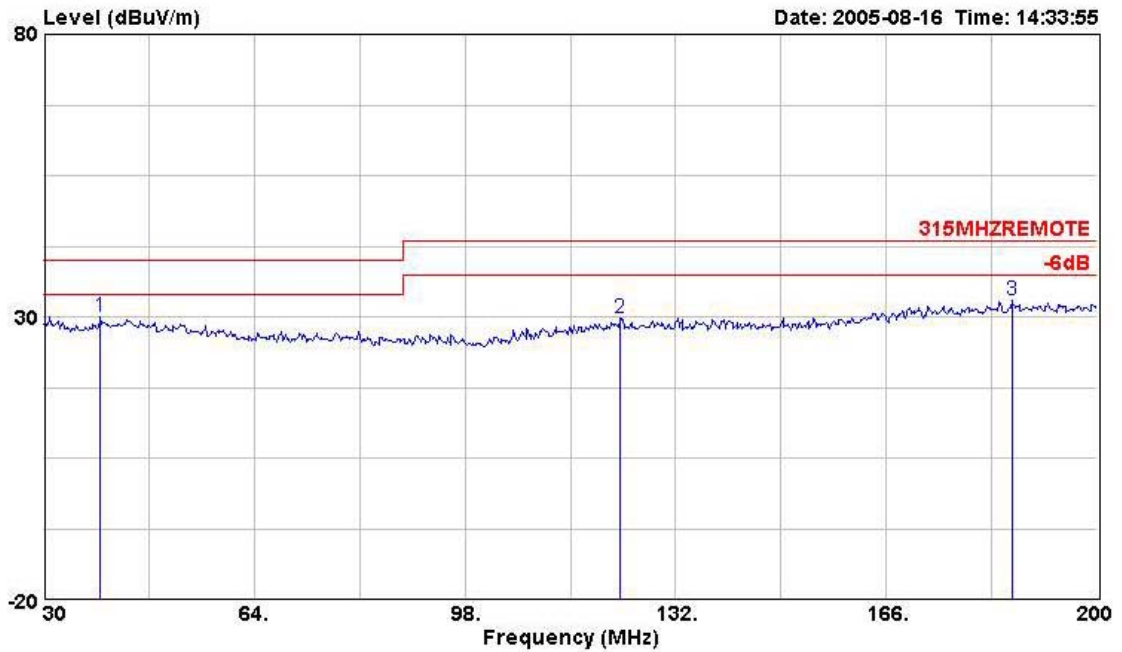


|   | Freq    | Level  | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|--------|---------|-----------|
|   | MHz     | dBuV/m | dB         | dBuV       | dBuV/m     | dB         | dB/m           | dB            |        | cm      | deg       |
| 1 | 39.180  | 29.89  | -10.11     | 47.23      | 40.00      | 0.63       | 12.48          | 30.45         | Peak   | ---     | ---       |
| 2 | 122.990 | 29.84  | -13.66     | 47.09      | 43.50      | 1.10       | 12.08          | 30.43         | Peak   | ---     | ---       |
| 3 | 186.230 | 32.87  | -10.63     | 46.98      | 43.50      | 1.27       | 14.69          | 30.07         | Peak   | ---     | ---       |

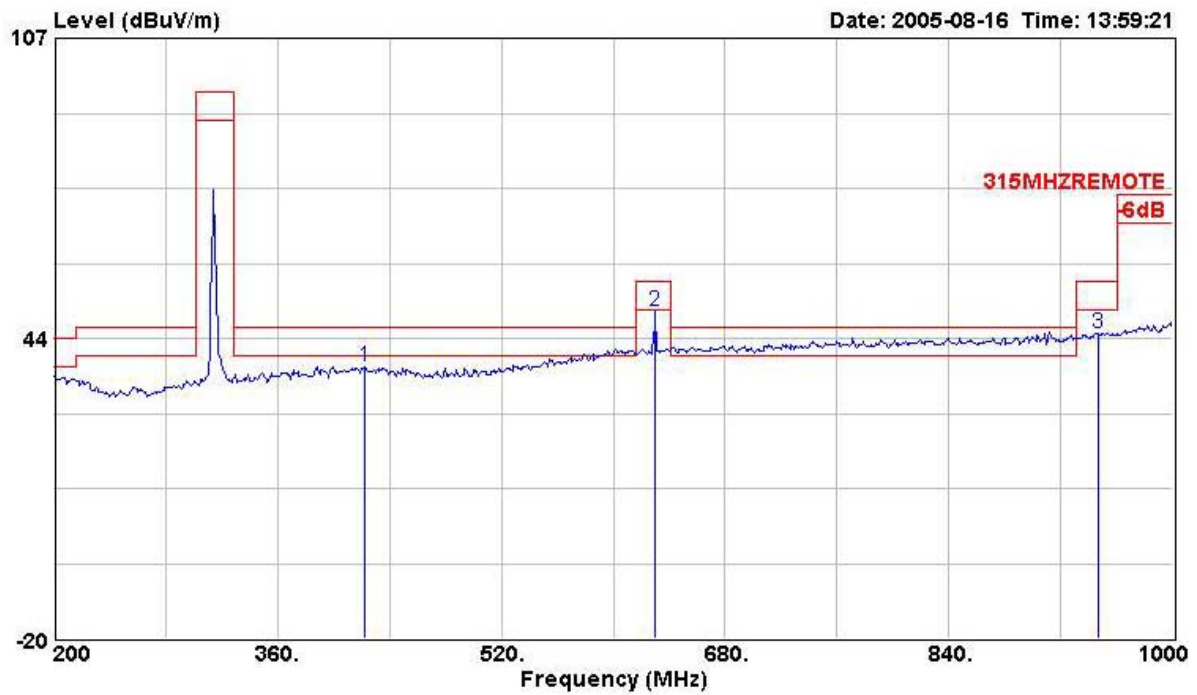


|   | Freq    | Level  | Over Limit | Read Level | Limit Line | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|---------|--------|------------|------------|------------|-------------------|----------------|---------------|--------|---------|-----------|
|   | MHz     | dBuV/m | dB         | dBuV       | dBuV/m     | dB                | dB/m           | dB            |        | cm      | deg       |
| 1 | 422.400 | 37.41  | -8.59      | 49.42      | 46.00      | 1.96              | 16.62          | 30.58         | Peak   | ---     | ---       |
| 2 | 630.400 | 49.06  | -6.56      | 56.84      | 55.62      | 2.45              | 20.49          | 30.73         | Peak   | ---     | ---       |
| 3 | 947.200 | 44.57  | -11.05     | 48.22      | 55.62      | 2.97              | 22.75          | 29.37         | Peak   | ---     | ---       |



Horizontal Polarization

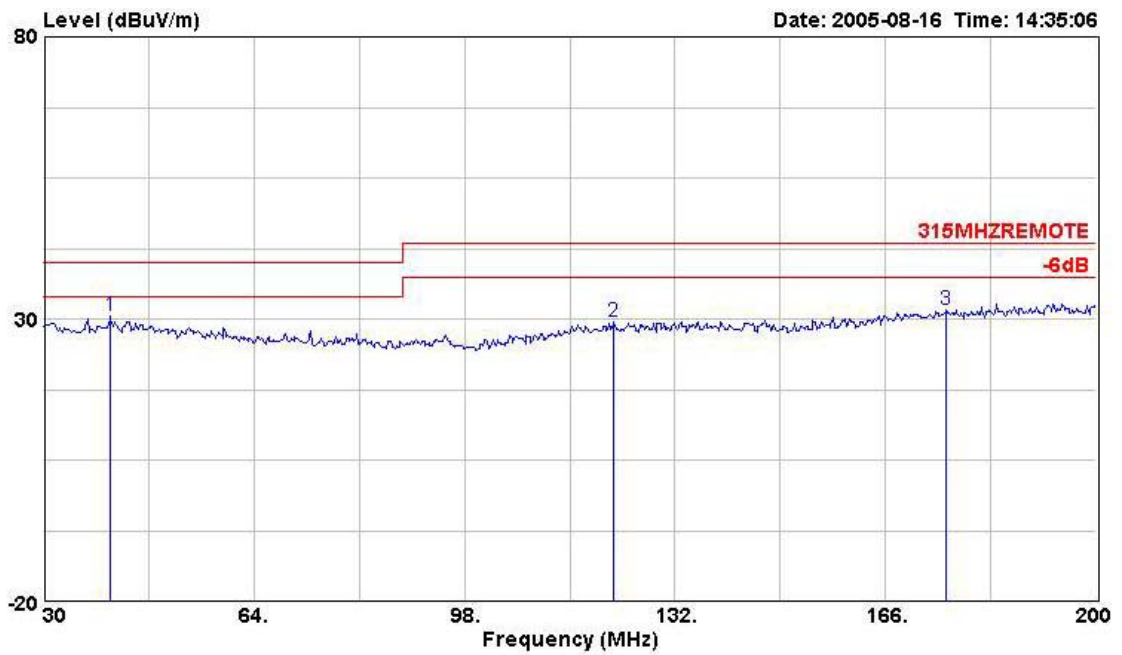


|   | Freq | Level   | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark | Ant Pos | Table Pos |
|---|------|---------|------------|------------|------------|------------|----------------|---------------|--------|---------|-----------|
|   | MHz  | dBuV/m  | dB         | dBuV       | dBuV/m     | dB         | dB/m           | dB            |        | cm      | deg       |
| 1 | 0    | 40.710  | -9.55      | 47.67      | 40.00      | 0.64       | 12.57          | 30.42         | Peak   | ---     | ---       |
| 2 |      | 122.140 | -14.05     | 46.72      | 43.50      | 1.10       | 12.03          | 30.39         | Peak   | ---     | ---       |
| 3 | 0    | 175.860 | -11.80     | 46.20      | 43.50      | 1.27       | 14.20          | 29.97         | Peak   | ---     | ---       |

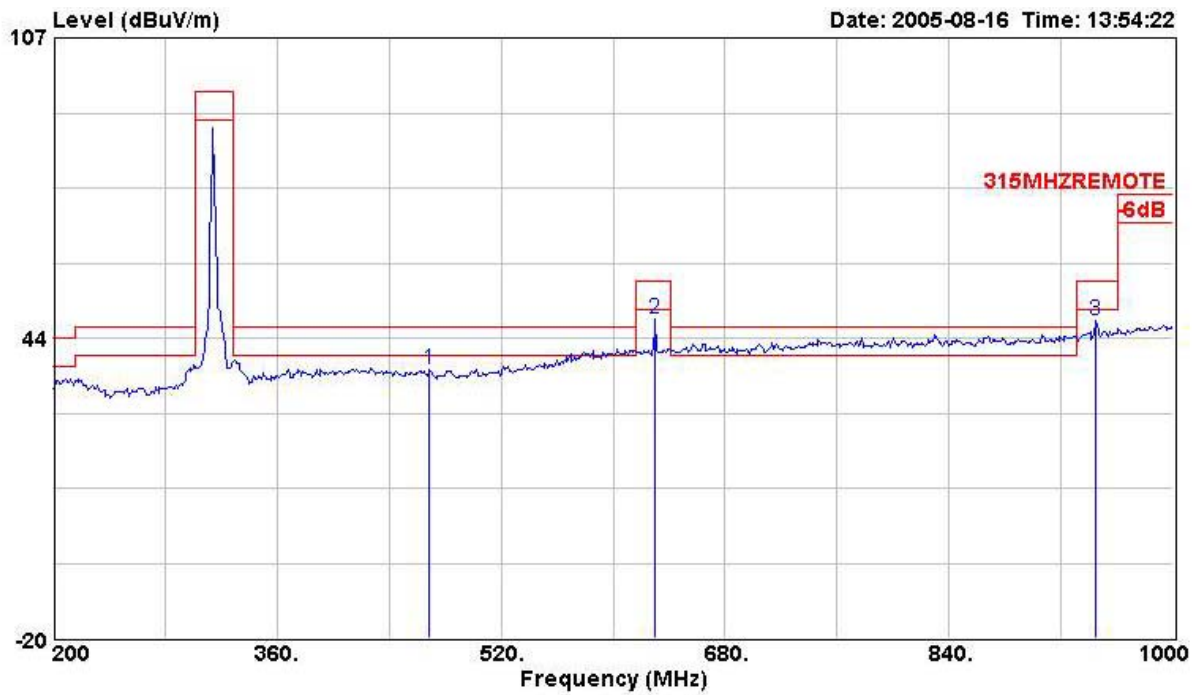

|   | Freq | Level   | Over  | Read  | Limit  | Cable | Antenna | Preamp | Remark | Ant  | Table |     |
|---|------|---------|-------|-------|--------|-------|---------|--------|--------|------|-------|-----|
|   | MHz  | dBuV/m  | Limit | Level | Line   | Loss  | Factor  | Factor |        | Pos  | Pos   |     |
|   |      |         | dB    | dBuV  | dBuV/m | dB    | dB/m    | dB     |        | cm   | deg   |     |
| 1 | 0    | 468.000 | 36.94 | -9.06 | 49.83  | 46.00 | 2.13    | 16.26  | 31.27  | Peak | ---   | --- |
| 2 | 0    | 630.400 | 47.56 | -8.06 | 55.34  | 55.62 | 2.45    | 20.49  | 30.73  | Peak | ---   | --- |
| 3 | 0    | 944.800 | 47.06 | -8.56 | 50.79  | 55.62 | 2.98    | 22.69  | 29.40  | Peak | ---   | --- |


315MHz (Above 1GHz)

Vertical Polarization

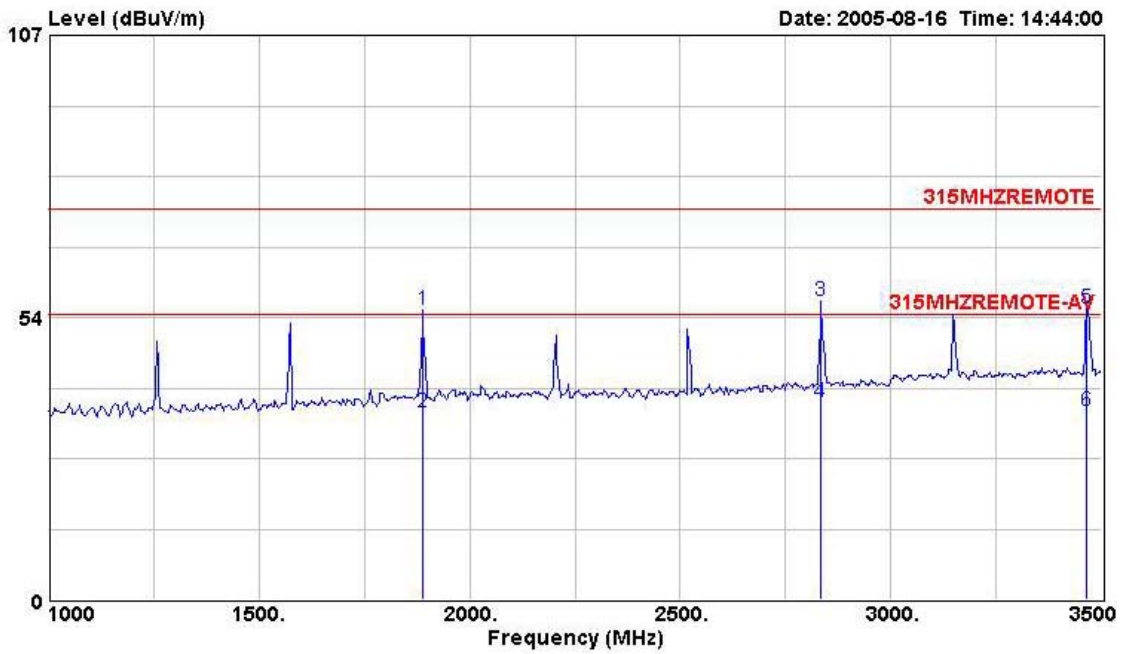

|   | Freq     | Level  | Over Limit | Read Level | Limit Line | Cable Loss | Antenna Factor | Preamp Factor | Remark  | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|---------|---------|-----------|
|   | MHz      | dBuV/m | dB         | dBuV       | dBuV/m     | dB         | dB/m           | dB            |         | cm      | deg       |
| 1 | 1887.500 | 54.87  | -19.13     | 58.98      | 74.00      | 1.66       | 26.99          | 32.76         | Peak    | ---     | ---       |
| 2 | 1887.500 | 35.55  | -18.45     | 39.66      | 54.00      | 1.66       | 26.99          | 32.76         | Average | ---     | ---       |
| 3 | 2835.000 | 56.72  | -17.28     | 57.91      | 74.00      | 2.13       | 29.53          | 32.85         | Peak    | ---     | ---       |
| 4 | 2835.000 | 37.40  | -16.60     | 38.59      | 54.00      | 2.13       | 29.53          | 32.85         | Average | ---     | ---       |
| 5 | 3465.000 | 55.22  | -18.78     | 54.46      | 74.00      | 2.34       | 31.12          | 32.70         | Peak    | ---     | ---       |
| 6 | 3465.000 | 35.90  | -18.10     | 35.14      | 54.00      | 2.34       | 31.12          | 32.70         | Average | ---     | ---       |

Horizontal Polarization

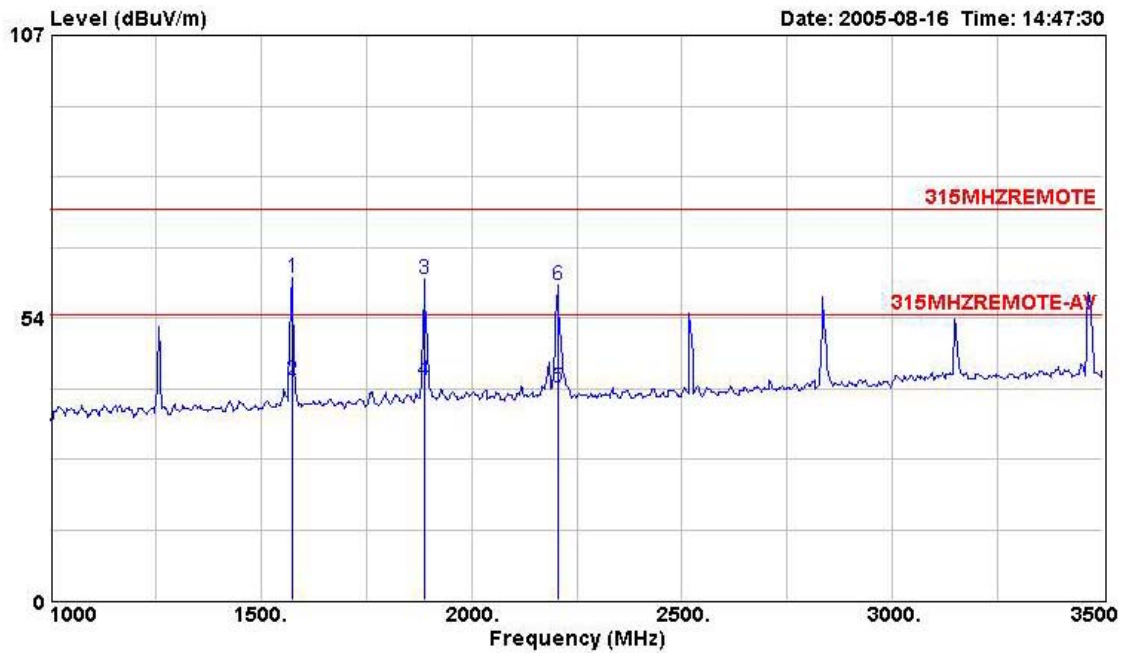

|   | Freq     | Level  | Over Limit | Read Level | Limit Line | CableAntenna Loss | Antenna Factor | Preamp Factor | Remark  | Ant Pos | Table Pos |
|---|----------|--------|------------|------------|------------|-------------------|----------------|---------------|---------|---------|-----------|
|   | MHz      | dBuV/m | dB         | dBuV       | dBuV/m     | dB                | dB/m           | dB            |         | cm      | deg       |
| 1 | 1575.000 | 61.14  | -12.86     | 66.95      | 74.00      | 1.51              | 25.67          | 32.98         | Peak    | ---     | ---       |
| 2 | 1575.000 | 41.82  | -12.18     | 47.63      | 54.00      | 1.51              | 25.67          | 32.98         | Average | ---     | ---       |
| 3 | 1887.500 | 60.88  | -13.12     | 64.99      | 74.00      | 1.66              | 26.99          | 32.76         | Peak    | ---     | ---       |
| 4 | 1887.500 | 41.56  | -12.44     | 45.67      | 54.00      | 1.66              | 26.99          | 32.76         | Average | ---     | ---       |
| 5 | 2205.000 | 40.31  | -13.69     | 43.52      | 54.00      | 1.81              | 27.87          | 32.89         | Average | ---     | ---       |
| 6 | 2205.000 | 59.63  | -14.37     | 62.84      | 74.00      | 1.81              | 27.87          | 32.89         | Peak    | ---     | ---       |



### 5.2.12. Photographs of Radiated Emissions Test Configuration

FRONT VIEW



REAR VIEW



### 5.3. 20dB Spectrum Bandwidth Measurement

#### 5.3.1. Applicable Standard

47 CFR FCC Part 15 Subpart C, section 15.231(c): The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emissions shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

| Fundamental Freq. (MHz) | 20dB Bandwidth (MHz) |
|-------------------------|----------------------|
| 315                     | 0.7875               |

Section 15.215: Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (433.05 ~ 434.79MHz).

In ANSI C63.4-2003, the resolution bandwidth of the measuring instrument shall be set to a value greater than 5% of the bandwidth requirements. When no bandwidth requirements are specified, the minimum resolution band-width of the measuring instrument is given in the following:

| Fundamental Freq.  | Minimum Resolution Bandwidth |
|--------------------|------------------------------|
| 9 kHz to 30 MHz    | 1 kHz                        |
| 30 to 1000 MHz     | 10 kHz                       |
| 1000 MHz to 40 GHz | 100 kHz                      |

#### 5.3.2. Measuring Instruments

Please refer to section 6 in this report.


#### 5.3.3. Major Test Instruments Setting

| Spectrum Parameter | Setting                 |
|--------------------|-------------------------|
| Attenuation        | Auto                    |
| Span Frequency     | > Measurement Bandwidth |
| RB                 | 10 kHz (20dB Bandwidth) |
| VB                 | 10 kHz (20dB Bandwidth) |
| Detector           | Peak                    |
| Trace              | Max Hold                |
| Sweep Time         | Auto                    |

#### 5.3.4. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 10 kHz and the video bandwidth of 10 kHz were utilised for 20 dB bandwidth measurement.

5.3.5. Test Setup Layout

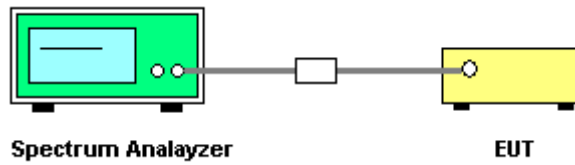

5.3.6. Test Deviation

The measurement uncertainty is  $10^{-7}$ . Test methods have no deviations with original standard.

5.3.7. Test Mode(s)

EUT is CTX mode (Continuous Transmission). Measurements have been done on channel, 315 MHz.


5.3.8. Test Result

|               |          |
|---------------|----------|
| Test Site     | TH01-HY  |
| Temperature   | 20       |
| Humidity      | 65%      |
| Test Engineer | Eason Lu |

| Frequency | 20dB Bandwidth (kHz) | 99% Occupied Bandwidth (kHz) | Limits (MHz) | Result   |
|-----------|----------------------|------------------------------|--------------|----------|
| 315 MHz   | 282.00               | 526.00                       | 0.79         | Complies |

5.3.9. 20 dB Bandwidth Plots

20 dB Bandwidth Plot on 315 MHz

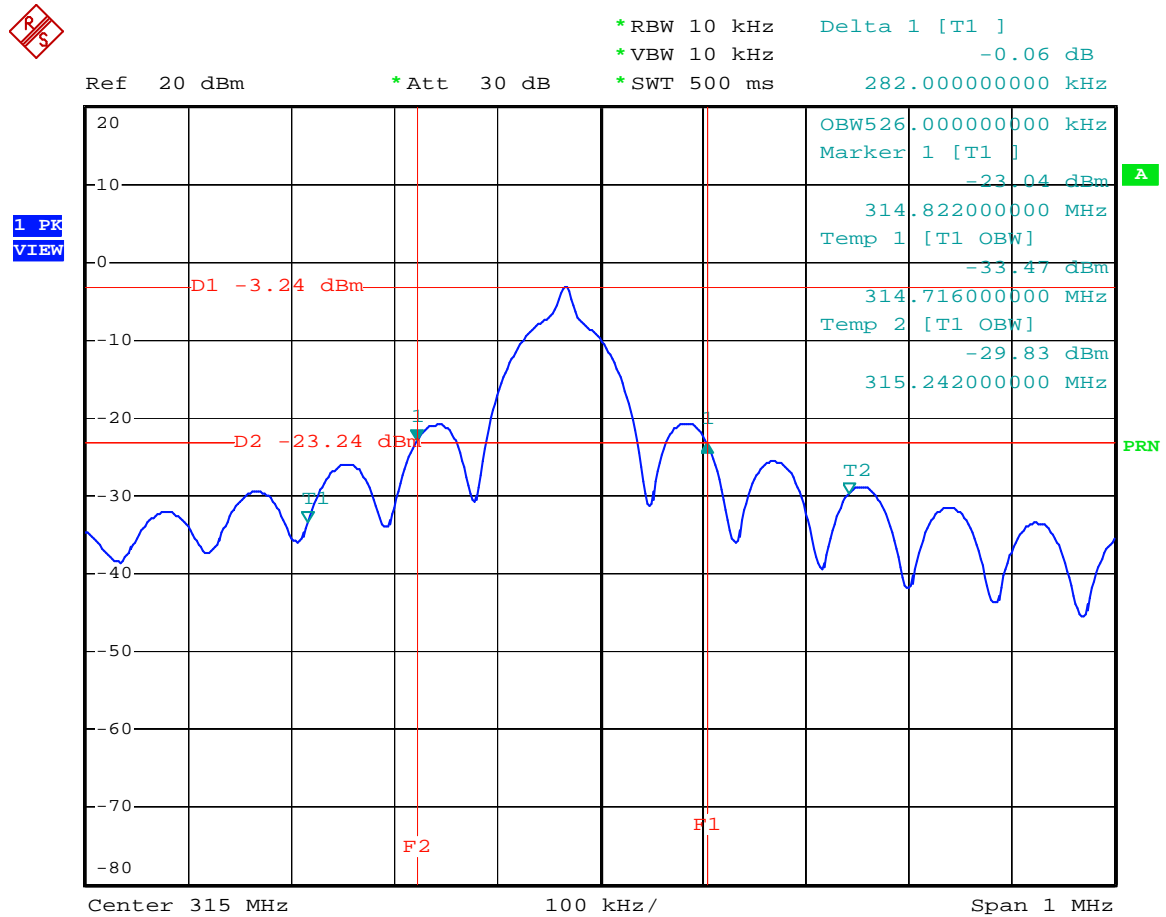

Date: 18.AUG.2005 11:55:04

## 5.4. Dwell Time of Periodic Operation Measurement

### 5.4.1. Applicable Standard

47 CFR FCC Part 15 Subpart C, section 15.231(a)/(e):

If devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(a).

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.

(4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

(5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs 15.231(a) of this section, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

If devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(e)

Intentional radiators may operate at a periodic rate exceeding that specified in section 15.231(a) and may be employed for any type of operation, including operation prohibited section 15.231(a).

### 5.4.2. Measuring Instruments

Refer to section 6 in this report.


### 5.4.3. Major Test Instruments Setting

| Spectrum Parameter | Setting        |
|--------------------|----------------|
| Attenuation        | Auto           |
| Span Frequency     | 0 MHz          |
| RB                 | 1000 kHz       |
| VB                 | 1000 kHz       |
| Detector           | Peak           |
| Trace              | Single Trigger |

#### 5.4.4. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.

#### 5.4.5. Test Setup Layout

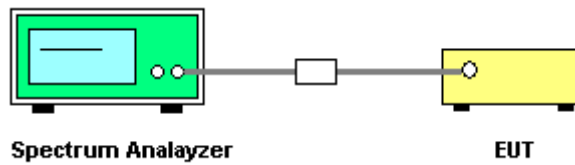

#### 5.4.6. Test Deviation


The measurement uncertainty is  $10^{-7}$ . Test methods have no deviations with original standard.

#### 5.4.7. Test Mode(s)

EUT is in normal use mode, one transmission after one trig. Measurement has been done on channel 1.

### 5.4.8. Test Result

#### Dwell Time of Periodic Operation

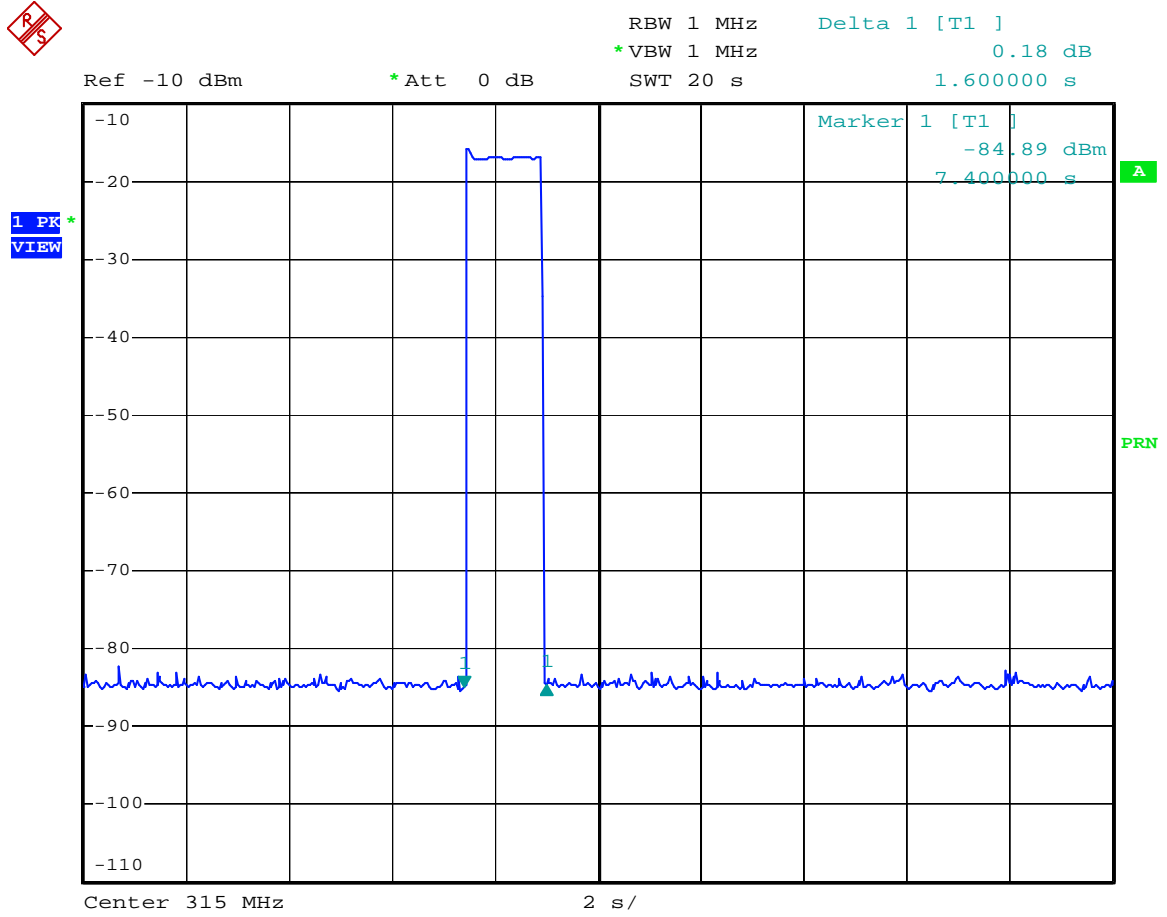

Date: 18.AUG.2005 14:19:45

## 5.5. Antenna Requirements

### 5.5.1. Applicable Standard

47 CFR FCC Part 15 Subpart C, section 15.203: The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the power limits in 47 CFR FCC Part 15 Subpart C, section 15.231.

### 5.5.2. Antenna Connector Construction

Please refer to section 2.3 in this test report, all antenna connectors comply with 47 CFR FCC Part 15 Subpart C, section 15.203 requirements.



## 6. List of Measuring Equipments

| Instrument                 | Manufacturer   | Model No.    | Serial No.  | Characteristics    | Calibration Date | Remark                   |
|----------------------------|----------------|--------------|-------------|--------------------|------------------|--------------------------|
| 3m Semi Anechoic Chamber   | SIDT FRANKONIA | SAC-3M       | 03CH03-HY   | 30MHz ~ 1GHz<br>3m | Jun. 16, 2005    | Radiation<br>(03CH03-HY) |
| Spectrum analyzer          | R&S            | FSP40        | 100004      | 9KHZ ~ 40GHz       | Aug. 31, 2004    | Radiation<br>(03CH03-HY) |
| Amplifier                  | SCHAFFNER      | CPA9231A     | 18667       | 9KHZ ~ 2GHz        | Jan. 10, 2005    | Radiation<br>(03CH03-HY) |
| Amplifier                  | Agilent        | 8449B        | 3008A02120  | 1GHz ~ 26.5GHz     | May 31, 2005     | Radiation<br>(03CH03-HY) |
| Biconical Antenna          | SCHWARZBECK    | VHBB 9124    | 301         | 30MHz ~ 200MHz     | Jul. 22, 2005    | Radiation<br>(03CH03-HY) |
| Log Antenna                | SCHWARZBECK    | VUSLP 9111   | 221         | 200MHz ~ 1GHz      | Jul. 22, 2005    | Radiation<br>(03CH03-HY) |
| Horn Antenna               | EMCO           | 3115         | 6741        | 1GHz ~ 18GHz       | Apr. 22, 2005    | Radiation<br>(03CH03-HY) |
| RF Cable-R03m              | Jye Bao        | RG142        | CB021       | 30MHz ~ 1GHz       | Feb. 22, 2005    | Radiation<br>(03CH03-HY) |
| RF Cable-HIGH              | SUHNER         | SUCOFLEX 106 | 03CH03-HY   | 1GHz ~ 40GHz       | Dec.01, 2004     | Radiation<br>(03CH03-HY) |
| Turn Table                 | HD             | DS 420       | 420/650/00  | 0 ~ 360 degree     | N/A              | Radiation<br>(03CH03-HY) |
| Antenna Mast               | HD             | MA 240       | 240/560/00  | 1 m - 4 m          | N/A              | Radiation<br>(03CH03-HY) |
| Spectrum analyzer          | R&S            | FSP40        | 100004      | 9KHZ ~ 40GHz       | Aug. 31, 2004    | Conducted<br>(TH01-HY)   |
| Power meter                | R&S            | NRVS         | 100444      | DC ~ 40GHz         | Jul. 06, 2005    | Conducted<br>(TH01-HY)   |
| Power sensor               | R&S            | NRV-Z55      | 100049      | DC ~ 40GHz         | Jul. 06, 2005    | Conducted<br>(TH01-HY)   |
| Power Sensor               | R&S            | NRV-Z32      | 100057      | 30MHz ~ 6GHz       | Apr. 28, 2005    | Conducted<br>(TH01-HY)   |
| AC power source            | HPC            | HPA-500W     | HPA-9100024 | AC 0 ~ 300V        | Apr. 21, 2005    | Conducted<br>(TH01-HY)   |
| DC power source            | G.W.           | GPC-6030D    | C671845     | DC 1V ~ 60V        | Nov. 28, 2004    | Conducted<br>(TH01-HY)   |
| Temp. and Humidity Chamber | KSON           | THS-C3L      | 612         | N/A                | Oct. 01, 2004    | Conducted<br>(TH01-HY)   |
| RF CABLE-1m                | Jye Bao        | RG142        | CB034-1m    | 20MHz ~ 7GHz       | Jan. 01, 2005    | Conducted<br>(TH01-HY)   |
| RF CABLE-2m                | Jye Bao        | RG142        | CB035-2m    | 20MHz ~ 1GHz       | Jan. 01, 2005    | Conducted<br>(TH01-HY)   |
| Oscilloscope               | Tektronix      | TDS1012      | CO38515     | 100MHz / 1GS/s     | Apr. 15, 2005    | Conducted<br>(TH01-HY)   |
| Signal Generator           | R&S            | SMR40        | 100116      | 10MHz ~ 40GHz      | Dec. 31, 2004    | Conducted<br>(TH01-HY)   |
| Data Generator             | Tektronix      | DG2030       | 063-2920-50 | 0.1Hz~400MHz       | Jun. 02, 2005    | Conducted<br>(TH01-HY)   |

Note: Calibration Interval of instruments listed above is one year.



| Instrument   | Manufacturer | Model No.     | Serial No.  | Characteristics | Calibration Date | Remark                |
|--------------|--------------|---------------|-------------|-----------------|------------------|-----------------------|
| Amplifier    | MITEQ        | AMF-6F-260400 | 923364      | 26.5GHz ~ 40GHz | Jan. 05, 2004*   | Radiation (03CH03-HY) |
| Loop Antenna | R&S          | HFH2-Z2       | 860004/001  | 9kHz ~ 30MHz    | May 24, 2004*    | Radiation (03CH03-HY) |
| Horn Antenna | SCHWARZBECK  | BBHA9170      | BBHA9170154 | 15GHz ~ 40GHz   | Jun. 09, 2004*   | Radiation (03CH03-HY) |

Note: Calibration Interval of instruments listed above is two year.

## 7. SPORTON COMPANY PROFILE

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

### 7.1. Test Location

|        |  |
|--------|--|
| SHIJR  | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C.<br>TEL : 02-2696-2468<br>FAX : 02-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 03-327-3456<br>FAX : 03-318-0055         |
| LINKOU | ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C<br>TEL : 02-2601-1640<br>FAX : 02-2601-1695               |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C.<br>TEL : 02-2631-4739<br>FAX : 02-2631-9740            |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C.<br>TEL : 02-8227-2020<br>FAX : 02-8227-2626           |
| NEIHU  | ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C.<br>TEL : 02-2794-8886<br>FAX : 02-2794-9777         |
| JHUBEI | ADD : No.8, Lane 728, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.<br>TEL : 03-656-9065<br>FAX : 03-656-9085       |

## 8. Certificate of NVLAP Accreditation

United States Department of Commerce  
National Institute of Standards and Technology

**NVLAP**<sup>®</sup>

ISO/IEC 17025:1999  
ISO 9002:1994

**Certificate of Accreditation**



**SPORTON INTERNATIONAL, INC.**  
TAIPEI HSIEN 221  
TAIWAN

*is recognized by the National Voluntary Laboratory Accreditation Program  
for satisfactory compliance with criteria set forth in NIST Handbook 150:2001,  
all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994.  
Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:*

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

December 31, 2005  
*Effective through*

  
For the National Institute of Standards and Technology  
NVLAP Lab Code: 200079-0

NVLAP-01C (06-01)