



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Everspring Industry Co., Ltd.
Applicant Address	7th fl, 609, Wan Shou Road, Sec 1, Kweishan, Taoyuan Hsien 333, Taiwan, R.O.C.
FCC ID	FU5SR102
Manufacturer's company	Everspring Industry Co., Ltd.
Manufacturer Address	7th fl, 609, Wan Shou Road, Sec 1, Kweishan, Taoyuan Hsien 333, Taiwan, R.O.C.

Product Name	EZ alarm system
Brand Name	EVERSPRING
Model Name	SR102
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.231
Test Freq. Range	315 MHz
Receive Date	May 30, 2006
Final Test Date	July 11, 2006
Submission Type	Original Equipment



Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

NVLAQ®

Lab Code: 200079-0

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Table for Carrier Frequencies	3
3.3. Table for Test Modes	3
3.4. Table for Testing Locations.....	4
3.5. Table for Supporting Units	4
3.6. Test Configurations	4
4. TEST RESULT	5
4.1. AC Power Line Conducted Emissions Measurement.....	5
4.2. Field Strength of Fundamental Emissions Measurement	8
4.3. 20dB Spectrum Bandwidth Measurement	11
4.4. Deactivating Time.....	13
4.5. Radiated Emissions Measurement	16
4.6. Antenna Requirements	26
5. LIST OF MEASURING EQUIPMENTS	27
6. TEST LOCATION.....	29
7. NVLAP CERTIFICATE OF ACCREDITATION	30
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A6
APPENDIX B. TEST PHOTOS.....	B1 ~ B3



History of This Test Report

Original Issue Date: July 13, 2006

Report No.: FR653002

- No additional attachment.
- Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. CERTIFICATE OF COMPLIANCE

Product Name : EZ alarm system
Brand Name : EVERSPRING
Model Name : SR102
Applicant : Everspring Industry Co., Ltd.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.231

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on May 30, 2006 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.


Tina Jao 7/13/06


Prepared By:

Tina Jao / Specialist


Carl Lee 13.7.06

Tested By:

Carl Lee / Engineer


Wayne Hsu 13.7.06

Reviewed By:

Wayne Hsu

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	-	-
4.2	15.231(b)	Field Strength of Fundamental Emissions	Complies	4.86 dB
4.3	15.231(c)	20dB Spectrum Bandwidth	Complies	-
4.4	15.231(a)	Deactivating Time	Complies	-
4.5	15.231(b)	Radiated Emissions	Complies	10.44 dB
4.6	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	$\pm 2.26\text{dB}$	Confidence levels of 95%
Field Strength of Fundamental Emissions	$\pm 3.72\text{dB}$	Confidence levels of 95%
20dB Spectrum Bandwidth	$\pm 6.25 \times 10^{-7}$	Confidence levels of 95%
Radiated Emissions	$\pm 3.72\text{dB}$	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

The EUT is a manually operated transmitter. For more detailed features description, please refer to the manufacturer's specifications or user's manual.

Items	Description
Product Type	Transmitter of alarm system
Power Type	3V DC from batteries
Modulation	ASK
Center Frequency	315 MHz
Channel Number	1
Channel Band Width (99%)	972 kHz
Max. Field Strength	70.76 dBuV/m at 3m (Average)
Antenna Type	Helix

3.2. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
315 MHz	1	315 MHz

3.3. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel
AC Power Line Conducted Emissions	-	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	1
Deactivating Time	Normal Use	1
Radiated Emissions 9kHz~30MHz Radiated Emissions 9kHz~10 th Harmonic Band Edge Emissions	CTX	1

Note: CTX=continuously transmitting

3.4. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	101377	IC 4088	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).


Please refer section 6 for Test Site Address.

3.5. Table for Supporting Units

The EUT was tested alone.

3.6. Test Configurations

3.6.1. Radiation Emissions Test Configuration



3.6.2. AC Power Line Conduction Emissions Test Configuration

The transmitter is battery powered; there is no need to do this testing.

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

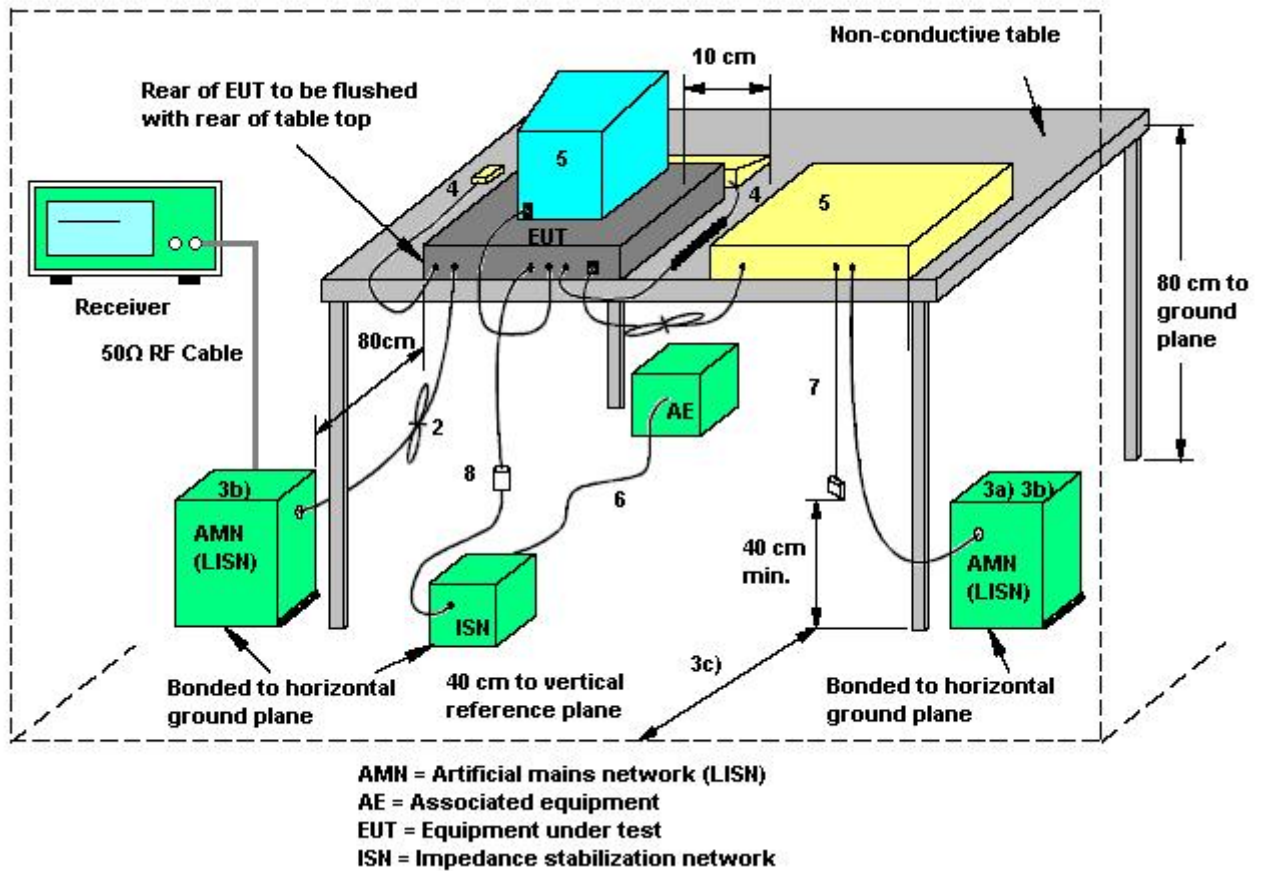

1. If cables, which hang closer than 40 cm to the horizontal metal groundplane, cannot be shortened to appropriate length, the excess shall be folded back and forth forming a bundle 30 cm to 40 cm long.
2. Excess mains cord shall be bundled in the centre or shortened to appropriate length.
3. EUT is connected to one artificial mains network (AMN). All AMNs and ISNs may alternatively be connected to a vertical reference plane or metal wall.
4. All other units of a system are powered from a second AMN. A multiple outlet strip can be used for multiple mains cords.
5. AMN and ISN are 80 cm from the EUT and at least 80 cm from other units and other metal planes.
6. Mains cords and signal cables shall be positioned for their entire lengths, as far as possible, at 40 cm from the vertical reference plane.
7. Cables of hand operated devices, such as keyboards, mice, etc. shall be placed as for normal usage.
8. Peripherals shall be placed at a distance of 10 cm from each other and from the controller, except for the monitor which, if this is an acceptable installation practice, shall be placed directly on the top of the controller.
9. I/O signal cable intended for external connection.
10. The end of the I/O signal cables which are not connected to an AE may be terminated, if required, using correct terminating impedance.
11. If used, the current probe shall be placed at 0,1 m from the ISN.

4.1.5. Test Deviation

There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

4.1.7. Results of AC Power Line Conducted Emissions Measurement

The transmitter is battery powered; there is no need to do this testing.

4.2. Field Strength of Fundamental Emissions Measurement

4.2.1. Limit

Devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(a). The field strength of emissions from intentional radiators at 3 meters operated under this Section shall not exceed the following:

Frequency Band (MHz)	Fundamental Emissions Limit (uV/m) at 3m
40.66-40.70	2250
70-130	1250
130-174	1250-3750(**)
174-260	3750
260-470	3750-12500(**)
Above 470	12500

**1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

(1) for the band 130 - 174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818 \times (\text{operating frequency, MHz}) - 6136.3636$;

(2) for the band 260 - 470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667 \times (\text{operating frequency, MHz}) - 7083.3333$.

So the field strength of emission limits have been calculated in below table.

Carrier Frequency (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
315 MHz	75.62 (Average)
315 MHz	95.62 (Peak)

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	Auto
Center Frequency	Fundamental Frequency
RB	120 kHz
Detector	Peak / Average

4.2.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use the receiver to measure peak and average reading.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

4.2.4. Test Setup Layout

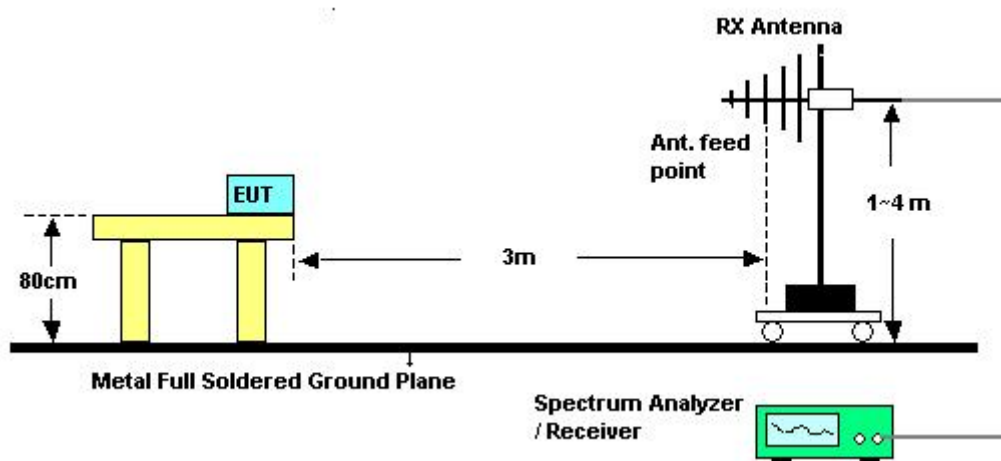

4.2.5. Test Deviation


There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Field Strength of Fundamental Emissions

Temperature	28°C	Humidity	58%
Test Engineer	Sam Lee	Configurations	Channel 1

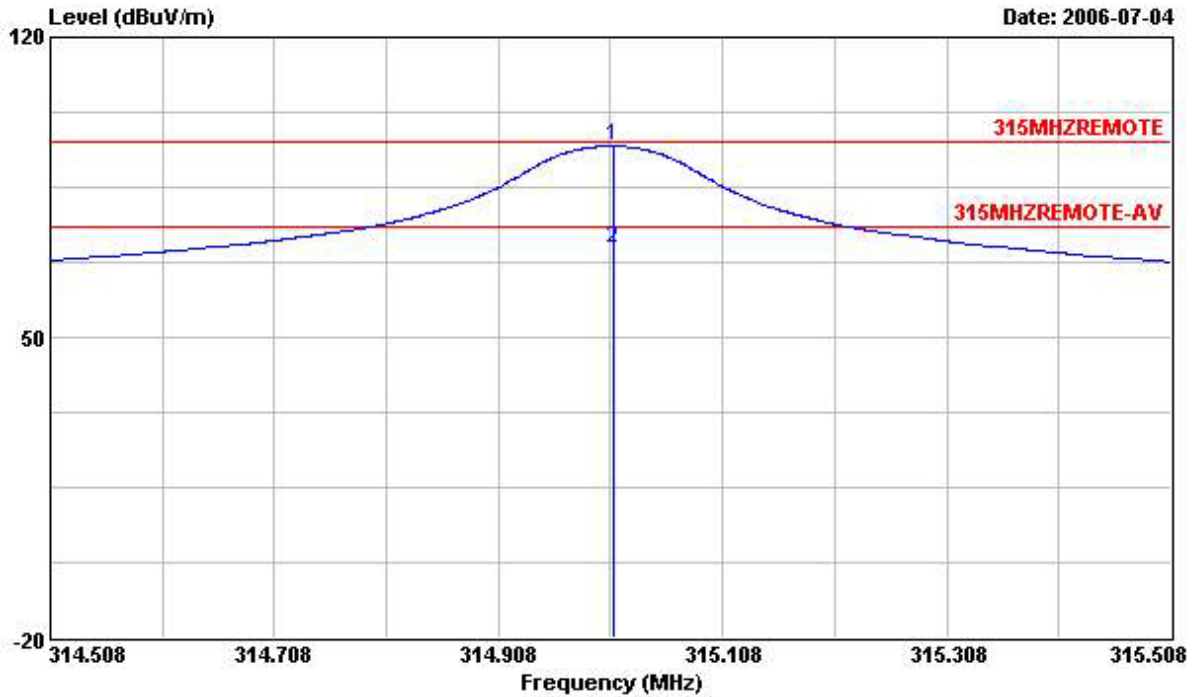

	Freq	Level	Over Limit	Limit Line	Read&Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1 @	315.010	94.62	-1.00	95.62	107.52	14.27	3.01	30.18	Peak
2	315.010	70.76	-4.86	75.62	83.66	14.27	3.01	30.18	Average

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Receiving maximum fundamental emissions are Horizontal Polarization.

4.3. 20dB Spectrum Bandwidth Measurement

4.3.1. Limit

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. So the emission bandwidth limits have been calculated in below table.

Fundamental Frequency	20dB Bandwidth Limits (kHz)
315 MHz	787.5

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RB	10 kHz
VB	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 10 kHz and the video bandwidth of 10 kHz were used.
3. Measured the spectrum width with power higher than 20dB below carrier.

4.3.4. Test Setup Layout

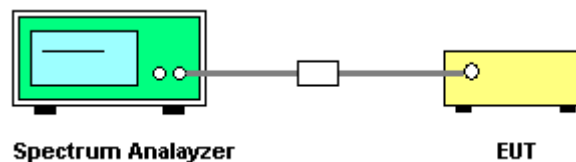

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of 20dB Spectrum Bandwidth

Temperature	28°C	Humidity	58%
Test Engineer	Sam Lee	Configurations	Channel 1

Frequency	20dB BW (kHz)	Limits (kHz)	Test Result
315 MHz	364.00	787.5	Complies

20 dB/99% Bandwidth Plot on 315 MHz

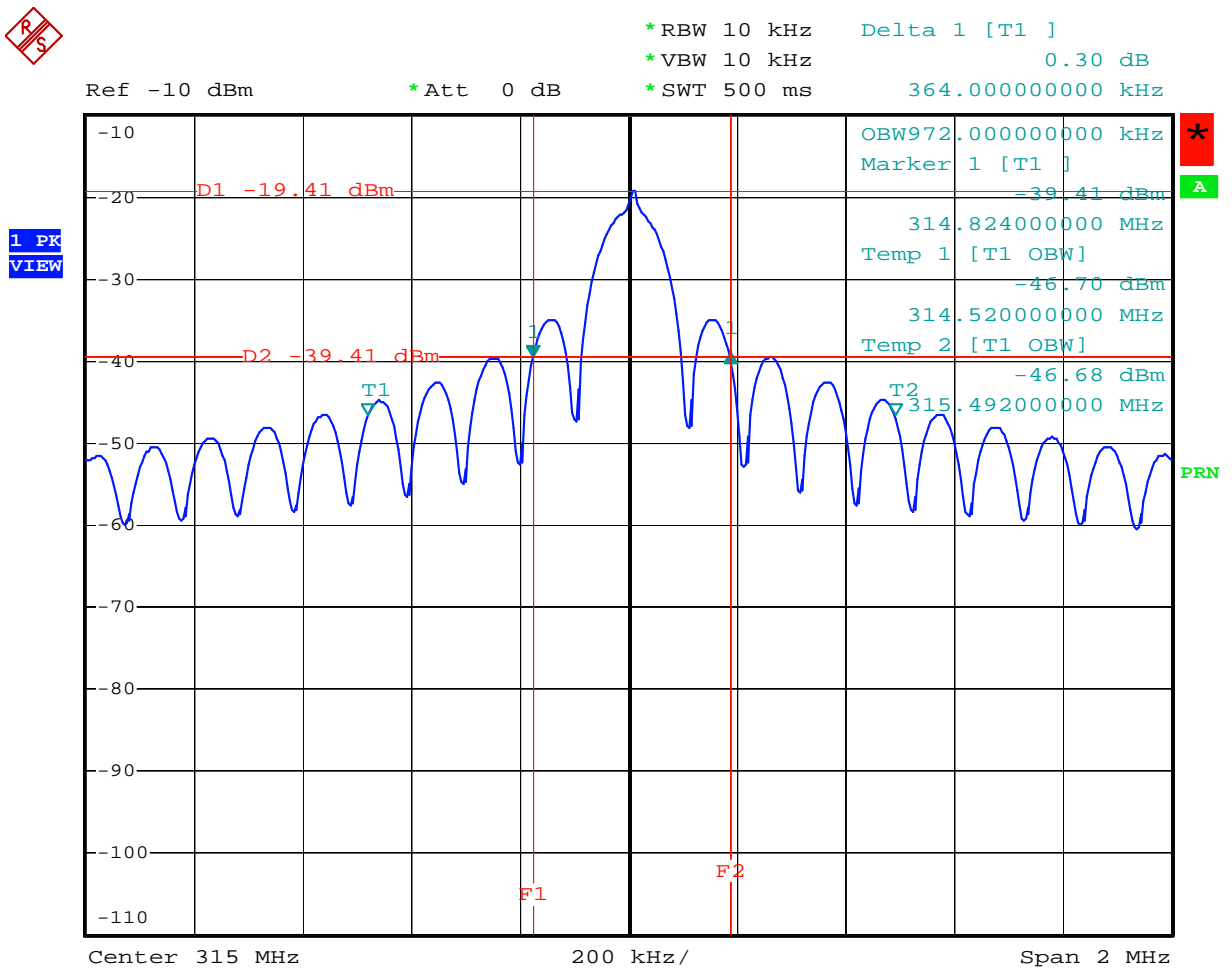

Date: 6.JUL.2006 17:45:33

4.4. Deactivating Time

4.4.1. Limit

A manually operated transmitter shall employ a switch that will automatically deactivate the EUT within not more than 5 seconds of being released.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger
Attenuation	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.

4.4.4. Test Setup Layout

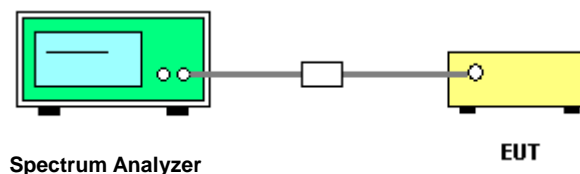

4.4.5. Test Deviation


There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT is in normal operation and released manually.

4.4.7. Test Result of Deactivating Time

Temperature	28°C	Humidity	58%
Test Engineer	Sam Lee	Configurations	Channel 1

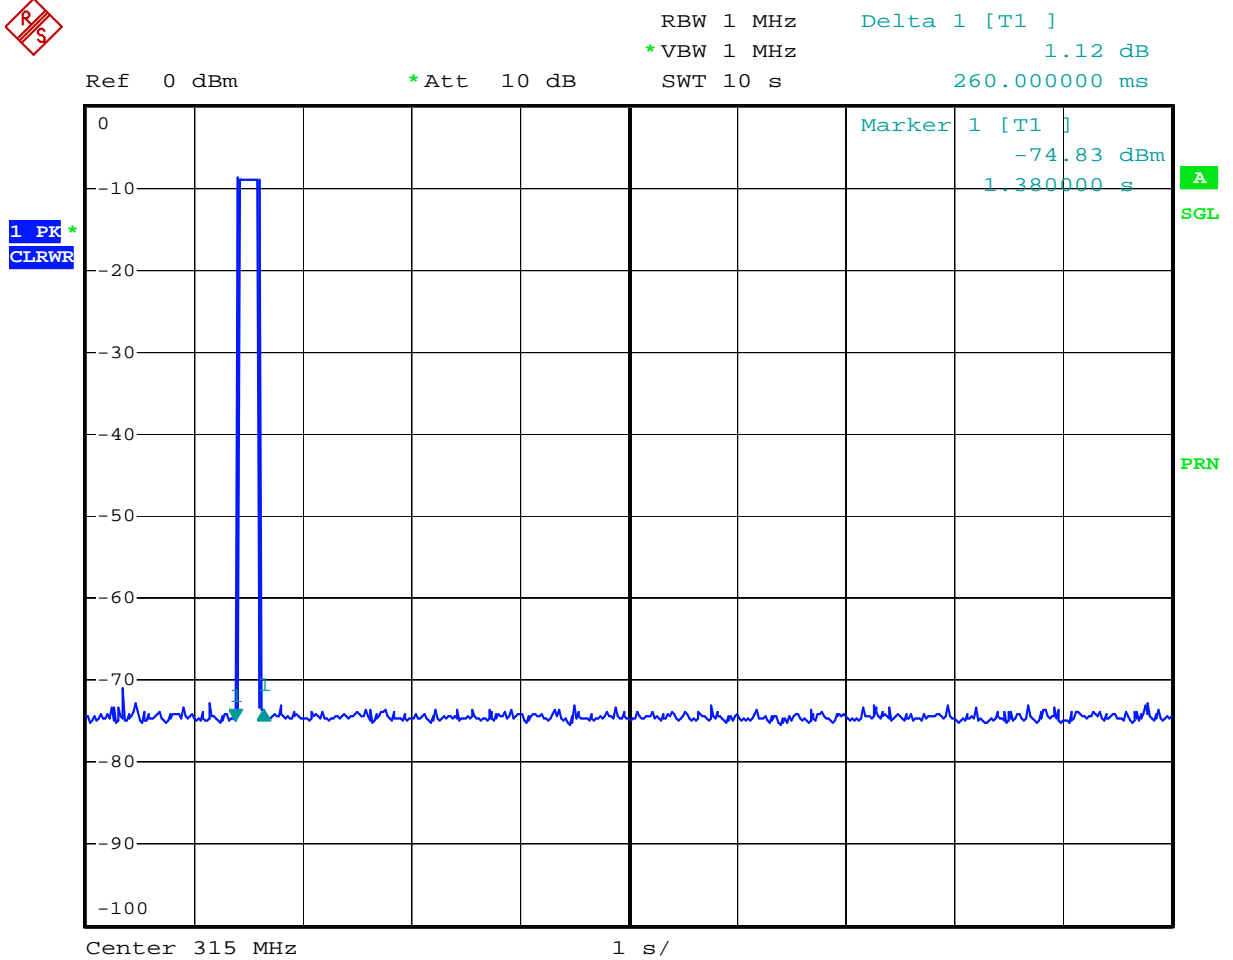

Date: 6.JUL.2006 17:52:06

Note: The EUT is deactivated immediately after being released.

4.4.8. Test Result of Operation Restriction

Periodic Operation Restriction	Applicable	Declared by applicant	Test performance	Passed
The transmitter is used for				
<input type="checkbox"/> security or safety applications <input checked="" type="checkbox"/> other applications		<input checked="" type="checkbox"/>		
The transmitter is operated				
<input checked="" type="checkbox"/> manually <input type="checkbox"/> automatically		<input checked="" type="checkbox"/>		
Periodic operation according to				
<input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart C 15.231(a)				
Only control signals are sent and there is on continuous transmission.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
(2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
(3) Periodic transmissions at regular predetermined intervals are				
<input checked="" type="checkbox"/> not permitted <input type="checkbox"/> permitted with total transmission time of two seconds per hour or less (for polling or supervision transmission to determine system integrity of transmitters used in security or safety applications)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> 47 CFR FCC Part 15 Subpart C 15.231(e)				
The device is provided with a means for automatically limiting operation so that the duration of each transmissions is not greater than one second and the silent period between transmissions is at least 30 times the duration of the transmission but in no case less than 10 seconds.	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: Result may be based on the applicant declaration (i.e. no test is performed). However, in this case there is no verification by the test laboratory.

4.5. Radiated Emissions Measurement

4.5.1. Limit

Devices complying with 47 CFR FCC Part 15 Subpart C, section 15.231(a). The field strength of emissions from intentional radiators at 3 meters operated under this Section shall not exceed the following:

Frequency Band (MHz)	Spurious Emissions Limit (uV/m) at 3m
40.66-40.70	225
70-130	125
130-174	125-375(**)
174-260	375
260-470	375-1250(**)
Above 470	1250

**1. Linear interpolations, the formulas for calculating the maximum permitted fundamental field strengths are as follows:

(1) for the band 130 - 174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818 \times (\text{operating frequency, MHz}) - 6136.3636$;

(2) for the band 260 - 470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667 \times (\text{operating frequency, MHz}) - 7083.3333$.

(3) The maximum permitted unwanted emissions level is 20 dB below the maximum permitted fundamental level. In addition field strength of any emissions which appear inside of the restriction band shall not exceed the general radiated emissions limits in Section 15.209(a).

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	$2400/F(\text{KHz})$	300
0.490~1.705	$24000/F(\text{KHz})$	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	100KHz / 100KHz for peak

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the

field strength is at its maximum value.


8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

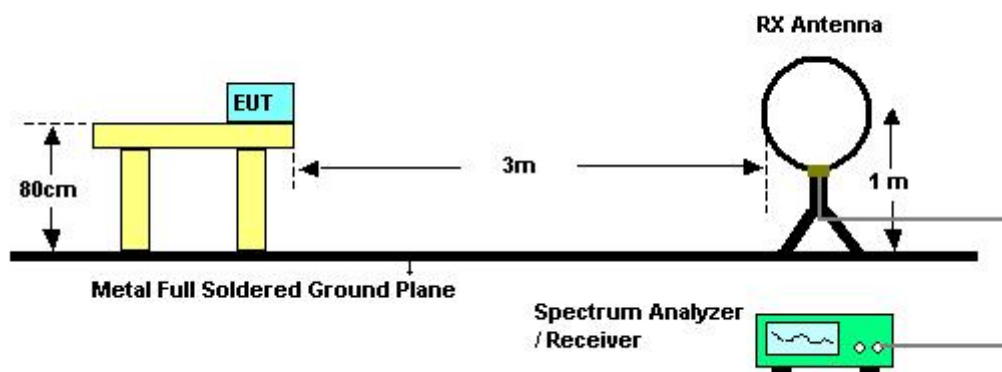

For radiated emissions above 30MHz

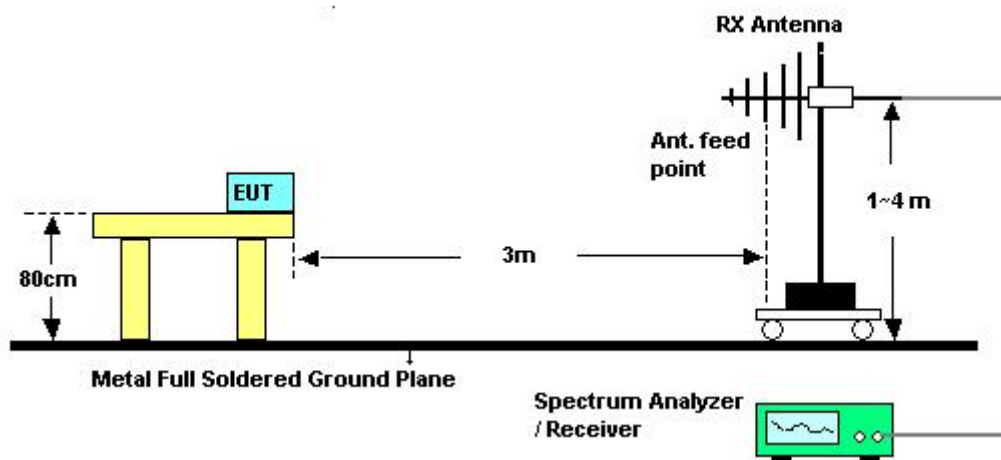

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	26°C	Humidity	51%
Test Engineer	Ted Chiu		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.5.8. Results for Radiated Emissions (30MHz~10th Harmonic)

Temperature	26°C	Humidity	51%
Test Engineer	Ted Chiu	Configurations	Channel 1

Horizontal

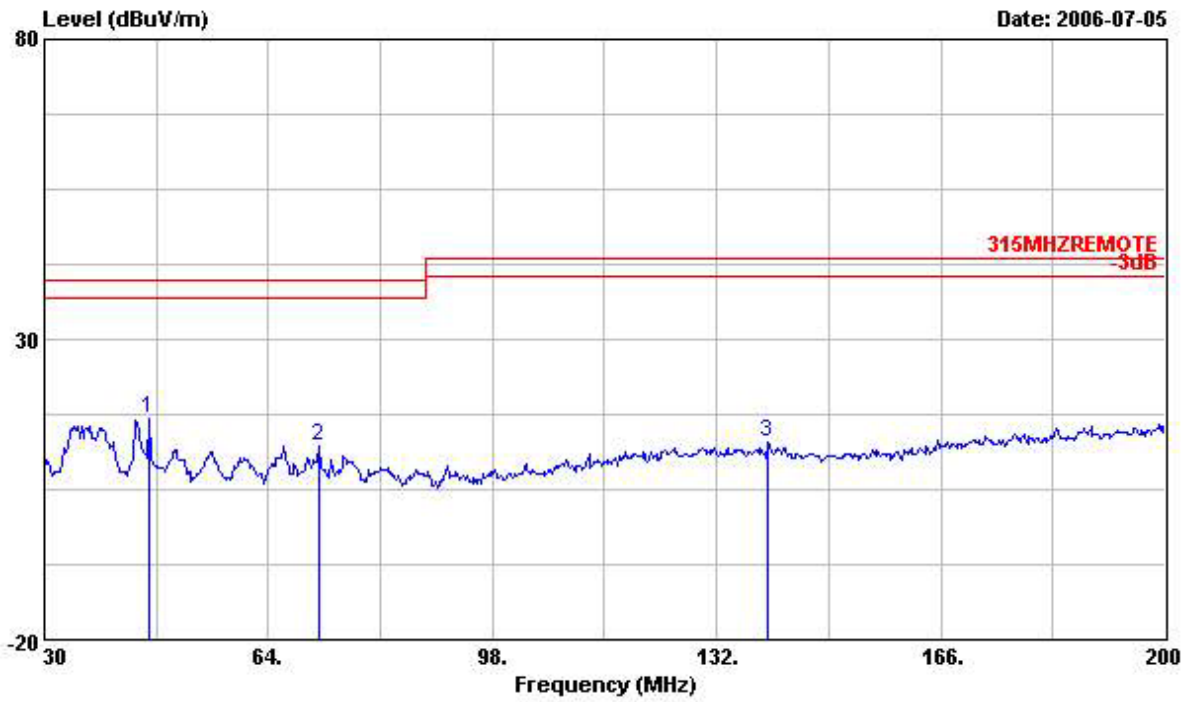


	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	45.980	16.82	-23.18	40.00	33.90	12.19	0.80	30.07 Peak
2	71.820	12.37	-27.63	40.00	31.37	9.74	1.38	30.12 Peak
3	139.820	12.82	-30.68	43.50	28.46	12.60	1.87	30.11 Peak

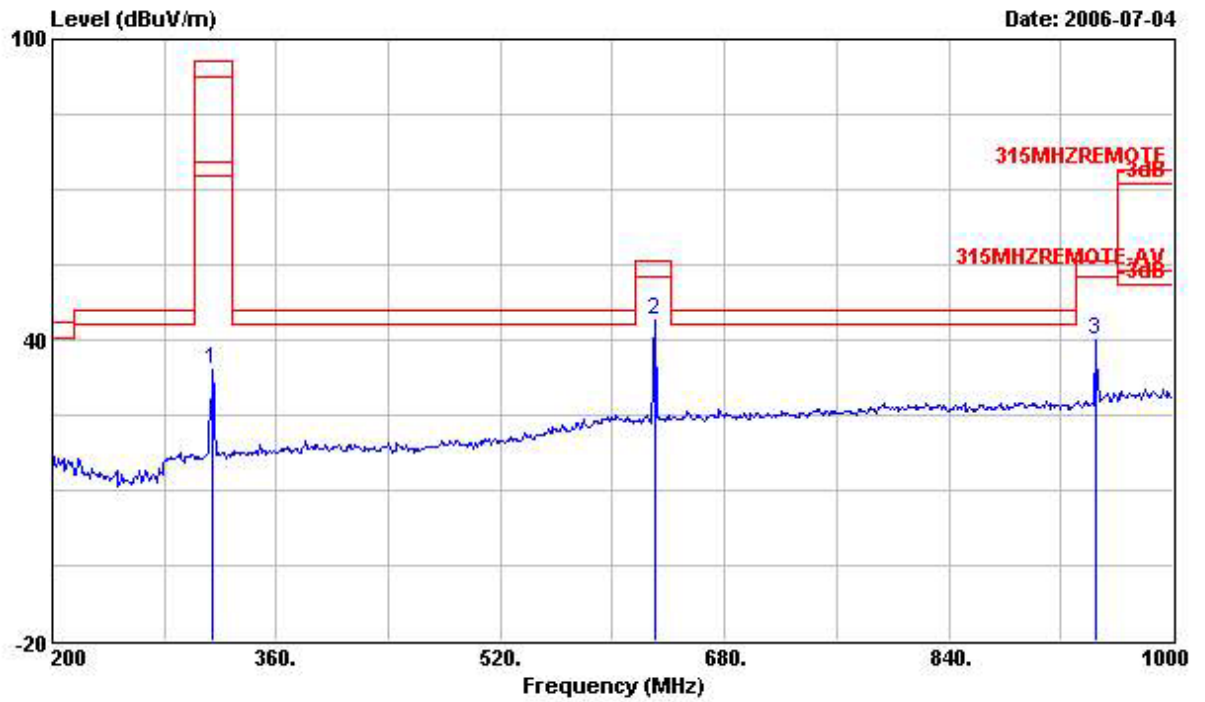


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	314.400	34.06	-61.56	95.62	46.99	14.24	3.01	30.18	Peak
2	630.400	44.10	-11.52	55.62	49.11	20.49	4.39	29.90	Peak
3	944.800	39.94	-15.68	55.62	41.27	22.69	5.50	29.52	Peak

Vertical

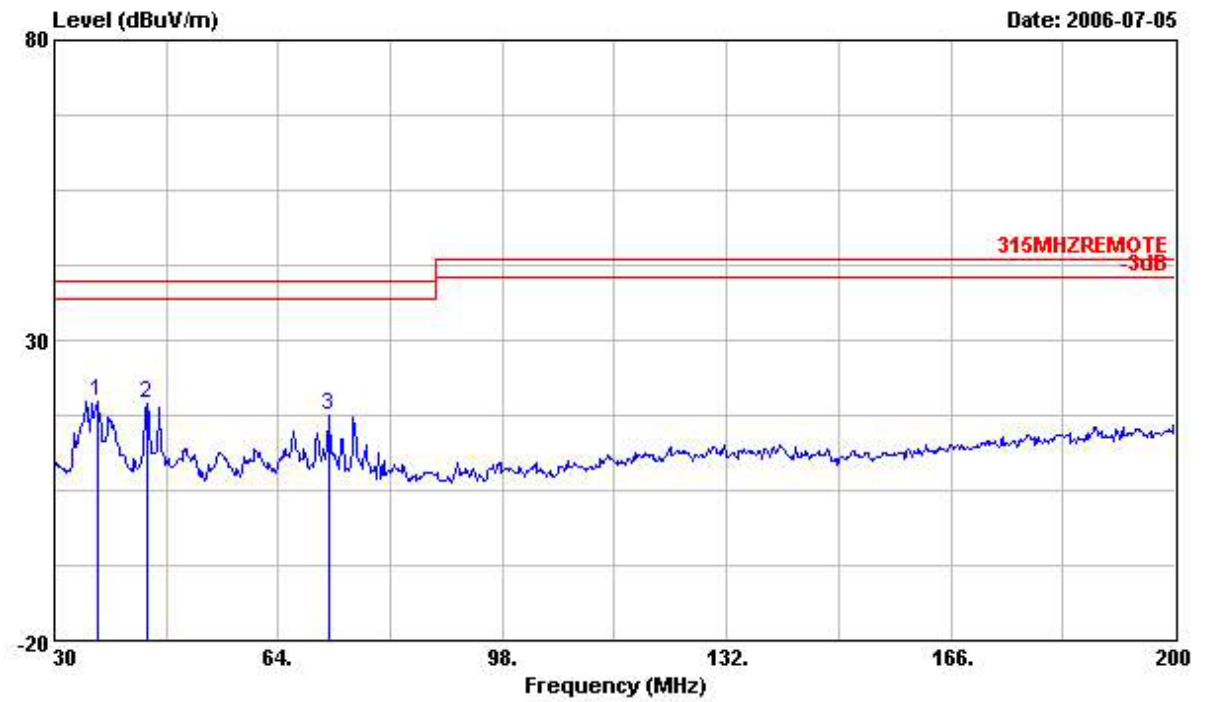

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	
1	36.460	19.83	-20.17	40.00	37.24	12.09	0.53	30.03	Peak
2	44.110	19.34	-20.66	40.00	36.24	12.44	0.73	30.07	Peak
3	71.820	17.52	-22.48	40.00	36.52	9.74	1.38	30.12	Peak

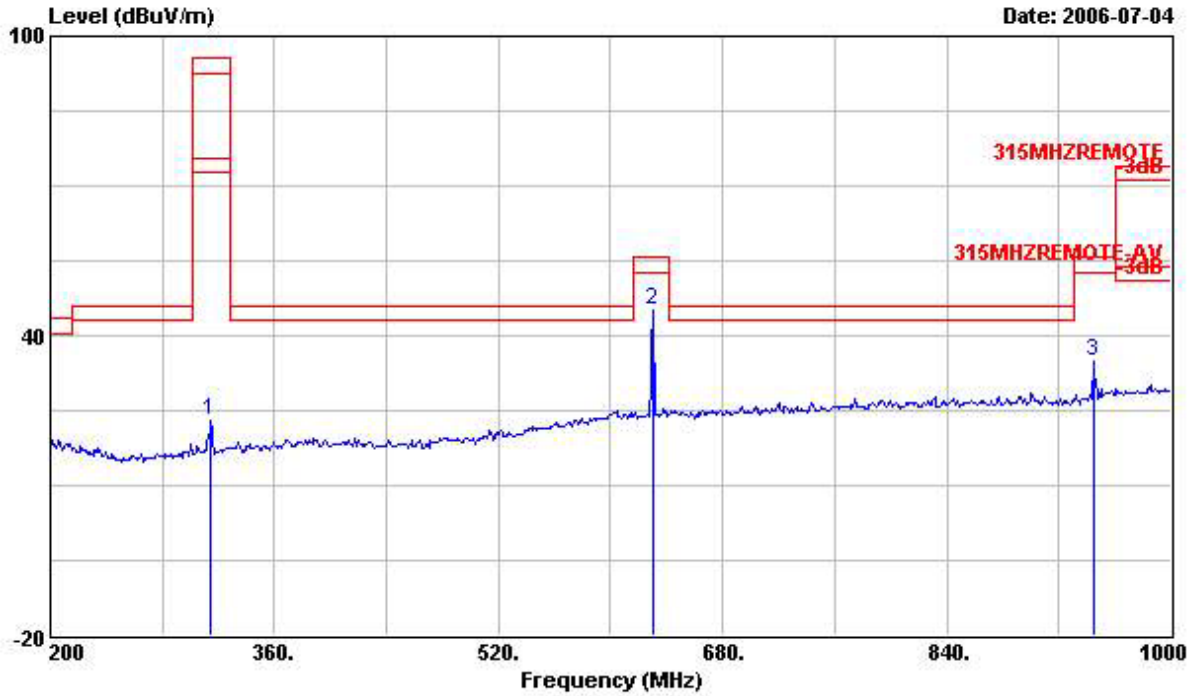

	Freq	Level	Over Limit	Limit Line	Read&Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	314.400	23.16	-72.46	95.62	36.09	14.24	3.01	30.18	Peak
2	630.400	45.18	-10.44	55.62	50.19	20.49	4.39	29.90	Peak
3	944.800	34.73	-20.89	55.62	36.06	22.69	5.50	29.52	Peak

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th harmonic of highest frequency)


Temperature	28°C	Humidity	60%
Test Engineer	Ted Chiu	Configurations	Channel 1

Horizontal

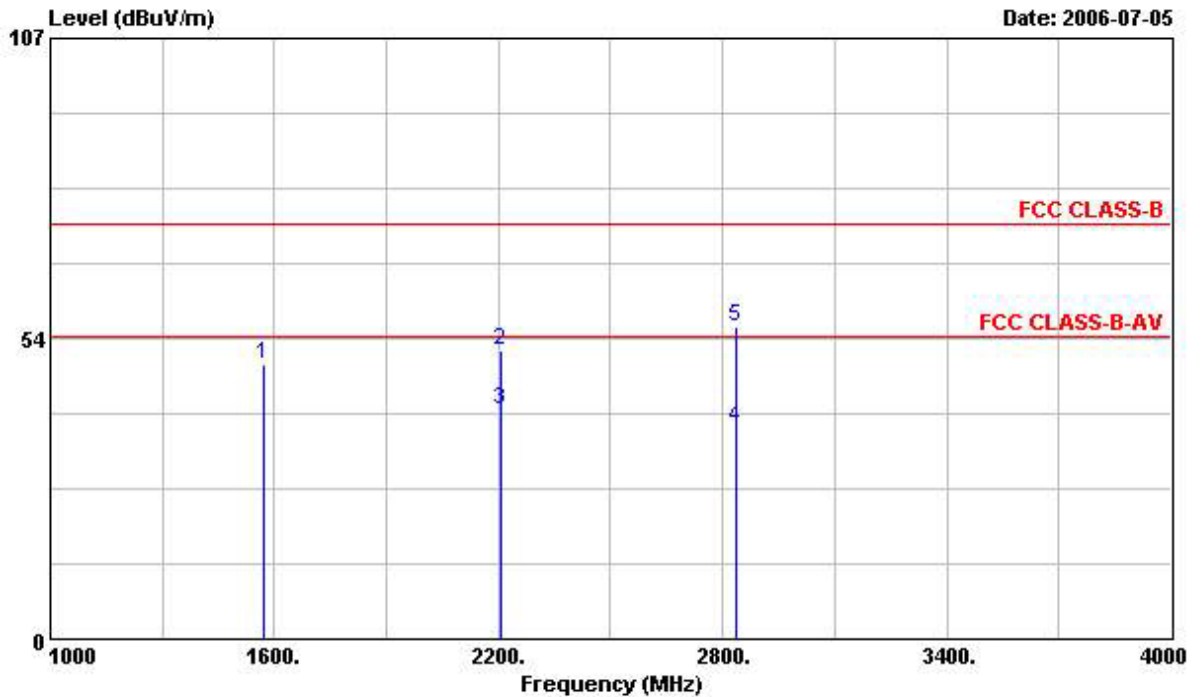

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	
1	1574.000	48.82	-25.18	74.00	54.62	25.67	1.56	33.03 Peak
2	2204.000	51.36	-22.64	74.00	54.55	27.91	1.75	32.85 Peak
3	2204.000	40.85	-13.15	54.00	44.04	27.91	1.75	32.85 Average
4	2836.000	37.57	-16.43	54.00	38.78	29.50	2.18	32.89 Average
5	2836.000	55.60	-18.40	74.00	56.81	29.50	2.18	32.89 Peak

Vertical

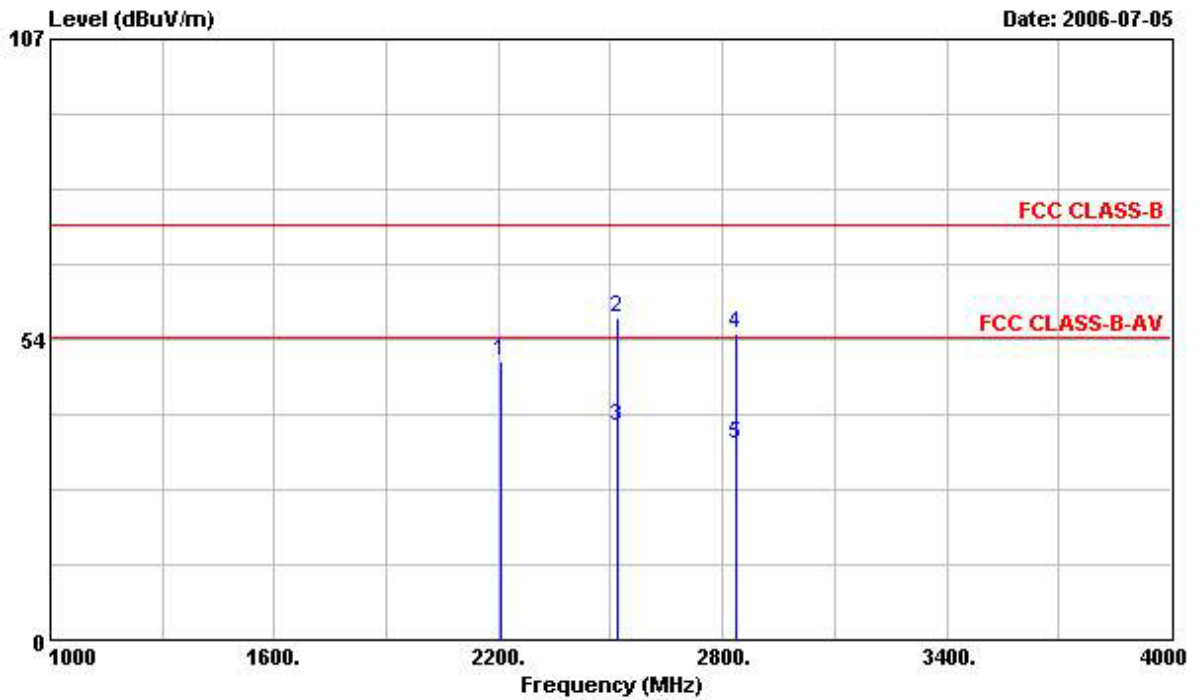

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	2204.000	49.61	-24.39	74.00	52.80	27.91	1.75	32.85	Peak
2	2518.000	57.28	-16.72	74.00	59.99	28.55	1.96	33.22	Peak
3	2518.000	37.88	-16.12	54.00	40.59	28.55	1.96	33.22	Average
4	2836.000	54.51	-19.49	74.00	55.72	29.50	2.18	32.89	Peak
5	2836.000	34.80	-19.20	54.00	36.01	29.50	2.18	32.89	Average

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Pol. : V is Vertical Polarization ; H is Horizontal Polarization.

4.6. Antenna Requirements

4.6.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.6.2. Antenna Connector Construction

Antenna connector comply with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 22, 2006	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Dec. 19, 2005	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9708-1839	9kHz – 30MHz	Mar. 18, 2006	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2006	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 15, 2006	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	3565	9 kHz - 2 GHz	Jan. 18, 2006	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 29, 2006	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30 MHz - 200 MHz	Jul. 22, 2005	Radiation (03CH03-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	221	200 MHz - 1 GHz	Jul. 22, 2005	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6903	1GHz ~ 18GHz	Mar. 15, 2006	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec.02, 2005	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.02, 2005	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Nov. 26, 2005	Conducted (TH01-HY)
Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jun, 10, 2006	Conducted (TH01-HY)
Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 05, 2006	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun, 10, 2006	Conducted (TH01-HY)
DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Nov. 27, 2005	Conducted (TH01-HY)
Temp. and Humidity Chamber	KSON	THS-C3L	C671845	DC 1V ~ 60V	Dec. 28, 2005	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 30, 2005	Conducted (TH01-HY)
Oscilloscope	Tektronix	TDS1012	CB035-2m	20MHz ~ 1GHz	Dec. 30, 2005	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	CO38515	100MHz / 1GS/s	Jun. 20, 2006	Conducted (TH01-HY)
Data Generator	Tektronix	DG2030	100116	10MHz ~ 40GHz	Dec. 30, 2005	Conducted (TH01-HY)
DC power source	G.W.	GPC-6030D	063-2920-50	0.1Hz~400MHz	Jun. 16, 2006	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 24, 2006*	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005*	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. NVLAP CERTIFICATE OF ACCREDITATION

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®]

Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 200079-0

Sporton International, Inc. Hwa Ya EMC Laboratory
Tao Yuan Hsien 333
TAIWAN

*is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:*

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

2006-01-01 through 2006-12-31
Effective dates




For the National Institute of Standards and Technology

NVLAP-01C (REV. 2005-05-19)