

**#01\_WLAN2.4GHz\_802.11b 1Mbps\_Bottom Face\_0mm\_Ch6**

Communication System: 802.11b ; Frequency: 2437 MHz; Duty Cycle: 1:1.029

Medium: MSL\_2450\_151016 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.947 \text{ S/m}$ ;  $\epsilon_r = 54.098$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

**DASY5 Configuration**

- Probe: EX3DV4 - SN3955; ConvF(7.32, 7.32, 7.32); Calibrated: 2014/11/21;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2014/11/13
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch6/Area Scan (81x51x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 1.78 W/kg


**Configuration/Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 30.66 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.29 W/kg

**SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.366 W/kg**

Maximum value of SAR (measured) = 1.64 W/kg

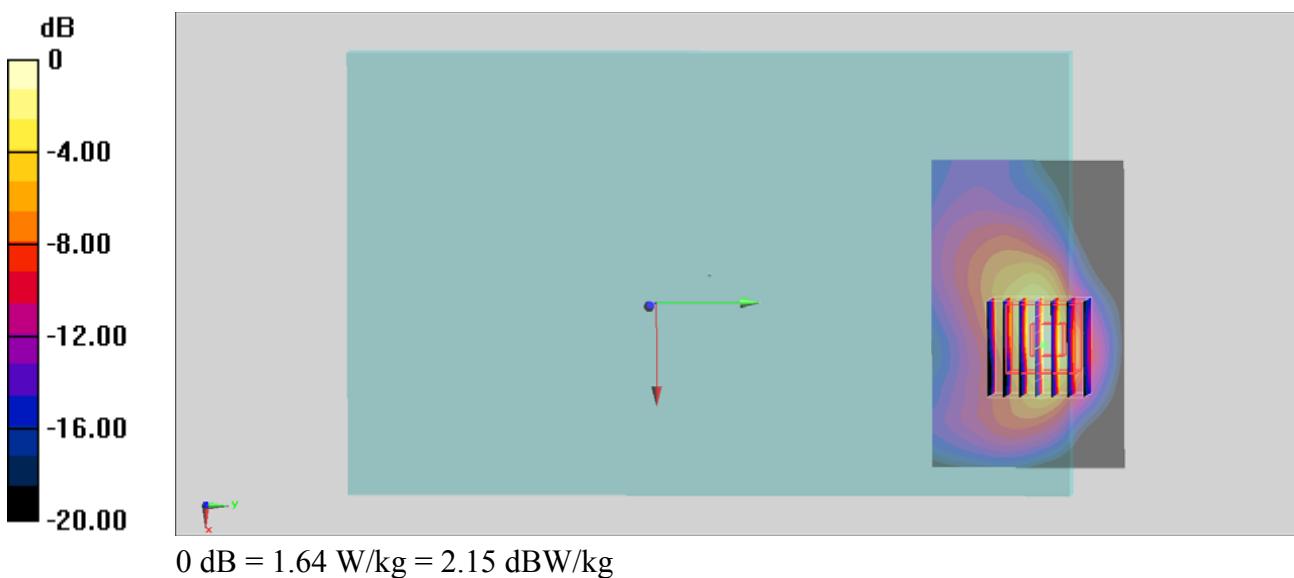

## #02\_WLAN5GHz\_802.11a 6Mbps\_Edge1 \_0mm\_Ch44

Communication System: 802.11a ; Frequency: 5220 MHz; Duty Cycle: 1:1.144

Medium: MSL\_5G\_151023 Medium parameters used:  $f = 5220 \text{ MHz}$ ;  $\sigma = 5.532 \text{ S/m}$ ;  $\epsilon_r = 47.297$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

### DASY5 Configuration

- Probe: EX3DV4 - SN3925; ConvF(4.62, 4.62, 4.62); Calibrated: 2015/5/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2015/5/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch44/Area Scan (61x81x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.72 W/kg


**Configuration/Ch44/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value = 9.147 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 4.26 W/kg

**SAR(1 g) = 1 W/kg; SAR(10 g) = 0.267 W/kg**

Maximum value of SAR (measured) = 2.55 W/kg

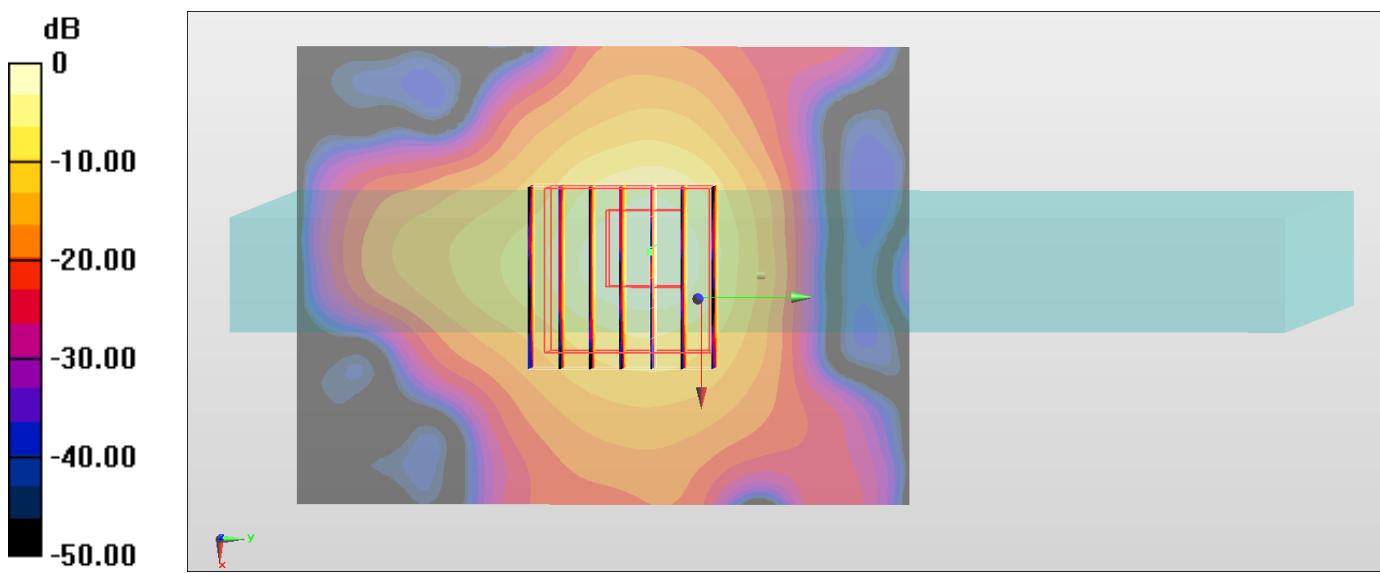

## #03\_WLAN5GHz\_802.11a 6Mbps\_Edge1 \_0mm\_Ch165

Communication System: 802.11a ; Frequency: 5825 MHz; Duty Cycle: 1:1.144  
 Medium: MSL\_5G\_151023 Medium parameters used :  $f = 5825 \text{ MHz}$ ;  $\sigma = 6.239 \text{ S/m}$ ;  $\epsilon_r = 46.333$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

### DASY5 Configuration

- Probe: EX3DV4 - SN3925; ConvF(4.16, 4.16, 4.16); Calibrated: 2015/5/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2015/5/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1227
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Configuration/Ch165/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 2.36 W/kg

**Configuration/Ch165/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.360 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.10 W/kg

**SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 2.43 W/kg

