



TABLE OF CONTENTS

GENERAL INFORMATION2

MODIFICATION LIST4

CONDUCTED POWER LINE TEST5

1 TEST INSTRUMENTS & FACILITIES5

2 TEST PROCEDURE5

3 TEST SETUP.....6

4 CONFIGURATION OF THE EUT8

5 EUT OPERATING CONDITION11

6 LIMIT OF CONDUCTED POWER LINE EMISSION CLASS B :11

7 RESULT OF CONDUCTED POWER LINE TEST (1).....12

8 RESULT OF CONDUCTED POWER LINE TEST (2).....13

RADIATED EMISSION TEST14

1 TEST INSTRUMENTS & FACILITIES14

2 TEST PROCEDURE15

3 TEST SETUP.....15

4 CONFIGURATION OF THE EUT16

5 EUT OPERATING CONDITION16

6 LIMIT OF RADIATED EMISSION CLASS B :16

7 RESULT OF RADIATED EMISSION TEST (1)17

8 RESULT OF RADIATED EMISSION TEST (2)19

PHOTO OF FCC ID LABEL.....21

APPENDIX A

PHOTOS OF TEST CONFIGURATION

APPENDIX B

PHOTOS OF EUT

GENERAL INFORMATION

- 1 APPLICANT : SAMPO CORPORATION
- 2 ADDRESS : 216, Chung Shan Road, Sec. 1,
Pan Chiao City, Taipei Hsien,
Taiwan, R. O. C.
- 3 MANUFACTURER : SAMPO CORPORATION
- 4 ADDRESS : 216, Chung Shan Road, Sec. 1,
Pan Chiao City, Taipei Hsien,
Taiwan, R. O. C.
- 5 DESCRIPTION OF EUT :
- EUT : Multimedia Monitor
- FCC ID : FYLHD5
- Model Number : SME-32HD5, SME-32HDXXXX,
SME-32SDXXXX, SM-34HDXXXX,
DTV34XHXXXX, VC-34MXXXX,
XV-34HDXXXX (X=0~9, A~Z or Blank)
- Serial # : N/A
- Data Cable : N/A
- Power Cord : UN-SHIELDED
- Power Supply Type : SWITCHING

- 5.1 The difference between series models of SAMPO Multimedia monitor is for different OEM customer. The internal circuit and P. C. B. Layout and function is the same.

6 FEATURES OF EUT :

- 6.1 Cathode ray tube
 - a. tube size: 34 inch (32 inch viewable)
 - b. Dot pitch: H=0.8mm
 - c. Light transmission: 35% typical
- 6.2 Power
 - a. Input voltage: 100Vac~240Vac 60Hz/50Hz Max
 - b. Input current: 3A at 110Vac / 60Hz Max
 - c. Power consumption: 220 Watts (Max)
- 6.3 Input signal
 - Video signal
 - a. Type: Analog
 - b. Polarity: Positive
 - c. Amplitude: RGB: 0.7 Vp-p/AV:1.0 Vp-p
 - d. Input impedance: 75 ohms
 - e. Dot rate: 65 MHz (Max.)
- 6.4 Horizontal sync
 - a. Type: TTL
 - b. Polarity: Positive or negative
 - c. Input impedance: 1K ohm (Min)
 - d. Frequency: RGB: 31KHz to 52 KHz
AV: 15.734 KHz (NTSC) / 60Hz
- 6.5 Vertical sync
 - a. Type: TTL
 - b. Polarity: Positive or negative
 - c. Input impedance: 1K ohm (Min)
 - d. Frequency: 50 Hz to 120Hz
- 6.6 Connector type: 15 pin D-type and RCA JACK and S-terminal
- 6.7 Standard size
 - Horizontal size: 620 +/- 8 mm
 - Vertical size: 465 +/- 8 mm
- 6.8 Unit dimension (with base): W (886) x H (718) x D (583)
Packaging dimension: W (1035) x H (888) x D (765)



MODIFICATION LIST

THE FOLLOWING ACCESSORIES WERE ADDED TO THE EUT DURING TESTING :

NO MODIFICATION BY HOMETEK TECHNOLOGY INC.

CONDUCTED POWER LINE TEST

1 TEST INSTRUMENTS & FACILITIES

The following test Instruments was used during the conducted test :


Item	Instruments/ Facilities	Specification	Manufacturer	Model #	Date Of Cal.
1	EMI Receiver	9KHz ~ 30MHz	ROHDE & SCHWARZ	ESHS 30	MAR/2000
2	LISN	50Ω/50uH/100A 9KHz ~ 30MHz	SCHWARZ BECK	NNLK 8121	MAR/2000
3	LISN	9KHz ~ 30MHz	ROHDE & SCHWARZ	ESH3-Z5	MAR/2000
4	ESXS-K1	Version 2.03b	ROHDE & SCHWARZ	1082.9678.02 840.913/246	N/A
5	Cables	10KHz ~ 30MHz		NO : 10	JUL/99

2 TEST PROCEDURE


- 2.1 The EUT was tested according to **ANSI C63.4 - 1992 & CISPR 22**.
- 2.2 The EUT was placed 0.4 meter from the conducting wall of shielding room and kept at least 0.8 meter from any other grounded conducting surface.
- 2.3 The frequency range form 0.15 MHz to 30 MHz was investigated.
- 2.4 The LISN used was 50 Ohm / 50 uHenry as specified by **ANSI C63.4 - 1992 & CISPR 22**.
and AC power source is 110V/60Hz.
- 2.5 All the support peripherals are connect to the other LISN.
- 2.6 Cables and peripherals were moved to find the maximum emission levels for each frequency.

3 TEST SETUP

3.1 Typical : Setup Of Conducted Test

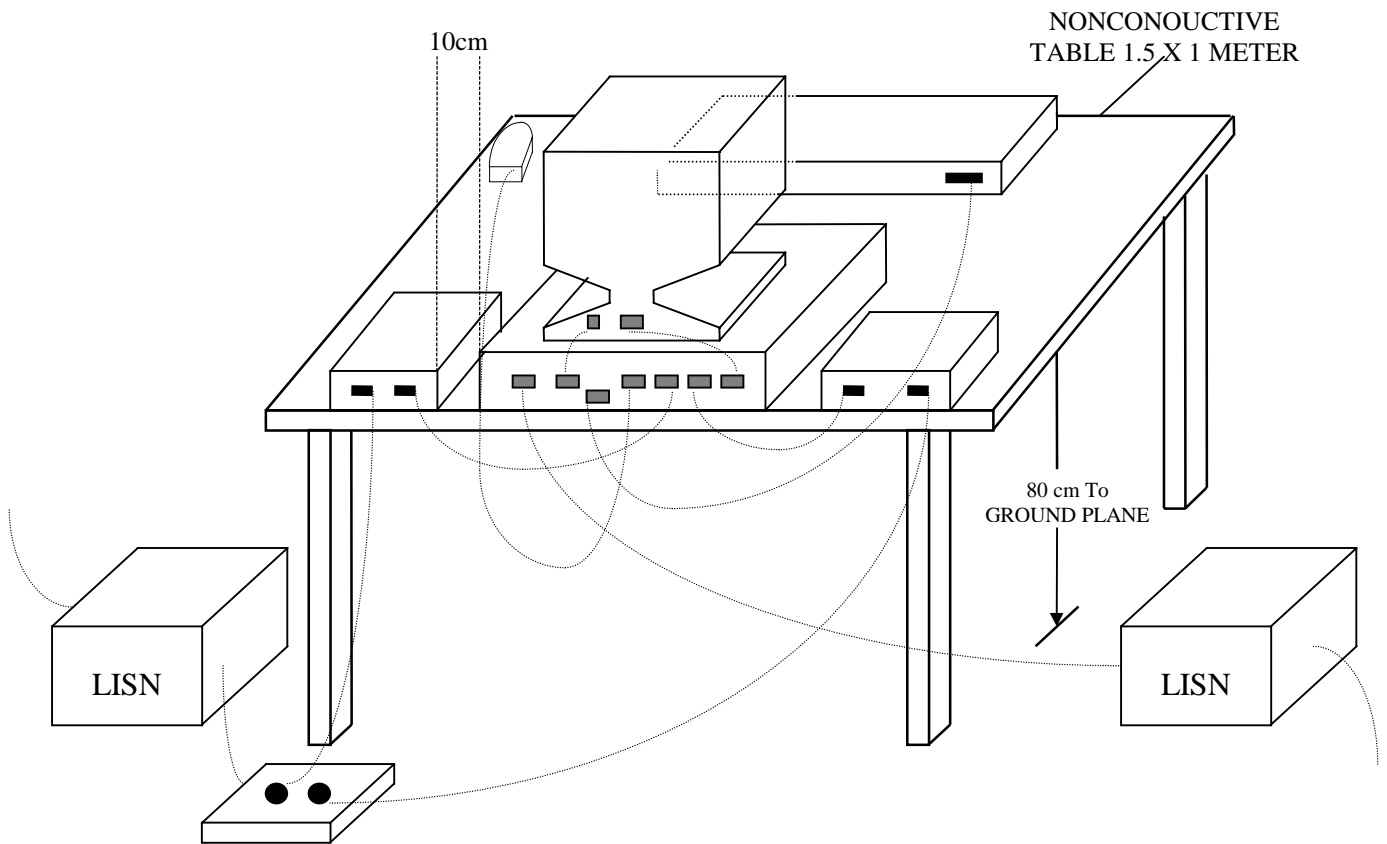

3.2 Block Diagram Of Conducted Test

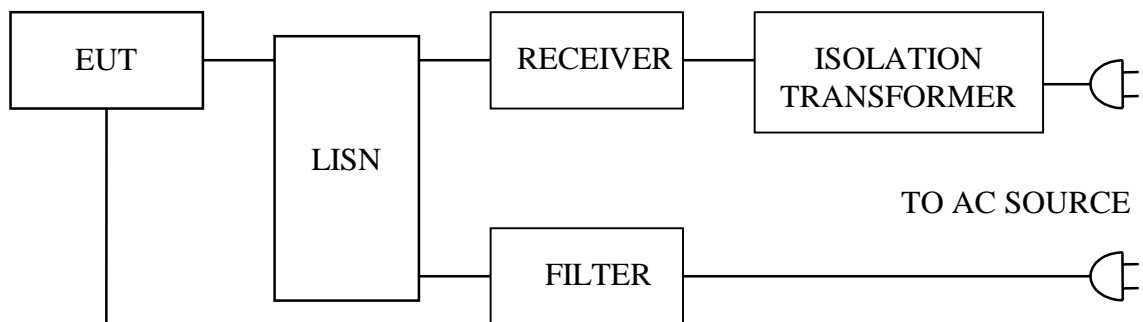

- PC
- Monitor
- Printer
- Modem
- Mouse
- Key Board
- DVD Player

4 CONFIGURATION OF THE EUT

The EUT was configured according to **ANSI C63.4 - 1992 & CISPR 22**. All I/O ports were connected to the appropriate peripherals. All peripherals and cables are listed below (including internal device) :

4.1 EUT

EUT Type : Proto Type Engineer Type Mass Production
Condition when received : Good Damage : _____
Connector Type : Metal Type Plastic Type
Device : Multimedia Monitor
Applicant : SAMPO
Manufacturer : SAMPO
Model Number : SME-32HD5, SME-32HDXXXX,
SME-32SDXXXX, SM-34HDXXXX,
DTV34XHXXXX, VC-34MXXXX,
XV-34HDXXXX (X=0~9, A~Z or Blank)
Serial Number : N/A
FCC ID : FYLHD5
Data Cable : N/A
Power Cord : Un-Shielded, 1.8 m

4.2 PERIPHERALS

Host Personal Computer

Manufacturer : ASUS
Model Number : P2B
Serial Number : HTPC001
FCC ID : FCC DoC
Data Cable : Shielded
Power Cord : Shielded, 1.8 m



Monitor

Manufacturer : GVC
Model Number : M1448P
Serial Number : 4PTA730020050
FCC ID : DK4M1448
Data Cable : Shielded, 1.5 m, Connected to the VGA port
Power Cord : Un-Shielded, 1.8 m

Printer

Manufacturer : HP
Model Number : DJ400
Serial Number : MY77T1D0DD
FCC ID : B94C2642X
Data Cable : Shielded, 1.5m, Connected to the Printer port
Power Cord & Adaptor : Un-Shielded, 1.8 m

Modem

Manufacturer : ACEEX
Model Number : 1414
Serial Number : 9013520
FCC ID : IFAXDM1414
Data Cable : Shielded, 1.5m, Connected to the COM port
Power Cord & Adaptor : Un-Shielded, 1.8 m

Mouse (PSII)

Manufacturer : HP
Model Number : M-S34
Serial Number : LZA64519290
FCC ID : DZL211029
Data Cable : Shielded, 1.8 m, Connected to the PSII port
Power Cord : N/A

 KeyBoard (PSII)

Manufacturer : AST
Model Number : SK-2000REW
Serial Number : N/A
FCC ID : GYUR26SK
Data Cable : Shielded, 1.5 m, Connected to the PSII port
Power Cord : N/A

 DVD Player

Manufacturer : MIRACLE DIGITECH
Model Number : CAVS DVD-1000
Serial Number : N/A
FCC ID : N/A
Data Cable (AV) : Shielded, 1.8 m
Data Cable (S) : Shielded, 1.8 m
Power Cord : Un-Shielded, 1.8 m

4.3 REMARK :

5 EUT OPERATING CONDITION

- 5.1 Operating condition is according to **ANSI C63.4 - 1992 & CISPR 22**.
- 5.2 The oscillator frequency of the EUT were 15 KHz (AV) and 31~52 KHz (RGB).
- 5.3 Turn on the power of all equipments.
- 5.4 Test program sent “H” pattern to peripherals as following :
 - 5.4.1 Printer
 - 5.4.2 Monitor
 - 5.4.3 Modem
 - 5.4.4 Keyboard
- 5.5 The photos of conducted test configuration, please refer to appendix A.**

6 LIMIT OF CONDUCTED POWER LINE EMISSION CLASS B :

CISPR 22

Frequency Range	Quasi Peak	Average
0.15 ~ 0.5 MHz	66 - 56 dBuV	56 - 46 dBuV
0.5 ~ 5 MHz	56 dBuV	46 dBuV
5 ~ 30 MHz	60 dBuV	50 dBuV

- 6.1 In the above table, the tighter limit applies at the band edges.

7 RESULT OF CONDUCTED POWER LINE TEST (1)

- 7.1 The frequency range from 0.15 MHz to 30 MHz was investigated. All readings are quasi-peak values and average.
- 7.2 IF bandwidth : 9 kHz, Meas Time : 1 sec.
- 7.3 Temperature : 20 °C, Humidity : 72 % RH.
- 7.4 Deviations from the specifications : None
- 7.5 Line :

Frequency (MHz)	Level (dBuV)		Limit (dBuV)		Margin (dBuV)	
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.150	35.34	25.83	66.00	56.00	-30.66	-30.17
0.378	42.96	41.88	58.32	48.28	-15.36	-6.40
0.508	40.97	38.40	56.00	46.00	-15.03	-7.60
1.400	38.72	30.59	56.00	46.00	-17.28	-15.41
8.525	40.08	31.79	60.00	50.00	-19.92	-18.21
11.975	47.01	40.71	60.00	50.00	-12.99	-9.29

7.6 Neutral :

Frequency (MHz)	Level (dBuV)		Limit (dBuV)		Margin (dBuV)	
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.256	38.92	35.53	61.56	51.63	-22.64	-16.10
0.379	42.40	41.27	58.30	48.28	-15.90	-7.01
0.508	40.81	38.92	56.00	46.00	-15.19	-7.08
1.400	34.82	29.25	56.00	46.00	-21.18	-16.75
12.720	48.88	42.20	60.00	50.00	-11.12	-7.80
16.800	36.62	27.17	60.00	50.00	-23.38	-22.83

REMARK :

1. Model : SME-32HD5
2. Measuring mode : PC
3. Uncertainty in conduction emission measured : $< \pm 2.0\text{dB}$.
4. “ * ”, means this data is worse case emission level.
5. Result : **PASSED**

8 RESULT OF CONDUCTED POWER LINE TEST (2)

8.1 The frequency range from 0.15 MHz to 30 MHz was investigated. All readings are quasi-peak values and average.

8.2 IF bandwidth : 9 kHz, Meas Time : 1 sec.

8.3 Temperature : 20 °C, Humidity : 72 % RH.

8.4 Deviations from the specifications : None

8.5 Line :

Frequency (MHz)	Level (dBuV)		Limit (dBuV)		Margin (dBuV)	
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.299	36.20	28.77	60.27	50.30	-24.07	-21.53
0.482	29.84	28.20	56.30	46.30	-26.46	-18.10
1.480	31.55	23.87	56.00	46.00	-24.45	-22.13
1.960	32.53	25.20	56.00	46.00	-23.47	-20.80
12.560	51.94	45.66	60.00	50.00	-8.06	-4.34
20.640	40.14	31.45	60.00	50.00	-19.86	-18.55

8.6 Neutral :

Frequency (MHz)	Level (dBuV)		Limit (dBuV)		Margin (dBuV)	
	Quasi-Peak	Average	Quasi-Peak	Average	Quasi-Peak	Average
0.300	43.47	37.17	60.24	50.19	-16.77	-13.02
0.347	41.52	37.07	59.03	49.08	-17.51	-12.01
0.502	38.00	34.56	56.00	46.00	-18.00	-11.44
1.040	36.92	32.96	56.00	46.00	-19.08	-13.04
12.560	53.68	46.31	60.00	50.00	-6.32	-3.69
22.160	38.70	29.54	60.00	50.00	-21.30	-20.46

REMARK :

1. Model : SME-32HD5
2. Measuring mode : AV
3. Uncertainty in conduction emission measured : $< \pm 2.0\text{dB}$.
4. “*”, means this data is worse case emission level.
5. Result : **PASSED**

RADIATED EMISSION TEST

1 TEST INSTRUMENTS & FACILITIES

The following test Instruments was used during the radiated emission test :

Item	Instruments /facilities	Specification	Manufacturer	Model # / S/N#	Location	Date of Cal.
1	OPEN AREA TEST SITE	<input checked="" type="checkbox"/> OATS 1				NOV/99
2	EMI TEST RECEIVER	20MHz ~ 5GHz	ROHDE & SCHWARZ	ESBI 845636/007	Open Site I	SEP/99
3	PRE-AMPLIFIER	0.1MHz ~ 1.3 GHz	HP	8447D 1937A02095	Open Site II	APR/2000
4	EMI TEST RECEIVER	20Hz ~ 26.5GHz	ROHDE & SCHWARZ	ESMI 845442/006	Open Site II	APR/2000
5	PRE-AMPLIFIER	20MHz ~ 7GHz	ROHDE & SCHWARZ	ESMI-Z7 664126/008	Open Site I	SEP/99
6	ANTENNA (BI-LOG)	25MHz ~ 2GHz	SCHAFFNER	CBL6112B S/N : 2614	Open Site II	JUN/2000
7	ANTENNA (BI-LOG)	25MHz ~ 2GHz	SCHAFFNER	CBL6112B S/N : 2611	Open Site I	JUN/2000
8	CABLES	30MHz ~ 1GHz		No. 2, No. 4 No. 1, No. 3	OATS 1 OATS 2	NOV/99 JUN/2000
9	ANTENNA (DIPOLE)	30 ~ 300MHz	ROHDE & SCHWARZ	HZ-12 842899/08		JUL/99
10	ANTENNA (DIPOLE)	300 ~ 1000MHz	ROHDE & SCHWARZ	HZ-13 842007/0004		JUL/99
11	EMIVM	30 ~ 1000MHz	AUDIX	A582445 A582443	OATS 1 OATS 2	N/A


Note : 1. Items 1 ~ 8 upon which need to calibrated are with period of 1 year, except item 9-10.

2. Items 2 is used for the final measurement.

2 TEST PROCEDURE

- 2.1 The EUT was test according to **ANSI C63.4 - 1992 & CISPR 22**.
- 2.2 The radiated test was performed at HomeTek Lab's Open Site I.
- 2.3 The frequency range from 30 MHz to 1 GHz, the measurement were made at 10 meters, with a BI-log antenna.

3 TEST SETUP

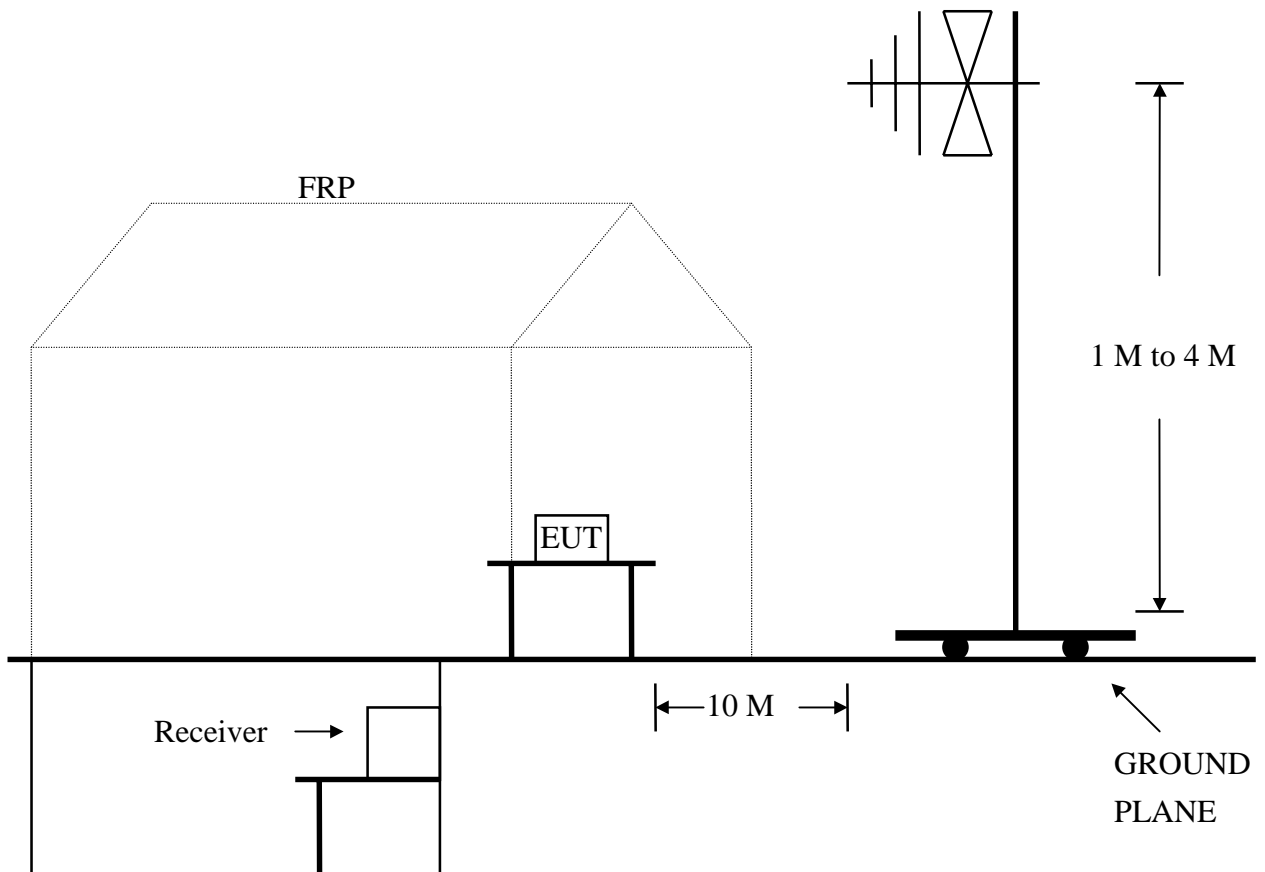

4 CONFIGURATION OF THE EUT

Same as “Conducted Power Line test”, section 4

5 EUT OPERATING CONDITION

5.1 Same as “Conducted Power Line test”, section 5

5.2 The radiated emission in the frequency range from 30 MHz - 1000 MHz was test in a horizontal and vertical polarization at HomeTek Lab’s open site I.

5.3 The photos of radiated test configuration, please refer to appendix A.

6 LIMIT OF RADIATED EMISSION CLASS B :

CISPR 22

Frequency (MHz)	Measurement Distance	Limit (dBuV/m)
30 - 230	10 (M)	30
230 - 1000	10 (M)	37

6.1 The tighter limit shall apply at the edge between two frequency bands.

6.2 Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

7 RESULT OF RADIATED EMISSION TEST (1)

- 7.1 The frequency range from 30 MHz to 1 GHz was investigated. All readings are quasi-peak values with resolution bandwidth of 120 kHz.
- 7.2 The measurements above 1 GHz with a resolution bandwidth of 1 MHz are peak reading at 10 meters.
- 7.3 The measurements were made at 10 meters of HomeTek Lab’s open site I.
- 7.4 Temperature : 23 °C, Humidity : 55 % RH.
- 7.5 Radiated Emission data : **Horizontal**

Frequency (MHz)	Reading Level (dBuV)	ANT factor dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV)
42.06	15.33	10.84	0.60	26.77	30	-3.23
48.08	17.33	8.30	0.63	26.26	30	-3.74
54.08	18.64	6.16	0.67	25.47	30	-4.53
84.14	18.36	7.66	0.80	26.82	30	-3.18
129.20	14.40	11.42	0.92	26.74	30	-3.26
135.21	14.56	10.87	0.95	26.38	30	-3.62
186.28	16.61	8.42	1.15	26.18	30	-3.82
400.07	14.58	15.94	1.85	32.37	37	-4.63

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 400.07 MHz .
- Corrected Reading : (14.58) + (15.94) + (1.85) = . (Emission Level)

7.6 Radiated Emission data : **Vertical**

Frequency (MHz)	Reading Level (dBuV)	ANT factor dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV)
31.36	8.97	16.92	0.54	26.43	30	-3.57
48.04	15.92	9.78	0.61	26.31	30	-3.69
72.06	20.34	5.48	0.77	26.59	30	-3.41
84.11	18.12	7.66	0.80	26.58	30	-3.42
156.04	16.17	9.28	1.07	26.52	30	-3.48
194.92	16.91	8.90	1.16	26.97	30	-3.03
279.43	19.53	12.50	1.40	33.43	37	-3.57
429.00	14.64	16.61	1.99	33.24	37	-3.76

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 429.00 MHz .
- Corrected Reading : (14.64) + (16.61) + (1.99) = 33.24 . (Emission Level)

REMARK :

1. Model : SME-32HD5
2. Measuring mode : PC
3. Uncertainty in radiated emission measured : $\pm 4.0\text{dB}$.
4. “ * ”, means this data is worse case emission level.
5. Result : **PASSED**

8 RESULT OF RADIATED EMISSION TEST (2)

- 8.1 The frequency range from 30 MHz to 1 GHz was investigated. All readings are quasi-peak values with resolution bandwidth of 120 kHz.
- 8.2 The measurements above 1 GHz with a resolution bandwidth of 1 MHz are peak reading at 10 meters.
- 8.3 The measurements were made at 10 meters of HomeTek Lab's open site I.
- 8.4 Temperature : 23 °C, Humidity : 55 % RH.
- 8.5 Radiated Emission data : **Horizontal**

Frequency (MHz)	Reading Level (dBuV)	ANT factor dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV)
32.42	7.39	16.31	0.55	24.25	30	-5.75
36.01	11.46	14.26	0.56	26.28	30	-3.72
60.02	19.32	5.10	0.70	25.12	30	-4.88
84.05	16.97	7.60	0.80	25.37	30	-4.63
165.61	15.10	9.20	1.11	25.41	30	-4.59
193.55	15.68	8.74	1.16	25.58	30	-4.42
212.53	17.01	7.82	1.20	26.03	30	-3.97
332.39	16.68	13.72	1.61	32.01	37	-4.99

- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 332.39 MHz .
- Corrected Reading : (16.68) + (13.72) + (1.61) = 32.01 . (Emission Level)

8.6 Radiated Emission data : **Vertical**

Frequency (MHz)	Reading Level (dBuV)	ANT factor dB/m)	Cable Loss (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dBuV)
30.61	8.13	17.35	0.54	26.02	30	-3.98
36.02	11.65	14.26	0.56	26.47	30	-3.53
48.00	17.97	8.30	0.63	26.90	30	-3.10
60.03	20.96	5.10	0.70	26.76	30	-3.24
84.02	18.14	7.60	0.80	26.54	30	-3.46
162.21	16.11	9.20	1.10	26.41	30	-3.59
216.08	16.72	8.16	1.21	26.09	30	-3.91
332.39	18.21	13.72	1.61	33.54	37	-3.46


- Emission Level = Reading Level + ANT Factor + Cable Loss.
- Sample Calculation for 332.39 MHz .
- Corrected Reading : (18.21) + (13.72) + (1.61) = 33.54 . (Emission Level)

REMARK :

1. Model : SME-32HD5
2. Measuring mode : AV
3. Uncertainty in radiated emission measured : $\pm 4.0\text{dB}$.
4. “ * ”, means this data is worse case emission level.
5. Result : **PASSED**

PHOTO OF FCC ID LABEL

SAMPLE OF FCC ID LABEL :

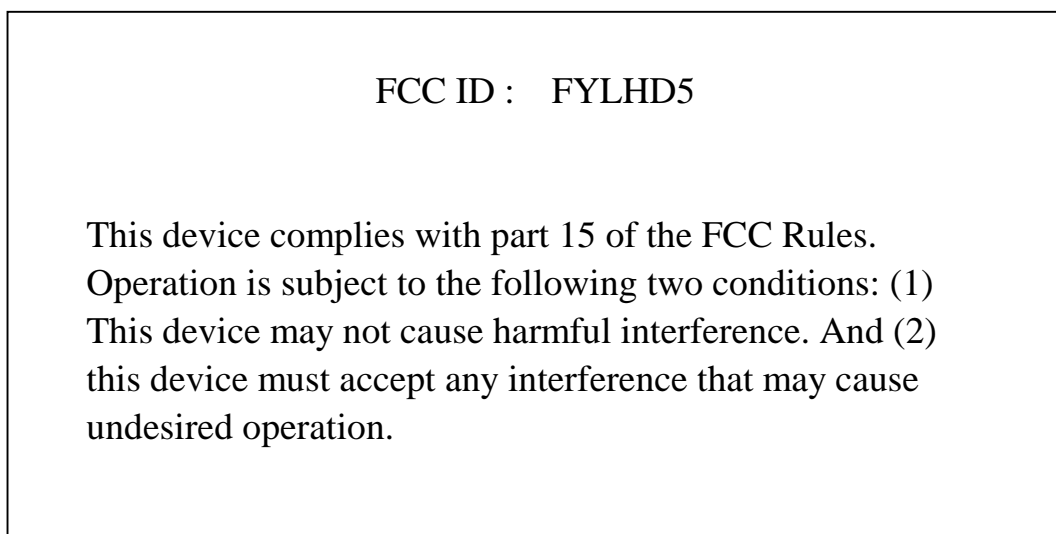

Please refer to appendix B photo of ID location.