


# INTERTEK TESTING SERVICES

Report No.: HK10031356-1  
Sample No.: 1//1 (Console)

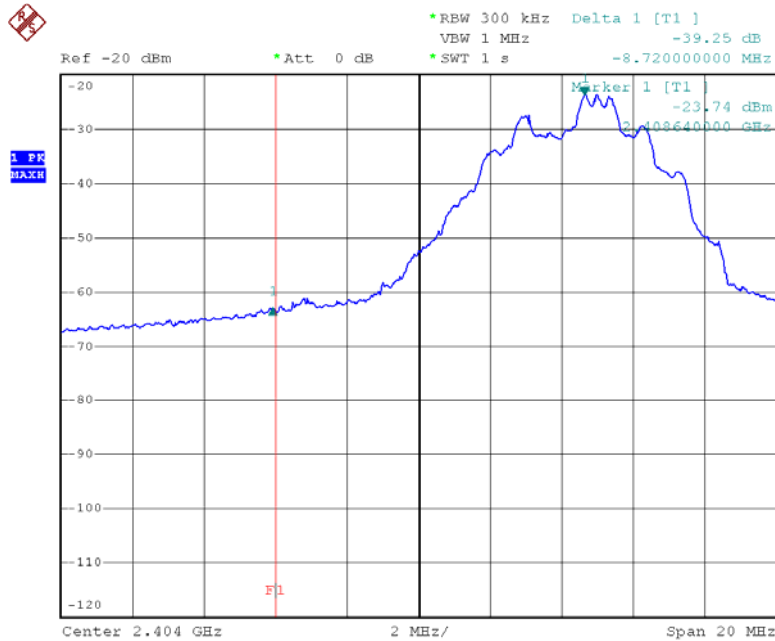


OATS = 93.4dBuV/m

Field strength (Peak)  
 = 93.4 – 39.25 dBuV/m  
 = 54.2 dBuV/m  
 (Limit: 74 dBuV/m)

Field strength (Average)  
 = 54.2 - AF dBuV/m  
 = 54.2 – 27 dBuV/m  
 = 27.2 dBuV/m  
 (Limit: 54 dBuV/m)

Date: 7.APR.2010 16:13:57

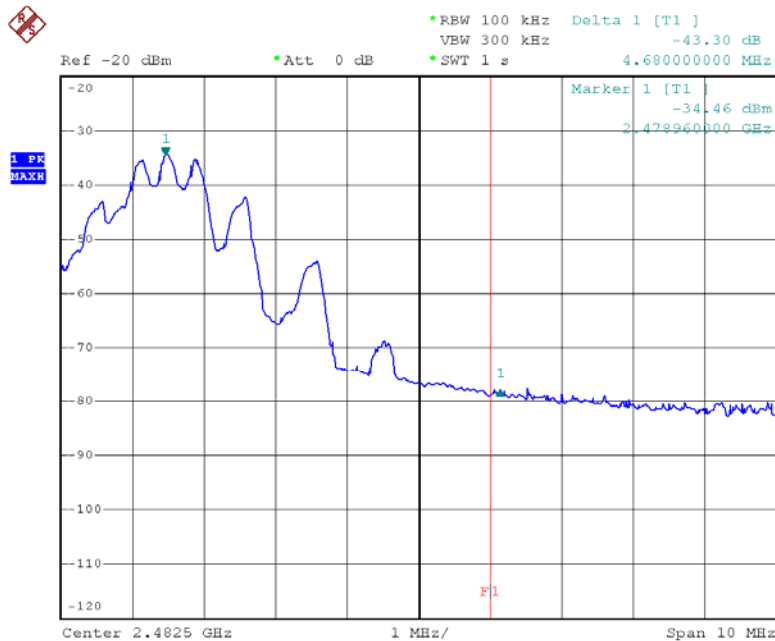

OATS = 93.2dBuV/m

Field strength (Peak)  
 = 93.2 – 43.3 dBuV/m  
 = 49.9 dBuV/m  
 (Limit: 74 dBuV/m)

Field strength (Average)  
 = 49.9 - AF dBuV/m  
 = 49.9 – 27 dBuV/m  
 = 22.9 dBuV/m  
 (Limit: 54 dBuV/m)

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement

(Pass/Fail)