


INTERTEK TESTING SERVICES

Report No.: HK10031355-1
Sample No.: 1/1 (Joystick)

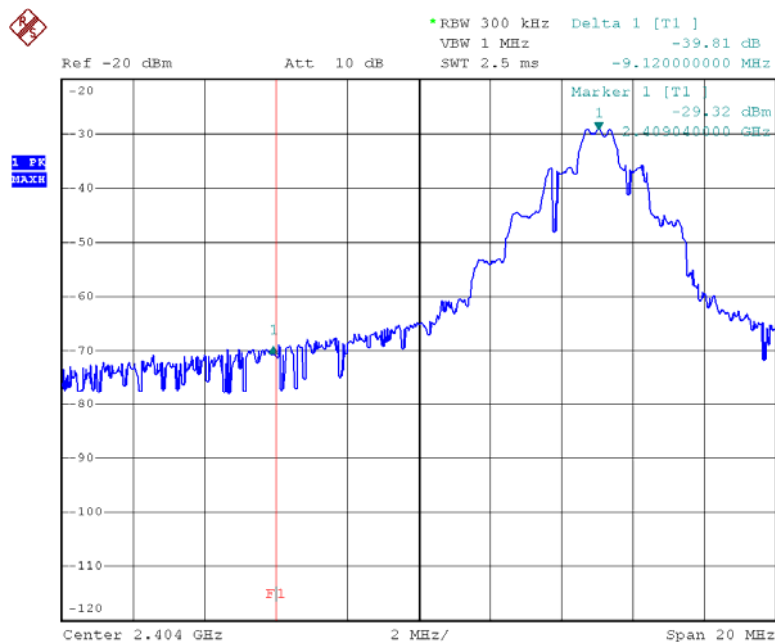


OATS = 86.8dBuV/m

Field strength (Peak)
= 86.8 – 39.8 dBuV/m
= 47 dBuV/m
(Limit: 74 dBuV/m)

Field strength (Average)
= 47- AF dBuV/m
= 47 – 33.2 dBuV/m
= 13.8 dBuV/m
(Limit: 54 dBuV/m)

Date: 8.APR.2010 11:49:32

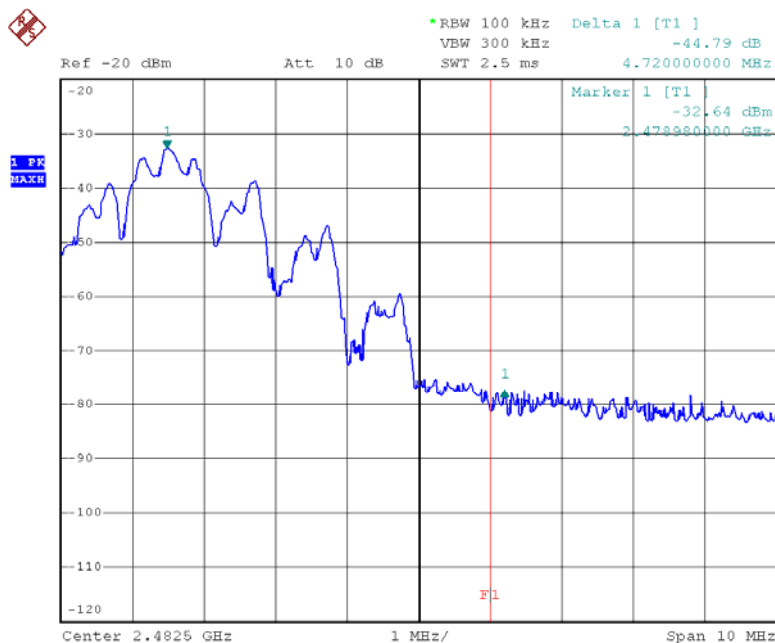

OATS = 85.9dBuV/m

Field strength (Peak)
= 85.9 – 44.7 dBuV/m
= 41.2 dBuV/m
(Limit: 74 dBuV/m)

Field strength (Average)
= 41.2 - AF dBuV/m
= 41.2 – 33.2 dBuV/m
= 8 dBuV/m
(Limit: 54 dBuV/m)

Date: 8.APR.2010 11:45:32

Bandedge Plot – Pursuant to FCC Part 15 Section 15. 249 Requirement

(Pass/Fail)