

Date: 2007-11-28 Page 1 of 18

No. : HM160590

**Applicant (NEB001):** NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING,

11 SHEUNG YUET ROAD, KOWLOON BAY,

HONG KONG.

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

9/F., NEW BRIGHT BUILDING,

11 SHEUNG YUET ROAD, KOWLOON BAY,

HONG KONG.

**Description of Samples:** Product: Radio Control Toy Transmitter

Brand Name: New Bright
Model Number: G6D10833HH
FCC ID: G6D10833HH

**Date Samples Received:** 2007-11-17

**Date Tested:** 2007-11-19 to 2007-11-20

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2006 and ANSI C63.4:2003 for FCC Certification.

**Conclusions:** The submitted product COMPLIED with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remarks: ----

Dr. LEE Kam Chuen, ElectroMagnetic Compatibility Department For and on behalf of

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-11-28 Page 2 of 18

No. : HM160590

#### **CONTENT:**

	Cover Content	Page 1 of 18 Page 2-3 of 18
<u>1.0</u>	General Details	
1.1	Test Laboratory	Page 4 of 18
1.2	Applicant Details Applicant Manufacturer	Page 4 of 18
1.3	Equipment Under Test [EUT] Description of EUT operation	Page 5 of 18
1.4	Date of Order	Page 5 of 18
1.5	Submitted Samples	Page 5 of 18
1.6	Test Duration	Page 5 of 18
1.7	Country of Origin	Page 5 of 18
<u>2.0</u>	<u>Technical Details</u>	
2.1	Investigations Requested	Page 6 of 18
2.2	Test Standards and Results Summary	Page 6 of 18
<u>3.0</u>	<u>Test Results</u>	
3.1	Emission	Page 7-9 of 18
3.2	Bandwidth Measurement	Page 10-12 of 18



Date : 2007-11-28 Page 3 of 18

No. : HM160590

Appendix A

Page 13 of 18 List of Measurement Equipment

Appendix B

Page 14-16 of 18 Duty Cycle Correction During 100 msec

Appendix C

Page 17-18 of 18 Photographs



Date: 2007-11-28 Page 4 of 18

No.: HM160590

#### 1.0 **General Details**

#### 1.1 **Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd. **EMC Laboratory** 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

#### 1.2 **Applicant Details** Applicant

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG.

### Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, HONG KONG.

The Hong Kong Standards and Testing Centre Ltd.
10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong 



Date: 2007-11-28 Page 5 of 18

No. : HM160590

# 1.3 Equipment Under Test [EUT] Description of Sample

Model Name: Radio Control Toy Transmitter

Manufacturer: NEW BRIGHT INDUSTRIAL CO., LTD.

Brand Name: New Bright
Model Number: G6D10833HH

Input Voltage: 3Vd.c ("AA" size battery x 2)

### 1.3.1 Description of EUT Operation

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD., Radio Control Toy Transmitter. The transmitter is a 2 joystick transmitter. The EUT continues to transmit while joystick is being pressed, It is joystick transmitter, Modulation by IC, and type is pulse modulation.

#### 1.4 Date of Order

2007-11-17

#### 1.5 Submitted Sample(s):

1 Sample

#### 1.6 Test Duration

2007-11-19 to 2007-11-20

# 1.7 Country of Origin

China

#### The Hong Kong Standards and Testing Centre Ltd.



Date : 2007-11-28 Page 6 of 18

No. : HM160590

#### **2.0 Technical Details**

#### **Investigations Requested** 2.1

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2005 and ANSI C63.4:2003 for FCC Certification.

#### 2.2 **Test Standards and Results Summary Tables**

EMISSION Results Summary								
Test Condition	Test Condition Test Requirement Test Method Class / Test Result							
			Severity	Pass	Failed			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	$\boxtimes$				
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A					

Note: N/A - Not Applicable



Date: 2007-11-28 Page 7 of 18

No. : HM160590

#### 3.0 Test Results

#### 3.1 Emission

#### 3.1.1 Radiated Emissions (30 – 1000MHz)


Test Requirement: FCC 47CFR 15.235
Test Method: ANSI C63.4:2003
Test Date: 2007-11-20
Mode of Operation: Tx mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\* Semi-Anechoic Chamber located on the G/F of HKSTC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

#### **Test Setup:**

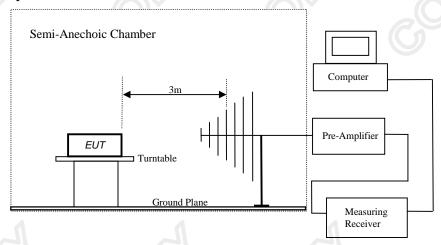

#### The Hong Kong Standards and Testing Centre Ltd.



Date : 2007-11-28 Page 8 of 18

No. : HM160590

#### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15,235]:

Frequency Range of	Field Strength of	Field Strength of	
Fundamental	Fundamental Emission	<b>Fundamental Emission</b>	
	[Peak]	[Average]	
[MHz]	$[\mu V/m]$	$[\mu V/m]$	
49.82-49.90	100,000	10,000	

#### **Results:**

Field Strength of Fundamental Emissions									
	Peak Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m Factor Strength Strength Polari								
MHz	dΒμV	dB/m	dBμV/m	μV/m	μV/m				
49.860	71.9	9.3	81.2	11,481.5	100,000	Vertical			

Field Strength of Fundamental Emissions									
Average									
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field		
	Level @3m	<b>Duty Cycle</b>	Factor	Strength	Strength		Polarity		
MHz	dΒμV	dB	dB/m	dBµV/m	μV/m	μV/m			
49.860	38.5	-33.4	9.3	47.8	245.5	10,000	Vertical		

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Remarks:

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.2dB

The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-11-28 Page 9 of 18

No. : HM160590

#### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range [MHz]	Quasi-Peak Limits [μV/m]		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.


#### **Results:**

	Radiated Emissions								
Quasi-Peak									
Frequency	Frequency Measured Correction Field Field Limit								
4	Level @3m	Factor	Strength	Strength	0	Polarity			
MHz	dΒμV	dB/m	dBµV/m	μV/m	μV/m				
99.7	28.5	8.8	37.3	73.3	150	Vertical			
149.6	22.7	9.3	32.0	39.8	150	Vertical			
199.4	< 1.0	11.9	< 12.9	< 4.4	150	Vertical			
249.3	< 1.0	15.9	< 16.9	< 7.0	200	Vertical			
299.2	< 1.0	17.4	< 18.4	< 8.3	200	Vertical			
349.0	< 1.0	16.8	< 17.8	< 7.8	200	Vertical			
398.9	< 1.0	17.3	< 18.3	< 8.2	200	Vertical			
448.7	< 1.0	20.5	< 21.5	< 11.9	200	Vertical			
498.6	< 1.0	20.6	< 21.6	< 12.0	200	Vertical			

No further spurious emissions found between lowest internal frequency and 30MHz.

Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty 30MHz to 1GHz 5.2dB





Date: 2007-11-28 Page 10 of 18

No. : HM160590

#### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2007-11-19 Mode of Operation: On mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

#### The Hong Kong Standards and Testing Centre Ltd.




Date: 2007-11-28 Page 11 of 18

No. : HM160590

### Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range	20dB Bandwidth	FCC Limits
[MHz]	[KHz]	[MHz]
49.86	33.47	within 49.82-49.90

# 20dB Bandwidth of Fundamental Emission

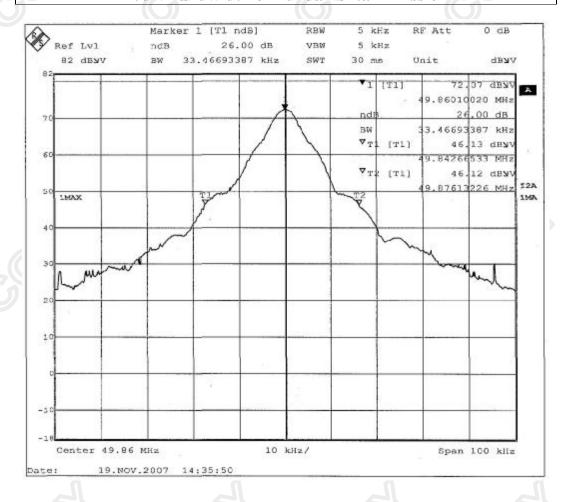


### The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-11-28 Page 12 of 18

No. : HM160590

# 20dB Bandwidth of Fundamental Emission

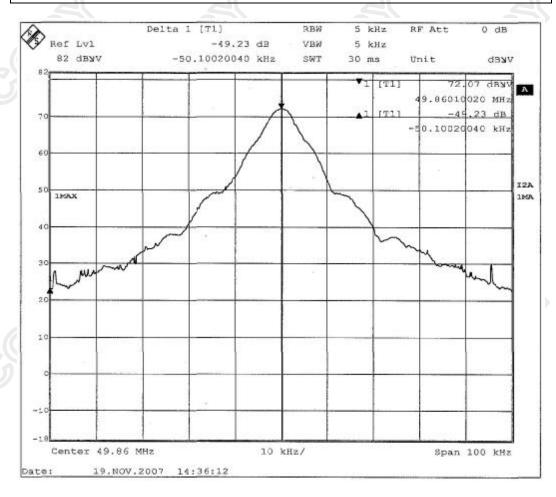



Date: 2007-11-28 Page 13 of 18

No. : HM160590

#### Appendix A

#### List of Measurement Equipment

### **Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM007	SPECTRUM ANALYZER	HEWLETT PACKARD	HP85660B	3144A21192	2006/12/29	2007/12/29
EM008	SPECTRUM ANALYZER DISPLAY			3144A20514	2006/12/29	2007/12/29
EM009	QUASIPEAK ADAPTOR	HEWLETT PACKARD	HP85650A	3303A01702	2006/12/29	2007/12/29
EM010	RF PRESELECTOR	HEWLETT PACKARD	HP85685A	3221A01410	2006/12/29	2007/12/29
EM011	ATTENUATOR/SWITCH	HEWLETT PACKARD	HP11713A	2508A10595	2006/12/29	2007/12/29
EM012	PRE-AMPLIFIER	HEWLETT PACKARD	HP8449B	3008A00262	2006/12/29	2007/12/29
EM020	HORN ANTENNA	ETS-LINGGREN	3115	4032	2006/07/11	2008/07/11
EM022	LOOP ANTENNA	ETS-LINGGREN	6502	1189-2424	2006/07/26	2008/07/26
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 7	100072	22007/06/08	2008/06/08
EM215	MULTIDEVICE CONTROLER	ETS-LINGGREN	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	ETS-LINGGREN	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	ETS-LINGGREN	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-LINGGREN	FACT-3		2007/05/02	2008/05/02
EM219	BICONILOG ANTENNA	ETS-LINGGREN	3142C	00029071	2006/02/01	2008/02/01
EM229	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB 40	100248	2007/07/11	2008/07/11

#### Remarks:-

Corrective Maintenance CM

N/A Not Applicable or Not Available

**TBD** To Be Determined



Date: 2007-11-28 Page 14 of 18

No. : HM160590

#### Appendix B

#### **Duty Cycle Correction During 100msec**

Each function key sends a different series of characters, but each packet period (49.72msec) never exceeds a series of 1 long (531.06 $\mu$ sec), 1 short + 1 (230.46 $\mu$ sec) and 6 short 2 (50.1 $\mu$ sec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered 1x531.06 $\mu$ sec+1x230.46 $\mu$ sec+6x50.1 $\mu$ sec per 49.72msec=2.13% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

#### Remarks:

Duty Cycle Correction = 20Log(0.0213) =-33.4dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.

# Figure A [Pulse Train] 100 kHz Ref Lvl VBW 100 kHz 92 dBwV 49,729459 ma SWT 100 ma dByV Unit 71.61 dBW 32.434870 ms .47 dB 49,729459 ma 124 IVIEW Center 49.85942385 MHz 10 ma/ 19.NOV,2007 14:37:44


#### The Hong Kong Standards and Testing Centre Ltd.




Date: 2007-11-28 Page 15 of 18

No. : HM160590

# Figure B [Long Pulse]

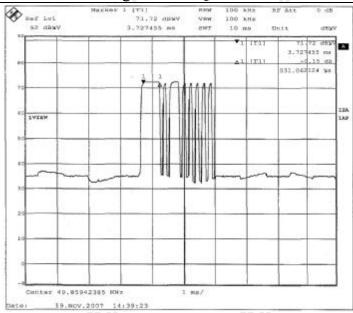

# Figure C [Short Pulse 1]

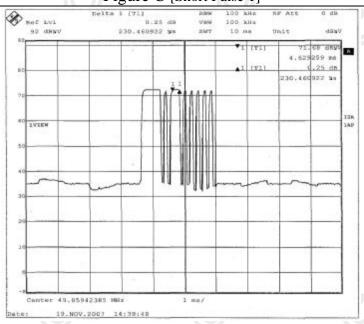


### The Hong Kong Standards and Testing Centre Ltd.



Date: 2007-11-28 Page 16 of 18

No.: HM160590

# Figure C [Short Pulse 2]

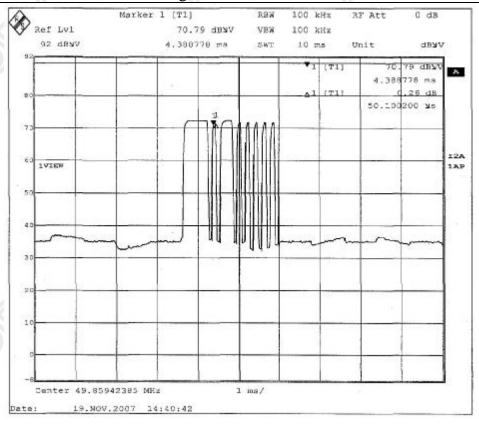



Date : 2007-11-28 Page 17 of 18

No. : HM160590

# Appendix C


### Photographs of EUT

Front View of the product











**Inner Circuit Bottom View** 






Date: 2007-11-28 Page 18 of 18

No. : HM160590

### **Photographs of EUT**

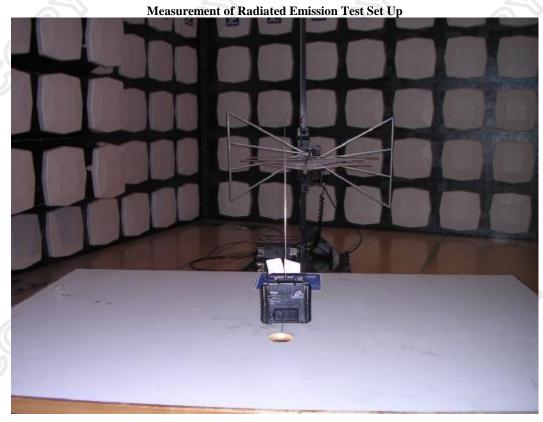

\*\*\*\*\* End of Test Report \*\*\*\*\*