

Page 1 of 20

Applicant (NEB001):	NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.				
Manufacturer:	NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.				
Description of Samples:	Product: Brand Name: Model Number: FCC ID:	Radio Control Toy Transmitter NEW BRIGHT G6D10833HK G6D10833HK			
Date Samples Received:	2009-07-22				
Date Tested:	2009-07-31				
Investigation Requested:	accordance with I	Iagnetic Interference measurement in FCC 47CFR [Codes of Federal Regulations] ANSI C63.4:2003 for FCC Certification.			
Conclusions:	Federal Commun Regulations Part	oduct <u>COMPLIED</u> with the requirements of ications Commission [FCC] Rules and 15. The tests were performed in accordance s described above and on Section 2.2 in this			
Remarks:		10			



Dr. LEE Kam Chuen, Authorized Signatory ElectroMagnetic Compatibility Department For and on behalf of The Hong Kong Standards and Testing Centre Ltd.

The Hong Kong Standards and Testing Centre Ltd.10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong KongTel: (852) 2666 1888Fax: (852) 2664 4353Homepage: www.hkstc.orgE-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from the Hong Kong Standards and Testing Centre Ltd. For full text of "Conditions of Issuance of Test Report", please refer to overleaf or refer to the website of Homepage.



Date : 2009-08-04 No. : HM164027 **CONTENT:** Page 1 of 20 Cover Page 2-3 of 20 Content 1.0 **General Details** Page 4 of 20 1.1 Test Laboratory Page 4 of 20 1.2 **Applicant Details** Applicant Manufacturer 1.3 Equipment Under Test [EUT] Page 5 of 20 Description of EUT operation Page 5 of 20 1.4 Date of Order Page 5 of 20 1.5 Submitted Samples Page 5 of 20 1.6 **Test Duration** Page 5 of 20 Country of Origin 1.7 2.0 **Technical Details** Page 6 of 20 2.1 **Investigations Requested** 2.2 Page 6 of 20 Test Standards and Results Summary <u>3.0</u> **Test Results** 3.1 Page 7-9 of 20 Emission Page 10-12 of 20 3.2 Bandwidth Measurement

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

Page 2 of 20



Page 3 of 20

# Appendix A

List of Measurement Equipment

# Appendix B

Duty Cycle Correction During 100 msec

# Appendix C

Photographs

Page 17-20 of 20

Page 14-16 of 20

Page 13 of 20





The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM164027

# 1.0 General Details

# 1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd. EMC Laboratory 10 Dai Wang Street, Taipo Industrial Estate New Territories, Hong Kong

# 1.2 Applicant Details Applicant

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.

# Manufacturer

NEW BRIGHT INDUSTRIAL CO., LTD. 9/F., NEW BRIGHT BUILDING, 11 SHEUNG YUET ROAD, KOWLOON BAY, KOWLOON, H.K.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 4 of 20



No. : HM164027

Page 5 of 20

# 1.3 Equipment Under Test [EUT] Description of Sample

Product: Manufacturer: Brand Name: Model Number: Input Voltage: Radio Control Toy Transmitter NEW BRIGHT INDUSTRIAL CO., LTD. NEW BRIGHT G6D10833HK 3Vd.c ("AA" size battery x 2)

# **1.3.1** Description of EUT Operation

The Equipment Under Test (EUT) is a NEW BRIGHT INDUSTRIAL CO., LTD., Radio Control Toy Transmitter. The EUT is a radio control toy transmitter. The EUT was operated with 2 knobs; the EUT continues to transmit while one of the switches is pressed. It is pulse transmitter, Modulation by IC, and type is pulse modulation.

1.4	Date of Order	
	2009-07-22	
1.5	Submitted Sample(s): 1 Sample	
1.6	Test Duration	
	2009-07-31	
1.7	Country of Origin	
	China	

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM164027

Page 6 of 20

# 2.0 <u>Technical Details</u>

# 2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2008 and ANSI C63.4:2003 for FCC Certification.

# 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary								
Test Condition	Test Requirement	Test Method	Class /	Test	Result			
			Severity	Pass	Failed			
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	$\boxtimes$				
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	$\boxtimes$				

Note: N/A - Not Applicable



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 7 of 20

# 3.0 Test Results

### 3.1 Emission


3.1.1 Radiated Emissions (30 – 1000MHz)

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47CFR 15.235 ANSI C63.4:2003 2009-07-31 Tx mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

<sup>\*</sup> Semi-Anechoic Chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

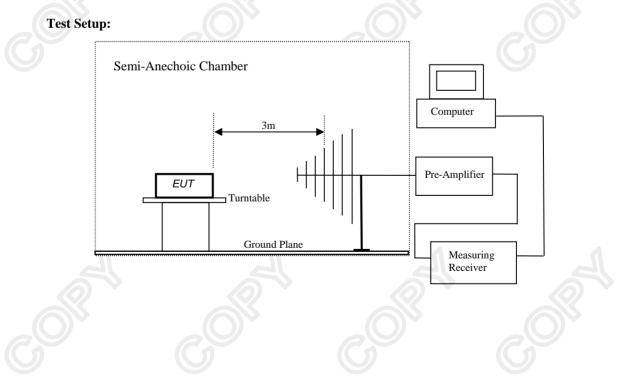

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM164027

Page 8 of 20

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of	Field Strength of	Field Strength of
Fundamental	Fundamental Emission	Fundamental Emission
	[Peak]	[Average]
[MHz]	[µV/m]	[µV/m]
49.82-49.90	100,000	10,000

**Results of Tx mode:** 

Field Strength of Fundamental Emissions									
	Peak Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m				
49.860	59.90	8.7	68.6	2,691.5	100,000	Vertical			

Field Strength of Fundamental Emissions								
Average								
Frequency	Measured	Adjusted by	Correction	Field	Field	Limit @3m	E-Field	
	Level @3m	Duty Cycle	Factor	Strength	Strength		Polarity	
MHz	dBµV	dB	dB/m	dBµV/m	μV/m	μV/m		
49.860	39.9	-20.0	8.7	48.6	269.2	10,000	Vertical	

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

#### Remarks:

Correction Factor includes Antenna Factor an	d Ca	ble Attenuation.	
Calculated measurement uncertainty	:	30MHz to 1GHz	5.2dB



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM164027

Page 9 of 20

# Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

# **Results of Tx mode:**

Radiated Emissions									
	Quasi-Peak								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBµV	dB/m	dBµV/m	μV/m	μV/m				
99.72	16.1	9.0	25.1	18.0	150	Vertical			
149.58	< 1.0	9.3	< 10.3	< 3.3	150	Vertical			
199.44	< 1.0	11.9	< 12.9	< 4.4	150	Vertical			
249.30	< 1.0	15.9	< 16.9	< 7.0	200	Vertical			
299.16	9.1	15.8	24.9	17.6	200	Vertical			
349.02	< 1.0	17.2	< 18.2	< 8.1	200	Vertical			
398.88	< 1.0	17.3	< 18.3	< 8.2	200	Vertical			
448.74	< 1.0	19.1	< 20.1	< 10.1	200	Vertical			
498.60	< 1.0	20.6	< 21.6	< 12.0	200	Vertical			

30MHz to 1GHz

Remarks:

No further spurious emissions found between lowest internal frequency and 30MHz. Correction Factor includes Antenna Factor and Cable Attenuation.

:

Calculated measurement uncertainty

5.2dB







The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 10 of 20

# 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: Test Method: Test Date: Mode of Operation: FCC 47 CFR 15.235 ANSI C63.4:2003 (Section 13.1.7) 2009-07-31 On mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM164027

Page 11 of 20

Limits for 20dB Bandwidth of Fundamental Emission:

20dB Bandwidth FCC Limits Frequency Range [MHz] [KHz] [MHz] within 49.82-49.90 49.86 18.03 **20dB Bandwidth of Fundamental Emission** Delta 1 [T1] RBW 3 kHz RF Att 30 dB VBW 10 kHz Ref Lvl -33.27 dB 118 dB**æ**V 49.89979960 kHz 50 ms SWT Unit dBæV 118 **v**<sub>1</sub> [T1] 87 35 dBæ А 110 86010 020 MH [T1] -3 .27 dB ▲1 100 20070 960 kH: 90 IN1 8( 1MAX 1MA 70 60 50 4( 30 20 10 Start 49.81 MHz 10 kHz/ Stop 49.91 MHz Date: 31.JUL.2009 18:08:43


> The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 12 of 20

Date : 2009-08-04

No. : HM164027

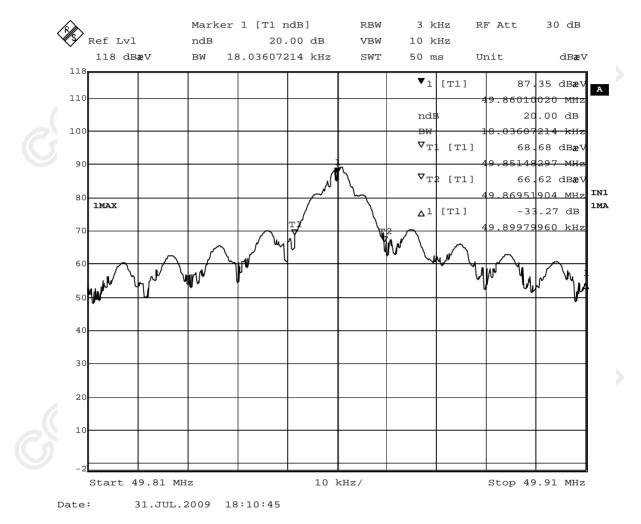



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



No. : HM164027

### Appendix A

### List of Measurement Equipment

Radiated Emission									
EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL			
EM215	MULTIDEVICE CONTROLER	EMCO	2090	00024676	N/A	N/A			
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A			
EM217	ELECTRIC POWERED TURNTABLE	ЕМСО	2088	00029144	N/A	N/A			
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3		2008/12/01	2011/12/01			
EM174	BICONILOG ANTENNA	EMCO	3142B	1671	2008/01/24	2010/01/24			
EM229	EMI Test Receiver	R&S	ESIB40	100248	2008/09/08	2009/09/08			
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2009/07/26	2012/07/26			

#### **Remarks:-**

- CM Corrective Maintenance
- N/A Not Applicable or Not Available
- TBD To Be Determined



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 13 of 20



Appendix B


# **Duty Cycle Correction During 100msec**

Each function key sends a different series of characters, but each packet period 100msec never exceeds a series of 2 long ( $601.2\mu$ sec) and 6 middle ( $300.6\mu$ sec), 16 short ( $100.20\mu$ sec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered [2x (601.2+3x300.6+8x100.2)]µs per 100msec4.60% duty cycle. Figure A through D show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.046) =-26.7dB Duty Cycle Correction =-20dB, if the calculation duty cycle correction >-20dB.

The following figures [Figure A to Figure D] show the characteristics of the pulse train for one of these functions.

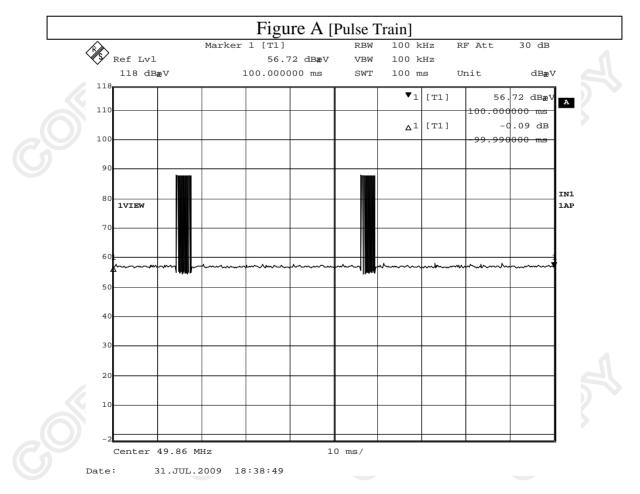

The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 14 of 20



Page 15 of 20








The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 16 of 20

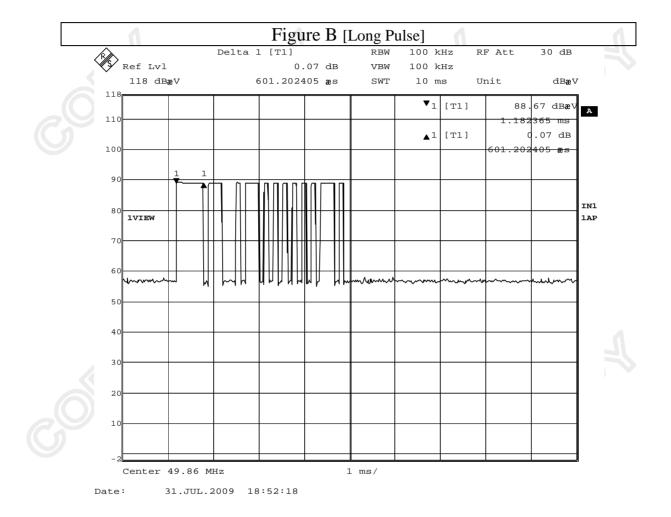




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 17 of 20

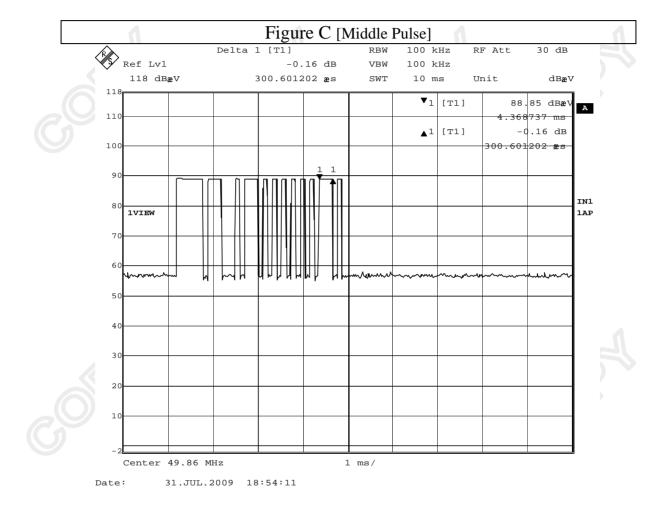




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 18 of 20

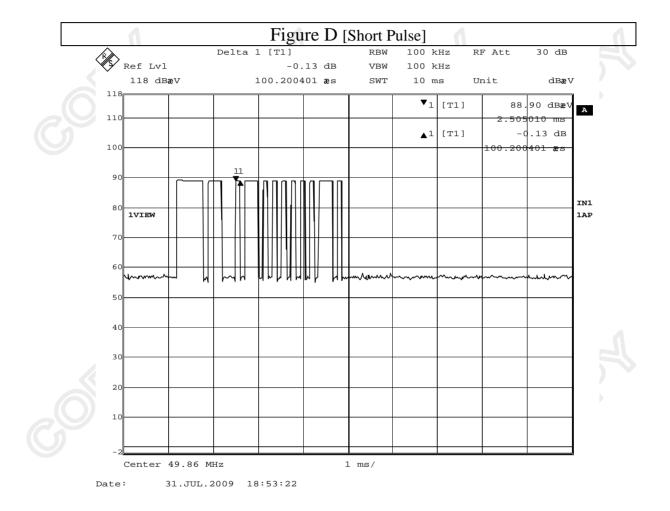




The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Page 19 of 20



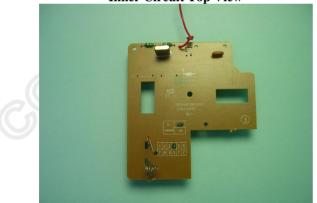








The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org



Photographs of EUT

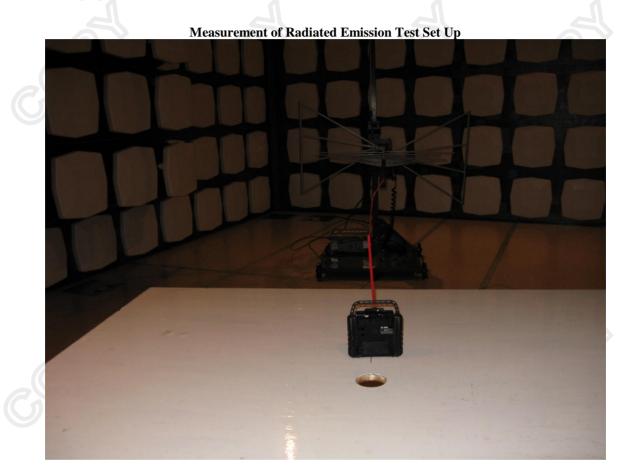

\*\*\*\*\* End of Test Report \*\*\*\*\*



The Hong Kong Standards and Testing Centre Ltd. 10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: www.hkstc.org E-mail: hkstc@hkstc.org

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd. For Conditions of Issuance of this test report, please refer to the overleaf or Homepage

Page 20 of 20